


ROMD / MINAMIDAITO

AD CHART

CHANGE : WIND SPEED METER, CEILOMETER added.


MINAMIDAITO AP

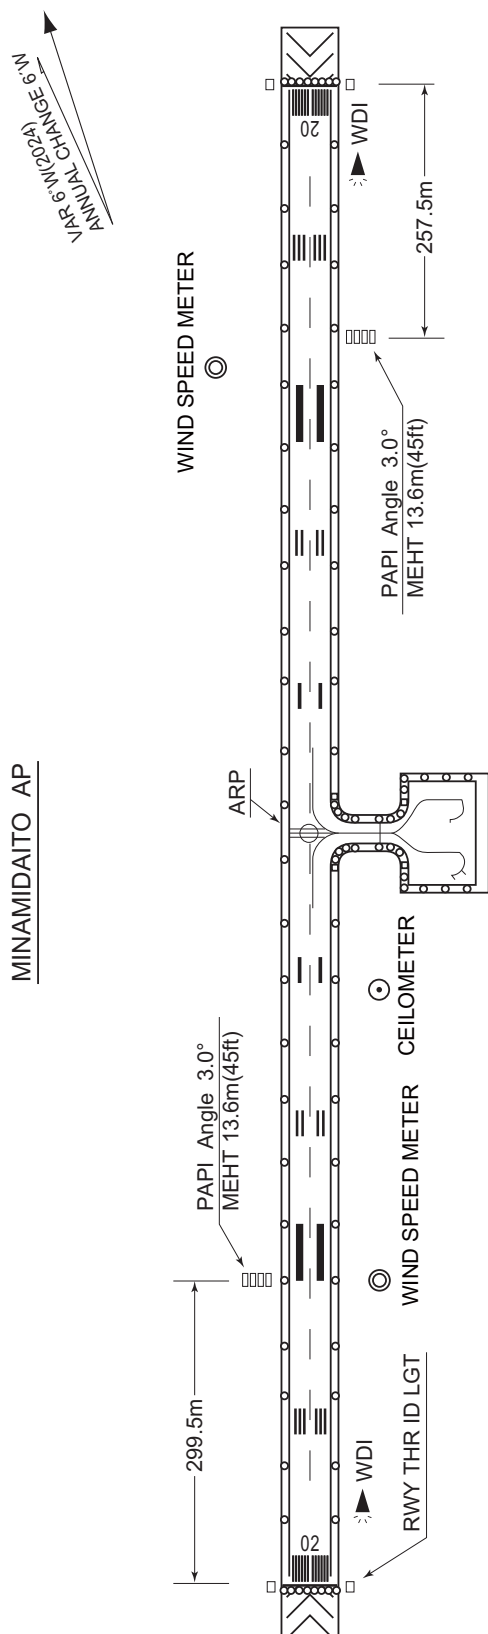

★ ABN

REMARKS :	WIDTH OF RWY	1500m x 45m
	WIDTH OF TWY	18m x 77.5m
	RWY GROOVING	1500m x 30m
	STRENGTH OF RWY	PCR 196/F/C/Y/T
	STRENGTH OF TWY	PCR 196/F/C/Y/T
	STRENGTH OF APRON	PCR 196/F/C/Y/T

LONGITUDINAL PROFILE OF RWY

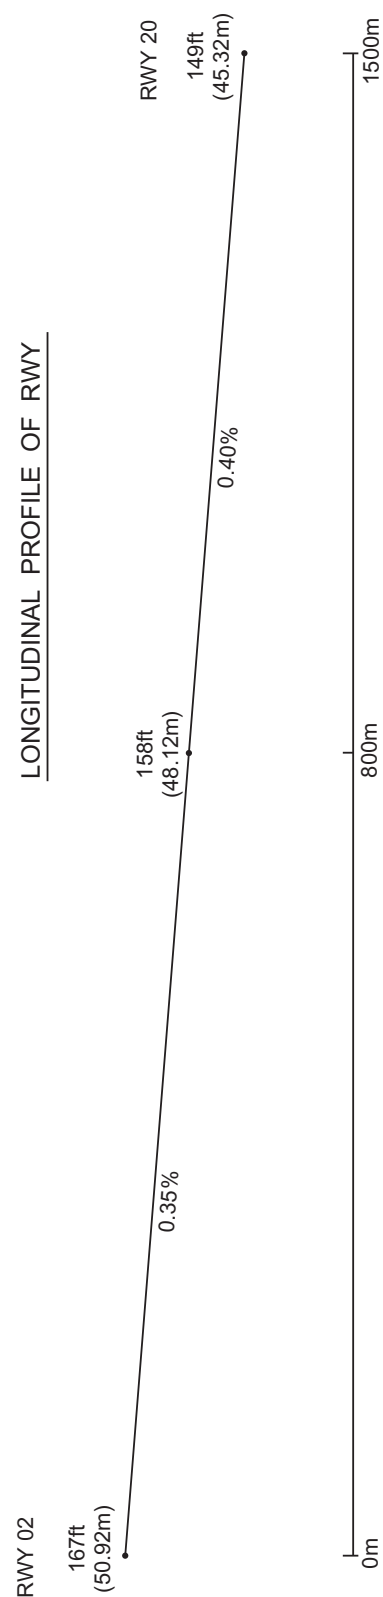


STANDARD DEPARTURE CHART -INSTRUMENT

ROMD / MINAMIDAITO

SID

TOPAT THREE DEPARTURE

RWY02 : Climb RWY HDG to 600FT, turn left HDG234° ...
RWY20 : Climb RWY HDG to 600FT, turn right HDG324° ...
... to intercept and proceed via MDE R279 to TOPAT.
Cross TOPAT at or above 8000FT.

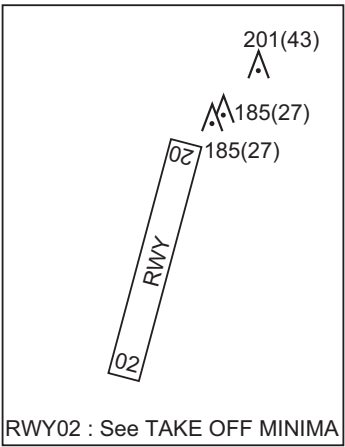

CHANGE : Description of PROC name.

8000
△ TOPAT
R279/D97.8 MDE
R103/D98.8 NHC

HDG234°

HDG324°

R279

VOR/DME
MINAMIDAITO
117.8 MDE
CH-125X
25°51'16"N/131°15'50"E
200FT

STANDARD DEPARTURE CHART -INSTRUMENT

ROMD / MINAMIDAITO

SID



MINAMIDAITO REVERSAL FOUR DEPARTURE

RWY 02 : Climb RWY HDG to 1000FT, turn right...

RWY 20 : Climb RWY HDG to 1000FT, turn left...


... direct to MDE VOR/DME.

Cross MDE VOR/DME at or above 2000FT.

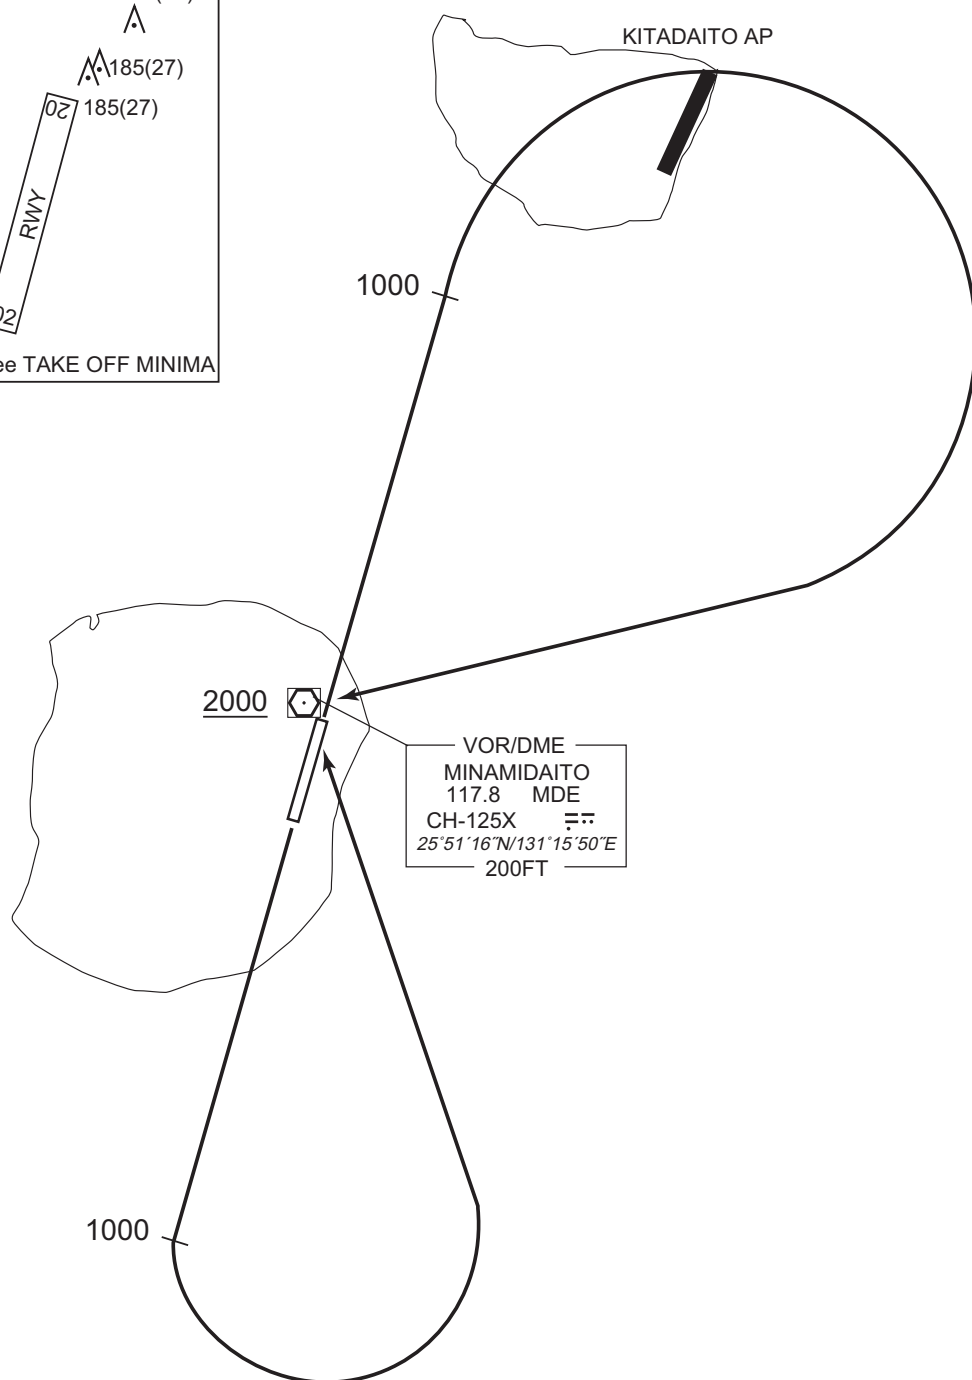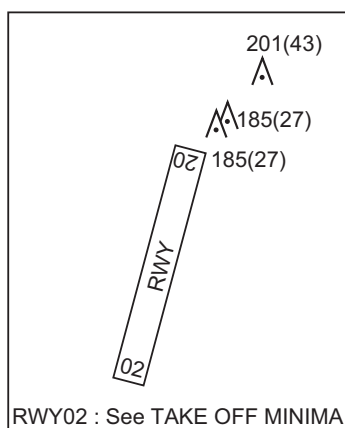

CHANGE : Description of PROC name.

STANDARD DEPARTURE CHART - INSTRUMENT

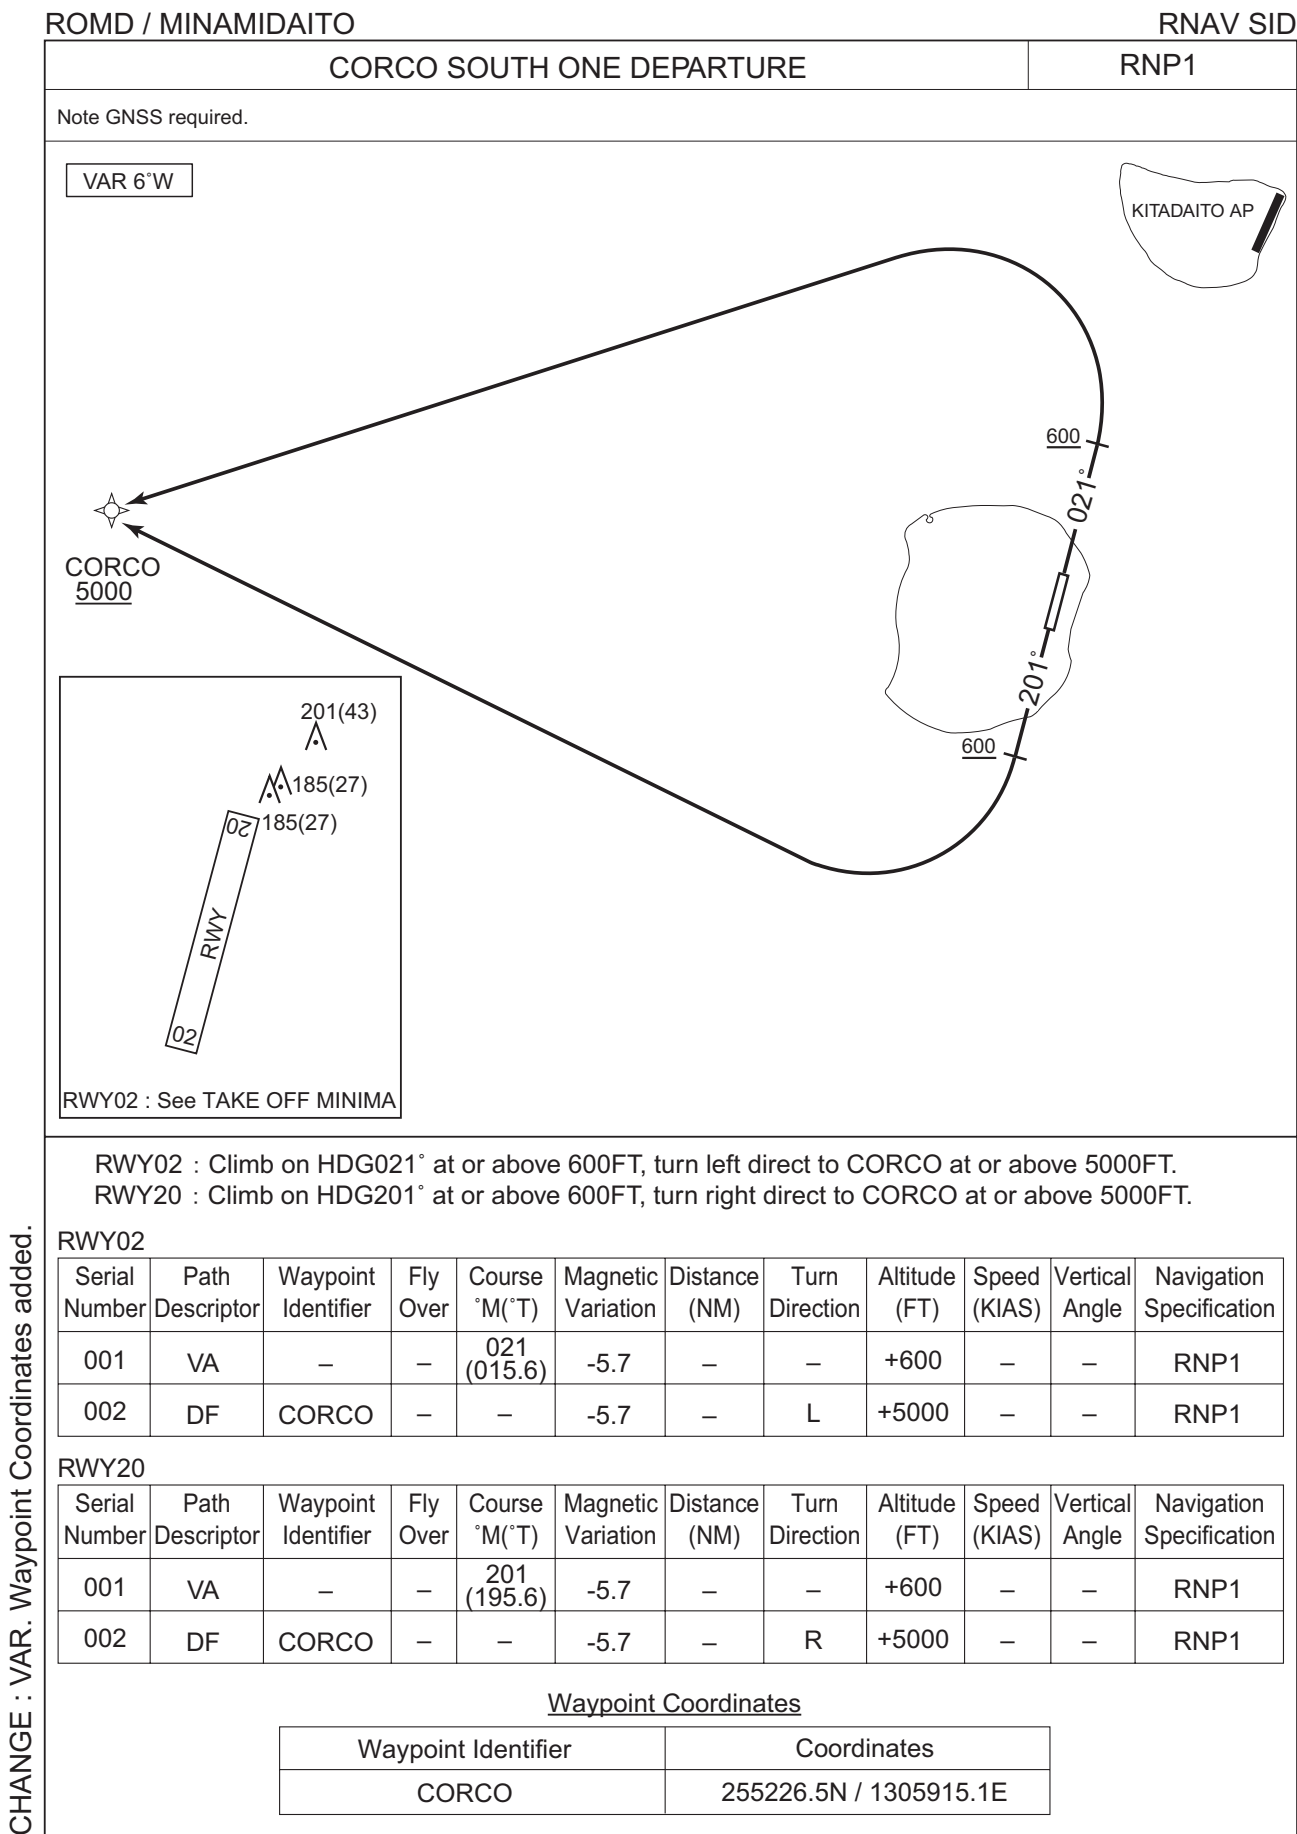


CHANGE : VAR. Waypoint Coordinates added.

INSTRUMENT APPROACH CHART

ROMD / MINAMIDAITO


VOR RWY02

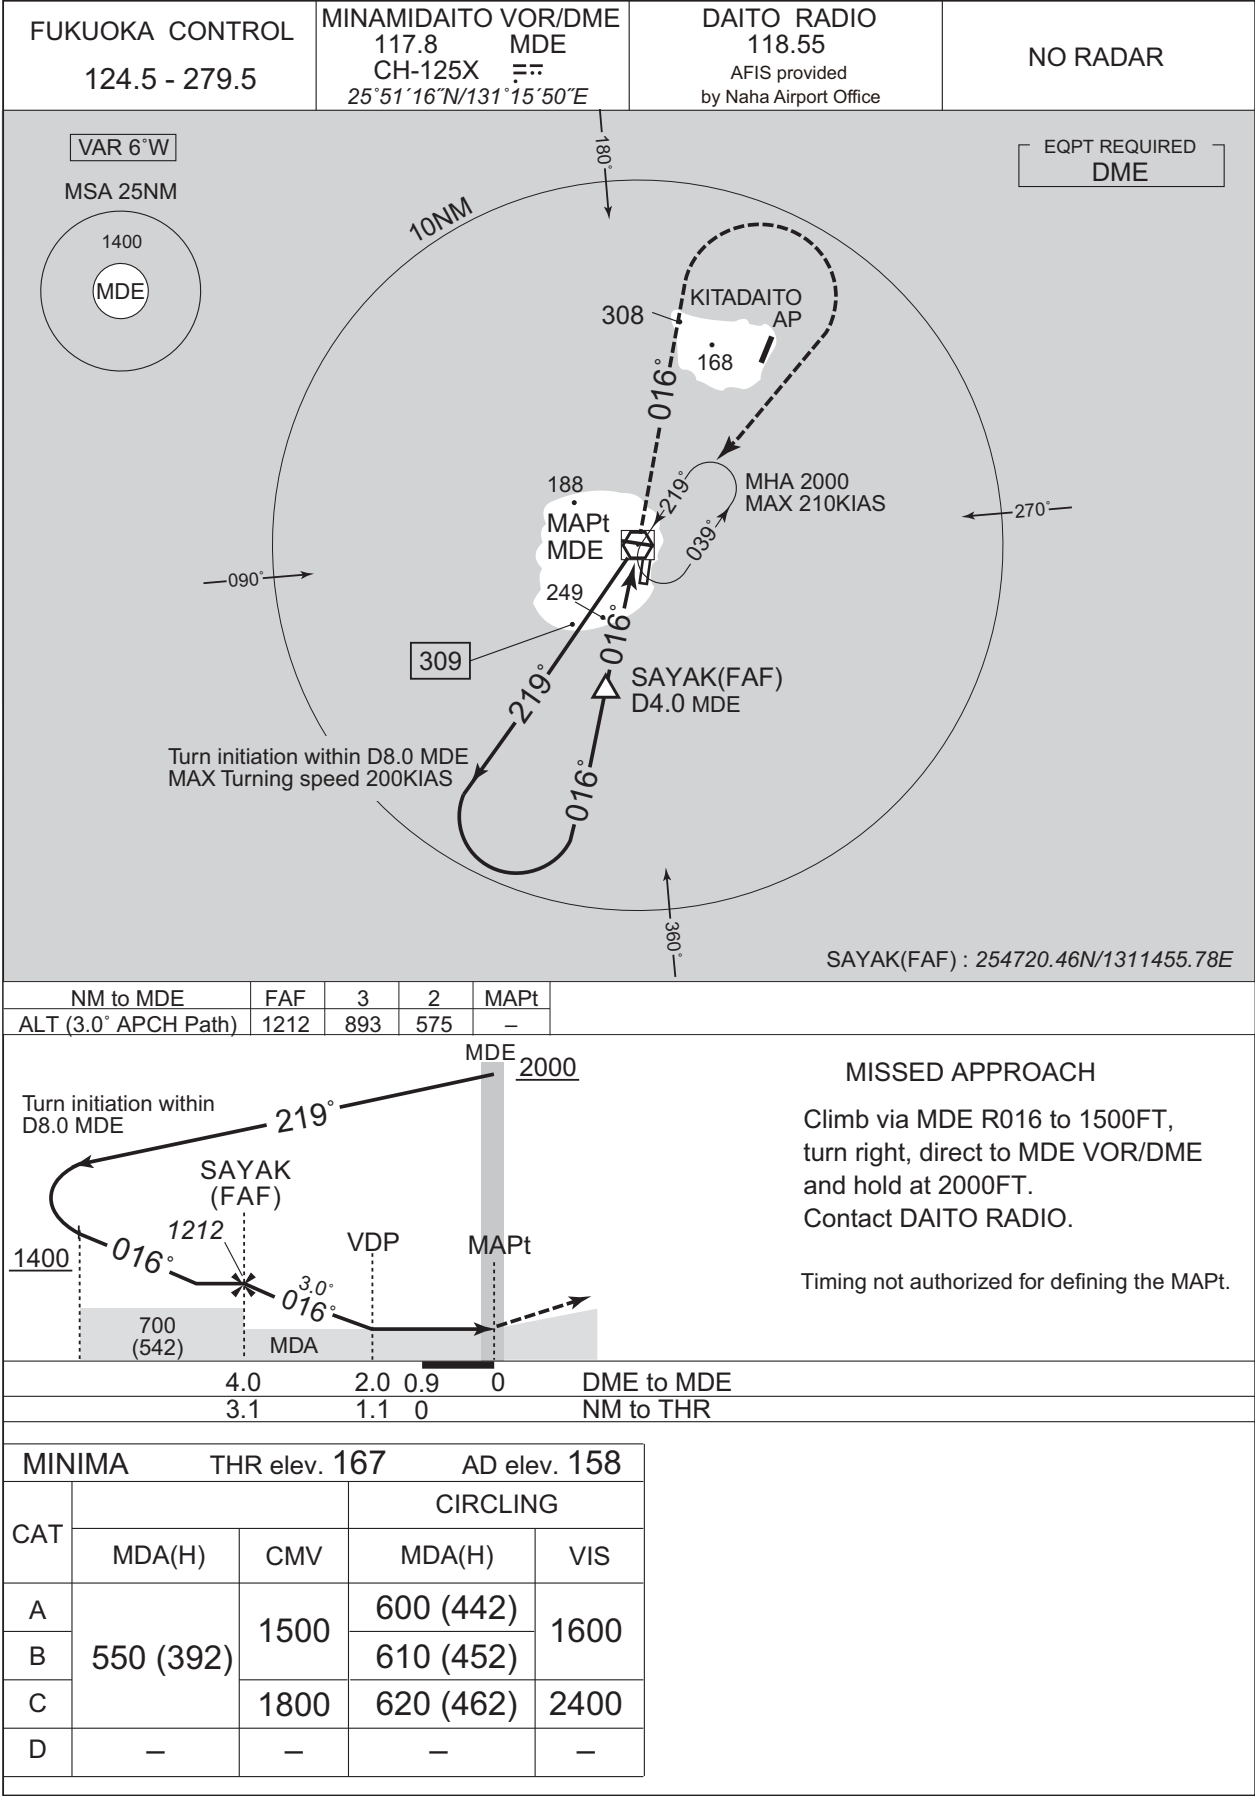

CHANGE : VAR OBST.


INSTRUMENT APPROACH CHART

ROMD / MINAMIDAITO VOR RWY20

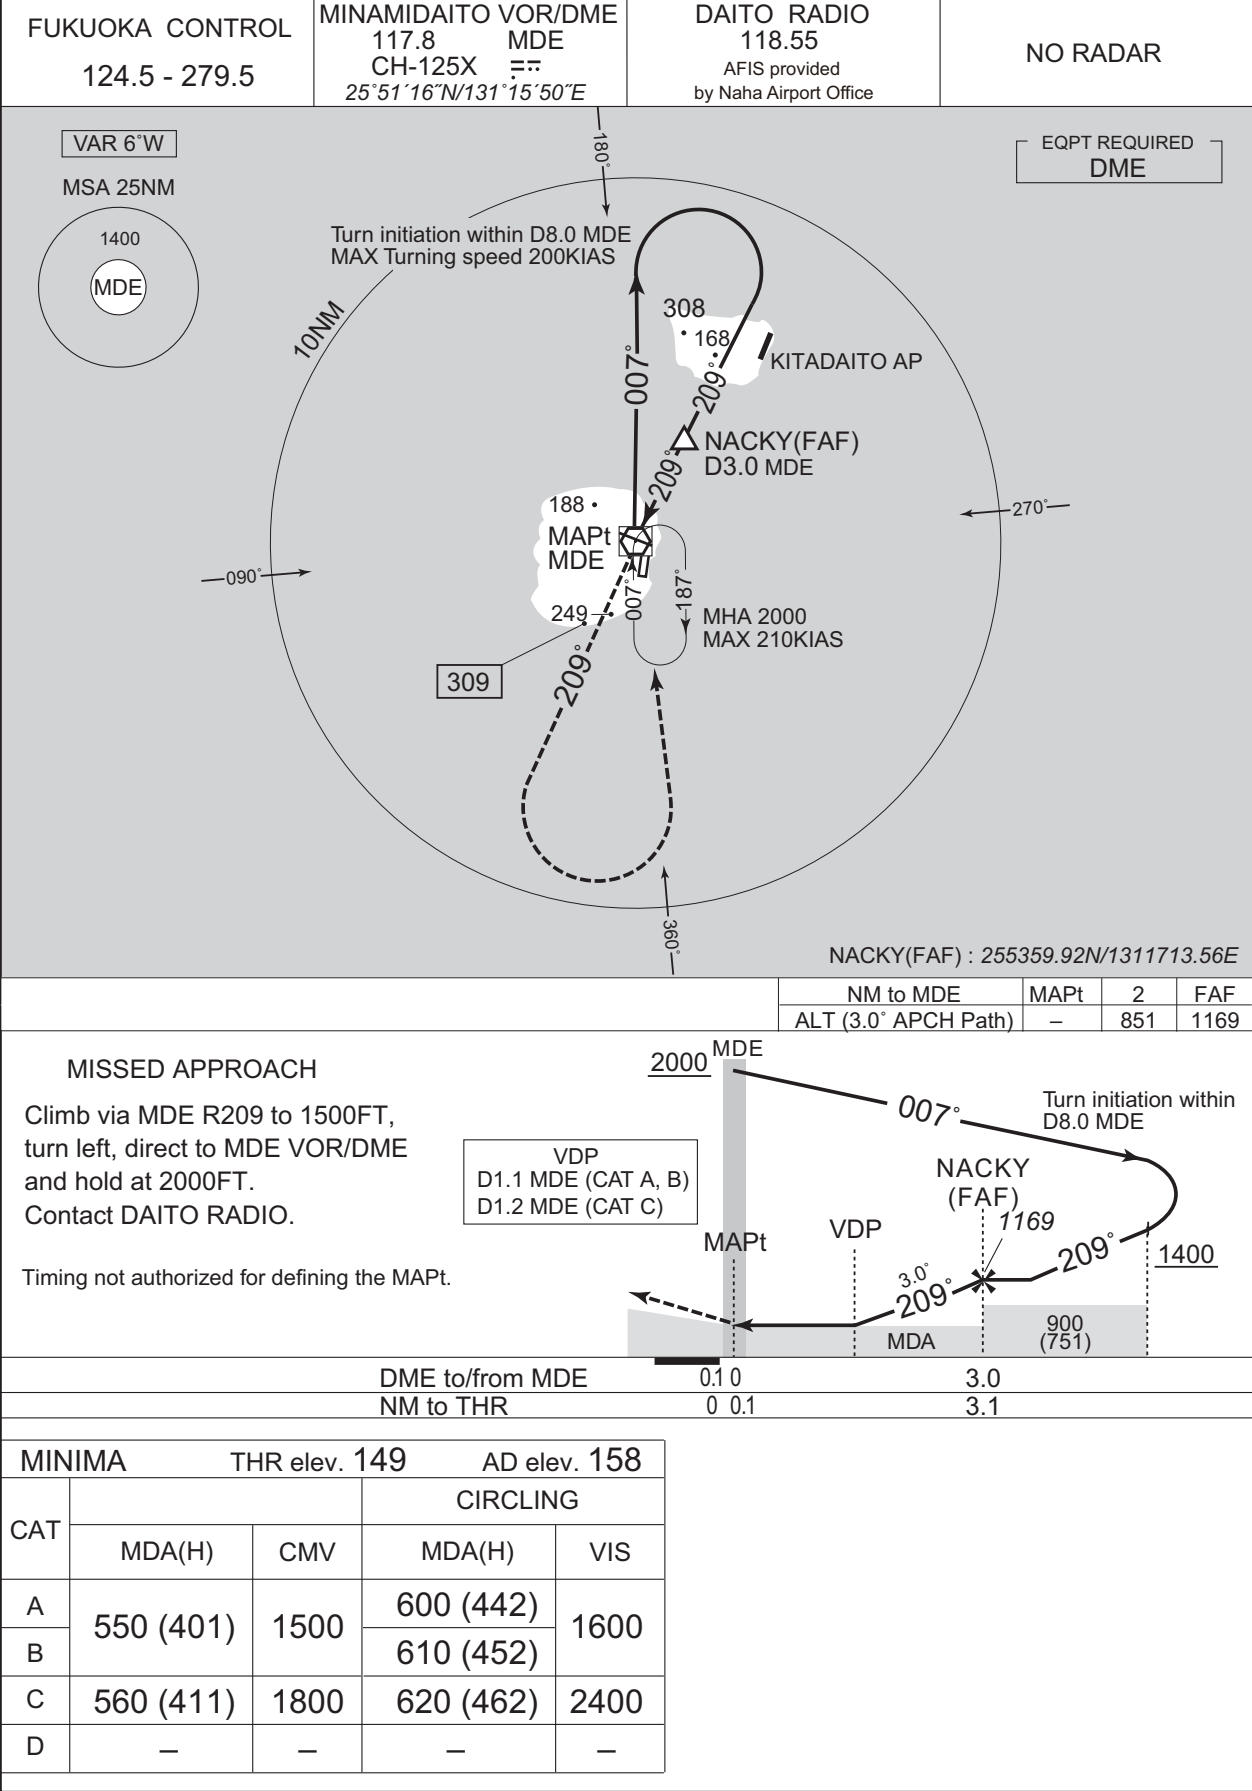

ROMD / MINAMIDAITO

RNP Z RWY02(AR)




RNP AR
RF required.

DAITO RADIO
118.55
AFIS provided
by Naha Airport Office

NO RADAR

For uncompensated Baro-VNAV systems, procedure not authorized below 5°C / above 45°C

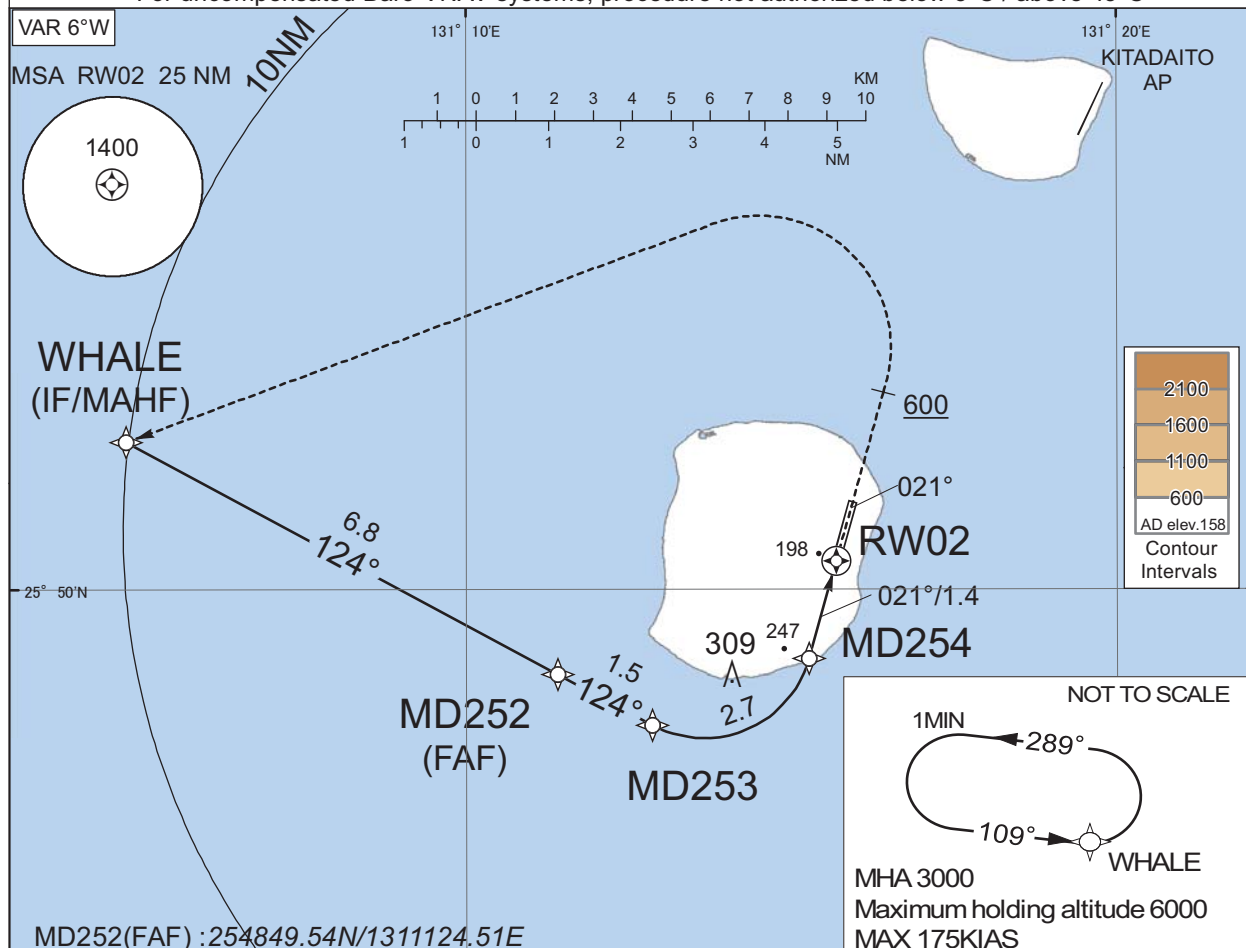

From RW02 on track 021°,
at or above 600FT turn left,
direct to WHALE and hold at 3000FT.
Contact DAITO RADIO.

MINIMA	THR elev. 167	AD elev. 158
CAT	RNP 0.30	
	DA(H)	CMV
A	-	-
B	-	-
C	447 (280)	1600
D	-	-

Authorization Required

CHANGE : New PROC.

INSTRUMENT APPROACH CHART

ROMD / MINAMIDAITO

RNP Z RWY02(AR)

Coding Table

Serial Number	Path Descriptor	Waypoint Identifier	Fly Over	Course °M(°T)	Magnetic Variation	Distance (NM)	Turn Direction	Altitude (FT)	Speed (KIAS)	VPA/ RDH (°/FT)	RNP Value
001	IF	WHALE	-	-	-5.7	-	-	+3000	-	-	-
002	TF	MD252	-	124 (118.4)	-5.7	6.8	-	2000	-	-	1.0
003	TF	MD253	-	124 (118.4)	-5.7	1.5	-	1526	-	-3.00	0.3
004	RF Center: MDRF1 r=1.51NM	MD254	-	-	-5.7	2.7	L	663	-	-3.00	0.3
005	TF	RW02	Y	021 (015.6)	-5.7	1.4	-	217	-	-3.00/50	0.3
006	FA	-	-	021 (015.6)	-5.7	-	-	+600	-	-	1.0
007	DF	WHALE	-	-	-5.7	-	L	3000	-	-	1.0

Path	Waypoint Identifier	Inbound Course °M(°T)	Magnetic Variation	Outbound Time (MIN)	Turn Direction	Minimum Altitude (FT)	Maximum Altitude (FT)	Speed (KIAS)	RNP Value
Hold	WHALE	109 (103.0)	-5.7	1.0 (-6000)	L	3000	6000	-175 (-6000)	1.0

Waypoint Coordinates

Waypoint Identifier	Coordinates	RF Arc Center Identifier	Coordinates
WHALE	255203.25N / 1310446.65E	MDRF1	254927.15N / 1311339.29E
MD252	254849.54N / 1311124.51E		
MD253	254807.07N / 1311251.61E		
MD254	254902.61N / 1311516.07E		
RW02	255023.94N / 1311541.26E		

CHANGE : New PROC.

ROMD / MINAMIDAITO

KOMOD / MINAMIDAITO

FUKUOKA CONTROL 124.5 - 279.5	RNP APCH	DAITO RADIO 118.55 AFIS provided by Naha Airport Office	NO RADAR
---	----------	---	-----------------

Baro-VNAV not authorized below 5°C

VAR 6°W

MSA 25NM
1400
ARP

ARP : 255048N / 1311549E

Fix	Elev.	Lat	Long
WHALE (IAF)	255203.25N	1310446.65E	
SHIGE	254409.02N	1310909.30E	
KOHJO (IF)	254304.20N	1311325.19E	
JYUGO (FAF)	254724.92N	1311445.83E	
RW02 (MAPt)	255023.94N	1311541.26E	
MD251 (MATF)	255420.02N	1311654.45E	
MINAMIDAITO (MDE) (MAHF)	255116.14N	1311549.64E	

NM to Next Fix	FAF	3	2	MAPt
ALT (3.0' APCH Path)	1200	1172	853	-

MHA 2000 MAX 210KIAS
1MIN
NOT TO SCALE

MHA 3000 Maximum holding altitude 6000 MAX 175KIAS
1MIN
NOT TO SCALE

MISSED APPROACH
Climb direct to MD251, turn left direct to MDE and hold at 2000FT.
Contact DAITO RADIO.


CAT	LNAV/VNAV		LNAV		CIRCLING	
	DA(H)	CMV	MDA(H)	CMV	MDA (H)	VIS
A	550 (383)	1500	550 (392)	1500	600 (442)	1600
B					610 (452)	
C					620 (462)	
D	-	-	-	-	-	-

PROC renamed. Maximum HLDG ALT at WHALE established.
CHANGE: Missed APCH for using VOR/DME abolished. OBST.

INSTRUMENT APPROACH CHART

ROMD / MINAMIDAITO

RNP Z RWY20(AR)

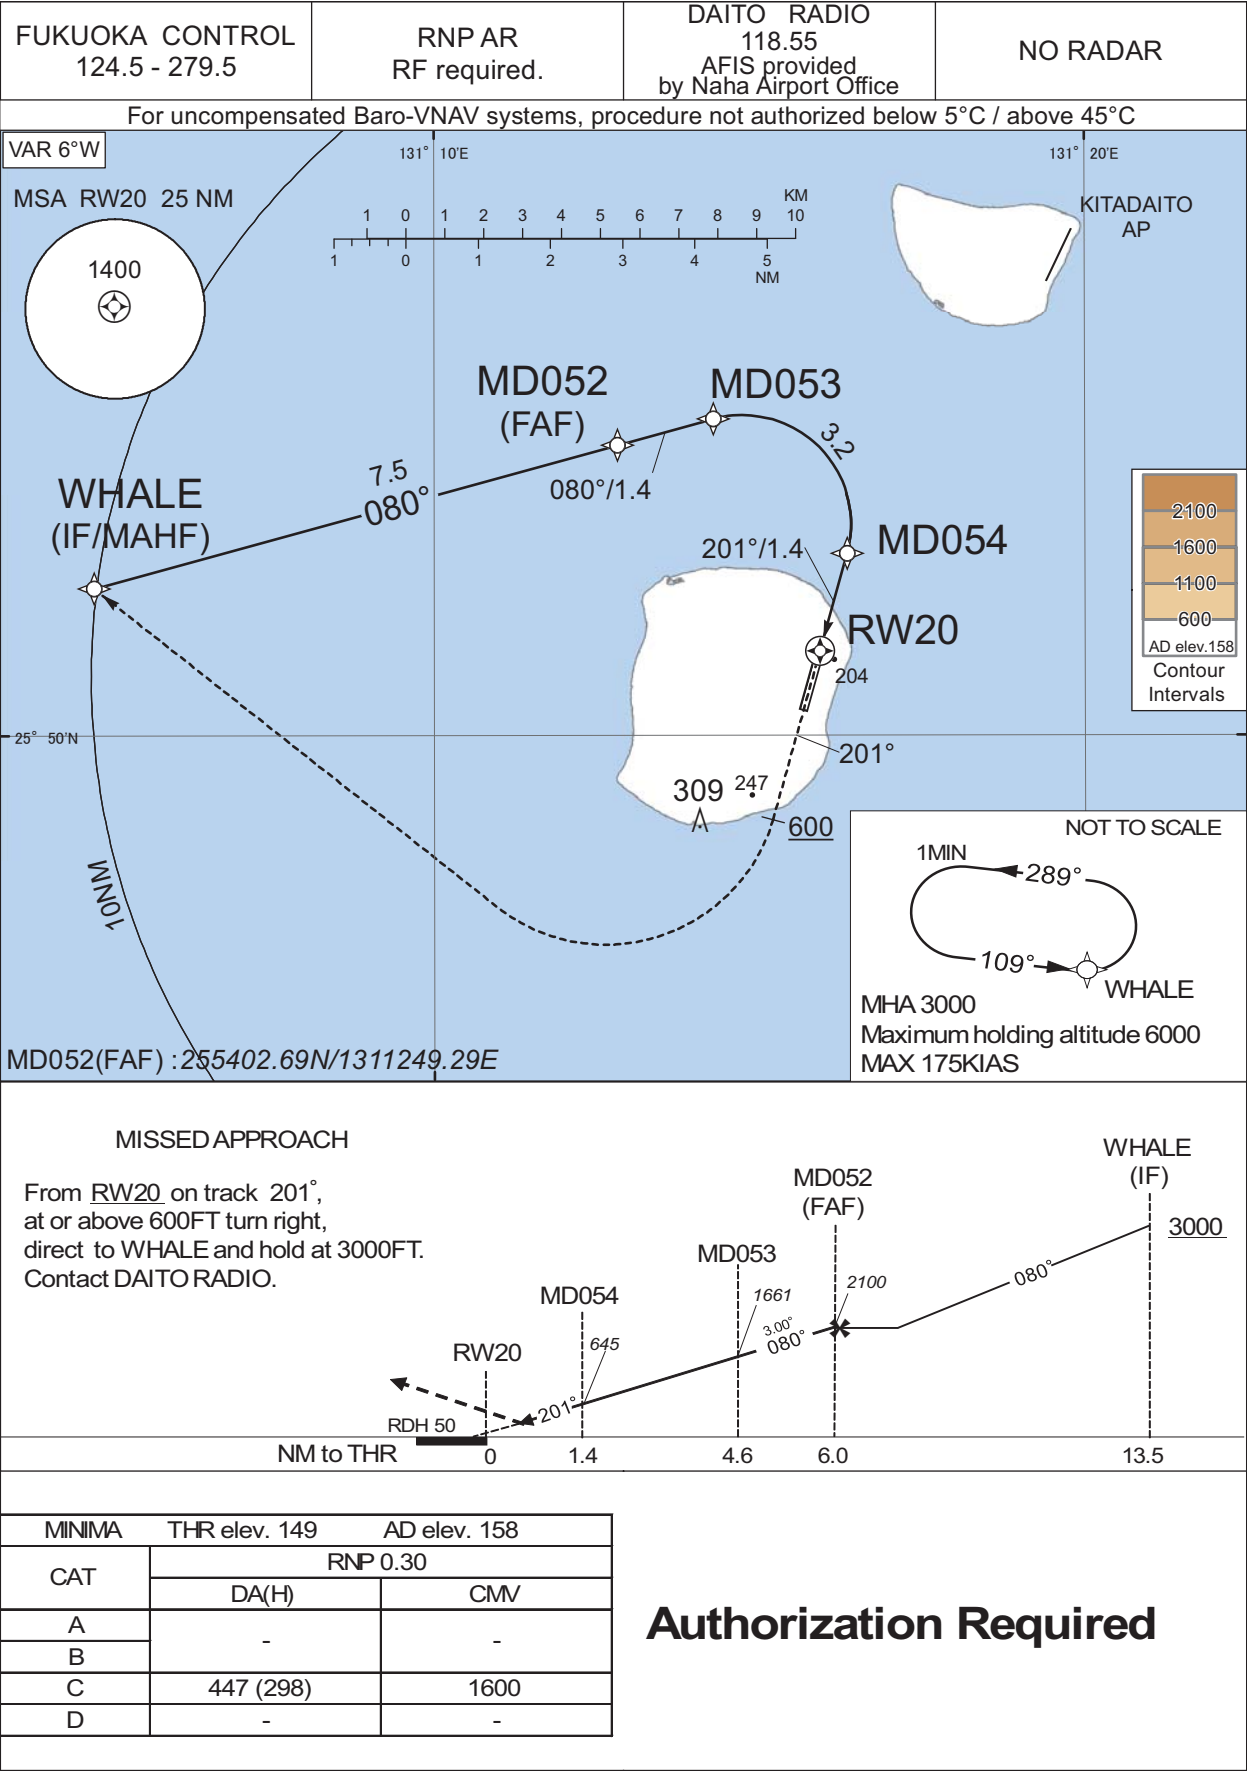

INSTRUMENT APPROACH CHART

ROMD / MINAMIDAITO

RNP Z RWY20(AR)


Coding Table											
Serial Number	Path Descriptor	Waypoint Identifier	Fly Over	Course °M(°T)	Magnetic Variation	Distance (NM)	Turn Direction	Altitude (FT)	Speed (KIAS)	VPA/ RDH (°/FT)	RNP Value
001	IF	WHALE	-	-	-5.7	-	-	+3000	-	-	-
002	TF	MD052	-	080 (074.6)	-5.7	7.5	-	2100	-	-	1.0
003	TF	MD053	-	080 (074.7)	-5.7	1.4	-	1661	-	-3.00	0.3
004	RF Center: MDRF2 r=1.51NM	MD054	-	-	-5.7	3.2	R	645	-	-3.00	0.3
005	TF	RW20	Y	201 (195.6)	-5.7	1.4	-	199	-	-3.00/50	0.3
006	FA	-	-	201 (195.6)	-5.7	-	-	+600	-	-	1.0
007	DF	WHALE	-	-	-5.7	-	R	3000	-	-	1.0

Path	Waypoint Identifier	Inbound Course °M(°T)	Magnetic Variation	Outbound Time (MIN)	Turn Direction	Minimum Altitude (FT)	Maximum Altitude (FT)	Speed (KIAS)	RNP Value
Hold	WHALE	109 (103.0)	-5.7	1.0 (-6000)	L	3000	6000	-175 (-6000)	1.0

Waypoint Coordinates			
Waypoint Identifier	Coordinates	RF Arc Center Identifier	Coordinates
WHALE	255203.25N / 1310446.65E	MDRF2	255256.75N / 1311444.18E
MD052	255402.69N / 1311249.29E		
MD053	255424.51N / 1311417.72E		
MD054	255232.20N / 1311621.01E		
RW20	255110.87N / 1311555.80E		

CHANGE : New PROC.


INSTRUMENT APPROACH CHART

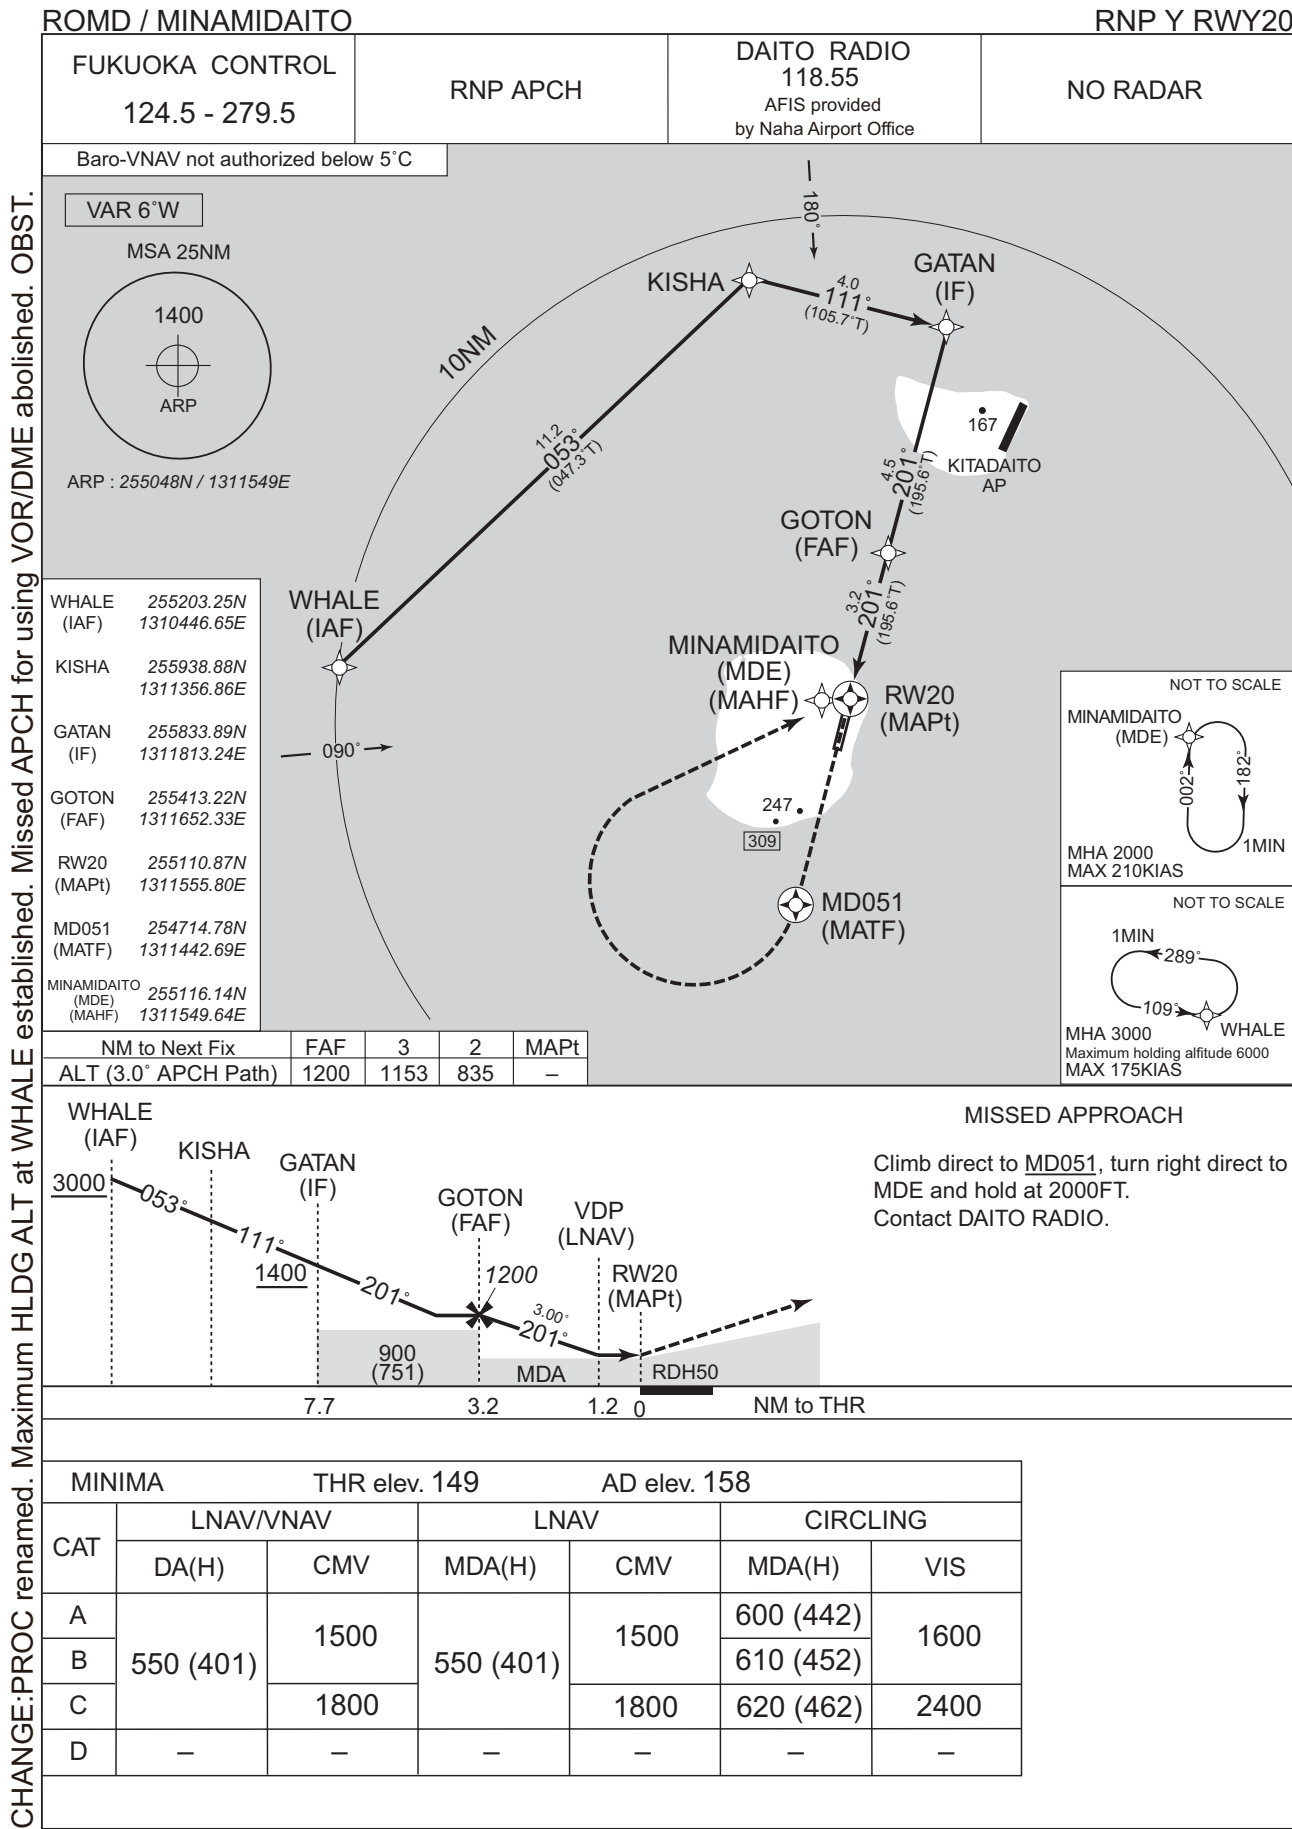

CHANGE:PROC renamed. Maximum HLDG ALT at WHALE established. Missed APCH for using VOR/DME abolished. OBST.

ROMD / MINAMI DAITO

Visual REP

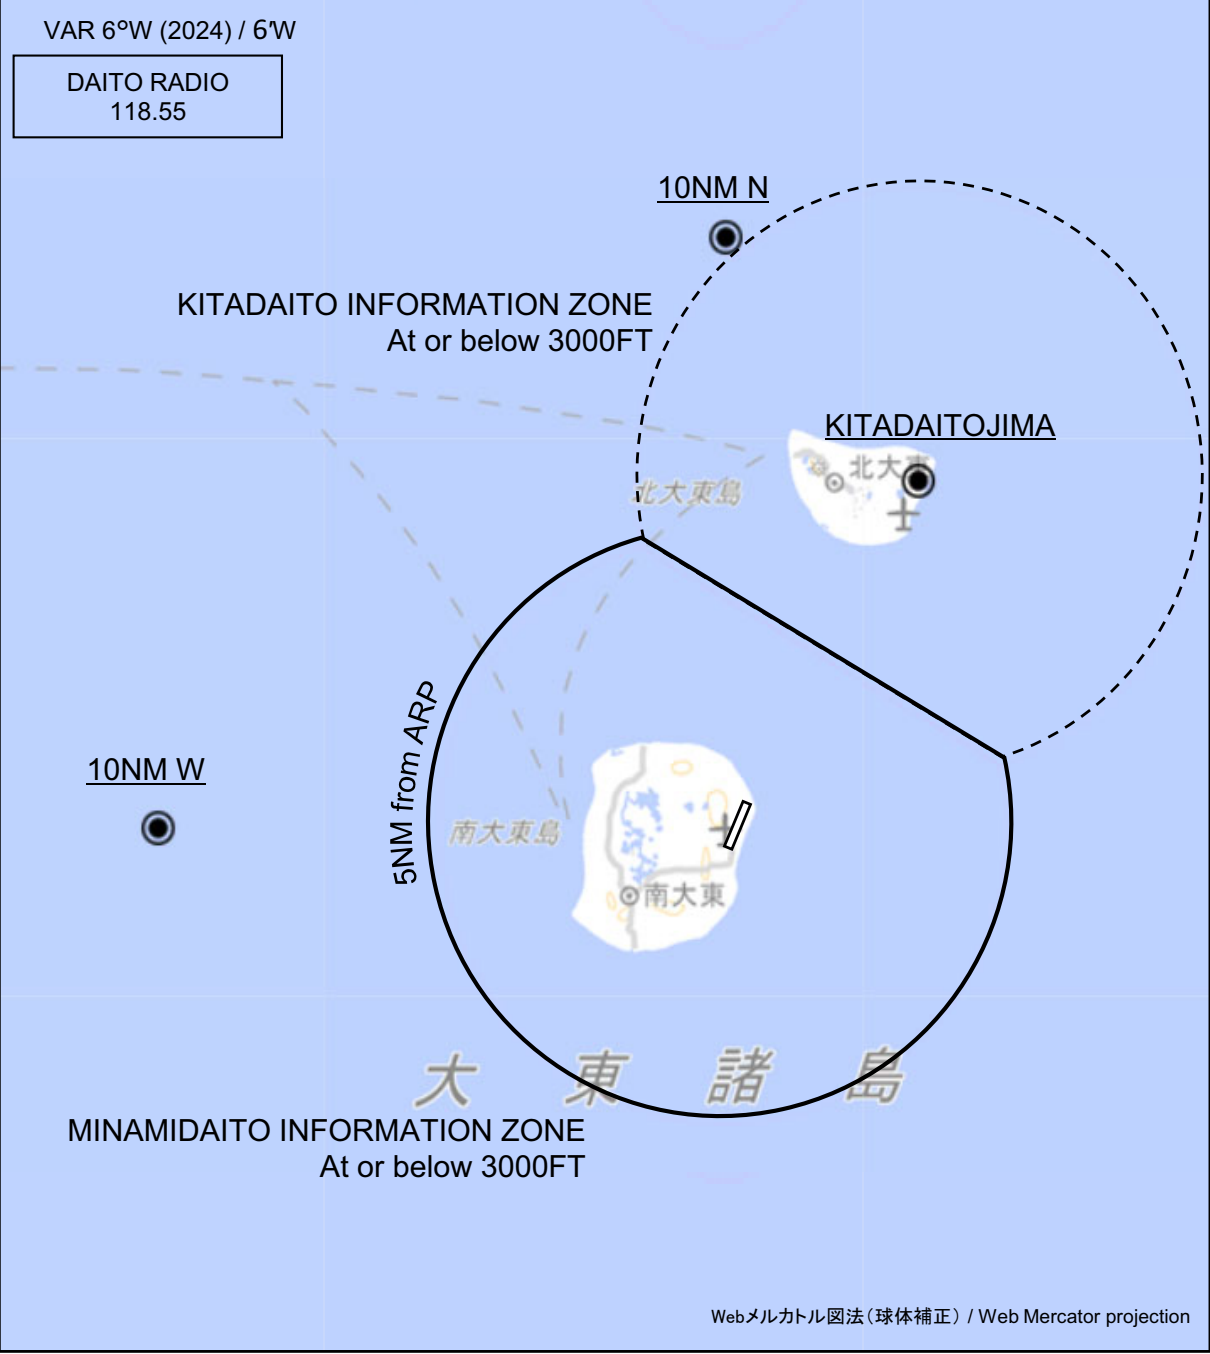

※図中に標高を示す数字がある場合、単位はメートル(m)である。The unit of measurement used to express elevation is meter(m).

CHANGE : VAR.

Call sign	BRG / DIST from ARP	Remarks
10NM N	360°T / 10.0NM	海上 Over the sea
北大東島 Kitadaitojima	030°T / 6.8NM	北大東空港 Kitadaito Airport
10NM W	270°T / 10.0NM	海上 Over the sea

ROMD / MINAMIDAITO

Minimum Vectoring Altitude CHART

CHANGE : Shape of segment. Minimum vectoring altitude.

