

## AD 2 AERODROMES

## ROTM AD 2.1 AERODROME LOCATION INDICATOR AND NAME

## ROTM - FUTENMA

## ROTM AD 2.2 AERODROME GEOGRAPHICAL AND ADMINISTRATIVE DATA

|   |                                                                                                    |                                       |
|---|----------------------------------------------------------------------------------------------------|---------------------------------------|
| 1 | ARP coordinates and site at AD                                                                     | 2616N/12745E, 261614.50N/1274452.97E* |
| 2 | Direction and distance from (city)                                                                 | 5nm NE of NAHA                        |
| 3 | Elevation/ Reference temperature                                                                   | 246ft / -                             |
| 4 | Geoid undulation at AD ELEV<br>PSN                                                                 | Nil                                   |
| 5 | MAG VAR/ Annual change                                                                             | Nil                                   |
| 6 | AD Administration, address,<br>telephone, telefax, telex, AFS,<br>e-mail and/or Web-site addresses | USMC                                  |
| 7 | Types of traffic permitted(IFR/<br>VFR)                                                            | Nil                                   |
| 8 | Remarks                                                                                            | Nil                                   |

## ROTM AD 2.3 OPERATIONAL HOURS

|    |                           |     |
|----|---------------------------|-----|
| 1  | AD Administration         | Nil |
| 2  | Customs and immigration   | Nil |
| 3  | Health and sanitation     | Nil |
| 4  | AIS Briefing Office       | Nil |
| 5  | ATS Reporting Office(ARO) | Nil |
| 6  | MET Briefing Office       | Nil |
| 7  | ATS                       | Nil |
| 8  | Fuelling                  | Nil |
| 9  | Handling                  | Nil |
| 10 | Security                  | Nil |
| 11 | De-icing                  | Nil |
| 12 | Remarks                   | Nil |

**ROTM AD 2.4 HANDLING SERVICES AND FACILITIES**

|   |                                         |                    |
|---|-----------------------------------------|--------------------|
| 1 | Cargo-handling facilities               | Nil                |
| 2 | Fuel/ oil types                         | 115/145 JP-4       |
| 3 | Fuelling facilities/ capacity           | To be issued later |
| 4 | De-icing facilities                     | Nil                |
| 5 | Hangar space for visiting aircraft      | Nil                |
| 6 | Repair facilities for visiting aircraft | Nil                |
| 7 | Remarks                                 | Nil                |

**ROTM AD 2.5 PASSENGER FACILITIES**

|   |                      |     |
|---|----------------------|-----|
| 1 | Hotels               | Nil |
| 2 | Restaurants          | Nil |
| 3 | Transportation       | Nil |
| 4 | Medical facilities   | Nil |
| 5 | Bank and Post Office | Nil |
| 6 | Tourist Office       | Nil |
| 7 | Remarks              | Nil |

**ROTM AD 2.6 RESCUE AND FIRE FIGHTING SERVICES**

|   |                                             |     |
|---|---------------------------------------------|-----|
| 1 | AD category for fire fighting               | Nil |
| 2 | Rescue equipment                            | Nil |
| 3 | Capability for removal of disabled aircraft | Nil |
| 4 | Remarks                                     | Nil |

**ROTM AD 2.7 SEASONAL AVAILABILITY-CLEARING**

|   |                             |     |
|---|-----------------------------|-----|
| 1 | Types of clearing equipment | Nil |
| 2 | Clearance priorities        | Nil |
| 3 | Remarks                     | Nil |

**ROTM AD 2.8 APRONS, TAXIWAYS AND CHECK LOCATIONS DATA**

|   |                                     |                    |
|---|-------------------------------------|--------------------|
| 1 | Apron surface and strength          | To be issued later |
| 2 | Taxiway width, surface and strength | To be issued later |
| 3 | ACL and elevation                   | Not Available      |
| 4 | VOR checkpoints                     | Nil                |
| 5 | INS checkpoints                     | Nil                |
| 6 | Remarks                             | Nil                |

**ROTM AD 2.9 SURFACE MOVEMENT GUIDANCE AND CONTROL SYSTEM AND MARKINGS**

|   |                                                                                                                |                         |
|---|----------------------------------------------------------------------------------------------------------------|-------------------------|
| 1 | Use of aircraft stand ID signs, TWY guide lines and Visual docking/ parking guidance system of aircraft stands | Nil                     |
| 2 | RWY and TWY markings and LGT                                                                                   | RWY:06/24<br>(LGT):RTHL |
| 3 | Stop bars                                                                                                      | Nil                     |
| 4 | Remarks                                                                                                        | Nil                     |

**ROTM AD 2.10 AERODROME OBSTACLES**

| RWY/Area affected | Obstacle type | Coordinates | Elevation | Markings/ LGT | Remarks |
|-------------------|---------------|-------------|-----------|---------------|---------|
| Nil               |               |             |           |               |         |

**ROTM AD 2.11 METEOROLOGICAL INFORMATION PROVIDED**

|    |                                                                        |         |
|----|------------------------------------------------------------------------|---------|
| 1  | Associated MET Office                                                  | FUTENMA |
| 2  | Hours of service<br>MET Office outside hours                           | Nil     |
| 3  | Office responsible for TAF preparation<br>Periods of validity          | Nil     |
| 4  | Trend forecast<br>Interval of issuance                                 | Nil     |
| 5  | Briefing/ consultation provided                                        | Nil     |
| 6  | Flight documentation<br>Language(s) used                               | Nil     |
| 7  | Charts and other information available<br>for briefing or consultation | Nil     |
| 8  | Supplementary equipment<br>available for providing information         | Nil     |
| 9  | ATS units provided with information                                    | Nil     |
| 10 | Additional information(limitation of service, etc.)                    | Nil     |

**ROTM AD 2.12 RUNWAY PHYSICAL CHARACTERISTICS**

| Designations<br>RWY NR | TRUE BRG     | Dimensions of<br>RWY(M) | Strength(PCN) and<br>surface of RWY | THR coordinates<br>THR geoid undulation | THR elevation and<br>highest elevation of TDZ<br>of precision APP RWY |
|------------------------|--------------|-------------------------|-------------------------------------|-----------------------------------------|-----------------------------------------------------------------------|
| 1                      | 2            | 3                       | 4                                   | 5                                       | 6                                                                     |
| 06                     | To be issued | 2740×45                 | PCN 48/F/A/W/T<br>Asphalt Concrete  | Nil                                     | Nil                                                                   |
| 24                     | Later        | 2740×45                 |                                     | Nil                                     | Nil                                                                   |
| Slope of RWY           |              | Strip<br>Dimensions(M)  | Remarks                             |                                         |                                                                       |
| 7                      |              | 10                      | 12                                  |                                         |                                                                       |
| To be issued later     |              |                         |                                     |                                         |                                                                       |

## ROTM AD 2.13 DECLARED DISTANCES

| RWY Designator | TORA<br>(m) | TODA<br>(m) | ASDA<br>(m) | LDA<br>(m) | Remarks |
|----------------|-------------|-------------|-------------|------------|---------|
| 1              | 2           | 3           | 4           | 5          | 6       |
|                |             |             |             |            |         |

## ROTM AD 2.14 APPROACH AND RUNWAY LIGHTING

| RWY Designator | APCH<br>LGT<br>type<br>LEN<br>INTST | RTHL<br>Color<br>WBAR | PAPI<br>(VASIS)<br>Angle<br>DIST FM<br>THR<br>MEHT | RTZL<br>LEN | RCLL<br>LEN<br>Spacing<br>Color<br>INTST | REDL<br>LEN<br>Spacing<br>Color<br>INTST | RENL<br>Color<br>WBAR | STWL<br>LEN<br>Color |
|----------------|-------------------------------------|-----------------------|----------------------------------------------------|-------------|------------------------------------------|------------------------------------------|-----------------------|----------------------|
| 1              | 2                                   | 3                     | 4                                                  | 5           | 6                                        | 7                                        | 8                     | 9                    |
| 06             | AVBL                                | AVBL<br>Nil           |                                                    |             |                                          |                                          |                       |                      |
| 24             |                                     | AVBL<br>Nil           |                                                    |             |                                          |                                          |                       |                      |
| Remarks        |                                     |                       |                                                    |             |                                          |                                          |                       |                      |
| 10             |                                     |                       |                                                    |             |                                          |                                          |                       |                      |
| Nil            |                                     |                       |                                                    |             |                                          |                                          |                       |                      |

## ROTM AD 2.15 OTHER LIGHTING, SECONDARY POWER SUPPLY

|   |                                                          |          |
|---|----------------------------------------------------------|----------|
| 1 | ABN/IBN location, characteristics and hours of operation | ABN:AVBL |
| 2 | LDI location and LGT<br>Anemometer location and LGT      | Nil      |
| 3 | TWY edge and centerline lighting                         | Nil      |
| 4 | Secondary power supply/ switch-over time                 | Nil      |
| 5 | Remarks                                                  | Nil      |

## ROTM AD 2.16 HELICOPTER LANDING AREA

|                    |
|--------------------|
| To be issued later |
|--------------------|

**ROTM AD 2.17 ATS AIRSPACE**

| Designation and lateral limits |                                                                                                                                                                                                                                                                                                                                                                                                                     | Vertical limits (ft)        | Airspace classification | ATS unit call sign Language | Remarks |
|--------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-----------------------------|-------------------------|-----------------------------|---------|
| 1                              |                                                                                                                                                                                                                                                                                                                                                                                                                     | 2                           | 3                       | 4                           | 6       |
| FUTENMA CTR                    | Area bounded by a line drawn from AJA Bridge (261429N/1274125E) to the intersection of Highways 58 and Highway 81 (261708N/1274519E) to a point on Highway 81 one and half nautical mile east of the Highway 58 and Highway 81 intersection (261717N/1274551E) to the intersection of Highway 329 and Highway 20 (261905N/1274912E) to AWASE Point (261904N/1275047E) to YONABARU (261206N/1274508E) to AJA Bridge. | -----<br>2246<br>(exc 2246) | D                       | FUTENMA<br>TOWER<br>En      |         |

**ROTM AD 2.18 ATS COMMUNICATION FACILITIES**

| Service designation | Call sign                 | Frequency                                          | Hours of operation | Remarks                       |
|---------------------|---------------------------|----------------------------------------------------|--------------------|-------------------------------|
| 1                   | 2                         | 3                                                  | 4                  | 5                             |
| TWR                 | Futenma Tower             | 340.2MHz<br>118.8MHz<br>243.0MHz(E)<br>121.5MHz(E) | H24                | APP ser provided by Naha APP. |
| GND                 | Futenma<br>Ground Control | 360.2MHz<br>122.8MHz                               | H24                |                               |

**ROTM AD 2.19 RADIO NAVIGATION AND LANDING AIDS**

| Type of aid | ID  | Frequency            | Hours of operation | Position of transmitting antenna coordinates | Elevation of DME transmitting antenna | Remarks                                                                                       |
|-------------|-----|----------------------|--------------------|----------------------------------------------|---------------------------------------|-----------------------------------------------------------------------------------------------|
| 1           | 2   | 3                    | 4                  | 5                                            | 6                                     | 7                                                                                             |
| TACAN       | NFO | 1003 MHz<br>(CH-42X) | H24                | 261607.8N/1274434.8E                         |                                       | Unusable:<br>031° - 229° beyond<br>28NM BLW 6000ft.<br>230° - 030° beyond<br>28NM BLW 3500ft. |

## ROTM AD 2.20 LOCAL TRAFFIC REGULATIONS

1. Airport regulations

|     |
|-----|
| Nil |
|-----|

2. Taxiing to and from stands

|     |
|-----|
| Nil |
|-----|

3. Parking area for small aircraft(General aviation)

|     |
|-----|
| Nil |
|-----|

4. Parking area for helicopters

|     |
|-----|
| Nil |
|-----|

5. Apron - taxiing during winter conditions

|     |
|-----|
| Nil |
|-----|

6. Taxiing - limitations

|     |
|-----|
| Nil |
|-----|

7. School and training flights - technical test flights - use of runways

|     |
|-----|
| Nil |
|-----|

8. Helicopter traffic - limitation

|     |
|-----|
| Nil |
|-----|

9. Removal of disabled aircraft from runways

|     |
|-----|
| Nil |
|-----|

## ROTM AD 2.21 NOISE ABATEMENT PROCEDURES

|     |
|-----|
| Nil |
|-----|

ROTAM AD 2.22 FLIGHT PROCEDURES

WX MINIMA CONCERNING PAR/ASR APCH PROCEDURE

RADAR INSTRUMENT APPROACH MINIMUMS

FUTENMA MCAS (ROTM)

Naha, Okinawa I, Japan Amdt 6 10JUL25 (25191) (USN)

ELEV 248

RADAR ①② - Call NAHA APP CON (E) 257.5x 297.2x 317.8x 

|                        | <u>RWY</u> | <u>GS/TCH/RPI</u> | <u>CAT</u> | <u>DA/<br/>MDA-VIS</u> | <u>HAT/HATh<br/>HAA</u> | <u>CEIL-VIS</u> |
|------------------------|------------|-------------------|------------|------------------------|-------------------------|-----------------|
| PAR ③④                 | 6 ⑤        | 3.1°/52/909       | ABCDE      | 504-¾                  | 259                     | (300-¾)         |
|                        | 24 ⑤       | 3.2°/50/903       | ABCDE      | 515-⅞                  | 267                     | (300-⅞)         |
| PAR (W/O GS) ④         | 6 ⑥        |                   | AB         | 780-¾                  | 535                     | (600-¾)         |
|                        |            |                   | CDE        | 780-1¼                 | 535                     | (600-1¼)        |
|                        | 24         |                   | AB         | 820-1                  | 572                     | (600-1)         |
|                        |            |                   | CDE        | 820-1⅝                 | 572                     | (600-1⅝)        |
| ASR ④                  | 24         |                   | AB         | 940-1                  | 692                     | (700-1)         |
|                        |            |                   | CDE        | 940-2                  | 692                     | (700-2)         |
|                        | 6 ⑦        |                   | AB         | 1000-1                 | 755                     | (800-1)         |
|                        |            |                   | CDE        | 1000-1⅞                | 755                     | (800-1⅞)        |
| CIR ④⑧<br>(PAR W/O GS) | All Rwy    |                   | AB         | 980-1                  | 732                     | (800-1)         |
|                        |            |                   | C          | 980-2                  | 732                     | (800-2)         |
|                        |            |                   | D          | 980-2¼                 | 732                     | (800-2¼)        |
|                        |            |                   | E          | 1160-3                 | 912                     | (1000-3)        |
|                        |            |                   | AB         | 1000-1¼                | 752                     | (800-1¼)        |
| CIR ④⑧<br>(ASR)        | All Rwy    |                   | C          | 1000-2¼                | 752                     | (800-2¼)        |
|                        |            |                   | D          | 1000-2½                | 752                     | (800-2½)        |
|                        |            |                   | E          | 1160-3                 | 912                     | (1000-3)        |
|                        |            |                   |            |                        |                         |                 |

① Acft will be RADAR vectored by NAHA APP CON for handoff to FUTENMA RADAR at 2200 for Rwy 06 and 2000 for Rwy 24.  
② MP 2200-0200Z Mon.  
③ PAR svc degraded dur heavy rain.  
④ TERPS  
⑤ CAUTION: GS exceeds 3°.  
⑥ When ALS inop, increase CAT AB vis to 1 mile, CAT CDE vis to 1½ miles.  
⑦ When ALS inop, increase CAT AB vis to 1¼ miles, CAT CDE vis to 2 miles.  
⑧ Circling NA NW of Rwy 6/24. CAT DE remain within 2.8 NM.

NOTE:REPRINTING DOD FLIP


ROTAM AD 2.23 ADDITIONAL INFORMATION

Nil

ROTAM AD 2.24 CHARTS RELATED TO AN AERODROME

Aerodrome/Heliport Chart



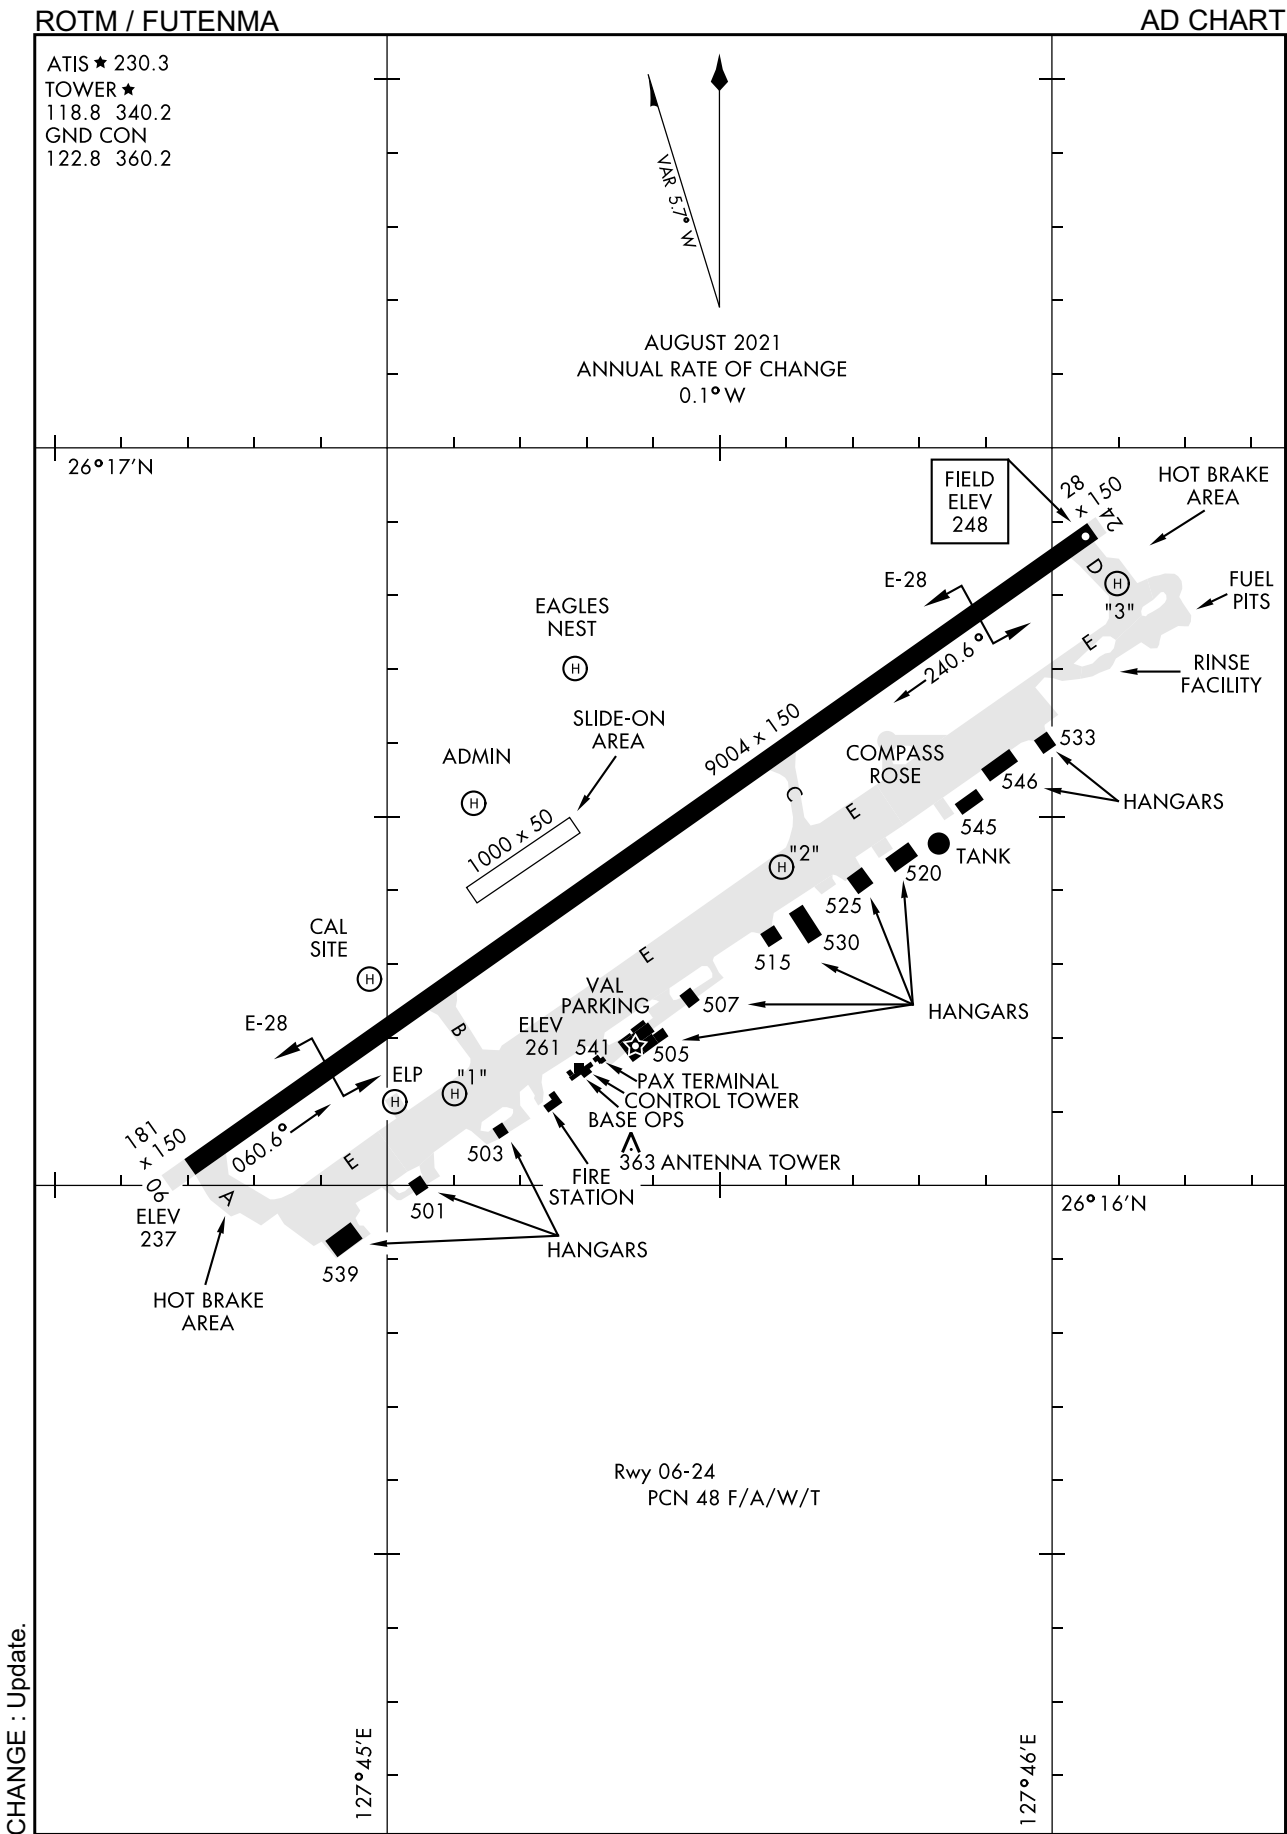

NOTE: REPRINTING DOD FLIP