

مصانع سيمبود لإنتاج الأسلاك والكابلات
SIMPOOD Wire & Cable Manufacturing Company



www.SIMPOOD.com



SIMPOOD

Wire & Cable Manufacturing Company



 SIMPOOD



www.SIMPOOD.com

CONTENTS

- 4 Company Profile Company Certification
- 5 Flexible Stranded Wires NYA Rigid Wires
- 6 Flexible Cables NYM Rigid Cables RG
- 7 Cables Telephone Cables Three-and-a-half
- 8 High-Voltage Cable Wire & Cable Specifications
- 9 and Applicable Standards Technical Data
- 10 Exhibitions
- 11
- 12
- 13
- 14
- 16

أهداف الشركة

تعمد (شركة سيمبود) كإنتاج الكابلات والكابلات الدقيقة والكابلات

COMPANY PROFILE

SIMPOOD Wire & Cable Manufacturing Company (S) the production of electrical wires and cables and di in Iran and neighboring markets. The company man wires, power cables, flexible wires and communicat accordance with applicable national standards. Its p developed using quality raw materials and are supp expertise and trained personnel. SIMPOOD emphas competitive pricing, customer service and complian standards. The company also highlights environme production and Green Technology, with continued a and development (R&D). Customer satisfaction and rights are presented as key commitments of the co

CERTIFICATES & QUALITY DOCUMENT



تاییدیه توانیر

CERTIFICATES & QUALITY DOCUMENT



ارة، وفي الأماكن

NYAF — FLEXIBLE STRAND



تزيد مقاطعها

تزيد مقاطعها

Applications: • Rated 450/750 V: used inside equipment, lighting systems, dry location under or over plaster. It should not be installed in plaster or on cable trays, ducts or cabinets. Protection is required. • Rated 300/500 V: used under or over plaster and inside plastic h. It can be fixed directly on cable trays and cable ducts. Construction: Conductor: flexible stranded copper wire. Insulation: the applicable IEC/ISIRI standards. Insulation type PVC/C. Standards: IEC 60227 / ISIRI 60227 nominal-voltage requirements as stated in the standards.



NYA — RIGID WIRE



Applications: Used for wiring inside electrical switchboards. The wires can be installed under plaster and are suitable for control industrial wiring harnesses. Direct installation in cable trays is subject to the installation rules in the original catalog. Construction: Conductor: single-wire or stranded construction according to IEC/ISIRI standards. Insulation: PVC compound. Standards: IEC 60227 / ISIRI 607, with the cross-section ranges specified in the original catalog.



NYMHY — FLEXIBLE CABLE



Applications: Flexible cables for appliances subject to medium mechanical stress, including appliances, kitchens and office equipment and washing machines. They may be used provided they are not in direct contact with exposed to damaging heat. Construction: stranded copper, according to the application. Insulation: PVC compound, type PVC/C. R cores. Flat cable: parallel cores. Outer sheath normally black. Standards: IEC / ISIRI refer to original catalog.




الكابلات السلكية السمكة NYM

NYM — RIGID CABLE



Applications: Used for industrial cabling and suitable for dry, wet and damp locations, and for installation with brick and concrete method permits. Not intended for direct installation in compressed concrete or directly underground allowed by the applicable installation standards. Conductor: solid copper, single-wire or stranded. Insulation: PVC compound, type PVC/C. Insulation compound around the cable cores. Outer jacket normally black or gray. Standards: IEC / IS in the original catalog.

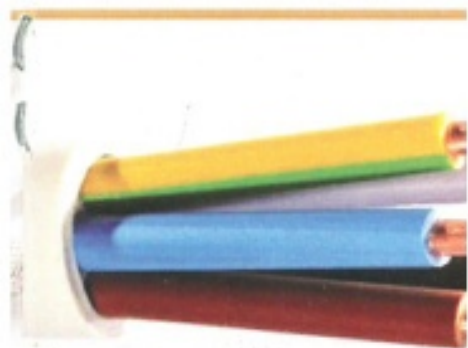

RG — COAXIAL CABLES




Applications: Used for transmission of audio and video signals, especially for satellite reception, computer networks, and telecommunications. Construction: Conductor: solid wire or regular braid, bare or tinned. Insulation: polyethylene. Second layer: braided copper or aluminum with an aluminum layer or copper-supporting layer. Outer sheath: special PVC compound. Standard: RG-58, RG-59, RG-6, RG-11.



A-2Y(ST)Y — TELEPHONE C



Applications: Used for installation of indoor communication lines in dry locations. Steel are recommended for open networks where protection is required. Construction: Conductors or tinned. Insulation: HDPE. Second layer wire, as required. Outer sheath: PE or PVC. IEC / VDE requirements as specified in the

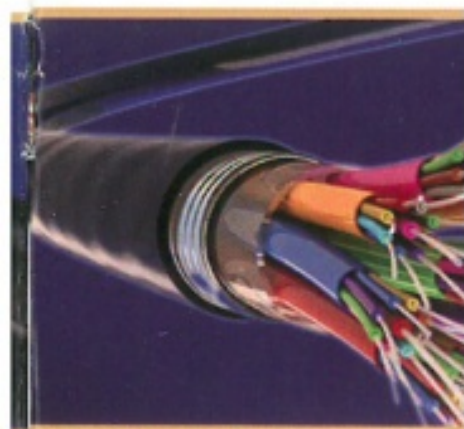

THREE-AND-A-HALF-CORE



Applications: Used for underground cable outside ducts, to supply electrical installation with expected risk of mechanical impact. Construction: 1-10 kV. Insulation: PVC / XLPE. Stranded tinned copper wire, stranded. Armoring: steel tape. Outer sheath: PVC. Standards: Applicable standards stated in the original catalog.



الوزن التقريبي	مقاومة الموصل الفصوى	مقاومة العازل الفصوى	متوسط القطر الخارجى	سُمك العازل	سطح المقطع الأسسى للموصل
----------------	-------------------------	-------------------------	---------------------	-------------	--------------------------

DIMENSIONS / TECHNICAL DATA

Single-core wires • Multi-core wires

2.5	4	6	10	16	25	35	50	70	95	120
0.8	0.8	0.8	1.0	1.0	1.2	1.2	1.4	1.4	1.6	1.6
3.4	3.9	4.4	5.7	6.7	8.4	9.7	11.5	13.2	15.1	16.7
4.1	4.8	5.3	6.8	8.1	10.2	11.7	13.9	16.0	18.2	20.2
0.0090	0.0070	0.0060	0.0056	0.0046	0.0044	0.0038	0.0037	0.0032	0.0032	0.0029
7.98	4.95	3.30	1.91	1.21	0.780	0.554	0.386	0.272	0.206	0.161
32	47	67	113	169	262	359	512	689	959	1200

أسلاك الشعرية

الوزن التقريبي	مقاومة الموصل في ٢٠°C	مقاومة العازل في ٧٠°C	متوسط القطر الخارجى	سُمك العازل	فتة الموصل	سطح المقطع الأسسى للموصل
kg/km	MΩ/km	MΩ/km	حد أعلى mm	حد أدنى mm	mm	mm²
8	36	0.0150	2.3	1.9	0.6	0.5
11	24.5	0.0120	2.5	2.1	0.6	0.75
14	18.1	0.0110	2.7	2.2	0.6	1
20	12.1	0.0110	3.2	2.6	0.7	1.5
22	12.1	0.0100	3.4	2.8	0.7	1.5
31	7.41	0.0100	3.9	3.2	0.8	2.5
33	7.41	0.0090	4.0	3.3	0.8	2.5
46	4.61	0.0085	4.4	3.6	0.8	4
48	4.61	0.0077	4.6	3.8	0.8	4
66	3.08	0.0070	5.0	4.1	0.8	6
69	3.08	0.0065	5.2	4.3	0.8	6
105	1.83	0.0070	6.4	5.3	1.0	10
110	1.83	0.0065	6.8	5.7	1.0	10
169	1.15	0.0050	7.8	6.4	1.0	16
262	0.727	0.0050	9.7	8.1	1.2	25
354	0.524	0.0043	10.9	9.0	1.2	35
490	0.387	0.0043	12.8	10.6	1.4	50
678	0.268	0.0035	14.6	12.1	1.4	70
935	0.193	0.0035	17.1	14.1	1.6	95
1165	0.153	0.0032	18.8	15.6	1.6	120

الأسلاك السمكية

الوزن التقريبي	مقاومة الموصل في ٢٠°C	مقاومة العازل في ٧٠°C	متوسط القطر الخارجي	سمك العازل	سمك الموصل	سطح المقطع الاسمي للموصل
kg/km	MΩ/km	MΩ/km	حد بين mm	حد بين mm	mm	mm ²

TECHNICAL DATA TABLES

Flexible cables • Telephone / coaxial cable data • Allowable

3 x 0.75	0.6	0.8	6.0	7.6	0.011	26	65
3 x 1	0.6	0.8	6.3	8.0	0.010	19.5	76
3 x 1.5	0.7	0.9	7.4	9.4	0.010	13.3	106
3 x 2.5	0.8	1.1	9.2	11.4	0.009	7.98	162
4 x 0.75	0.6	0.8	6.6	8.3	0.011	26	78
4 x 1	0.6	0.9	7.1	9.0	0.010	19.5	95
4 x 1.5	0.7	1.0	8.4	10.5	0.010	13.3	132
4 x 2.5	0.8	1.1	10.2	12.5	0.009	7.98	195
5 x 0.75	0.6	0.9	7.4	9.3	0.011	26	95
5 x 1	0.6	0.9	7.8	9.8	0.010	19.5	111
5 x 1.5	0.7	1.1	9.3	11.6	0.010	13.3	160
5 x 2.5	0.8	1.2	11.2	13.9	0.009	7.98	239

بلاط الشعرية

نوع الكابل	قياس الموصل	قطر العازل الخارجي	مادة الموصل	مادة العازل	عدد طبقات الحياكة	المقاومة	التضعيف في ١٠ هيرتز	قطر الكابل	الوزن التقريبي
	mm	mm				MΩ/km	dB	mm	kg/km
2.5C-2V	1x0.4	2.5	مس	بلي اتيلين	1	75	52	4.1	24
3C-2V	1x0.5	3.0	مس	بلي اتيلين فوم	1	75	42	5.5	42
4.5C-2V	1x1.0	4.5	مس	بلي اتيلين	1	75	22	6.6	48
3C-2W	1x0.5	3.0	مس	بلي اتيلين	2	75	42	6.5	68
RG-8/U	7x0.72	6.5	مس	بلي اتيلين	1	50	6.8	9.6	130
RG-11/U	7x0.4	7.4	مس قلع اندود	بلي اتيلين	2	75	7	10.4	142
RG58/U	19x0.18	3.0	مس قلع اندود	بلي اتيلين	1	50	17	5.0	40

أسلاك الهوائيات
(التقاط الإشارات)

مسافة (متر)	10	50	100	150	200	250	300	350	400	450	500	600
سطح المقطع												
1.5 mm ²	27	15	7	5								
2.5 mm ²	36	25	12	8	6							
4 mm ²	46	40	20	13	10	8	6					
6 mm ²	58	58	30	20	15	12	10	8	7	6.5	6	5
10 mm ²	77	77	50	33	25	20	16	14	12	11	10	8
16 mm ²	100	100	80	53	40	32	26	22	20	17	16	13
25 mm ²	130	130	125	83	62	50	41	35	31	27	25	20
35 mm ²	155	155	155	115	86	69	57	49	43	38	34	28
50 mm ²	185	185	185	156	117	93	78	66	58	52	46	38
70 mm ²	230	230	230	222	166	133	114	95	83	74	66	55
95 mm ²	275	275	275	275	225	180	150	129	117	100	90	75
120 mm ²	315	315	315	315	275	222	185	159	139	123	111	92
150 mm ²	355	355	355	355	330	264	220	189	165	147	132	110
185 mm ²	400	400	400	400	393	314	262	220	196	174	157	131

جدول المسافات وتردد
الكابلات حسب الامبير

عدد وسطح مقطع	سم العازل	سم التغليف	سم التغليف	متوسط القطر	مقاومة الموصل القصوى	الوزن التقريبي
---------------	-----------	------------	------------	-------------	----------------------	----------------

MULTI-CORE CABLE TECHNICAL DATA

1 x 50	1.4	-	1.4	14.7	0.387	590
1 x 70	1.4	-	1.4	16.4	0.268	799
1 x 95	1.6	-	1.4	18.8	0.193	1106
1 x 120	1.6	-	1.5	21.1	0.153	1342
2 x 1.5	0.8	1.0	1.8	11.5	12.1	186
2 x 2.5	0.8	1.0	1.8	12.5	7.41	222
2 x 4	1.0	1.0	1.8	14	4.61	303
2 x 6	1.0	1.0	1.8	15	3.08	374
2 x 10	1.0	1.0	1.8	16.7	1.83	493
2 x 16	1.0	1.0	1.8	20	1.15	734
2 x 25	1.2	1.0	1.8	23	0.727	1059
2 x 35	1.2	1.0	1.8	25.5	0.524	1346
3 x 1.5	0.8	1.0	1.8	12	12.1	206
3 x 2.5	0.8	1.0	1.8	13	7.41	257
3 x 4	1.0	1.0	1.8	15	4.61	363
3 x 6	1.0	1.0	1.8	16	3.08	444
3 x 10	1.0	1.0	1.8	17.5	1.83	615
3 x 16	1.0	1.0	1.8	21	1.15	905
3 x 25	1.0	1.0	1.8	24.5	0.727	1320
3 x 35	1.2	1.0	1.8	27	0.524	1699
4 x 1.5	1.2	1.0	1.8	12.8	12.1	241
4 x 2.5	0.8	1.0	1.8	13.8	7.41	302
4 x 4	0.8	1.0	1.8	16	4.61	417
4 x 6	0.8	1.0	1.8	17	3.08	527
4 x 10	1.0	1.0	1.8	19	1.83	738
4 x 16	1.0	1.0	1.8	22.5	1.15	1115
4 x 25	1.2	1.0	1.8	26.9	0.727	1620
4 x 35	1.2	1.0	1.8	29.5	0.524	2100
5 x 1.5	0.8	1.0	1.8	13.5	12.1	272
5 x 2.5	0.8	1.0	1.8	14.5	7.41	345
5 x 4	1.0	1.0	1.8	17	4.61	483
5 x 6	1.0	1.0	1.8	18.5	3.08	615
5 x 10	1.0	1.0	1.8	20.5	1.83	864
5 x 16	1.0	1.0	1.8	24.5	1.15	1273
5 x 25	1.0	1.0	1.8	17.5	0.727	1888
5 x 35	1.2	1.0	1.8	18.5	0.524	2468
3 x 25 / 16	1.2 / 1.0	1.0	1.8	27	0.727 / 1.15	1440
3 x 35 / 16	11.2 / 1.0	1.0	1.8	28	0.524 / 1.15	1799

كابلات القدرة غير المرنة من ١ - ٠.٦ كيلو فولت





SIMPOOD

Wire & Cable Manufacturing Company

D
O
O
P
M
S

www.SIMPOOD.com