


Two guards. Separate fastenings.

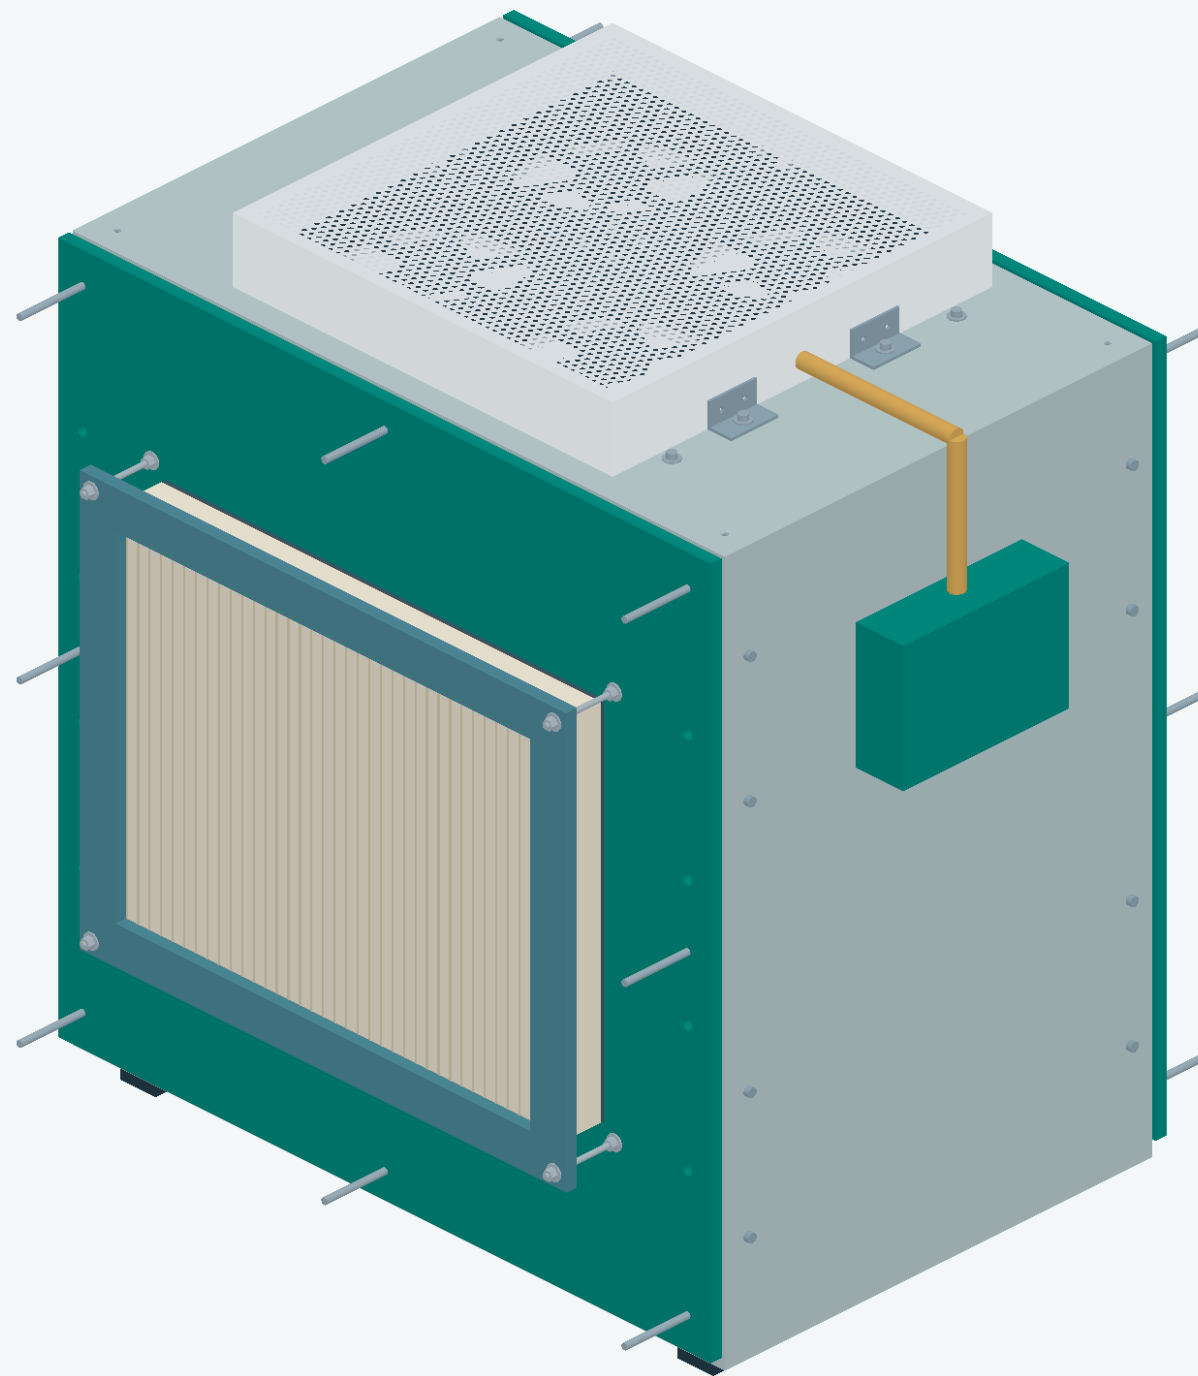

WHY CHANGE: the previous four shared bolts retained both guards. R02G gives the upper and lower guards four separate bolts each, so removing one set does not release the other mounting.

WHAT CHANGED: upper brackets moved along the sides; four extra holes added to the fan plate. Upper side-skirt rivet holes move with their brackets. Inner brackets retain their earlier positions.


DIGITAL CHECKS: 245 valid parts; 8641 checked changed-part pairs without clashes. Sixteen assumed driver/socket envelope checks clear. Native reopen and STEP volume checks pass.

WHAT THIS DOES NOT PROVE: actual tools and hand access, sheet/rivet strength, finger protection, vibration resistance, captive fasteners, sealed cable entry or safe isolation. Guards remain proposed sheet envelopes, not certified products.

NEXT CONSTRUCTION GATE: complete guard seams/rivets, remaining cabinet hardware and protective access/isolation details; verify actual filter resistance and sealing. No powered demonstration until the complete assembly passes physical review.

Mounting coordinates and bolt stacks / millimetres

TOP VIEW: fan plate 550 x 360 x 9

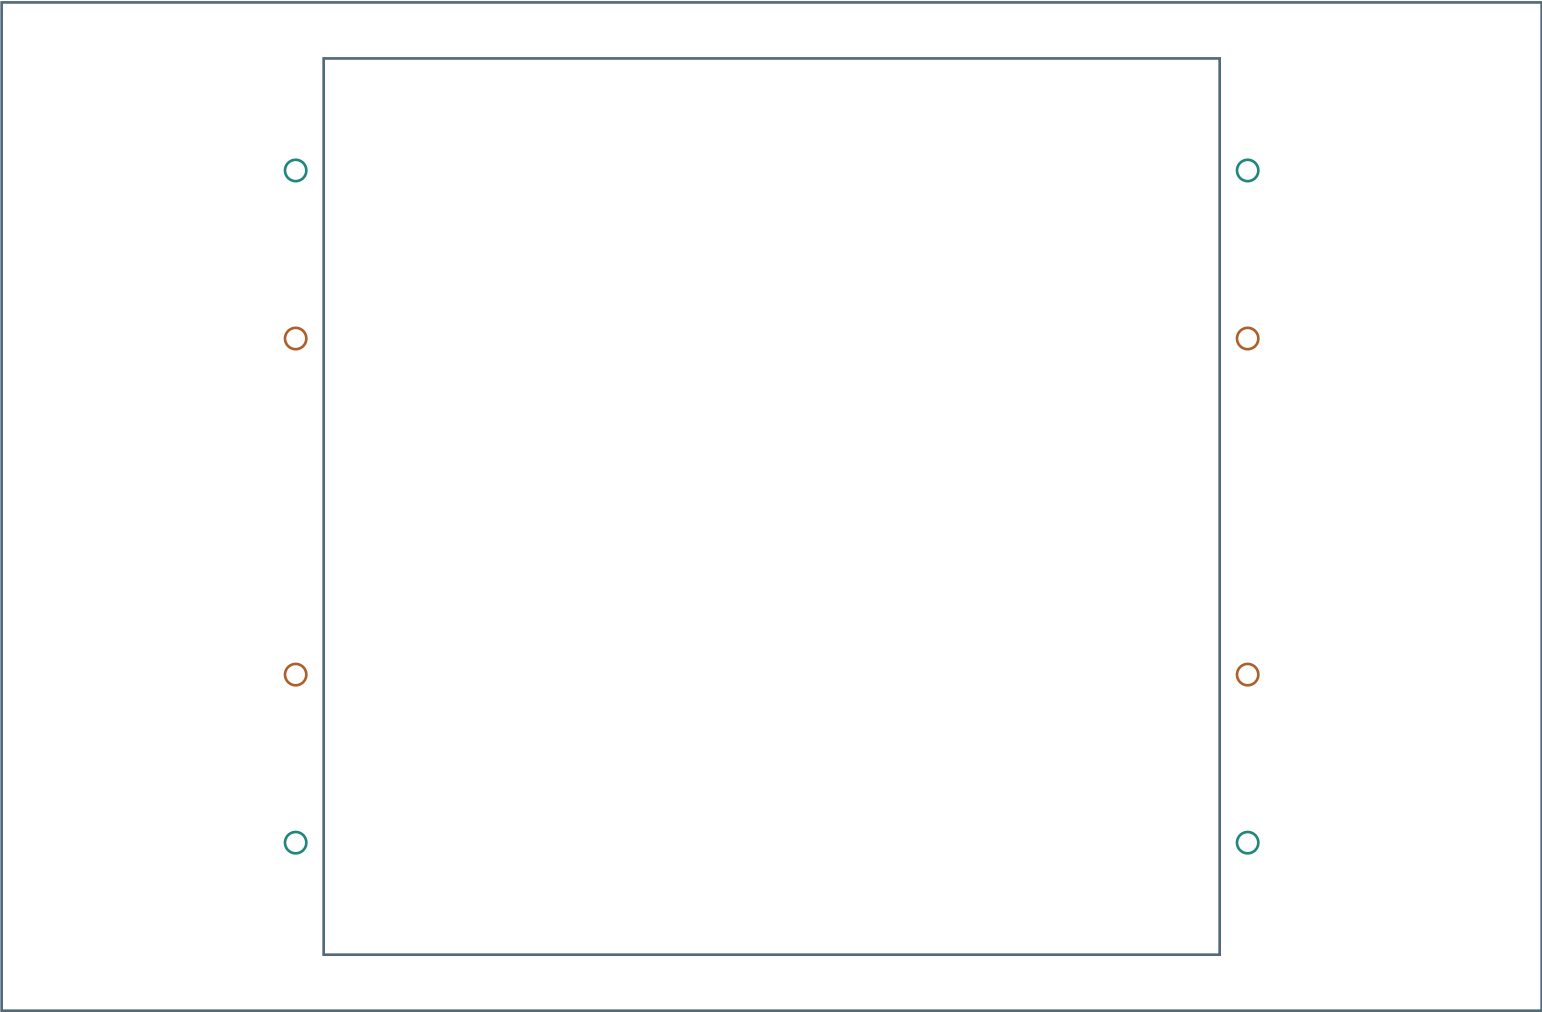

INNER: x105 / 445; y60 / 300; hole diameter4.5

OUTER: x105 / 445; y120 / 240; hole diameter4.5

Origin: plate front-left corner. Dimensions are global x,y.

Guard-only view: retain all other R01 plate holes/apertures.

OUTER GUARD: angle y100..140 and220..260, x95..115 /435..455, base z580..582. Screw head z583..587;20 mm shaft z563..583. Top washer582..583; bottom washer570..571; nut565..570.

INNER GUARD: angle y40..80 and280..320, same x positions, base z569..571. Screw head581..585;20 mm shaft561..581. Top washer580..581; bottom washer568..569; nut563..568.

BOTH: M4 x20 proposed screw; head7 diameter x4 high, nut7 across flats x5 high; washers12 OD x1 with assumed4.3 ID. Nominal thread projection2 mm. No torque/grade release.

OUTER SKIRT: new blank, diameter3.5 rivet holes at y110/130/230/250, z590 on both side skirts. OMIT prior y50/70/290/310 holes. Existing bracket holes travel with the brackets; no new bracket shape.

TOOL ASSUMPTIONS: straight driver shaft4 mm diameter,100 mm long above each screw; nut socket12 mm outside diameter,25 mm length below washer. Handles, hands, insertion route and tolerances excluded.

ASSEMBLY ORDER: prepare revised plate/skirt blanks; join guard skirts and brackets using reviewed fasteners; independently secure inner guard, then outer guard. Verify both retain their mountings when the other set is removed, with power isolated. This is a review sequence, not authorization to energize.

Source dimensions: Accu SSC-M4-20-A4-R360 cap screw; HNN-M4-A4 nut; Easyfix large M4 washer. Links and limitations in README. No product stock, coating selection, service life or safety certification is asserted.