

Date: 18 / 8 / 26

Lab Practical #12:



Study the concept of routing using packet tracer. **(Dynamic Routing)**

Practical Assignment #12:

- Connect the **two different routers** based on the calculated IP addresses and subnet using a packet tracer.
- Connect the **three different routers** based on the calculated IP addresses and subnet using a packet tracer.
- Connect the **five different routers** based on the calculated IP addresses and subnet using a packet tracer.




To do Instructions:

- RIP routing screenshot with routing table.
- Mention IP address table of each node and network ID of each network.
- Ping command / Packet (PDU) transfer screenshot between two different network nodes.

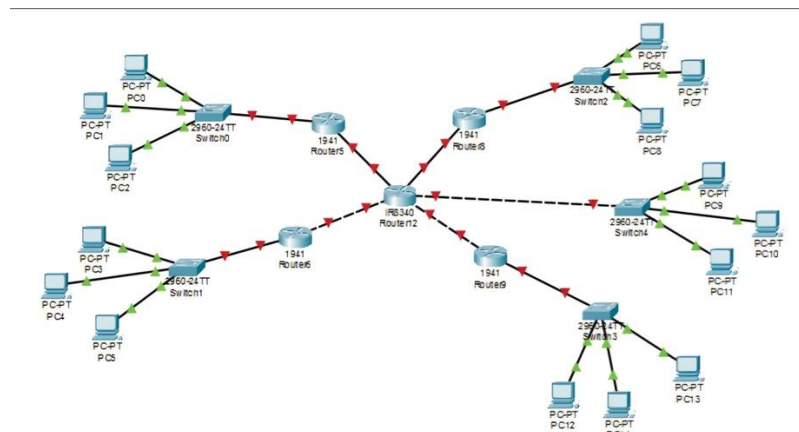
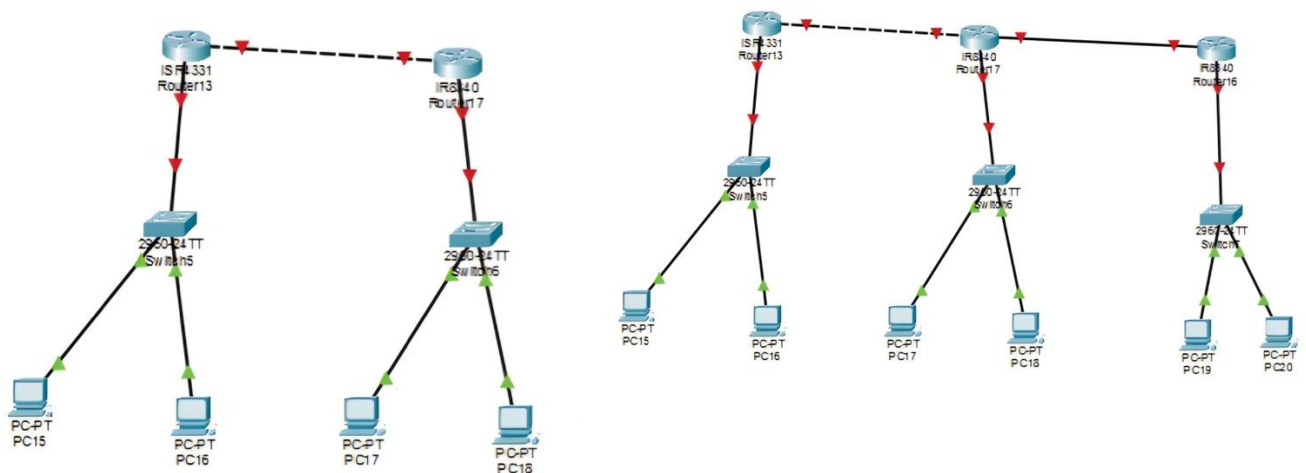


Date: 18 /8 /26

1.2 ROUTER

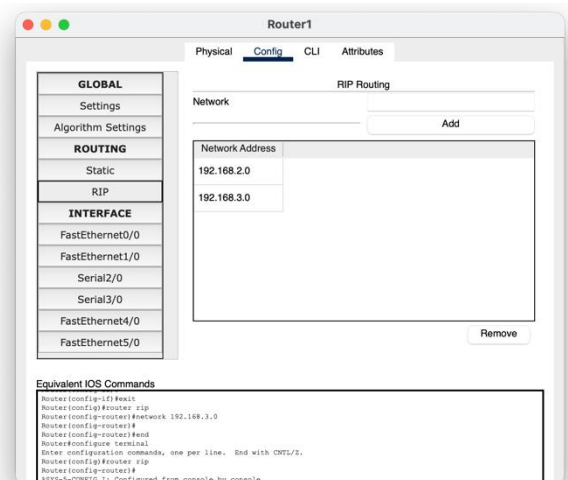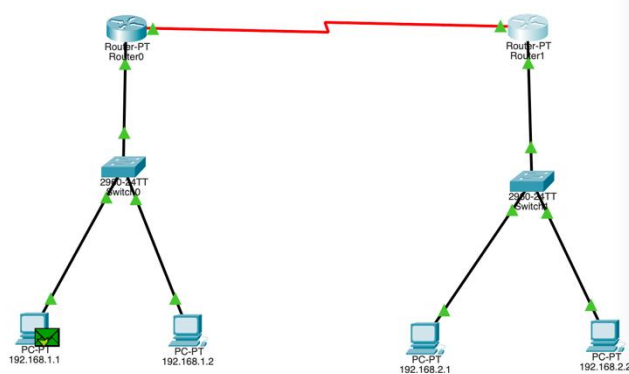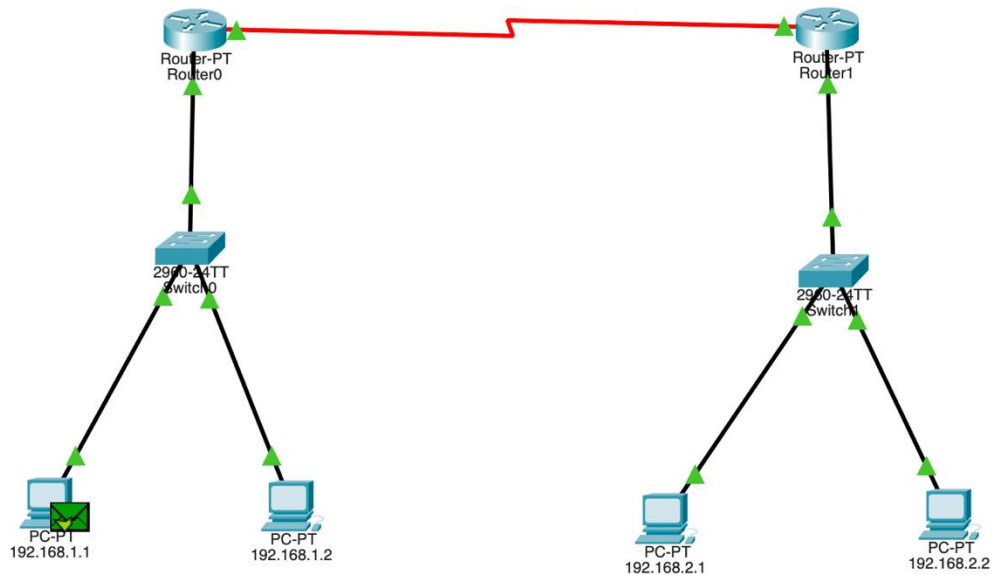




Date: 18 / 8 / 26

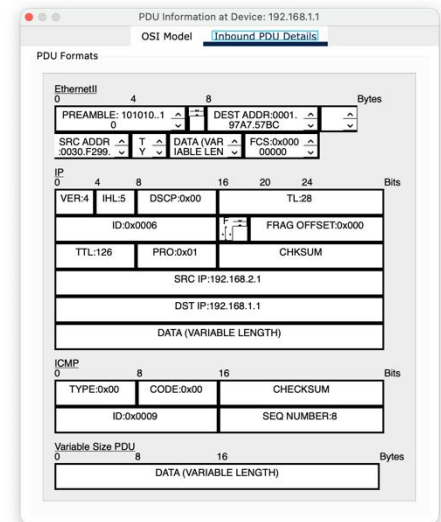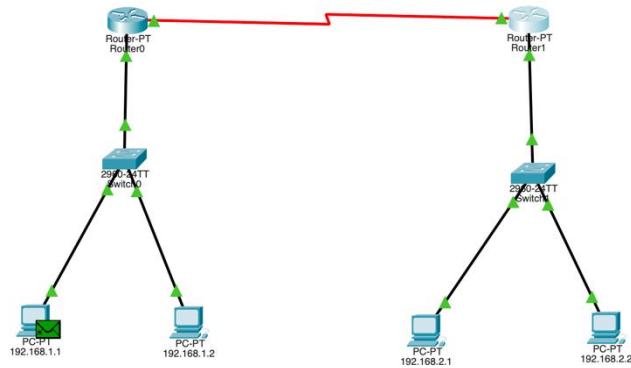



Device Type	Node name	IP Address	Network ID
PC	192.168.1.1	192.168.1.1	192.168.1.0
PC	192.168.1.2	192.168.1.2	192.168.1.0
PC	192.168.2.1	192.168.2.1	192.168.2.0
PC	192.168.2.2	192.168.2.2	192.168.2.0

Date: 18 / 8 / 26

2.3 ROUTER

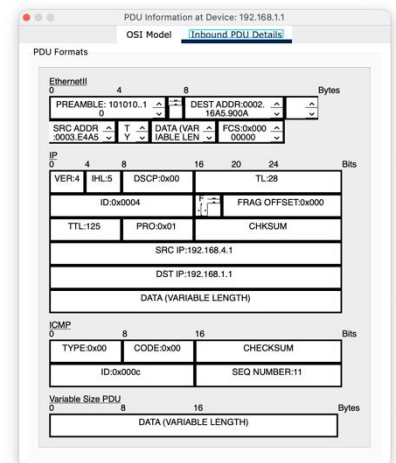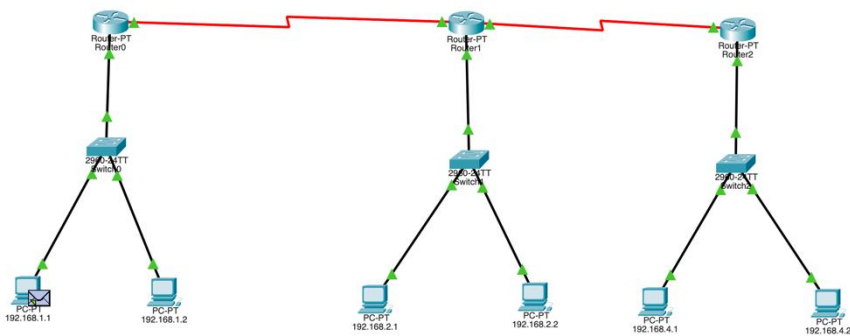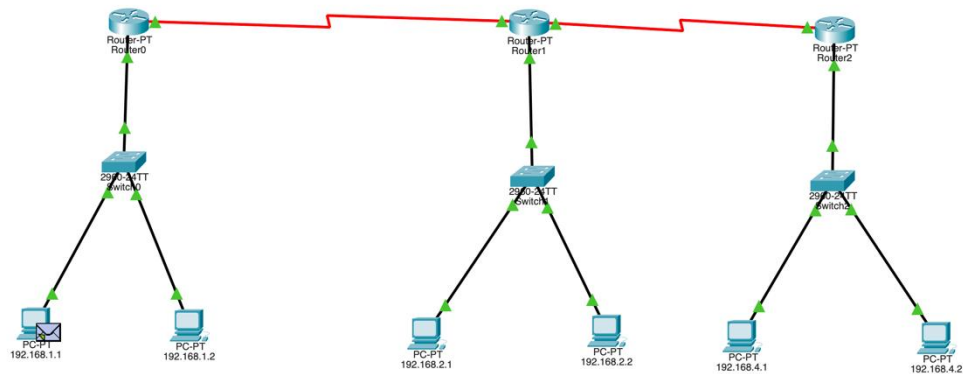


Date: 18 / 8 / 26

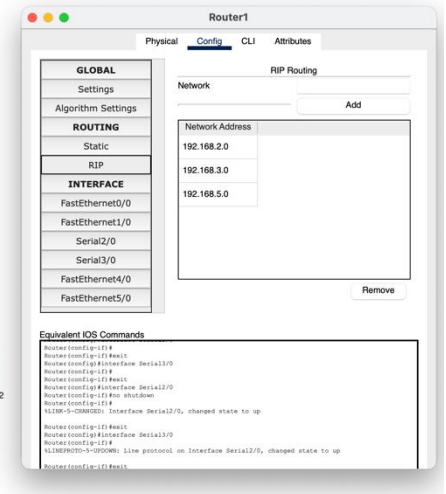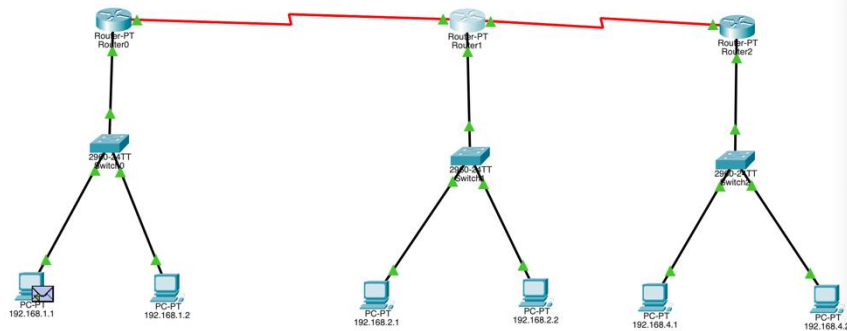

Device Type	Node Name	IP Address	Network ID
PC	192.168.1.1	192.168.1.1	192.168.1.0
PC	192.168.1.2	192.168.1.2	192.168.1.0
PC	192.168.2.1	192.168.2.1	192.168.2.0
PC	192.168.2.2	192.168.2.2	192.168.2.0
PC	192.168.4.1	192.168.4.1	192.168.4.0
PC	192.168.4.2	192.168.4.2	192.168.4.0

4. 5 Router

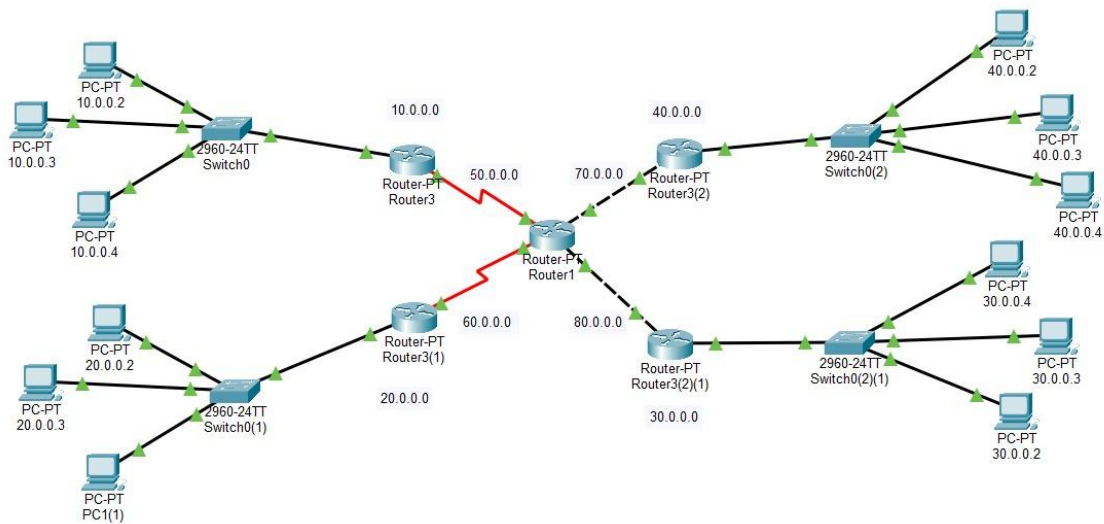

PDU Information at Device: 10.0.0.2


OSI Model Inbound PDU Details

At Device: 10.0.0.2
Source: 10.0.0.2
Destination: 40.0.0.2

In Layers	Out Layers
Layer7	Layer7
Layer6	Layer6
Layer5	Layer5
Layer4	Layer4
Layer 3: IP Header Src. IP: 40.0.0.2, Dest. IP: 10.0.0.2 ICMP Message Type: 0	Layer3
Layer 2: Ethernet II Header 00D0.D3BB.4296 >> 00E0.F7CB.DB20	Layer2
Layer 1: Port FastEthernet0	Layer1

1. FastEthernet0 receives the frame.

Challenge Me << Previous Layer Next Layer >>

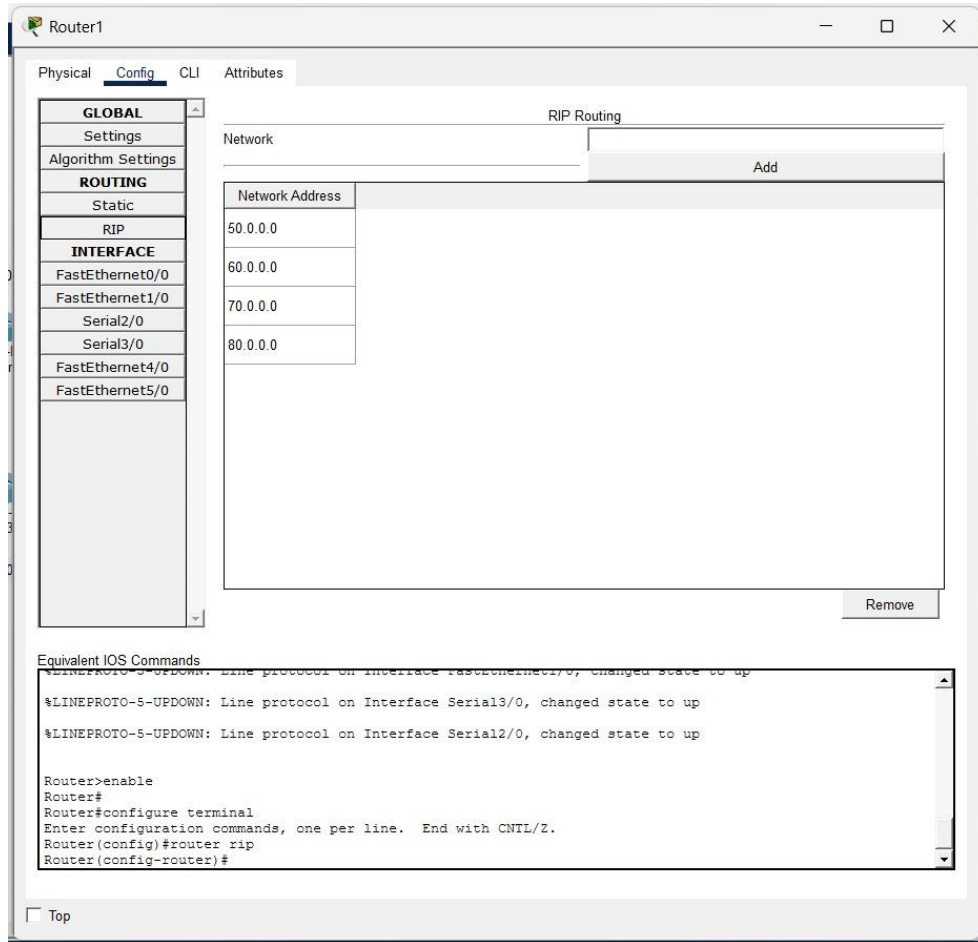

Device Type	Node Name	IP Address	Network ID
PC	10.0.0.2	10.0.0.2	10.0.0.0
PC	10.0.0.3	10.0.0.3	10.0.0.0
PC	10.0.0.4	10.0.0.4	10.0.0.0
PC	20.0.0.2	20.0.0.2	20.0.0.0
PC	20.0.0.3	20.0.0.3	20.0.0.0
PC	20.0.0.4	20.0.0.4	20.0.0.0
PC	30.0.0.2	30.0.0.2	30.0.0.0
PC	30.0.0.3	30.0.0.3	30.0.0.0
PC	30.0.0.4	30.0.0.4	30.0.0.0
PC	40.0.0.2	40.0.0.2	40.0.0.0
PC	40.0.0.3	40.0.0.3	40.0.0.0
PC	40.0.0.4	40.0.0.4	40.0.0.0