


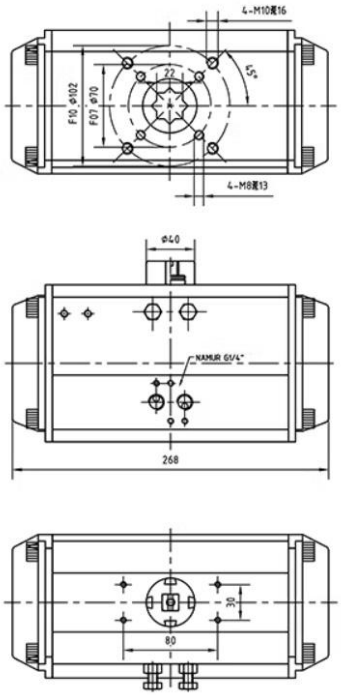

JOINT ACTUATOR ROUTINE & SHUTDOWN MAINTENANCE FRAGNET

OPENING
Preparation
LOTO
Depressurize
Isolate
Inspect as found
TAG
Inspect Body
Ispect Bonnet
Functional Check
Manual Operation
Check for Open/Close
Disconnect air lines
Secure lines from damage
Removal & Dissassemble
Drop theActuator
Scaffold
Depressurize Valve
Check actuator position
Check valve "open "
If Open close the Valve
Remove fastners
Lift actuator
Rign down actuator

REFURBISHMENT
Shop Activities
Dismantle Actuator
Clean
Remove Dirt
Remove Scale
Remove product
Inspection
Mechanical inspection
Visual Inspection
Fail Safe (Open/Close) inspect
Replacement
Replace pin
Replace lubricant
Greese
Replace standard kit
Replace spindle O rings
Attend checklist
Assemble
Temporary boxup
Travel check
Replace tight fastners

REFIXING
Valve return & refix
Rig Back to location
Ensure Vakve in position
Position Actuator above Valve
Reconnection
Reconnect air lines
Check fail safe position (open/close)
Ensure cover leak free
Lubricate
Actuator Position check
Tighten Cover
Torque fasteners
Check actuator operation
Pressurise air tubes
Check valve operation
Final Boxup

rPlan AT 39, MERMAID 1 CHS LTD., SEC-11, CBD-BELAPUR, NAVI MUMBAI - 400614

Legal Owner | QR Code

Drw electronic code

Drawn By:

Drawn Date

Drw Purpose Code :-

Status of Approval :-

Dimentions as Mentioned

Engg Code :-

Backup Info Code :-

Angle of Projection :-

Description:
Double Acting Actuator FRAGNET
Preliminary Doc under prep

Statutory Note:
This document is prepared by rPlan and is the sole proprietory of the company.Its purpose is educational and no references within this document are for Engineering or Design corelation with the applicable codes. For any clarifications beyond the intended purpose viewers can always correspond to rPlan via its company website.This drw is not for duplication without company permission!

Checked Approved by | Checked Approved Date

Rev: XX | DWG No.

SCALE:- | SHEET