



ASTRA 2 way & 3 way Plug Valve



2-way Valve



3-way Valve

Application

The stainless steel plug cock is used in the food and chemical industries and in other installations where a hygienically finished closing device with minimum pressure drop is required.

Standard Design

The Plug Cock is made of Stainless Steel AISI 304. The plug cock is designed for quick and easy operation. The plug is fitted with O-rings ensuring that no leakage occurs even if the screw cap is only partly tightened. The plug cock is available with male parts according to optional standards and also with liners, seal rings and nuts. On the three-way cocks the plug handle is positioned according to the appropriate standard, where applicable.

Materials

Steel parts: AISI 304
O-rings: Nitrile (NBR).
Plastic parts: PTFE.
Finish: Semi bright.

Technical data

Max. working pressure (20°C): 400 kPa (4 bar).
Max. test pressure (20°C): 400 kPa (4 bar).
Max. temperature: +90°C.
Min. temperature: -20°C

Ordering Data

Please state the following when ordering:


Connections: IDF/ISO - SMS - DIN - BS or DS.

Type: 2 way & 3 way .


Size: Sizes are available: 25 mm, 38 mm, 51 mm, 63.5 mm, 76 mm.

Dimensions (mm)

Size	25 mm	38 mm	51 mm	63.5 mm	76.1 mm
A	140	160	180	230	245
K	110	110	110	155	155
L/ DS, SMS, IDF, BS	55	70	82	105	110
L/DIN	60	80	85	100	115
H	110	140	164	205	220
H/DIN	120	160	170	200	230
Weight (Kg)	2.5	5.5	8.0	16.0	22.00

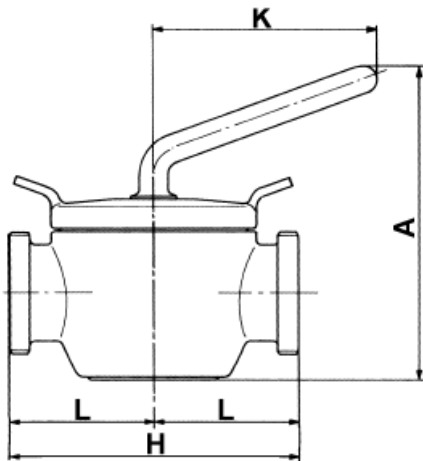


2-way Valve

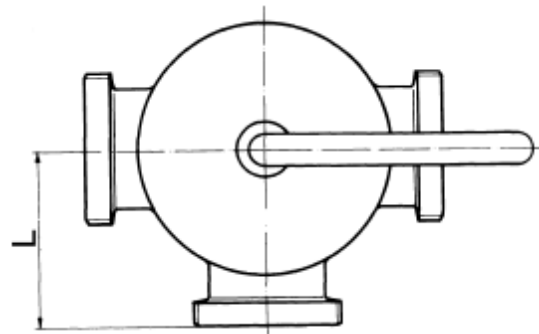

3-way Valve

Part List Drawing

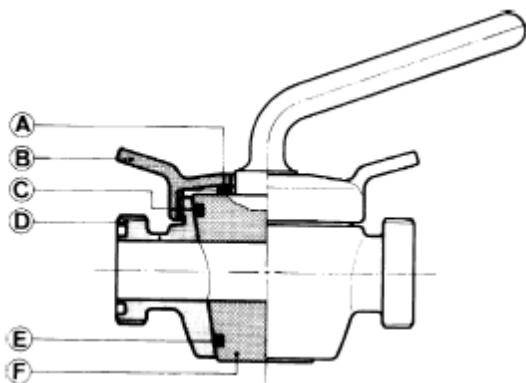

Parts list

- A. PTFE ring.
- B. Cover.
- C. O-Ring.
- D. Body.
- E. O-Ring.
- F. Plug.

CONTACT US:

PROJECT ENGINEERING SERVICES
FA-357 Mansarover Garden, New Delhi-110027
Contact No:-011-25417510, 25466316.