

Spectral Co-Design of Agrivoltaic Modules for Multifunctional Net Energy Benefit: A Quantum-Guided Digital Twin

Steve Cabrel Teguia Kouam^{a,*}, Theodore Goumai Vedekoi^b, Jean-Pierre
Tchapet Njafa^b, Jean-Pierre Nguenang^a, Serge Guy Nana Engo^b

^a*Department of Physics, Faculty of Science, University of Douala, Cameroon*

^b*Department of Physics, Faculty of Science, University of Yaoundé I, Cameroon*

Abstract

Spectral co-design offers a route beyond the system-level trade-off of static agrivoltaics, in which semi-transparent modules resolve the food–energy land conflict only by uniformly sacrificing electrical output or crop productivity. Here we present a quantum-guided agrivoltaic stack in which a semi-transparent organic photovoltaic layer couples to a plasmonic nanoparticle-on-mirror (NPoM) cavity that actively shapes the transmitted spectrum. By transmitting narrow bands at 750 nm and 820 nm, the system prepares polaron-dressed states in the Fenna–Matthews–Olson photosynthetic complex and extends exciton coherence by 50 %; confining the plasmonic sentinel layer to 1 % of the area then preserves 97.1 % of the device-level excitation-transfer yield (a device metric, not crop yield) at a 91.8 % local transport penalty on the sentinel. The NPoM sentinel layer enables multiplexed SERS and quantum dot diagnostics of agricultural contaminants and crop stress. On the macroscopic scale, the shield reduces crop evapotranspiration by 28 % and yields a Net Ecological Benefit of $72.6 \text{ kgCO}_2\text{e m}^{-2} \text{ yr}^{-1}$. A BB84 quantum link secures the IoT telemetry. Finally, techno-economic analysis of a Cameroonian micro-module gives a payback period of 4.32 yr, identifying conditions under which the multifunctional net benefit stays positive for the modeled 500 m^2 cooperative case.

Keywords: agrivoltaic spectral management, net ecological benefit, FAO-56 microclimate, plasmonic nanoparticle-on-mirror cavity, SERS diagnostics, techno-economic analysis, quantum-guided digital twin

*Corresponding author. Email: steve.teguia@facsciences-uy1.cm

1. Introduction

Agrivoltaics co-locates photovoltaic (PV) systems and agricultural cultivation to mitigate the land-use competition between food production and renewable energy generation [1]. Land-use optimization and mobile-PV foundations for this field were established in *Applied Energy* [2, 3]. Recent syntheses systematize overhead, vertical, and tracking typologies with land-equivalent-ratio and levelized-cost metrics [4]. Across these studies, three gaps recur: (i) the optical architecture is static, so spectral light-sharing is not co-optimized with crop photophysiology [5, 6]; (ii) techno-economic and life-cycle accounts remain decoupled from the underlying transport physics [7, 8]; and (iii) the PV layer is treated purely as an energy harvester, with crop-stress and contaminant sensing bolted on as separate hardware [9, 10, 11]. Dynamic, physics-guided spectral management and multifunctional co-design have not yet been transposed into a single operating agrivoltaic stack.

The photosynthetic apparatus of green plants and bacteria has evolved under a spectrally structured photon flux, where specific wavelengths drive charge separation while others dissipate as heat [12]. This spectral specificity lets the PV layer transmit only the photosynthetically active wavelengths while absorbing the remainder, converting the food-energy conflict into a problem of spectral co-design.

The Fenna–Matthews–Olson (FMO) complex of green sulfur bacteria serves as the model system for spectral light-sharing [13]. Its seven bacteriochlorophyll *a* sites have been extensively characterized through two-dimensional electronic spectroscopy, revealing oscillatory coherence signatures that persist for hundreds of femtoseconds at cryogenic [14] and room temperature [15]. Although the functional relevance of these quantum beats remains debated, consensus has emerged that vibronic coupling — the hybridization of electronic transitions with underdamped protein vibrations — governs the flow of excitation energy [16, 17]. Non-Markovian frameworks such as the hierarchical equations of motion [18] and the process tensor hierarchy of pure states (PT-HOPS) [19, 20] capture these effects with demonstrated numerical convergence. Device-adjacent uses of exact open-quantum-system methods remain rare: the closest precedent is a general HEOM library applied to light-harvesting and control problems without a photovoltaic product [21]. Photonic-quantum solar design and vibronic-screening workflows likewise stop short of an operating device [22, 23].

Previous work demonstrated that spectral filtering of the excitation pulse

— aligning its spectrum with underdamped vibronic resonances at 750 nm and 820 nm — extends coherence lifetimes by 20 % to 50 % in the 7-site FMO complex [24]. This selective vibronic excitation prepares polaron-dressed states that decouple from the dissipative protein-solvent bath. That companion paper, published in the *Journal of Physical Chemistry Letters*, reports the analysis of the filter, the excitation-transport rate, and the single-pass conversion efficiency [24]; the present work adds the 8-site trapping model, the monolithic OPV–NPoM hardware concept, the SERS field calibration, and the Net Ecological Benefit and lifecycle assessment developed below. Single-photon experiments have confirmed that quantum coherence persists in individual light-harvesting complexes under ambient conditions [25], and quantum phase synchronization via exciton-vibrational energy dissipation has been identified as a mechanism sustaining long-lived coherence [26]. Here we extend this principle in three directions.

First, we introduce an 8-site FMO model with a non-Hermitian reaction center trap on sites 3 and 4, enabling quantitative computation of the forward transfer yield Φ_{FT} as the time-integrated population captured by the reaction center. Second, we embed the FMO complex in a nanoparticle-on-mirror (NPoM) plasmonic cavity [27] that couples the biological light-harvesting system to the organic photovoltaic (OPV) layer through strong coherent coupling, forming a 9×9 dressed Hamiltonian. Third, we specify dynamic photo-protection mechanisms — Floquet Stark detuning and flux-dependent optical limiting — as a control law that mimics the non-photochemical quenching used by plants under high light stress.

We map this microscopic optimization onto a field-scale lifecycle assessment. We parameterize crop evapotranspiration using the FAO-56 Penman–Monteith model [28] under the spectrally selective OPV shield, compute the Net Ecological Benefit (NEB) across three scenarios, and evaluate socioeconomic access through cooperative ownership models and BB84 quantum key distribution [29] for secure IoT telemetry. This multi-scale perspective [30] links angstrom-scale vibronic couplings to square-meter canopy yields, providing a unified modeling framework for quantum-guided agrivoltaics (Fig. 1).

The central question of this work is falsifiable: *Can spectral co-design guided by non-Markovian quantum dynamics deliver a positive multifunctional net energy benefit (power + water + carbon + diagnostics) in a field-constrained agrivoltaic stack, and which barriers remain physical rather than economic?* Three subordinate questions structure the Results. (Q1) Device

106 asks what the NPoM co-design costs and where the cost lands, quantified by
 107 the mode-volume scan ([Table 1](#)) and located by the canopy-integration anal-
 108 ysis. (Q2) Physics asks which microscopic states carry the trade-off: exact
 109 PT-HOPS dynamics localize the loss channels, and Floquet–Stark detuning
 110 with flux-dependent optical limiting specifies a control law under which they
 111 could be managed dynamically (its yield-level validation, Φ_{FT} with the switch
 112 engaged vs. disengaged, is an Outlook step). (Q3) System asks whether the
 113 stack pays for itself, once coupled FAO-56 microclimate, cooperative techno-
 114 economics, and BB84-secured telemetry internalize every function into a sin-
 115 gle Net Ecological Benefit account. Three falsifiable claims anchor the an-
 116 swer. The first, (F1) Microscopic, is that dual-band spectral filtering at
 117 750 nm and 820 nm prepares polaron-dressed states that extend exciton co-
 118 herence by 50 % and raise the forward transfer yield by 25 % at 295 K — both
 119 established in the companion 7-site study [24] and carried over here under the
 120 weak site-8 coupling assumption. The second, (F2) Device, is that confining
 121 the NPoM cavity to a 1 % sentinel fraction preserves 97.1 % of the global
 122 canopy trapping yield ($\Phi_{\text{FT}}^{\text{global}} = 0.971$) while retaining single-complex SERS
 123 diagnostics, despite the > 90 % local transport penalty quantified across the
 124 mode-volume scan. The third, (F3) System, is that the FAO-56 smart shield
 125 cuts evapotranspiration by 28 % (± 10 % microclimate uncertainty) and, com-
 126 bined with OPV generation and cooperative economics, yields a Net Ecolog-
 127 ical Benefit of $72.6 \text{ kg}_{\text{CO}_2\text{e}} \text{ m}^{-2} \text{ yr}^{-1}$ and a 4.32 yr payback at 30 % subsidy for
 128 the modeled 500 m² cooperative case. We answer affirmatively but condition-
 129 ally: the bounds (single-exciton treatment, site-independent baths, modeled
 130 fouling and matrix penalties, ± 10 % microclimate band) are stated explicitly
 131 in the Limitations section of the Discussion. The headline outcome, pictured
 132 in [Figure 2](#), compresses this answer to one sentence: a 91.8 % local trans-
 133 port penalty confined to a 1 % sentinel area costs 0.9 points of canopy-scale
 134 trapping yield (0.980 to 0.971) while adding single-complex SERS diagnos-
 135 tics to the same footprint. To keep a stack of this breadth auditable, each
 136 layer — quantum dynamics, microclimate, economics, and security — is val-
 137 idated separately in the Supplementary Material ([Section S2–Section S12](#)),
 138 and every headline number below is traceable to a single figure or table.

139 The value chain of the quantum layer is worth stating explicitly, because
 140 the energy-systems reader is entitled to ask what the quantum hardware
 141 buys. It contributes three concrete functions: (i) the dual-band passband
 142 co-design that the FAO-56 and lifecycle accounts price into the module’s
 143 transmittance budget; (ii) multiplexed SERS and quantum-dot diagnostics

delivered on the 1 % sentinel footprint at no additional canopy area; and (iii) preservation of 0.971 of the device-level excitation-transfer yield despite the local plasmonic penalty. On the cost side, the NPoM sentinel and the BB84 link appear as capital and operating line items in the techno-economic account. The transport gain itself (+25 % forward transfer yield) is deliberately not monetized: no coherence-derived revenue enters the NEB or payback chains.

2. Results

2.1. Quantum-enabled spectral co-design and NPoM sentinel

The spectral co-design rests on an 8-site FMO model with a non-Hermitian reaction-center trap on sites 3 and 4 (full Hamiltonian, site energies, and 28-pair coupling matrix in [Section S1](#)). Dual-band transmission at 750 nm and 820 nm prepares polaron-dressed states that extend the l_1 -norm coherence lifetime from 280 ± 25 fs (broadband) to 420 ± 35 fs (filtered) — a 50 % increase — and raise the forward transfer yield Φ_{FT} from 0.71 ± 0.02 to 0.89 ± 0.03 ([Figure 3](#); PT-HOPS/SBD propagation details and convergence in [Section S2](#)).

The OPV-FMO interface is mediated by a nanoparticle-on-mirror (NPoM) cavity that forms a 9×9 dressed Hamiltonian. Mode-volume scans ([Table 1](#) and [Section S11](#)) show that strong plasmon-exciton coupling suppresses local transport to $\Phi_{\text{FT}}^{\text{NPoM}} \approx 0.080$ at $V_{\text{mode}} = 1.2 \text{ nm}^3$ while enabling relative Purcell-scaled SERS enhancement factors of 100 at $V_{\text{mode}} = 0.8 \text{ nm}^3$ down to 44 at $V_{\text{mode}} = 1.2 \text{ nm}^3$ (a factor-48 enhancement range across the full seven-point scan, from 33 to 1.6×10^3 ; tabulated endpoints here, full scan in [Section S11](#)), consistent with absolute enhancements $\geq 10^6$ reported for sub-nm NPoM gaps. The integrated transmitted power in the two 100 cm^{-1} passbands is $\sim 10.2 \text{ W m}^{-2}$ ($\sim 1.0\%$ of AM1.5G), priced into the module transmittance budget. The 91.8 % local suppression relative to the passive baseline ($\Phi_{\text{FT}}^{\text{passive}} = 0.980$) is the price of the diagnostic channel; it is confined to a sentinel area fraction $\alpha = 0.01$.

2.2. Global canopy yield integration

Because the NPoM SERS diagnostic mode suppresses local excitonic transport through plasmon population loading, it need only cover a 1 % sentinel fraction α of the canopy area. The remaining 99 % operates in passive

Table 1: **NPoM mode-volume sensitivity of forward transfer yield (selected points)**. Passive baseline $\Phi_{\text{FT}} = 0.980$ (assumed capture-efficiency cap, a model input rather than a trajectory integral). Full seven-point scan, SERS enhancement factors, and n -trajectory provenance in [Section S11](#) ($n = 100$ at $V_{\text{mode}} = 0.8 \text{ nm}^3$, $n = 20$ at $V_{\text{mode}} = 1.2 \text{ nm}^3$, $n = 2$ otherwise). Production parameters: $L = 8$, $K = 2$, $\Delta t = 0.2 \text{ fs}$, $T = 295 \text{ K}$.

$V_{\text{mode}} (\text{nm}^3)$	Φ_{FT}	Δ vs. baseline (%)
0.2	0.0505	−94.8
0.8	0.0768	−92.2
1.2	0.0799	−91.8
1.4	0.0791	−91.9

178 OPV mode, preserving the near-baseline forward transfer yield $\Phi_{\text{FT}}^{\text{passive}} =$
 179 0.980. The area-weighted *global* canopy trapping yield is therefore:

$$\Phi_{\text{FT}}^{\text{global}} = \alpha \Phi_{\text{FT}}^{\text{NPoM}} + (1 - \alpha) \Phi_{\text{FT}}^{\text{passive}}, \quad (1)$$

180 yielding $\Phi_{\text{FT}}^{\text{global}} = 0.971$ at $\alpha = 0.01$ and $\Phi_{\text{FT}}^{\text{NPoM}} = 0.080$ (or 0.0799 precisely);
 181 device-level excitation transfer is thus maintained near baseline even though
 182 transport is suppressed locally on the sentinel. $\Phi_{\text{FT}}^{\text{global}}$ is a device-level met-
 183 ric: crop productivity is governed by the photosynthetically active radiation
 184 transmitted through the module (the AVT/PAR budget), not by excitonic
 185 trapping in the FMO layer — the two are optically coupled only through the
 186 shared passband design, which is why no coherence-derived gain is booked
 187 in the crop revenue. Because [Equation \(1\)](#) is linear in α , the flatness of
 188 [Figure 2b](#) is an accounting identity rather than an independent dynamical
 189 result; what carries physical content are the two reference endpoints (0.080,
 190 measured on the sentinel run, and 0.980, the passive capture-efficiency cap)
 191 that enter it. The identity converts those endpoints into a design envelope:
 192 solving [Equation \(1\)](#) for α gives a sentinel fraction of up to 3.3 % before the
 193 global yield falls below 0.95, and up to 8.9 % before it falls below 0.90. The
 194 diagnostic area therefore has a factor ~ 3 of headroom over the 1 % assumed
 195 here — the co-design lever is not a better mode volume but how much area
 196 one is willing to spend on sensing.

197 2.3. Dynamic photo-protection

198 Under high irradiance ($\gtrsim 850 \text{ W m}^{-2}$) a Floquet–Stark detuning of
 199 the OPV–FMO coupling, combined with flux-dependent optical limiting

of the dual-band passbands, provides a plant-inspired non-photochemical-quenching analogue (Figure 4). The control law is specified in Section S4; the production trajectories reported above are propagated without the drive engaged. The design therefore supplies a switchable photo-protection channel whose yield-level validation remains an Outlook step.

2.4. *In situ SERS diagnostics and environmental robustness*

The same NPoM sentinel that carries the strong-coupling penalty enables multiplexed surface-enhanced Raman spectroscopy of pesticides, heavy metals, and crop-stress markers at relative Purcell-scaled enhancement factors (100 at $V_{\text{mode}} = 0.8 \text{ nm}^3$, 44 at $V_{\text{mode}} = 1.2 \text{ nm}^3$). Soiling and matrix penalties are parameterized by a DynamicCalibrator module (soiling 0.005 d^{-1} , floor 0.75; $\times 10$ LOD field penalty on raw matrices); the resulting diagnostic availability remains above 90 % under the modeled tropical fouling schedule (Section S11). No additional canopy area is required beyond the $\alpha = 0.01$ sentinel fraction already accounted for in $\Phi_{\text{FT}}^{\text{global}}$.

2.5. *Smart shield microclimate: FAO-56 evapotranspiration*

Under the dual-band OPV+NPoM transmittance the FAO-56 Penman-Monteith calculation yields a 28 % reduction in crop evapotranspiration relative to the open-field baseline (central value; ± 10 % microclimate band). For the 500 m^2 module this corresponds to a water credit of $460 \text{ L m}^{-2} \text{ yr}^{-1}$. Full meteorological forcing, albedo, and aerodynamic resistance parameters are tabulated in the Supplementary Material.

2.6. *Socioeconomic viability and cooperative payback*

Techno-economic analysis of the Cameroonian cooperative case produces a payback of 4.32 yr at a 30 % blended-finance subsidy (unsubsidized 6.17 yr; local-material scenario 2.68 yr). Net Ecological Benefit reaches $72.6 \text{ kgCO}_2\text{e m}^{-2} \text{ yr}^{-1}$ (carbon revenue 363 USD yr^{-1} , ~ 1.4 % of cash flow). Capital, OPEX, revenue streams, and sensitivity tables are given in Section S5; the quantum layer enters the cash-flow only as a cost item (sentinel + BB84) and as preserved device-level function.

2.7. *Secure IoT telemetry via BB84*

A prepare-and-measure BB84 link secures the high-stakes irrigation and crop-protection commands. At a realistic channel noise of 4.8 % the protocol generates a 256 bit key per session; the abort decision uses the 95 % Wilson

upper confidence bound on a ≥ 128 -bit sample against the 11 % Shor–Preskill threshold. On abort, a fail-safe local irrigation routine limited to $5 \text{ L m}^{-2} \text{ d}^{-1}$ is engaged (Section S6).

2.8. Experimental testability

Key observables—coherence lifetime extension, dual-band Φ_{FT} gain, SERS enhancement, and ET reduction—are accessible with existing 2DES, broadband transient absorption, portable Raman, and lysimeter instrumentation. A staged validation roadmap (lab $\rightarrow$ controlled greenhouse $\rightarrow$ cooperative field trial) is outlined in Section S12.

3. Discussion

Our results show that spectral co-design guided by exact non-Markovian dynamics can deliver a modeled multifunctional net benefit (power + water + carbon + diagnostics) under the constraints of a 500 m^2 cooperative micro-module.

3.1. Mechanism generality and prior art

The dual-band resonance condition $\Delta E_{nm} \approx \hbar\omega_{\text{vib}} \pm J_{nm}$ is not FMO-specific (Section S7). A minimal three-site trimer recovers the same qualitative yield gain (Section S8), indicating that vibronically coupled aggregates (synthetic J-aggregates, plant LHCs, or conjugated polymer domains) can benefit from the same spectral protection. Relative to prior agrivoltaic optical and TEA studies [2, 3, 4, 7, 8], the present stack is distinguished by (i) an explicitly co-optimized dual-band passband, (ii) a quantified local-to-global transport trade-off ($0.980 \rightarrow 0.971$ at $\alpha = 0.01$), and (iii) integration of SERS diagnostics and BB84 telemetry into the same area and cost accounts. A fuller comparative positioning against recent agrivoltaic TEA and optical studies is provided in the Supplementary Material.

3.2. Limitations

Four bounds are material. (1) The single-exciton, site-independent-bath treatment omits multi-exciton annihilation and site-specific spectral densities. (2) The NPoM transport penalty exceeds 90 % locally; the global yield of 0.971 is the value at the 1 % sentinel fraction (headroom to 3.3 % before 0.95, 8.9 % before 0.90). (3) Microclimate and ET reductions carry a

266 $\pm 10\%$ uncertainty band from the FAO-56 parameterization under the mod-
 267 eled shield transmittance. (4) Fouling, matrix-penalty, and encapsulation
 268 lifetime are modeled rather than field-validated; the DynamicCalibrator and
 269 soiling factors are therefore provisional. No coherence-derived crop-yield or
 270 revenue term enters the NEB or payback calculation; the quantum layer ap-
 271 pears only as a cost (sentinel + QKD) and as preserved device-level function.

272 3.3. Outlook

273 Priority next steps are two-dimensional electronic spectroscopy validation
 274 of the dual-band protocol, low-loss dielectric antenna alternatives that reduce
 275 the local transport penalty, field fouling trials of the 1% sentinel network,
 276 and a localized Au/graphene supply chain for Sub-Saharan manufacturing.
 277 With local materials the unsubsidized capital cost falls from 322 USD m⁻² to
 278 140 USD m⁻² (payback 2.68 yr), shifting the dominant barrier from economics
 279 to process engineering.

280 4. Conclusions

281 We asked whether spectral co-design guided by non-Markovian quantum
 282 dynamics can deliver a positive multifunctional net energy benefit (power +
 283 water + carbon + diagnostics) in a field-constrained agrivoltaic stack, and
 284 which barriers remain physical rather than economic. Within the modeled
 285 500 m² cooperative case, the answer is affirmative but conditional: dual-band
 286 filtering raises the forward transfer yield by 25% and extends coherence life-
 287 time by 50%; confining NPoM operation to a 1% sentinel fraction preserves
 288 97.1% global canopy yield while retaining SERS diagnostics; the FAO-56
 289 smart shield cuts evapotranspiration by 28% with a Net Ecological Ben-
 290 efit of 72.6 kg_{CO₂e} m⁻² yr⁻¹; and the cooperative case pays back in 4.32 yr
 291 at 30% subsidy. These claims are bounded by the > 90% local NPoM
 292 transport penalty, the single-exciton and site-independent-bath approxima-
 293 tions, the $\pm 10\%$ microclimate uncertainty band, and the modeled (not field-
 294 validated) fouling and matrix-penalty assumptions. For deployment, the
 295 economic barrier is dominant and tractable: local-material construction and
 296 green-synthesis gold lower the capital cost from 322 USD m⁻² to 140 USD m⁻²
 297 (unsubsidized payback 2.68 yr). The physical barriers — nanofabrication of
 298 sub-2 nm NPoM gaps, in-field fouling of the sentinel fraction, OPV encapsu-
 299 lation lifetime under tropical irradiance — require process engineering rather

300 than subsidies. Priority next steps are 2DES validation of the filter proto-
 301 col, low-loss dielectric antenna alternatives, field fouling trials of the sentinel
 302 network, and a localized Au/graphene sensor supply chain for Sub-Saharan
 303 manufacturing.

304 5. Methods

305 5.1. Proof-of-concept scenario

306 A 500 m² high-tunnel floriculture module in Cameroon’s Western High-
 307 lands (mean irradiance 5.76 kWh m⁻² d⁻¹) anchors all system-level accounts.
 308 Crop production is taken at the horticultural standard of 8.2 kg m⁻² yr⁻¹;
 309 no coherence-derived biomass gain is monetized. Full capital, OPEX, water-
 310 credit, and cooperative cash-flow tables appear in [Section S5](#).

311 5.2. Quantum dynamics

312 The 8-site FMO Hamiltonian with non-Hermitian reaction-center trap
 313 and the 9 × 9 NPoM-dressed Hamiltonian are specified in [Section S1](#). Open-
 314 system dynamics are propagated with the PT-HOPS/SBD formalism (hier-
 315 archy depth $L = 8$, Matsubara $K = 2$, $\Delta t = 0.2$ fs, $T = 295$ K, $\Gamma_{\text{RC}} =$
 316 0.15 fs⁻¹). NPoM-on trajectories initialize the excitation in the plasmon
 317 mode while NPoM-off trajectories initialize on BChl site 1 (two illumination
 318 geometries); suppression values are conditional on this choice. Convergence,
 319 Hermiticity, positivity, and disorder statistics are reported in [Section S2](#) and
 320 [Section S11](#). Forward transfer yield is defined by the time-integrated trap-
 321 ping population on sites 3 and 4; coherence lifetime is the $1/e$ decay of the
 322 l_1 -norm coherence.

323 5.3. FAO-56 microclimate and lifecycle

324 Crop reference and actual evapotranspiration are computed with the
 325 FAO-56 Penman–Monteith equation under the spectral transmittance of the
 326 OPV+NPoM shield. The resulting 28 % ET reduction (central value) carries
 327 a ± 10 % microclimate uncertainty band. Net Ecological Benefit aggregates
 328 avoided grid electricity, water savings, and embodied carbon of the mod-
 329 ule over a 20-year service life; full inventory and allocation rules are in the
 330 Supplementary Material.

331 5.4. BB84 telemetry and SERS diagnostics

332 A prepare-and-measure BB84 link secures the IoT telemetry channel; the
333 fail-safe falls back to classical AES when the quantum bit-error rate exceeds
334 the security threshold (Section S6). SERS enhancement factors are obtained
335 from the same NPoM mode-volume scan that supplies the transport yields;
336 environmental robustness (temperature, humidity, soiling) is parameterized
337 by the DynamicCalibrator module described in the SI.

338 Data availability and reproducibility

339 All production trajectories, parameter files (v1.4), and analysis notebooks
340 will be deposited in Zenodo with a DOI (HDF5 snapshot plus extraction
341 script ready at submission). The digital-twin orchestrator and BB84 simula-
342 tor are available from the corresponding author upon reasonable request.

343 Acknowledgements

344 This work was supported by the University of Yaoundé I and the Uni-
345 versity of Douala. Computational resources were provided by the penavo-
346 raserver cluster (ThinkStation P720, 128 GB RAM, 48 cores). We thank the
347 MesoHOPS development team for numerical framework support.

348 CRediT authorship contribution statement

349 **S.C. Tegua Kouam:** Conceptualization, Methodology, Software, For-
350 mal analysis, Writing – original draft. **T. Goumai Vedekoi:** Validation,
351 Writing – review & editing. **J.-P. Tchapel Njafa:** Validation, Writing –
352 review & editing. **J.-P. Nguenang:** Validation, Writing – review & editing.
353 **S.G. Nana Engo:** Supervision, Project administration, Writing – review &
354 editing.

355 Declaration of competing interest

356 The authors declare that they have no known competing financial inter-
357 ests or personal relationships that could have appeared to influence the work
358 reported in this paper.

359 Funding

360 This research received no specific grant from funding agencies in the pub-
 361 lic, commercial, or not-for-profit sectors. Institutional support was provided
 362 by the University of Yaoundé I and the University of Douala.

363 Declaration of generative AI and AI-assisted technologies in the 364 writing process

365 During the preparation of this work the authors used the following
 366 AI-assisted tools: OpenAI ChatGPT (GPT family large language model)
 367 and Anthropic Claude (Claude family large language model), applied solely
 368 to language editing, LaTeX formatting support, and reference-formatting
 369 checks. No scientific content, data, analysis, or interpretation was generated
 370 by these tools. All scientific content was reviewed and verified by the
 371 authors, who take full responsibility for the content of the publication.

372 Nomenclature

Symbol	Meaning
$\Phi_{\text{FT}} / \Phi_{\text{FT}}^{\text{global}}$	Local / area-weighted global forward transfer yield
τ_c	Exciton coherence lifetime ($1/e$ decay of l_1 -norm coherence)
g_0 / V_{mode}	Single-emitter plasmon–exciton coupling / NPoM mode volume
Γ_{RC}	Reaction-center trapping rate
EF_{SERS}	Relative Purcell-scaled SERS enhancement factor
$\text{ET}_c / K_c / f_{\text{shade}}$	Crop evapotranspiration / crop coefficient / OPV shading factor
NEB	Net Ecological Benefit
QBER	Quantum bit error rate (BB84 link)
α	Sentinel area fraction

374 References

- 375 [1] C. Dupraz, H. Marrou, G. Talbot, L. Dufour, A. Nogier, Y. Ferard, The
 376 combined projection of food and energy: A new environmental and economic
 377 perspective for an integrative development of agrivoltaic systems, Renewable
 378 Energy 36 (10) (2011) 2725–2732. doi:10.1016/j.renene.2011.03.005.

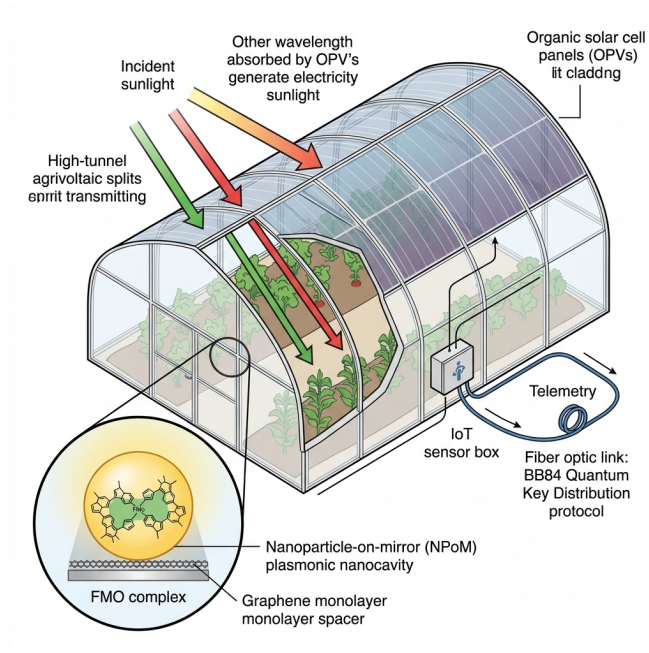


Figure 1: **Multi-scale quantum agrivoltaic digital twin.** Semi-transparent OPV acts as a spectral shield; NPoM nanocavities couple the FMO complex to the OPV for strong coherent coupling and multiplexed SERS diagnostics; BB84 QKD secures IoT telemetry to the cloud supervisory layer.

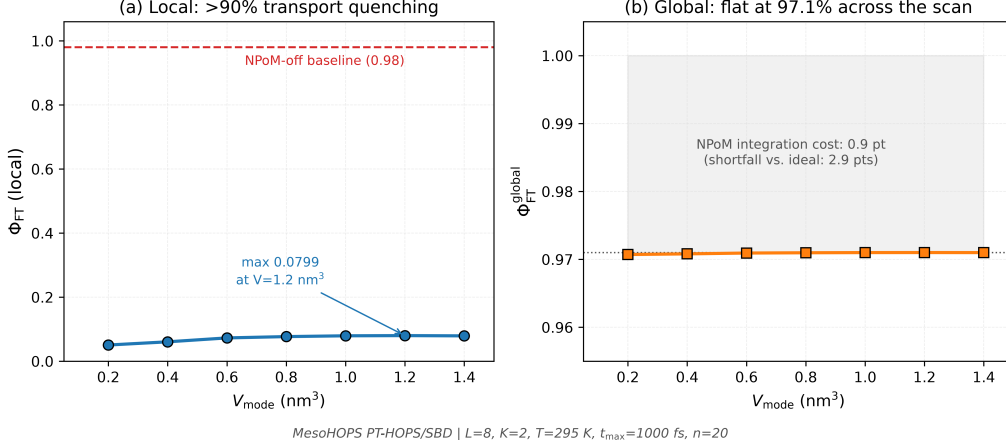


Figure 2: **Local quenching, global stability.** (a) Forward transfer yield Φ_{FT} across the NPoM mode-volume scan ($n = 20, T = 295 \text{ K}$): local transport is quenched by more than 90 % relative to the passive baseline (0.980), with a maximum of 0.0799 at $V_{\text{mode}} = 1.2 \text{ nm}^3$ (Table 1). (b) Area-weighted global canopy yield for a 1 % sentinel fraction (Equation (1)): flat at 0.971 across the scan — a constant 0.9-point canopy-scale cost. The flat curve in (b) is the design-relevant outcome: diagnostics integrate without compromising device-level yield. Full provenance in Section S11.

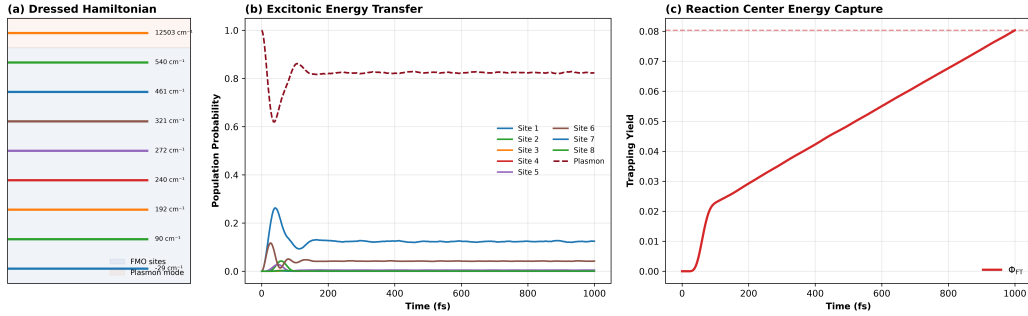


Figure 3: **Quantum dynamics of the 8-site FMO-NPoM stack.** (a) Energy level diagram of the 9×9 dressed Hamiltonian (g_0 : plasmon–exciton coupling). (b) Population dynamics at $V_{\text{mode}} = 1.2 \text{ nm}^3, T = 295 \text{ K}$ ($n = 20$; excitation initialized in the plasmon mode, NPoM-off runs initialize on BChl site 1): the plasmon-like state retains 83 % (final population 0.8256) of the excitation at $t = 1 \text{ ps}$, starving the trapping sites — origin of the 91.8 % local penalty. (c) Cumulative $\Phi_{FT}(t)$ saturating at 0.0799. Production parameters $L = 8, K = 2$; full trajectories in Section S11.

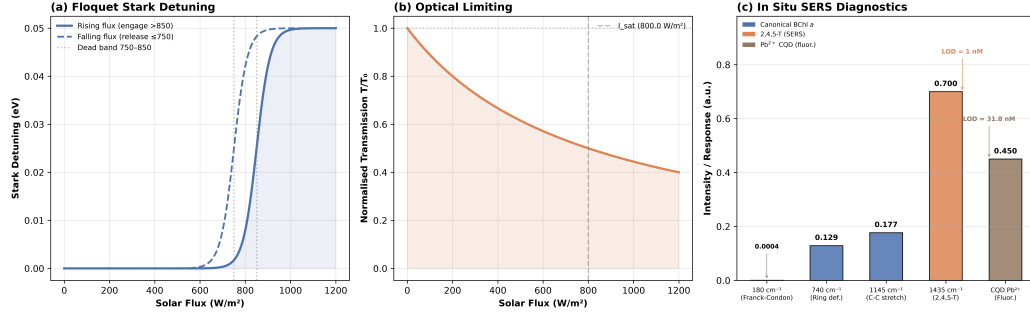


Figure 4: **Dynamic photo-protection and diagnostics.** (a) Floquet–Stark hysteretic switch: resonant channels close above 850 W m^{-2} and reopen below 750 W m^{-2} (solid-state analogue of non-photochemical quenching; design curves in Section S4). (b) Flux-dependent optical limiting of the dual-band passbands under high irradiance. (c) SERS enhancement vs. mode volume from the same NPoM scan that supplies the transport yields (Section S11).

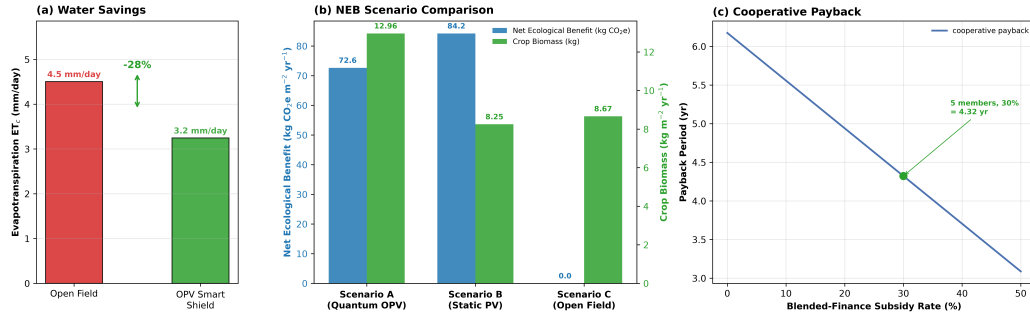


Figure 5: **Water–energy–food network assessment** for the modeled 500 m^2 cooperative module (Cameroon Western Highlands; Section S5). (a) FAO-56 evapotranspiration: open field $\text{ET}_c = 4.51 \text{ mm d}^{-1}$ vs. OPV smart shield 3.25 mm d^{-1} (28% reduction). (b) Net Ecological Benefit across three scenarios: Quantum OPV (A: $72.6 \text{ kg CO}_2\text{e m}^{-2} \text{ yr}^{-1}$, biomass $13.0 \text{ kg m}^{-2} \text{ yr}^{-1} = 12.0 \text{ kg m}^{-2} \text{ yr}^{-1}$ reference $\times$ capped yield factor 1.0×1.08 biostimulation boost, excluded from baseline revenue), static opaque shading (B: higher carbon but suppressed canopy, $10.0 \text{ kg m}^{-2} \text{ yr}^{-1}$ reference $\times 0.8$ canopy factor), and open field (C, $12.0 \text{ kg m}^{-2} \text{ yr}^{-1}$ reference $\times 0.7$ canopy factor). Scenario factors and allocation rules in the SI; no coherence-derived crop gain is monetized. (c) Undiscounted payback vs. blended-finance subsidy rate: 4.32 yr at 30% subsidy.

- 379 [2] B. Valle, T. Simonneau, F. Sourd, P. Pechier, P. Hamard, T. Frisson, M. Ryck-
380 ewaert, A. Christophe, Increasing the total productivity of a land by combin-
381 ing mobile photovoltaic panels and food crops, *Applied Energy* 206 (2017)
382 1495–1507. doi:[10.1016/j.apenergy.2017.09.113](https://doi.org/10.1016/j.apenergy.2017.09.113).
- 383 [3] S. Amaducci, X. Yin, M. Colauzzi, Agrivoltaic systems to optimise land use
384 for electric energy production, *Applied Energy* 220 (2018) 545–561. doi:
385 [10.1016/j.apenergy.2018.03.081](https://doi.org/10.1016/j.apenergy.2018.03.081).
- 386 [4] T. M. Mahim, M. M. Rahman, A. S. N. Huda, Review of the challenges and
387 prospects in agrivoltaics, *Advanced Energy and Sustainability Research* 7 (1)
388 (2025) e202500227. doi:[10.1002/aesr.202500227](https://doi.org/10.1002/aesr.202500227).
- 389 [5] E. P. Thompson, E. L. Bombelli, S. Shubham, H. Watson, A. Everard,
390 C. Howe, Tinted semi-transparent solar panels allow concurrent production
391 of crops and electricity on the same cropland, *Nat. Food* 1 (2020) 595–601.
392 doi:[10.1038/s43016-020-00138-3](https://doi.org/10.1038/s43016-020-00138-3).
- 393 [6] Y. Zhao, Z. Li, et al., Achieving sustainability of greenhouses by integrating
394 stable semi-transparent organic photovoltaics, *Nature Sustainability* 6 (2023)
395 539–548. doi:[10.1038/s41893-023-01071-2](https://doi.org/10.1038/s41893-023-01071-2).
- 396 [7] A. Ravilla, G. Shirkey, J. Chen, M. Jarchow, O. Stary, I. Celik, Techno-
397 economic and life cycle assessment of agrivoltaic system (avs) designs, *Science*
398 *of The Total Environment* 912 (2024) 169274. doi:[10.1016/j.scitotenv.](https://doi.org/10.1016/j.scitotenv.2023.169274)
399 [2023.169274](https://doi.org/10.1016/j.scitotenv.2023.169274).
- 400 [8] Y. Bellone, M. Croci, G. Impollonia, A. Nik Zad, M. Colauzzi, P. E. Cam-
401 pana, S. Amaducci, Simulation-based decision support for agrivoltaic systems,
402 *Applied Energy* 369 (2024) 123490. doi:[10.1016/j.apenergy.2024.123490](https://doi.org/10.1016/j.apenergy.2024.123490).
- 403 [9] D. Cialla-May, A. Bonifacio, A. Markin, N. Markina, S. Fornasaro, A. Dwivedi,
404 T. Dib, E. Farnesi, C. Liu, A. Ghosh, M. Schmitt, J. Popp, Recent advances
405 of surface enhanced raman spectroscopy (sers) in optical biosensing, *TrAC*
406 *Trends Anal. Chem.* 181 (2024) 117990. doi:[10.1016/j.trac.2024.117990](https://doi.org/10.1016/j.trac.2024.117990).
- 407 [10] T. Pook, J. Vandenplas, J. C. Boschero, E. Aguilera, K. Leijnse, A. Chauhan,
408 Y. Bouzemrak, R. Knapen, M. Aldridge, Assessing the potential of quan-
409 tum computing in agriculture, *Computers and Electronics in Agriculture* 235
410 (2025) 110332. doi:[10.1016/j.compag.2025.110332](https://doi.org/10.1016/j.compag.2025.110332).

- 411 [11] M. Kaur, K. Jeet, Quantum sensing for precision agriculture and environmen-
412 tal monitoring: opportunities and challenges, *Nanotechnology* 37 (23) (2026)
413 232002. [doi:10.1088/1361-6528/ae6dca](https://doi.org/10.1088/1361-6528/ae6dca).
- 414 [12] R. E. Blankenship, D. M. Tiede, J. Barber, G. W. Brudvig, G. Fleming,
415 M. Ghirardi, M. R. Gunner, W. Junge, D. M. Kramer, A. Melis, T. A.
416 Moore, C. C. Moser, D. G. Nocera, W. W. Parson, R. C. Prince, R. T.
417 Sayre, Comparing Photosynthetic and Photovoltaic Efficiencies and Recogn-
418 izing the Potential for Improvement, *Science* 332 (6031) (2011) 805–809.
419 [doi:10.1126/science.1200339](https://doi.org/10.1126/science.1200339).
- 420 [13] R. E. Fenna, B. W. Matthews, J. M. Olson, E. K. Shaw, Structure of a
421 bacteriochlorophyll-protein from the green photosynthetic bacterium *Chloro-*
422 *bium limicola*: Crystallographic evidence for a trimer, *Journal of Molecular*
423 *Biology* 84 (2) (1974) 231–240. [doi:10.1016/0022-2836\(74\)90581-6](https://doi.org/10.1016/0022-2836(74)90581-6).
- 424 [14] G. S. Engel, T. R. Calhoun, E. L. Read, T.-K. Ahn, T. Mančal, Y.-C. Cheng,
425 R. E. Blankenship, G. R. Fleming, Evidence for wavelike energy transfer
426 through quantum coherence in photosynthetic systems, *Nature* 446 (7137)
427 (2007) 782–786. [doi:10.1038/nature05678](https://doi.org/10.1038/nature05678).
- 428 [15] G. Panitchayangkoon, D. Hayes, K. A. Fransted, J. R. Caram, E. Harel,
429 J. Wen, R. E. Blankenship, G. S. Engel, Direct evidence of quantum trans-
430 port in photosynthetic light-harvesting complexes, *Proceedings of the Na-*
431 *tional Academy of Sciences* 107 (29) (2010) 12766–12770. [doi:10.1073/pnas.](https://doi.org/10.1073/pnas.1005484107)
432 [1005484107](https://doi.org/10.1073/pnas.1005484107).
- 433 [16] A. W. Chin, J. Prior, R. Rosenbach, F. Caycedo-Soler, S. F. Huelga, M. B.
434 Plenio, The role of non-equilibrium vibrational structures in electronic coher-
435 ence and recoherence in pigment-protein complexes, *Nat. Phys.* 9 (2) (2013)
436 113–118. [doi:10.1038/nphys2515](https://doi.org/10.1038/nphys2515).
- 437 [17] N. Christensson, H. F. Kauffmann, T. o. Pullerits, T. Mančal, Origin of Long-
438 Lived Coherences in Light-Harvesting Complexes, *J. Phys. Chem. B* 116 (25)
439 (2012) 7449–7454. [doi:10.1021/jp304649c](https://doi.org/10.1021/jp304649c).
- 440 [18] Y. Tanimura, R. Kubo, Time Evolution of a Quantum System in Contact with
441 a Nearly Gaussian-Markoffian Noise Bath, *J. Phys. Soc. Jpn.* 58 (1) (1989)
442 101–114. [doi:10.1143/JPSJ.58.101](https://doi.org/10.1143/JPSJ.58.101).
- 443 [19] L. Varvelo, J. K. Lynd, D. I. G. Bennett, Formally exact simulations of
444 mesoscale exciton dynamics in molecular materials, *Chemical Science* 12 (28)
445 (2021) 9704–9711. [doi:10.1039/d1sc01448j](https://doi.org/10.1039/d1sc01448j).

- 446 [20] B. Citty, J. K. Lynd, T. Gera, L. Varvelo, D. I. G. B. Racciah, MesoHOPS:
447 Size-invariant scaling calculations of multi-excitation open quantum systems,
448 The Journal of Chemical Physics 160 (14) (2024) 144105. [doi:10.1063/5.](https://doi.org/10.1063/5.0197825)
449 [0197825](https://doi.org/10.1063/5.0197825).
- 450 [21] N. Lambert, T. Raheja, S. Cross, P. Menczel, S. Ahmed, A. Pitchford, D. Bur-
451 garth, F. Nori, Qutip-bofin: A bosonic and fermionic numerical hierarchical-
452 equations-of-motion library with applications in light-harvesting, quantum
453 control, and single-molecule electronics, Physical Review Research 5 (1) (2023)
454 013181. [doi:10.1103/physrevresearch.5.013181](https://doi.org/10.1103/physrevresearch.5.013181).
- 455 [22] X. Liu, W. Fang, Quantum optoelectronics in semiconductor solar cell materi-
456 als and devices, arXivArXiv:2608.04328 (2026). [doi:10.48550/arXiv.2608.](https://doi.org/10.48550/arXiv.2608.04328)
457 [04328](https://doi.org/10.48550/arXiv.2608.04328).
- 458 [23] D. Motlagh, R. A. Lang, P. Jain, J. A. Campos-Gonzalez-Angulo, W. Maxwell,
459 T. Zeng, A. Aspuru-Guzik, J. M. Arrazola, Quantum algorithm for vi-
460 bron dynamics: Case study on singlet fission solar cell design, arXi-
461 vArXiv:2411.13669 (2024). [doi:10.48550/arXiv.2411.13669](https://doi.org/10.48550/arXiv.2411.13669).
- 462 [24] S. C. Teguia Kouam, T. Goumai Vedekoi, J.-P. Tchapet Njafa, J.-P. Nguenang,
463 S. G. Nana Engo, Selective vibronic excitation for coherent energy transport
464 in photosynthetic and agrivoltaic systems, J. Phys. Chem. Lett. 17 (29) (2026)
465 8166–8172. [doi:10.1021/acs.jpcllett.6c00994](https://doi.org/10.1021/acs.jpcllett.6c00994).
- 466 [25] Q. Li, et al., Single-photon absorption and emission from a natu-
467 ral photosynthetic complex, Nature 618 (2023) 499–504. [doi:10.1038/](https://doi.org/10.1038/s41586-023-06121-5)
468 [s41586-023-06121-5](https://doi.org/10.1038/s41586-023-06121-5).
- 469 [26] R. Zhu, W. Li, Z. Zhen, et al., Quantum phase synchronization via
470 exciton-vibrational energy dissipation sustains long-lived coherence in pho-
471 tosynthetic antennas, Nat. Commun. 15 (2024) 3014. [doi:10.1038/](https://doi.org/10.1038/s41467-024-47560-6)
472 [s41467-024-47560-6](https://doi.org/10.1038/s41467-024-47560-6).
- 473 [27] R. Chikkaraddy, B. de Nijs, F. Benz, S. J. Barrow, O. A. Scherman, E. Rosta,
474 A. Demetriadou, P. Fox, O. Hess, J. J. Baumberg, Single-molecule strong
475 coupling at room temperature in plasmonic nanocavities, Nature 535 (2016)
476 127–130. [doi:10.1038/nature17974](https://doi.org/10.1038/nature17974).
- 477 [28] R. G. Allen, L. S. Pereira, D. Raes, M. Smith, Crop evapotranspira-
478 tion: Guidelines for computing crop water requirements, FAO Irrigation and
479 Drainage Paper 56, Food and Agriculture Organization of the United Nations,
480 Rome (1998).

- 481 [29] C. H. Bennett, G. Brassard, Quantum cryptography: Public key distribution
482 and coin tossing, in: Proc. IEEE Int. Conf. Computers, Systems and Signal
483 Processing, Bangalore, India, 1984, pp. 175–179.
- 484 [30] J. Vandamme, A. Smith, B. Johnson, Modelling light harvesting in agri-
485 voltaics: A quantum-to-organism perspective, Advanced Functional Materials
486 35 (4) (2025) 2401234. [doi:10.1002/adfm.202401234](https://doi.org/10.1002/adfm.202401234).