3/9/26 EXP NO: 9

IMPLEMENTATION OF SUBNETTING IN CISCO PACKET TRACER SIMULATION

Aim


To implement classless IP subnetting and config that network


Requirements

- CISCO Packet Tracer
- Routers
- Switches
- PCs
- Ethernet ~~cot~~ cables

Procedure

- open cisco packet tracker
- add router, switches, pcs
- connect the devices using cables
- use network 192.168.1.0/24
- the /25 mask provides 8 subnets
- config the routers
- config the switch ports
- config each pc

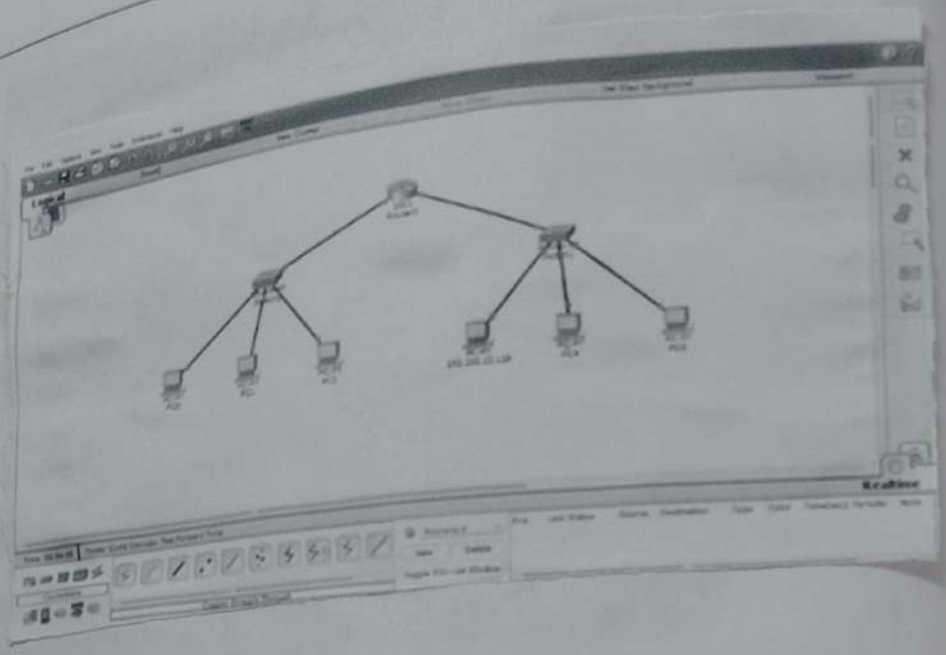

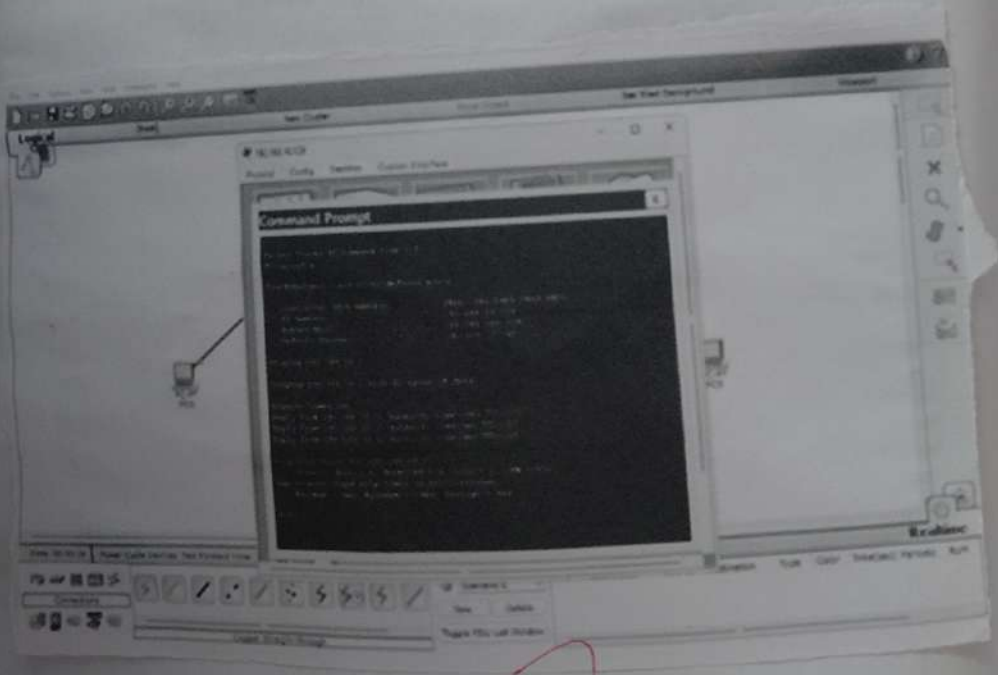
Command Prompt

Input

net address : 192.168.1.0 /24

subnet : /27

Output

subnet topology is successfully created.

O/P

Program

Router config

```
enable
config terminal
interface fast ethernet 0/0
ip address 192.168.1.1
255.255.255.224
no shutdown
exit
interface fast ethernet 0/2
ip address 192.168.2.1
255.255.255.224
no shutdown
exit
```

switch config

```
enable
config terminal
interface fast ethernet
switch port
exit
switch mode
exit
```

Result

Thus the network was submitted & configured successfully.

28/5/24