

USN : 1WN24CS167

1. Create a topology and simulate sending a simple PDU from source to destination using hub and switch as connecting devices and demonstrate ping message.

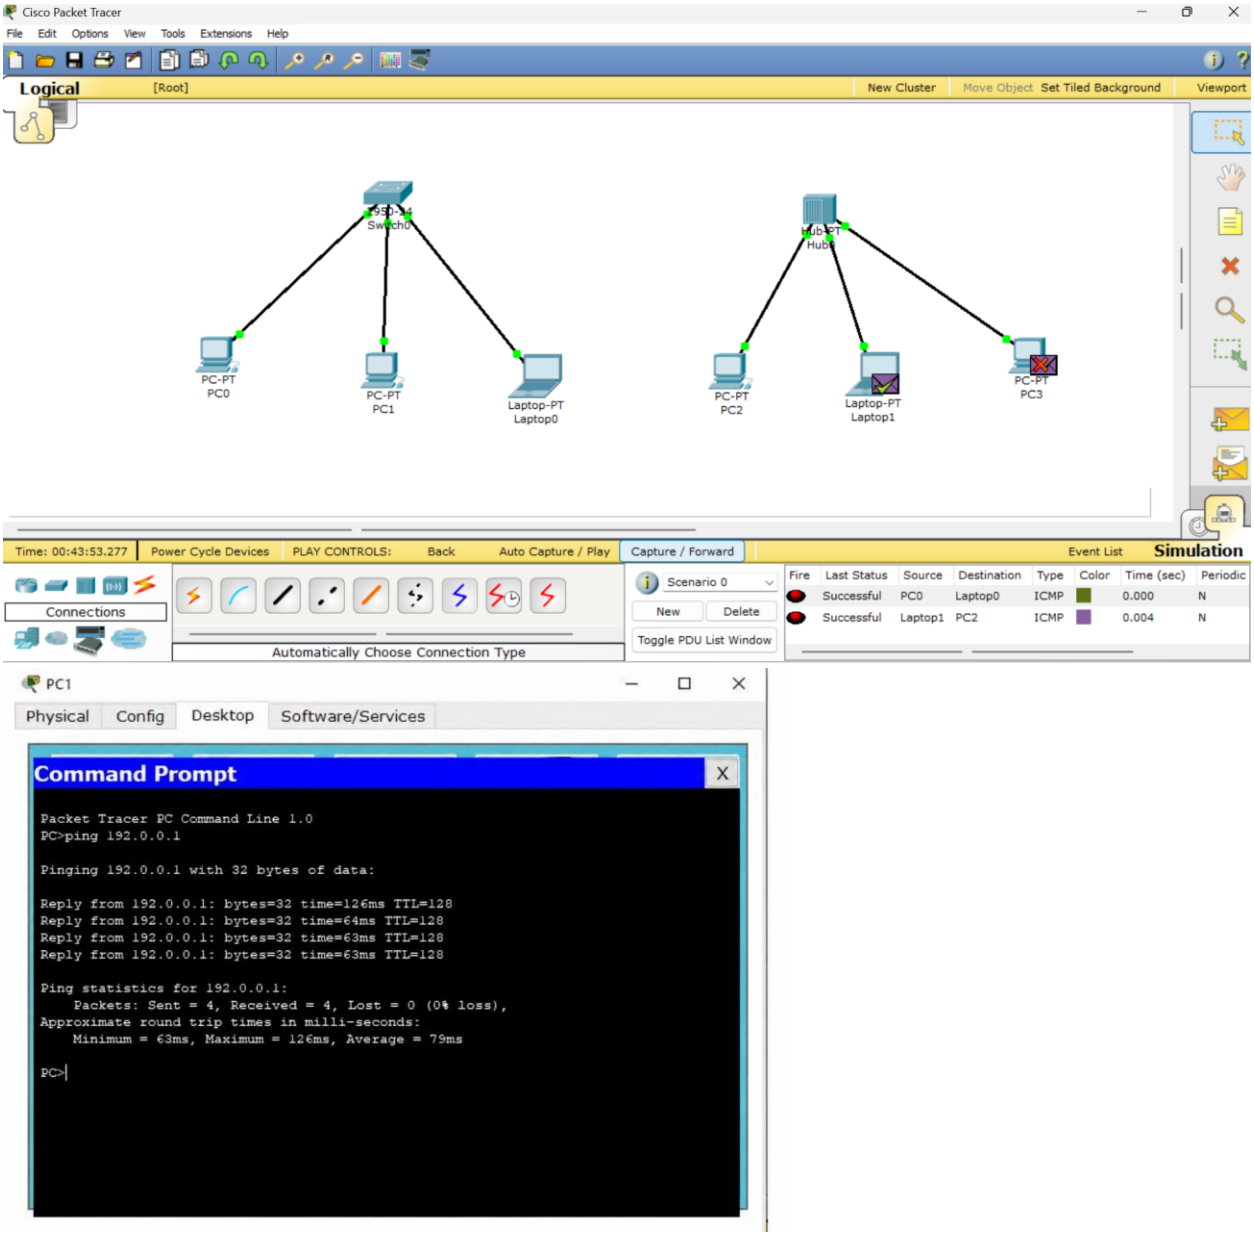

Observation Book :

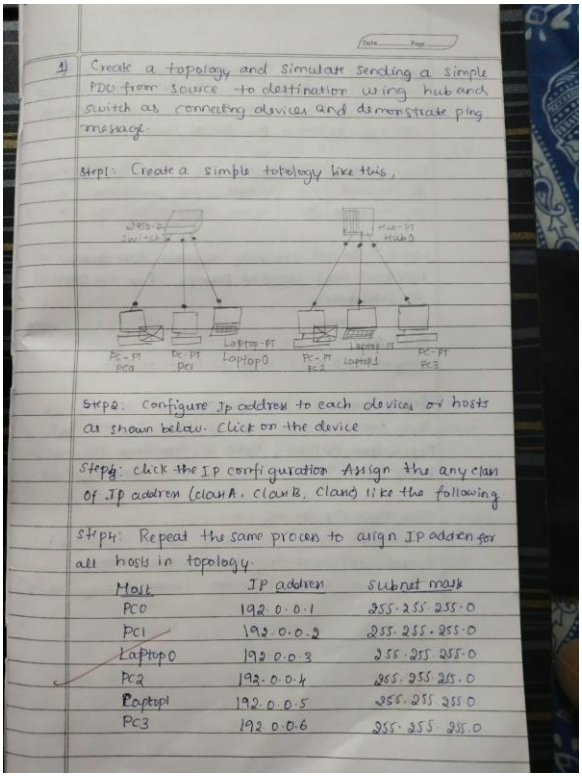

1) Create a topology and simulate sending a simple PDU from source to destination using hub and switch as connecting devices and demonstrate ping message.


Step1: Create a simple topology like this,

Step2: Configure IP address to each devices or hosts as shown below. Click on the device

Step3: click the IP configuration Assign the any class of IP address (class A, class B, class) like the following

Step4: Repeat the same process to assign IP address for all hosts in topology.

Host	IP address	Subnet mask
PC0	192.0.0.1	255.255.255.0
PC1	192.0.0.2	255.255.255.0
Laptop0	192.0.0.3	255.255.255.0
PC2	192.0.0.4	255.255.255.0
Laptop1	192.0.0.5	255.255.255.0
PC3	192.0.0.6	255.255.255.0

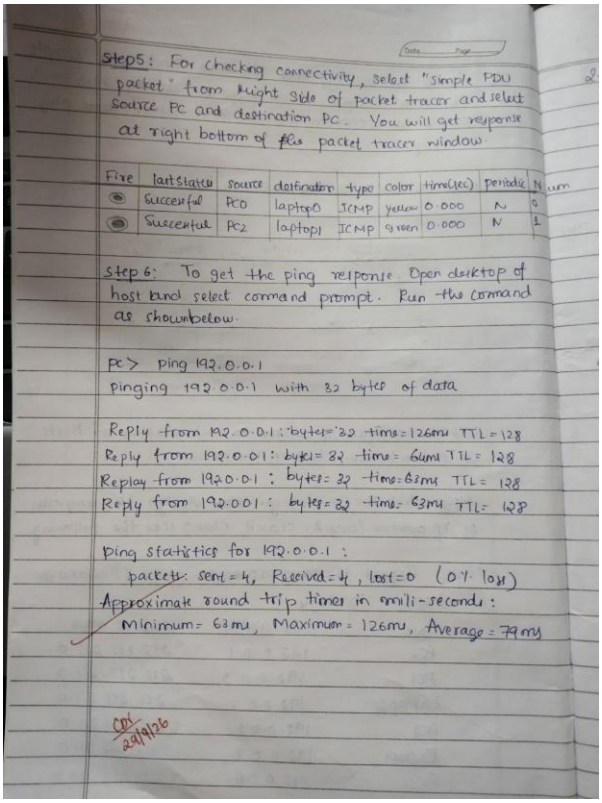

Step5: For checking connectivity, select "simple PDU packet" from right side of packet tracer and select source PC and destination PC. You will get response at right bottom of PCs packet tracer window.

Fire	Last Status	Source	Destination	Type	Color	Time(sec)	Periodic	Num
●	Successful	PC0	laptop0	ICMP	yellow	0.000	N	0
●	Successful	PC2	laptop1	ICMP	green	0.000	N	1

Step 6: To get the ping response. Open desktop of host and select command prompt. Run the command as shown below.

```
PC> ping 192.0.0.1
pinging 192.0.0.1 with 32 bytes of data

Reply from 192.0.0.1: bytes=32 time=126ms TTL=128
Reply from 192.0.0.1: bytes=32 time=6ms TTL=128
Reply from 192.0.0.1: bytes=32 time=63ms TTL=128
Reply from 192.0.0.1: bytes=32 time=63ms TTL=128

Ping statistics for 192.0.0.1:
    packets: sent=4, Received=4, lost=0 (0% loss)
Approximate round trip times in milli-seconds:
    Minimum=63ms, Maximum=126ms, Average=79ms
```

CDI 29/9/20