


USN : 1WN24CS167


3. How to configure DHCP within a LAN and Outside a LAN in a packet Tracer

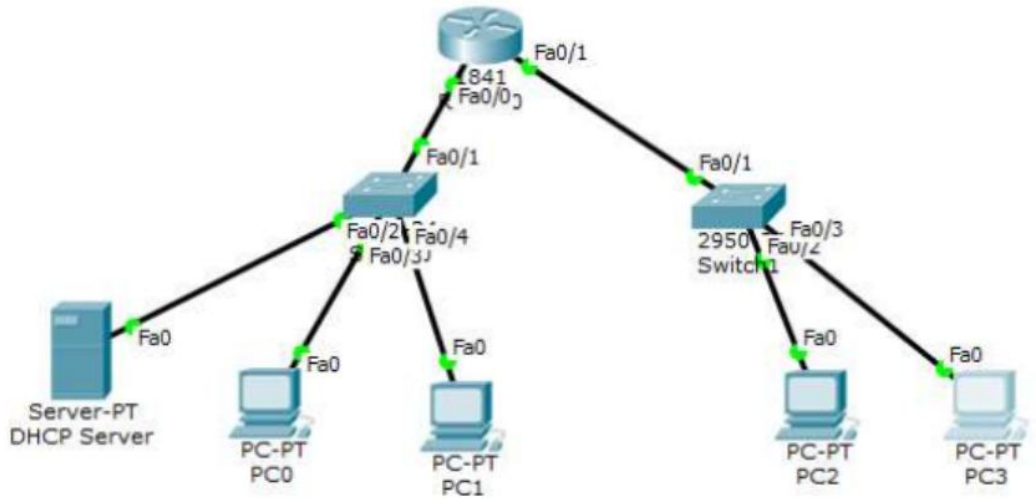

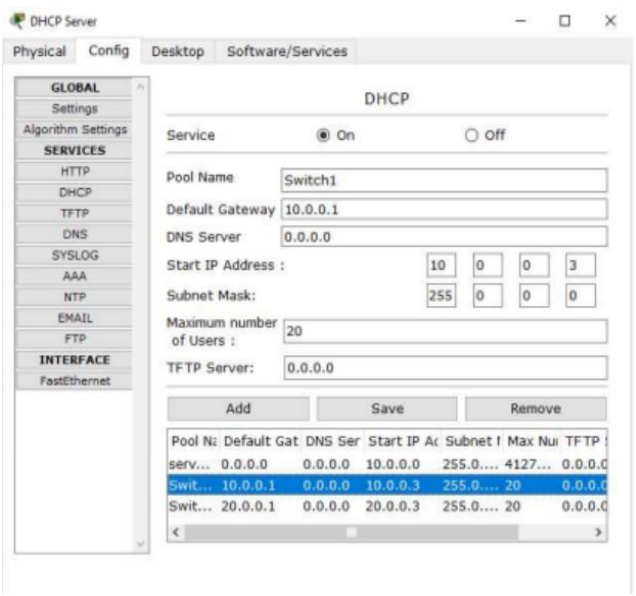

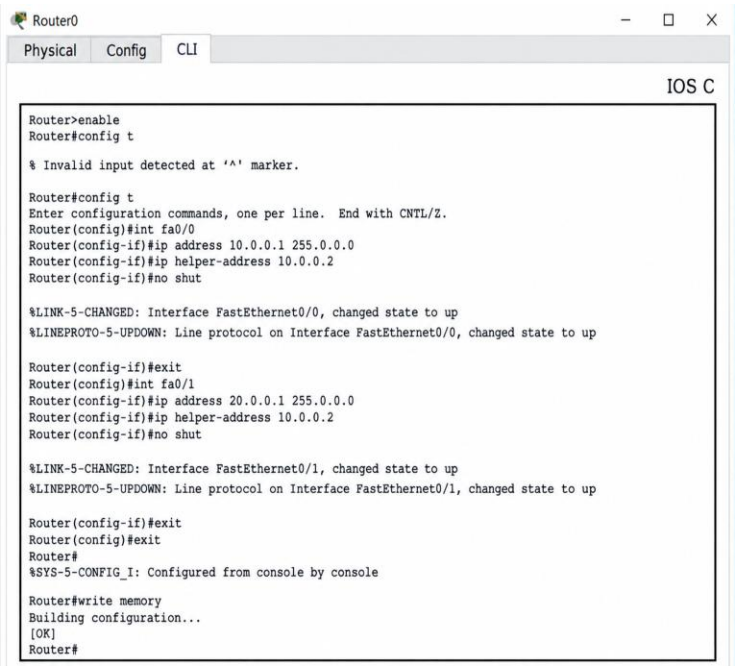

Observation Book :

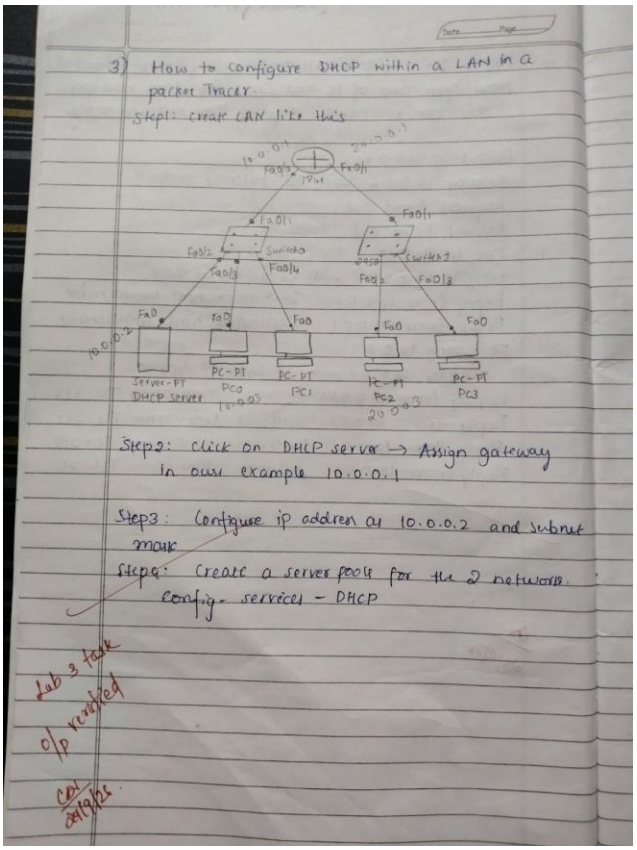

3) How to configure DHCP within a LAN in a packet Tracer

Step1: create LAN like this


Step2: Click on DHCP server → Assign gateway in our example 10.0.0.1

Step3: Configure ip address as 10.0.0.2 and subnet mask

Step4: Create a server pools for the 2 networks. config - services - DHCP

Lab 3 task

o/p verified

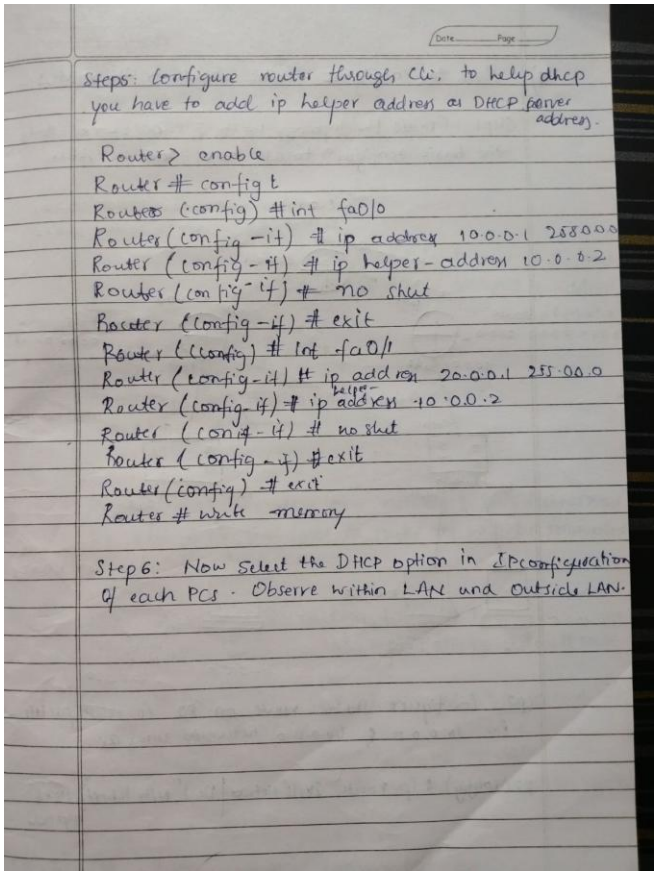

Steps: Configure router through cli, to help dhcp you have to add ip helper address as DHCP server address.

Router> enable
Router# config t
Router(config) #int fa0/0
Router(config-if) # ip address 10.0.0.1 255.0.0.0
Router(config-if) # ip helper-address 10.0.0.2
Router(config-if) # no shut
Router(config-if) # exit
Router(config) # int fa0/1
Router(config-if) # ip address 20.0.0.1 255.0.0.0
Router(config-if) # ip helper-address 10.0.0.2
Router(config-if) # no shut
Router(config-if) #exit
Router(config) #exit
Router # write memory

Step6: Now select the DHCP option in IPconfiguration of each PCs. Observe within LAN and outside LAN.