# Product Summary
ZED-F9P

u-blox F9 high precision GNSS module

P

Multi-band receiver delivers centimeter-level accuracy in seconds

- Concurrent reception of GPS, GLONASS, Galileo and BeiDou
- Multi-band RTK with fast convergence times and reliable performance
- High update rate for highly dynamic applications
- Centimeter accuracy in a small and energy-efficient module
- Easy integration of RTK for fast time-to-market

17.0 × 22.0 × 2.4 mm

Product description

The ZED-F9P positioning module features the new u-blox F9 receiver platform, which provides multi-band GNSS to high-volume industrial applications in a compact form factor. ZED-F9P is a multi-band GNSS module with integrated u-blox multi-band RTK technology for centimeter-level accuracy. The module enables precise navigation and automation of moving industrial machinery by means of a small, surface-mounted module.

The ZED-F9P module is designed for easy integration and low design-in costs with minimal e-BOM. Thanks to its small package size, light weight, and small power consumption it is well-suited for mass market adoption.

ZED-F9P ensures the security of positioning and navigation information by using secure interfaces and advanced jamming and spoofing detection technologies.

ZED-F9P offers support for a range of correction services allowing each application to optimize performance according to the application's individual need. ZED-F9P comes with built-in support for standard RTCM corrections, supporting centimeter-level navigation from local base stations or from virtual reference stations (VRS) in a Network RTK setup. The module can be upgraded to support future SSR-type correction services suitable for mass market penetration.

u-blox modules are manufactured in ISO/TS 16949 certified sites and are fully tested on a system level. Qualification tests are performed as stipulated in the ISO16750 standard: "Road vehicles – Environmental conditions and testing for electrical and electronic equipment".

	ZED-F9P
Grade	
Automotive	
Professional	•
Standard	
GNSS	
GPS / QZSS	•
GLONASS	•
Galileo	•
BeiDou	•
Number of concurrent GNSS	4
Multi-band	•
Interfaces	
UART	2
USB	1
SPI	1
DDC (I2C compliant)	1
Features	
Programmable (flash)	•
Data logging	•
Carrier phase output	•
Additional SAW	•
RTC crystal	•
Oscillator	T
RTK rover	•
RTK base station	•
Moving base	•
Survey-in and fixed mode	•
Timepulse	1
Power supply	
2.7 V – 3.6 V	•

T = TCXO

ZED-F9P

P

Features

Receiver type	184-channel u-blox F9 engine GPS L1C/A L2C, GLO L1OF L2OF, GAL E1B/C E5b, BDS B1I B2I, QZSS L1C/A L2C	
Nav. update rate	RTK	up to 20 Hz[1]
Position accuracy[2]	RTK	0.01 m + 1 ppm CEP
Convergence time[2]	RTK	< 10 sec
Acquisition	Cold starts	24 s
	Aided starts	2 s
	Reacquisition	2 s
Sensitivity	Tracking & Nav.	-167 dBm
	Cold starts	-148 dBm
	Hot starts	-157 dBm
	Reacquisition	-160 dBm
Assistance	AssistNow Online OMA SUPL & 3GPP compliant	
Oscillator	TCXO	
RTC crystal	Built-In	
Anti-jamming	Active CW detection and removal Onboard band pass filter	
Anti-spoofing	Advanced anti-spoofing algorithms	
Memory	Flash	
Moving base	For attitude sensing and heading applications	
Supported antennas	Active	

1 The highest navigation rate can limit the number of supported constellations
2 Depends on atmospheric conditions, baseline length, GNSS antenna, multipath conditions, satellite visibility, and geometry

Interfaces

Serial interfaces	2 UART 1 SPI 1 USB 1 DDC (I2C compliant)
Digital I/O	Configurable timepulse EXTINT input for wakeup RTK fix status GEOFENCE status
Timepulse	Configurable: 0.25 Hz to 10 MHz
Protocols	NMEA, UBX binary, RTCM version 3.3

Package

54-pin LGA (Land Grid Array)
17 x 22 x 2.4 mm

Environmental data, quality & reliability

Operating temp.	−40 °C to +85 °C
Storage temp.	−40 °C to +85 °C
RoHS compliant (2015/863/EU)	
Green (halogen-free)	
EU Radio Equipment Directive compliant 2014/53/EU	
Qualification according to ISO 16750	
Manufactured and fully tested in ISO/TS 16949 certified production sites	
High vibration and shock resistance	

Electrical data

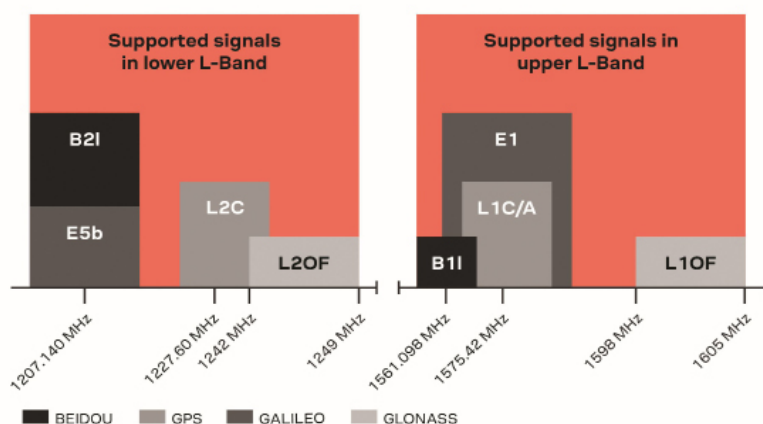|	
Supply voltage	2.7 V to 3.6 V
Power consumption	68 mA @ 3.0 V (continuous)
Backup supply	1.65 V to 3.6 V

Support products

u-blox support products provide reference design, and allow efficient integration and evaluation of u-blox positioning technology.

C099-F9P	u-blox ZED-F9P application board, with ODIN-W2 for connectivity. Includes multi-band antenna (ANN-MB). One board per package.

Product variants

ZED-F9P	u-blox F9 high precision GNSS module with rover and base functionality

Supported signals in lower L-Band: B2I, E5b, L2C, L2OF — 1207.140 MHz, 1227.60 MHz, 1242 MHz, 1249 MHz

Supported signals in upper L-Band: E1, L1C/A, B1I, L1OF — 1561.098 MHz, 1575.42 MHz, 1598 MHz, 1605 MHz

BEIDOU   GPS   GALILEO   GLONASS

Further information

For contact information, see www.u-blox.com / contact-us.

For more product details and ordering information, see the product data sheet.