国民技术

股票代码:300077

国民技术

芯片产品选型手册

MCU产品 安全芯片 蓝牙芯片 电源产品

芯之所向, Beyond the Future

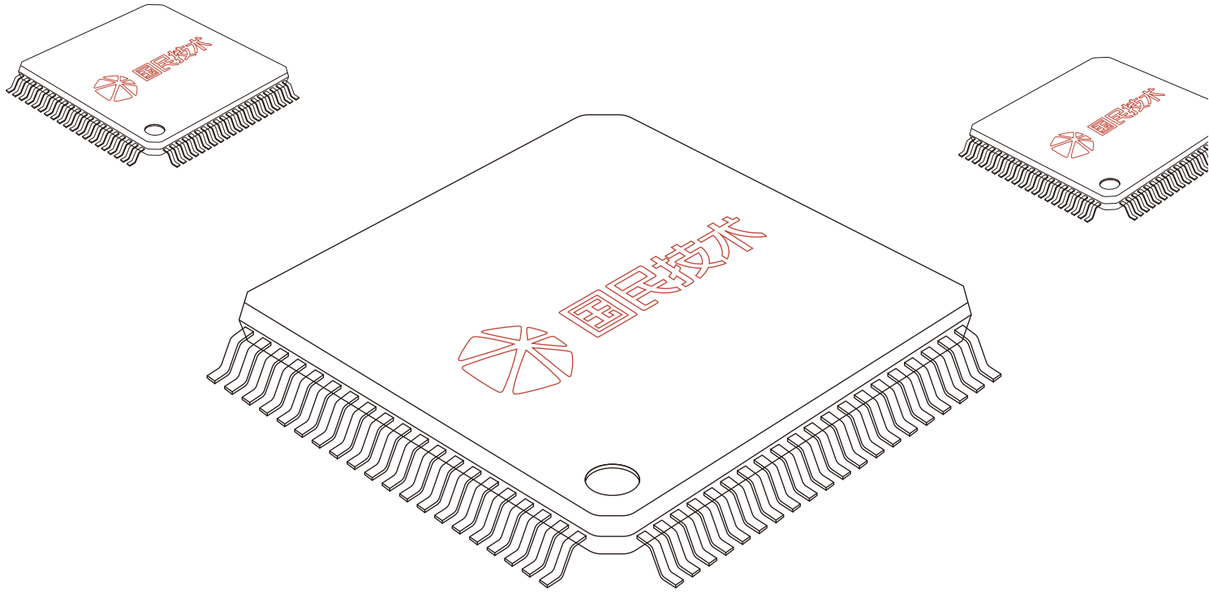

国民技术公众号
（公司资讯）

NSING 加油站
（开发资源）

国民技术旗舰店
（购买样品）

技术支持群助手
（Nsing-xiaoAn）

销售客服
（企业微信）

国民技术股份有限公司

地址:广东省深圳市南山区高新区北区宝深路109号国民技术大厦

网址:www.nsingtech.com

联系销售

手机:18988772159（微信同号）

邮箱:sales@nsingtech.com

技术支持

助手:Nsing-xiaoAn（微信号）

邮箱:support@nsingtech.com

资料下载

https://www.nsingtech.com/support/down/

www.nsingtech.com 2026.3

NSING

公司致力于为人们

安全、便捷、智能的生产生活提供芯片及解决方案

2000年成立
26年IC设计与量产经验

2010年上市
股票代码:300077

4大核心技术领域
安全、SoC、射频、电源

资质与荣誉

- 中国上市公司协会副监事长单位
- 国家高新技术企业
- 深圳市自主创新行业龙头企业
- 深圳市工程研究开发中心
- 深圳市信息安全芯片技术工程研究中心
- 深圳市重点实验室
- 9次荣获工信部“中国芯”优秀奖项
- 公安部“中关村安信网络身份认证产业联盟”发起单位
- 广东省汽车半导体和元器件应用产业联盟副理事长单位

科研成就

- “863 计划”[注1]、“03 专项”[注2]、“核高基”[注3]
- 拥有1500多项国内外专利，其中发明专利超过1000项
- 2017年摘得国家知识产权最高荣誉——中国专利金奖
- 获得9项中国专利优秀奖
- RCC（限域通信）技术于 2017年 5 月正式成为国家标准
- 推动并参与了可信计算新一代 ISO/IEC 国际标准的制定

服务能力

- 全球化技术研发
- 本土化的技术服务团队
- 线上线下服务支持
- 国际、国内一流供应商合作伙伴

注1：国家高技术研究发展计划
注2：“新一代宽带无线移动通信网”国家科技重大专项
注3：“核心电子器件、高端通用芯片及基础软件产品”
国家科技重大专项

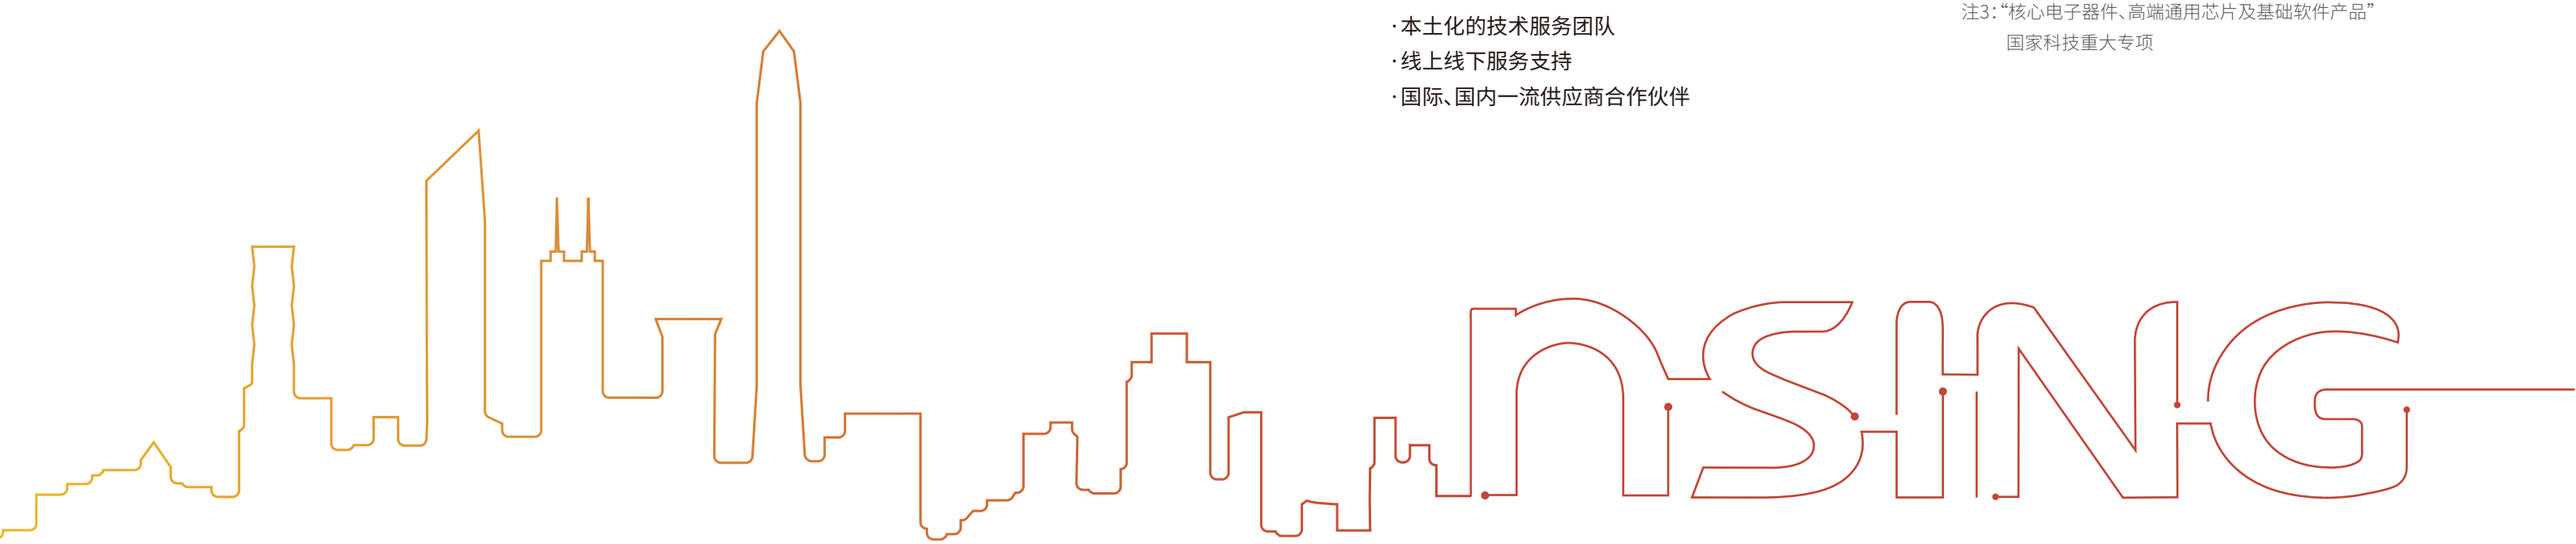

MCU产品

Roadmap

持续创新，提供全场景、广覆盖、高性能、安全可靠的MCU产品。

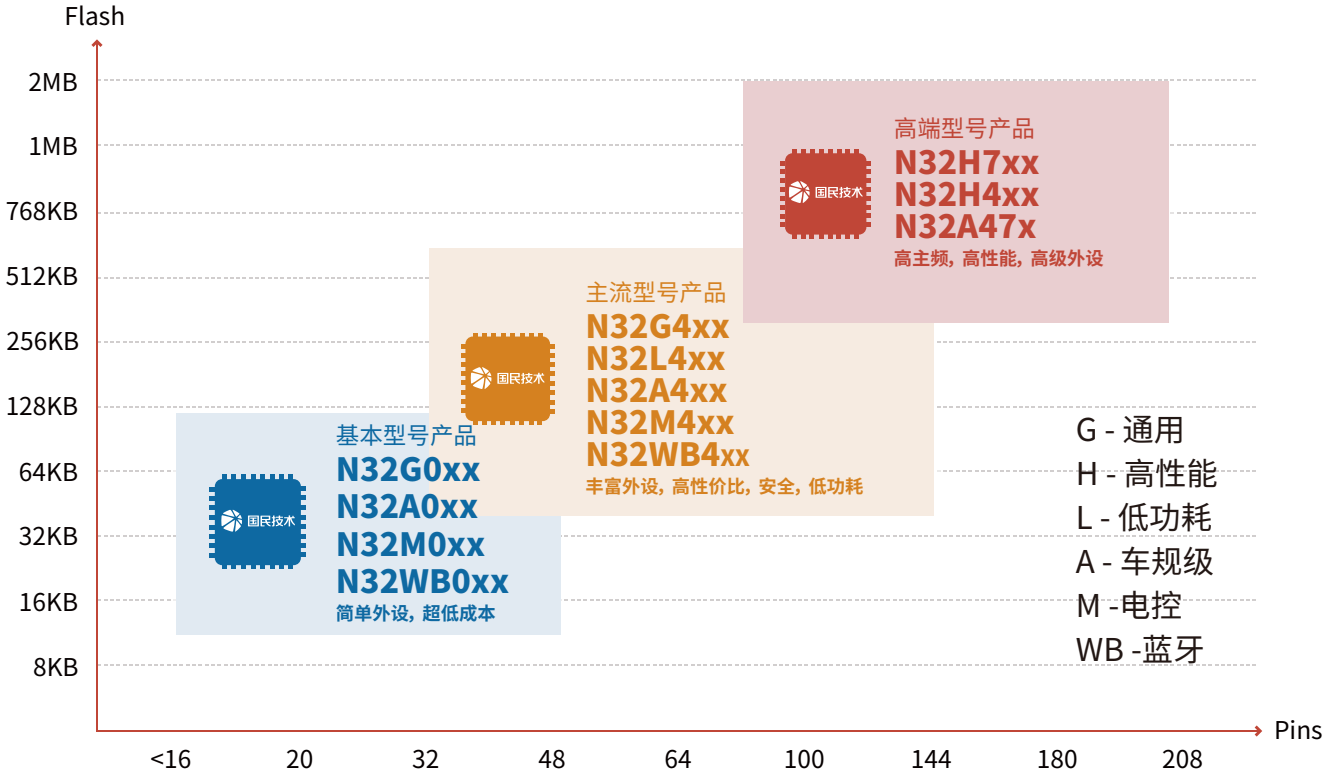

MCU产品命名规则

N	32	H	7	85	X	K	B	7	EC	—W

公司简称
N：
NSING TECHNOLOGIES INC.

处理器位宽
32 = 32bit

产品家族
G=通用
H=高性能
L=低功耗
WB=无线蓝牙
M=电机控制
A=汽车级

处理器内核
0=ARM Cortex-M0
4=ARM Cortex-M4F
7=ARM Cortex-M7

产品系列
x0,03=超值系列
x2,01=基本系列
x3/5=增强系列
x6=LCD系列
x7=互联系列
FR=指纹识别系列
17=合封
（4运放+250V6N预驱）
18=合封（2运放+LDO）

引脚个数
F=20脚
P=25脚
G=28脚
K=32脚
T=36脚
H=40脚
S=44脚
C=48脚
R=64脚
N=72脚
M=80、81脚
L=88脚
V=100脚
Q=128脚
Z=144脚
A=169脚
I=176脚
B=208脚
X=240脚

封装
L=LQFP
T=TQFP
Q=QFN
W=WLCSP
S=TSSOP
U=UFQFPN
B=BGA

Flash容量
4=16KB Flash
5=29.5KB Flash
6=32KB Flash
8=64KB Flash
B=128KB Flash
C=256KB Flash
E=512KB Flash
G=1024KB Flash
I=2048KB Flash
K=4096KB Flash

温度等级
6=-40~+85°C
7=-40~+105°C
8=-40~+125°C

选型信息
EC=支持
EtherCAT

固件
W=G1
数字电源

MCU产品

产品矩阵

提供通用、低功耗、车规、无线、电控等**42**个系列**300**余款MCU产品型号。

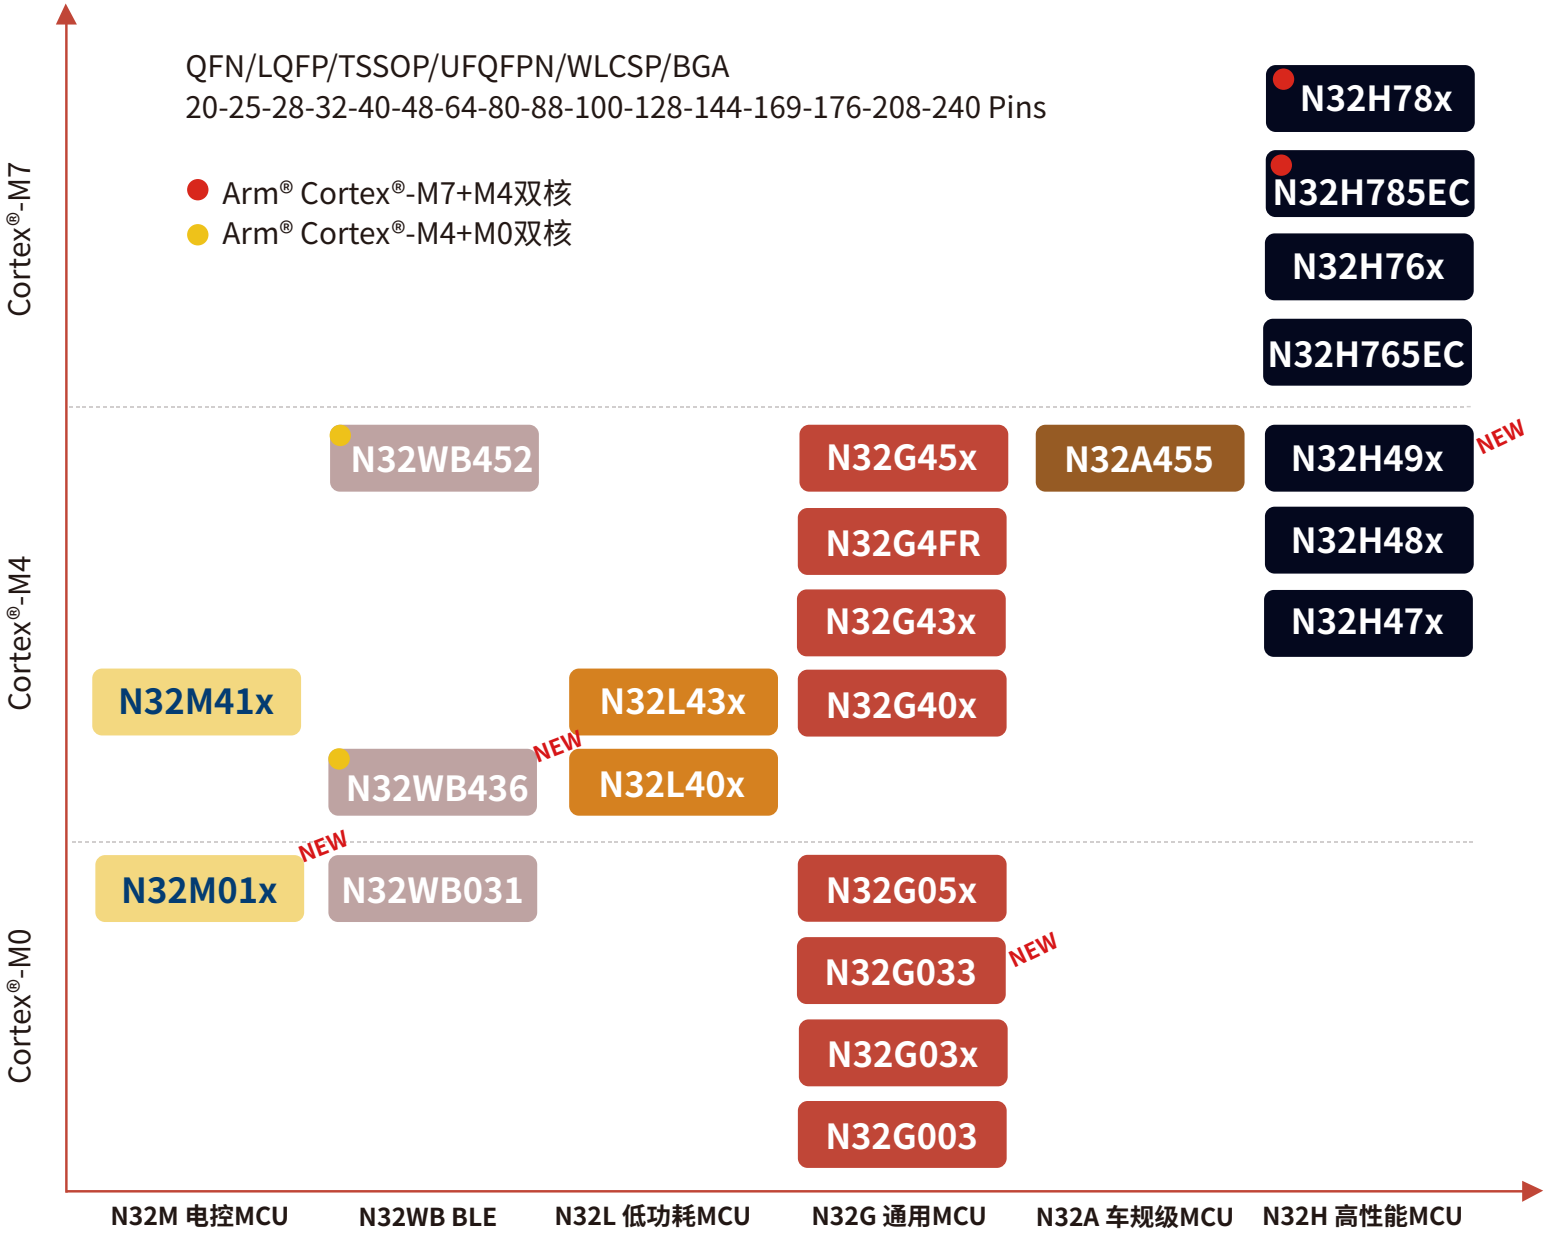

安全芯片

● 车规产品

物联网安全及微认证

- **N32S002** M0,16MHz,32K NEW
- **NS3300** ECC163/ECDSA256, 1kBit

可信计算

- **NS350** TPM2.0(Spec1.59)/TCM2.0
- **Z32H330TC** TPM2.0(Spec1.38)/TCM2.0

多用途安全芯片

- **N32S033** M0,80MHz,512K
- ● **N32S032** M0,80MHz,320K
- **N32S035** M0,80MHz,100K NEW
- **Z32HUA** M0,80MHz,100K
- **Z32HUB** M0,60MHz,320K
- **N32S003** M0,48MHz,64K

安全背书

商用密码检测认证中心 Commercial Cryptography Testing and Certification Center

中国信息安全测评中心

中国网络安全审查技术与认证中心 CHINA CYBERSECURITY REVIEW TECHNOLOGY AND CERTIFICATION CENTER

BCTC 国家金融科技测评中心 National FinTech Evaluation Center 银行卡检测中心 Bank Card Test Center

公安部第一研究所 FIRST RESEARCH INSTITUTE OF THE MINISTRY OF PUBLIC SECURITY OF PRC

ESI

NIST

EMVCo

@SEC the information security provider

THALES

UL

TÜVRheinland® Precisely Right.

高性能MCU

Series	Commerical Product Code	Core	Frenquency (MHz)	Flash (KB)	SRAM (KB)	I/O	Supply Voltage/ Operating Temperature	DCDC	Coprocessor			Timer			Memory Expansion Interface				Analog Interface			Connectivity							DMA/Channels	MDMA/Channels	EtherCAT		ETH 1000M	ETH 100M	Graphics Processing					Cryptographic Algorithm	Package	SPQ(PCS)
									Cor dic	DSMU	FMAC	(2)SHRTIM	(3)xTimer	RTC	SDRAM	SDMMC	xSPI	FEMC	12-bit ADC Cell (CHs)	12-bit DAC(1)CHs	COMP	USART/ISO7816/LIN	UART/LIN	LPUART	SPI/I²S	I²C	USB HS	CAN-FD				ESC			LCDC	MIPI-DSI	2.5D GPU	JPEG	DVP			
N32H787	N32H787XIB7	Arm® Cortex®-M7 & Arm® Cortex®-M4F	600&300	2048	1504	166	2.3V~3.6V/-40~+105°C	Yes	Yes			2	23	1	1	2	1	1	3*(53)	6	4	8	7	2	7/4	10	2	8	3/24	1/16	–		1	1	1	1	1	1	2	DES/3DES、AES、SHA1/SHA224/SHA256/SHA384/SHA512、SM4、CRC8/CRC16/CRC32、TRNG	BGA240+25	119/盘
	N32H787XKB7		600&300	4096	1504	166		Yes	Yes			2	23	1	1	2	1	1	3*(53)	6	4	8	7	2	7/4	10	2	8	3/24	1/16	–		1	1	1	1	1	1	2		BGA240+25	119/盘
N32H785	N32H785XIB7		600&300	2048	1504	166		Yes	Yes			2	23	1	1	2	1	1	3*(53)	6	4	8	7	2	7/4	10	2	8	3/24	1/16	–		1	1	1	–	1	1	2		BGA240+25	119/盘
	N32H785XKB7		600&300	4096	1504	166		Yes	Yes			2	23	1	1	2	1	1	3*(53)	6	4	8	7	2	7/4	10	2	8	3/24	1/16	–		1	1	1	–	1	1	2		BGA240+25	119/盘
	N32H785IIB7		600&300	2048	1504	126		Yes	Yes			2	23	1	1	2	1	1	3*(38)	6	4	7	6	2	6/4	8	2	8	3/24	1/16	–		1	1	1	–	1	1	2		BGA176+25	168/盘
	N32H785IKB7		600&300	4096	1504	126		Yes	Yes			2	23	1	1	2	1	1	3*(38)	6	4	7	6	2	6/4	8	2	8	3/24	1/16	–		1	1	1	–	1	1	2		BGA176+25	168/盘
	N32H785IIL7		600&300	2048	1504	117		Yes	Yes			2	23	1	1	2	1	1	3*(36)	6	4	7	6	2	6/4	8	2	8	3/24	1/16	–		1	1	1	–	1	1	2		LQFP176	40/盘
	N32H785IKL7		600&300	4096	1504	117		Yes	Yes			2	23	1	1	2	1	1	3*(36)	6	4	7	6	2	6/4	8	2	8	3/24	1/16	–		1	1	1	–	1	1	2		LQFP176	40/盘
N32H785EC	N32H785XIB7EC		600&300	2048	1504	166		Yes	Yes			2	23	1	1	2	1	1	3*(53)	6	4	8	7	2	7/4	10	2	8	3/24	1/16	1		1	1	1	–	1	1	2		BGA240+25	119/盘
	N32H785XKB7EC		600&300	4096	1504	166		Yes	Yes			2	23	1	1	2	1	1	3*(53)	6	4	8	7	2	7/4	10	2	8	3/24	1/16	1		1	1	1	–	1	1	2		BGA240+25	119/盘
N32H765	N32H765IIB7	Arm® Cortex®-M7	600	2048	1504	126	2.3V~3.6V/-40~+105°C	Yes	Yes			2	23	1	1	2	1	1	3*(38)	6	4	7	6	2	6/4	8	2	8	3/24	1/16	–		1	1	1	–	1	1	2	DES/3DES、AES、SHA1/SHA224/SHA256/SHA384/SHA512、SM4、CRC8/CRC16/CRC32、TRNG	BGA176+25	168/盘
	N32H765IKB7		600	4096	1504	126		Yes	Yes			2	23	1	1	2	1	1	3*(38)	6	4	7	6	2	6/4	8	2	8	3/24	1/16	–		1	1	1	–	1	1	2		BGA176+25	168/盘
	N32H765IIL7		600	2048	1504	117		Yes	Yes			2	23	1	1	2	1	1	3*(36)	6	4	7	6	2	6/4	8	2	8	3/24	1/16	–		1	1	1	–	1	1	2		LQFP176	40/盘
	N32H765IKL7		600	4096	1504	117		Yes	Yes			2	23	1	1	2	1	1	3*(38)	6	4	7	6	2	6/4	8	2	8	3/24	1/16	–		1	1	1	–	1	1	2		LQFP176	40/盘
	N32H765ZIL7		600	2048	1504	97		Yes	Yes			2	23	1	1	2	1	1	3*(28)	6	2	5	5	2	6/4	8	2	7	3/24	1/16	–		–	1	1	–	1	1	1		LQFP144	60/盘
	N32H765ZKL7		600	4096	1504	97		Yes	Yes			2	23	1	1	2	1	1	3*(28)	6	2	5	5	2	6/4	8	2	7	3/24	1/16	–		–	1	1	–	1	1	1		LQFP144	60/盘
N32H765EC	N32H765IIB7EC		600	2048	1504	126		Yes	Yes			2	23	1	1	2	1	1	3*(38)	6	4	7	6	2	6/4	8	2	8	3/24	1/16	1		1	1	1	–	1	1	2		BGA176+25	168/盘
	N32H765IKB7EC		600	4096	1504	126		Yes	Yes			2	23	1	1	2	1	1	3*(38)	6	4	7	6	2	6/4	8	2	8	3/24	1/16	1		1	1	1	–	1	1	2		BGA176+25	168/盘
N32H762	N32H762IIL7		600	2048	1504	138		No	Yes			2	23	1	1	2	1	1	3*(40)	6	4	7	7	2	7/4	10	2	8	3/24	1/16	–		1	1	1	–	1	1	2		LQFP176	40/盘
	N32H762IKL7		600	4096	1504	138		No	Yes			2	23	1	1	2	1	1	3*(40)	6	4	7	7	2	7/4	10	2	8	3/24	1/16	–		1	1	1	–	1	1	2		LQFP176	40/盘
N32H760	N32H760ZIL7		600	2048	1504	114		No	Yes			–	21	1	1	2	1	1	3*(28)	6	3	5	5	2	6/4	8	2	6	3/24	1/16	–		–	1	1	–	1	1	2		LQFP144	60/盘
	N32H760ZKL7		600	4096	1504	114		No	Yes			–	21	1	1	2	1	1	3*(28)	6	3	5	5	2	6/4	8	2	6	3/24	1/16	–		–	1	1	–	1	1	2		LQFP144	60/盘
	N32H760VIB7		600	2048	1504	82		No	Yes			–	21	1	1	2	1	1	3*(24)	6	2	3	5	2	5/4	8	2	6	3/24	1/16	–		–	1	1	–	1	1	2		BGA100	260/盘
	N32H760VKB7		600	4096	1504	82		No	Yes			–	21	1	1	2	1	1	3*(24)	6	2	3	5	2	5/4	8	2	6	3/24	1/16	–		–	1	1	–	1	1	2		BGA100	260/盘
	N32H760VIL7		600	2048	1504	82		No	Yes			–	21	1	1	2	1	1	3*(28)	6	2	3	5	2	5/4	8	2	6	3/24	1/16	–		–	1	1	–	1	1	2		LQFP100	90/盘
	N32H760VKL7		600	4096	1504	82		No	Yes			–	21	1	1	2	1	1	3*(28)	6	2	3	5	2	5/4	8	2	6	3/24	1/16	–		–	1	1	–	1	1	2		LQFP100	90/盘

注："-"表示不支持，"*"表示ADC支持硬件16bit过采样

(1)其中2个DAC对外输出，其它对内输出，(2)支持100ps高精度定时器，(3)高级/通用/基础/低功耗等计时器总数

高性能MCU

Series	Commerical Product Code	Core	Frenquency (MHz)	Flash (KB)	SRAM (KB)	I/O	Supply Voltage/ Operating Temperature	Coprocessor		Timer					PWM		ADC		DAC	Connectivity											DMA/Channels	ETH	DVP	Cryptographic Algorithm	Package	SPQ(PCS)
								Cor dic	DSMU	ATIM	GTIM	BTIM	LPTIM	RTC	PWM	Complementary PWM	Nb*Resolution	Channels		USART/ISO7816/LIN	UART/LIN	SPI/I²S	I²C	USB FS Device	USB HS OTG	CAN-FD	xSPI	SDIO	SDRAM	FEMC						
N32H497	N32H497RGL7	Arm® Cortex®-M4F	240	1024	580	54	1.8V~3.6V/-40~+105°C	Yes		3	10	2	2	1	49	30	3x12bit	20	2x12bit	5	5	5/2	4	1	1	3	1	1	–	–	2/16	1	1	DES/3DES.AES.SHA1/SHA224/SHA256.SM3.SM4.MD5.CRC16/CRC32.TRNG	LQFP64 (10mm*10mm)	160/盘
	N32H497RGB7		240	1024	580	52		Yes		3	10	2	2	1	49	30	3x12bit	23	2x12bit	5	5	5/2	4	1	1	3	1	1	–	–	2/16	1	1		BGA64 (5mm*5mm)	–
	N32H497NGB7		240	1024	580	59		Yes		3	10	2	2	1	51	30	3x12bit	23	2x12bit	5	5	5/2	4	1	1	3	1	1	–	–	2/16	1	1		BGA72 (4.41mm*3.76mm)	–
	N32H497MGB7		240	1024	580	67		Yes		3	10	2	2	1	51	30	3x12bit	23	2x12bit	5	5	5/2	4	1	1	3	1	1	–	–	2/16	1	1		BGA81 (4.41mm*3.76mm)	–
	N32H497VGL7		240	1024	580	85		Yes		3	10	2	2	1	52	30	3x12bit	20	2x12bit	5	5	6/2	4	1	1	3	1	1	–	1	2/16	1	1		LQFP100 (14mm*14mm)	90/盘
	N32H497VGL7C		240	1024	580	83		Yes		3	10	2	2	1	52	30	3x12bit	19	2x12bit	5	5	6/2	4	1	1	3	1	1	–	1	2/16	1	1		LQFP100-2 (14mm*14mm)	90/盘
	N32H497ZGL7		240	1024	580	118		Yes		3	10	2	2	1	52	30	3x12bit	28	2x12bit	5	5	6/2	4	1	1	3	1	1	1	1	2/16	1	1		LQFP144 (20mm*20mm)	60/盘
N32H493	N32H493MEB7		240	512	260	67		–		3	10	2	2	1	51	30	3x12bit	23	2x12bit	1	2	5/0	4	–	–	–	1	–	–	–	2/16	–	–		BGA81 (4.41mm*3.76mm)	–
	N32H493MGB7		240	1024	260	67		–		3	10	2	2	1	51	30	3x12bit	23	2x12bit	1	2	5/0	4	–	–	–	1	–	–	–	2/16	–	–		BGA81 (4.41mm*3.76mm)	–
	N32H493NEB7		240	512	260	59		–		3	10	2	2	1	51	30	3x12bit	23	2x12bit	1	2	6/0	4	–	–	–	1		–	–	2/16	–	–		BGA72 (4.41mm*3.76mm)	–
	N32H493NGB7		240	1024	260	59		–		3	10	2	2	1	51	30	3x12bit	23	2x12bit	1	2	6/0	4	–	–	–	1	–	–	–	2/16	–	–		BGA72 (4.41mm*3.76mm)	–
	N32H493REB7		240	512	260	52		–		3	10	2	2	1	49	30	3x12bit	23	2x12bit	1	2	6/0	4	–	–	–	1	–	–	–	2/16	–	–		BGA64 (5mm*5mm)	–
	N32H493RGB7		240	1024	260	52		–		3	10	2	2	1	49	30	3x12bit	23	2x12bit	1	2	6/0	4	–	–	–	1	–	–	–	2/16	–	–		BGA64 (5mm*5mm)	–
N32H492	N32H492REL7		240	512	324	54		Yes		3	10	2	2	1	49	30	3x12bit	20	2x12bit	5	5	5/2	4	1	1	3	1	1	–	–	2/16	1	1		LQFP64 (10mm*10mm)	160/盘
	N32H492RGL7		240	1024	324	54		Yes		3	10	2	2	1	49	30	3x12bit	20	2x12bit	5	5	5/2	4	1	1	3	1	1	–	–	2/16	1	1		LQFP64 (10mm*10mm)	160/盘
	N32H492REB7		240	512	324	52		Yes		3	10	2	2	1	49	30	3x12bit	23	2x12bit	5	5	6/2	4	1	1	3	1	1	–	–	2/16	1	1		BGA64 (5mm*5mm)	–
	N32H492RGB7		240	1024	324	52		Yes		3	10	2	2	1	49	30	3x12bit	23	2x12bit	5	5	5/2	4	1	1	3	1	1	–	–	2/16	1	1		BGA64 (5mm*5mm)	–
	N32H492NEB7		240	512	324	59		Yes		3	10	2	2	1	51	30	3x12bit	23	2x12bit	5	5	5/2	4	1	1	3	1	1	–	–	2/16	1	1		BGA72 (4.41mm*3.76mm)	–
	N32H492NGB7		240	1024	324	59		Yes		3	10	2	2	1	51	30	3x12bit	23	2x12bit	5	5	5/2	4	1	1	3	1	1	–	–	2/16	1	1		BGA72 (4.41mm*3.76mm)	–
	N32H492MEB7		240	512	324	67		Yes		3	10	2	2	1	51	30	3x12bit	23	2x12bit	5	5	5/2	4	1	1	3	1	1	–	–	2/16	1	1		BGA81 (4.41mm*3.76mm)	–
	N32H492MGB7		240	1024	324	67		Yes		3	10	2	2	1	51	30	3x12bit	23	2x12bit	5	5	5/2	4	1	1	3	1	1	–	–	2/16	1	1		BGA81 (4.41mm*3.76mm)	–
	N32H492VEL7		240	512	324	85		Yes		3	10	2	2	1	52	30	3x12bit	20	2x12bit	5	5	6/2	4	1	1	3	1	1	–	1	2/16	1	1		LQFP100 (14mm*14mm)	90/盘
	N32H492VGL7		240	1024	324	85		Yes		3	10	2	2	1	52	30	3x12bit	20	2x12bit	5	5	6/2	4	1	1	3	1	1	–	1	2/16	1	1		LQFP100 (14mm*14mm)	90/盘
	N32H492ZEL7		240	512	324	118		Yes		3	10	2	2	1	52	30	3x12bit	28	2x12bit	5	5	6/2	4	1	1	3	1	1	1	1	2/16	1	1		LQFP144 (20mm*20mm)	60/盘
	N32H492ZGL7		240	1024	324	118		Yes		3	10	2	2	1	52	30	3x12bit	28	2x12bit	5	5	6/2	4	1	1	3	1	1	1	1	2/16	1	1		LQFP144 (20mm*20mm)	60/盘

注："-"表示不支持

高性能MCU

Series	Commerical Product Code	Core	Frenquency (MHz)	Flash (KB)	SRAM (KB)	I/O	Supply Voltage/ Operating Temperature	Timer			PWM		High Precision PWM		Analog Interface				Connectivity										DMA/Channels	ETH	DVP	Cryptographic Algorithm	Package	SPQ(PCS)
								SHRTIM[2]	xTimer[3]	RTC	PWM	Complementary PWM	PWM	Complementary PWM	12-bit ADC Cell (CHs)	12-bit DAC CHs	PGA	COMP	USART/ISO7816/LIN	UART/LIN	SPI/I²S	I²C	USB FS Device	USB HS OTG	CAN-FD	xSPI	SDIO	FEMC						
N32H488	N32H488REL7	Arm® Cortex®-M4F	240	512	196	54	1.8V~3.6V/-40~+105°C	–	18	1	47	30	12	12	4(26)	8	4	7	4	4	6/2	4	1	1	3	1	1	–	2/16	1	1	DES/3DES、AES、SHA1/SHA224/SHA256、SM3、SM4、MD5、CRC16/CRC32、TRNG	LQFP64 (10mm*10mm)	160/盘
	N32H488VEL7		240	512	196	85		–	18	1	52	30	12	12	4(42)	8	4	7	4	4	6/2	4	1	1	3	1	1	1	2/16	1	1		LQFP100	90/盘
	N32H488ZEL7		240	512	196	118		–	18	1	52	30	12	12	4(51)	8	4	7	4	4	6/2	4	1	1	3	1	1	1	2/16	1	1		LQFP144	60/盘
N32H487	N32H487REL7		240	512	196	54		–	17	1	47	30	–	–	4(26)	2	–	–	4	4	5/2	4	1	1	3	1	1	–	2/16	1	1		LQFP64 (10mm*10mm)	160/盘
	N32H487VEL7		240	512	196	85		–	17	1	52	30	–	–	4(26)	2	–	–	4	4	6/2	4	1	1	3	1	1	1	2/16	1	1		LQFP100	90/盘
	N32H487ZEL7		240	512	196	118		–	17	1	52	30	–	–	4(42)	2	–	–	4	4	6/2	4	1	1	3	1	1	1	2/16	1	1		LQFP144	60/盘
	N32H487ZGL7		240	1024	196	118		–	17	1	52	30	–	–	4(42)	2	–	–	4	4	6/2	4	1	1	3	1	1	1	2/16	1	1		LQFP144-1	60/盘
N32H482	N32H482REL7		240	512	196	54		–	17	1	47	30	–	–	4(42)	2	–	–	4	4	5/2	4	1	1	2	1	1	–	2/16	–	–		LQFP64 (10mm*10mm)	160/盘
	N32H482VEL7		240	512	196	85		–	17	1	52	30	–	–	4(51)	2	–	–	4	4	6/2	4	1	1	2	1	1	1	2/16	–	–		LQFP100	90/盘
	N32H482VGL7		240	1024	196	85		–	17	1	52	30	–	–	4(51)	2	–	–	4	4	6/2	4	1	1	2	1	1	1	2/16	–	–		LQFP100	90/盘
	N32H482ZEL7		240	512	196	118		–	17	1	52	30	–	–	4(51)	2	–	–	4	4	6/2	4	1	1	2	1	1	1	2/16	–	–		LQFP144	60/盘
N32H481	N32H481REL7K		240	512	196	56		–	17	1	47	30	–	–	4(47)	8	–	–	3	4	6/2	4	–	1	–	–	–	–	2/16	1	1		LQFP64 (7mm*7mm)	250/盘
N32H474	N32H474CCU8		200	256	148	42	1.8V~3.6V/-40~+125°C	1	17	1	38	24	9	8	4(21)	8	4	7	4	4	5/2	4	1	–	3	1[1]	–	–	2/16	–	–		UQFN48	260/盘 4000/卷
	N32H474CEU8		200	512	196	42		1	17	1	38	24	9	8	4(21)	8	4	7	4	4	5/2	4	1	–	3	1[1]	–	–	2/16	–	–		UQFN48	260/盘 4000/卷
	N32H474CCL8		200	256	148	38		1	17	1	35	22	8	8	4(20)	8	4	7	4	4	5/2	4	1	–	3	1[1]	–	–	2/16	–	–		LQFP48	250/盘
	N32H474CEL8		200	512	196	38		1	17	1	35	22	8	8	4(20)	8	4	7	4	4	5/2	4	1	–	3	1[1]	–	–	2/16	–	–		LQFP48	250/盘
	N32H474RCL8		200	256	148	52		1	17	1	46	30	12	12	4(26)	8	4	7	4	4	5/2	4	1	–	3	1	–	–	2/16	–	–		LQFP64 (10mm*10mm)	160/盘
	N32H474REL8		200	512	196	52		1	17	1	46	30	12	12	4(26)	8	4	7	4	4	5/2	4	1	–	3	1	–	–	2/16	–	–		LQFP64 (10mm*10mm)	160/盘
	N32H474MCL8		200	256	148	66		1	17	1	49	30	12	12	4(38)	8	4	7	4	4	6/2	4	1	–	3	1	–	–	2/16	–	–		LQFP80	119/盘
	N32H474MEL8		200	512	196	66		1	17	1	49	30	12	12	4(38)	8	4	7	4	4	6/2	4	1	–	3	1	–	–	2/16	–	–		LQFP80	119/盘
	N32H474VCL8		200	256	148	86		1	17	1	52	30	12	12	4(45)	8	4	7	4	4	6/2	4	1	–	3	1	–	1	2/16	–	–		LQFP100	90/盘
	N32H474VEL8		200	512	196	86		1	17	1	52	30	12	12	4(45)	8	4	7	4	4	6/2	4	1	–	3	1	–	1	2/16	–	–		LQFP100	90/盘
	N32H474QCL8		200	256	148	107		1	17	1	52	30	12	12	4(51)	8	4	7	4	4	6/2	4	1	–	3	1	–	1	2/16	–	–		LQFP128	90/盘
	N32H474QEL8		200	512	196	107		1	17	1	52	30	12	12	4(51)	8	4	7	4	4	6/2	4	1	–	3	1	–	1	2/16	–	–		LQFP128	90/盘
	N32H474CCU7		240	256	148	42	1.8V~3.6V/-40~+105°C	1	17	1	38	24	9	8	4(21)	8	4	7	4	4	5/2	4	1	–	3	1[1]	–	–	2/16	–	–		UQFN48	260/盘
	N32H474CEU7		240	512	196	42		1	17	1	38	24	9	8	4(21)	8	4	7	4	4	5/2	4	1	–	3	1[1]	–	–	2/16	–	–		UQFN48	260/盘
	N32H474CCL7		240	256	148	38		1	17	1	35	22	8	8	4(20)	8	4	7	4	4	5/2	4	1	–	3	1[1]	–	–	2/16	–	–		LQFP48	250/盘
	N32H474CEL7		240	512	196	38		1	17	1	35	22	8	8	4(20)	8	4	7	4	4	5/2	4	1	–	3	1[1]	–	–	2/16	–	–		LQFP48	250/盘
	N32H474RCL7		240	256	148	52		1	17	1	46	30	12	12	4(26)	8	4	7	4	4	5/2	4	1	–	3	1	–	–	2/16	–	–		LQFP64 (10mm*10mm)	160/盘
	N32H474REL7		240	512	196	52		1	17	1	46	30	12	12	4(26)	8	4	7	4	4	5/2	4	1	–	3	1	–	–	2/16	–	–		LQFP64 (10mm*10mm)	160/盘
	N32H474MCL7		240	256	148	66		1	17	1	49	30	12	12	4(38)	8	4	7	4	4	6/2	4	1	–	3	1	–	–	2/16	–	–		LQFP80	119/盘
	N32H474MEL7		240	512	196	66		1	17	1	49	30	12	12	4(38)	8	4	7	4	4	6/2	4	1	–	3	1	–	–	2/16	–	–		LQFP80	119/盘
	N32H474VCL7		240	256	148	86		1	17	1	52	30	12	12	4(45)	8	4	7	4	4	6/2	4	1	–	3	1	–	1	2/16	–	–		LQFP100	90/盘
	N32H474VEL7		240	512	196	86		1	17	1	52	30	12	12	4(45)	8	4	7	4	4	6/2	4	1	–	3	1	–	1	2/16	–	–		LQFP100	90/盘
	N32H474QCL7		240	256	148	107		1	17	1	52	30	12	12	4(51)	8	4	7	4	4	6/2	4	1	–	3	1	–	1	2/16	–	–		LQFP128	90/盘
	N32H474QEL7		240	512	196	107		1	17	1	52	30	12	12	4(51)	8	4	7	4	4	6/2	4	1	–	3	1	–	1	2/16	–	–		LQFP128	90/盘

注："-"表示不支持，(1)表示xSPI仅支持4线，(2) 支持125ps高精度定时器，(3) 高级/通用/基础/低功耗等计时器总数

高性能MCU

Series	Commerical Product Code	Core	Frenquency (MHz)	Flash (KB)	SRAM (KB)	I/O	Supply Voltage/ Operating Temperature	Timer		PWM		High Precision PWM		Analog Interface				Connectivity										DMA/Channels	ETH	DVP	Cryptographic Algorithm	Package	SPQ(PCS)
								Timer	RTC	PWM	Complementary PWM	PWM	Complementary PWM	12-bit ADC Cell (CHs)	12-bit DAC CHs	PGA	COMP	USART/ISO7816/LIN	UART/LIN	SPI/I²S	I²C	USB FS Device	USB HS OTG	CAN-FD	xSPI	SDIO	FEMC						
N32H473	N32H473KCQ8	Arm® Cortex®-M4F	200	256	148	26	1.8V~3.6V/-40~+125°C	17	1	25	16	–	–	4 (13)	8	4	7	4	4	4/2	4	1	–	2	1(1)	–	–	2/16	–	–	DES/3DES, AES, SHA1/SHA224/SHA256, SM3, SM4, MD5, CRC16/CRC32, TRNG	QFN32 (5mm*5mm)	490/盘
	N32H473KEQ8		200	512	196	26		17	1	25	16	–	–	4 (13)	8	4	7	4	4	4/2	4	1	–	2	1(1)	–	–	2/16	–	–		QFN32 (5mm*5mm)	490/盘
	N32H473CGQ8		200	1024	196	42		17	1	38	24	–	–	4 (21)	8	4	7	4	4	5/2	4	1	–	2	1(1)	–	–	2/16	–	–		QFN48	260/盘 4000/卷
	N32H473CCU8		200	256	148	42		17	1	38	24	–	–	4 (21)	8	4	7	4	4	5/2	4	1	–	2	1(1)	–	–	2/16	–	–		UQFN48	260/盘 4000/卷
	N32H473CEU8		200	512	196	42		17	1	38	24	–	–	4 (21)	8	4	7	4	4	5/2	4	1	–	2	1(1)	–	–	2/16	–	–		UQFN48	260/盘 4000/卷
	N32H473CCL8		200	256	148	37		17	1	35	22	–	–	4 (20)	8	4	7	4	4	5/2	4	1	–	2	1(1)	–	–	2/16	–	–		LQFP48	250/盘
	N32H473CEL8		200	512	196	37		17	1	35	22	–	–	4 (20)	8	4	7	4	4	5/2	4	1	–	2	1(1)	–	–	2/16	–	–		LQFP48	250/盘
	N32H473RCL8		200	256	148	52		17	1	46	30	–	–	4 (26)	8	4	7	4	4	5/2	4	1	–	2	1	–	–	2/16	–	–		LQFP64 (10mm*10mm)	160/盘
	N32H473REL8		200	512	196	52		17	1	46	30	–	–	4 (26)	8	4	7	4	4	5/2	4	1	–	2	1	–	–	2/16	–	–		LQFP64 (10mm*10mm)	160/盘
	N32H473MCL8		200	256	148	66		17	1	49	30	–	–	4 (38)	8	4	7	4	4	6/2	4	1	–	2	1	–	–	2/16	–	–		LQFP80	119/盘
	N32H473MEL8		200	512	196	66		17	1	49	30	–	–	4 (38)	8	4	7	4	4	6/2	4	1	–	2	1	–	–	2/16	–	–		LQFP80	119/盘
	N32H473VCL8		200	256	148	86		17	1	52	30	–	–	4 (45)	8	4	7	4	4	6/2	4	1	–	2	1	–	1	2/16	–	–		LQFP100	90/盘
	N32H473VEL8		200	512	196	86		17	1	52	30	–	–	4 (45)	8	4	7	4	4	6/2	4	1	–	2	1	–	1	2/16	–	–		LQFP100	90/盘
	N32H473QCL8		200	256	148	107		17	1	52	30	–	–	4 (51)	8	4	7	4	4	6/2	4	1	–	2	1	–	1	2/16	–	–		LQFP128	90/盘
	N32H473QEL8		200	512	196	107		17	1	52	30	–	–	4 (51)	8	4	7	4	4	6/2	4	1	–	2	1	–	1	2/16	–	–		LQFP128	90/盘
	N32H473KCQ7		240	256	148	26	1.8V~3.6V/-40~+105°C	17	1	25	16	–	–	4 (13)	8	4	7	4	4	4/2	4	1	–	2	1(1)	–	–	2/16	–	–		QFN32 (5mm*5mm)	490/盘
	N32H473KEQ7		240	512	196	26		17	1	25	16	–	–	4 (13)	8	4	7	4	4	4/2	4	1	–	2	1(1)	–	–	2/16	–	–		QFN32 (5mm*5mm)	490/盘
	N32H473CCU7		240	256	148	42		17	1	38	24	–	–	4 (21)	8	4	7	4	4	5/2	4	1	–	2	1(1)	–	–	2/16	–	–		UQFN48	260/盘 4000/卷
	N32H473CEU7		240	512	196	42		17	1	38	24	–	–	4 (21)	8	4	7	4	4	5/2	4	1	–	2	1(1)	–	–	2/16	–	–		UQFN48	260/盘
	N32H473CCL7		240	256	148	37		17	1	35	22	–	–	4 (20)	8	4	7	4	4	5/2	4	1	–	2	1(1)	–	–	2/16	–	–		LQFP48	250/盘
	N32H473CEL7		240	512	196	37		17	1	35	22	–	–	4 (20)	8	4	7	4	4	5/2	4	1	–	2	1(1)	–	–	2/16	–	–		LQFP48	250/盘
	N32H473RCL7		240	256	148	52		17	1	46	30	–	–	4 (26)	8	4	7	4	4	5/2	4	1	–	2	1	–	–	2/16	–	–		LQFP64 (10mm*10mm)	160/盘
	N32H473REL7		240	512	196	52		17	1	46	30	–	–	4 (26)	8	4	7	4	4	5/2	4	1	–	2	1	–	–	2/16	–	–		LQFP64 (10mm*10mm)	160/盘
	N32H473MCL7		240	256	148	66		17	1	49	30	–	–	4 (38)	8	4	7	4	4	6/2	4	1	–	2	1	–	–	2/16	–	–		LQFP80	119/盘
	N32H473MEL7		240	512	196	66		17	1	49	30	–	–	4 (38)	8	4	7	4	4	6/2	4	1	–	2	1	–	–	2/16	–	–		LQFP80	119/盘
	N32H473VCL7		240	256	148	86		17	1	52	30	–	–	4 (45)	8	4	7	4	4	6/2	4	1	–	2	1	–	1	2/16	–	–		LQFP100	90/盘
	N32H473VEL7		240	512	196	86		17	1	52	30	–	–	4 (45)	8	4	7	4	4	6/2	4	1	–	2	1	–	1	2/16	–	–		LQFP100	90/盘
	N32H473QCL7		240	256	148	107		17	1	52	30	–	–	4 (51)	8	4	7	4	4	6/2	4	1	–	2	1	–	1	2/16	–	–		LQFP128	90/盘
	N32H473QEL7		240	512	196	107		17	1	52	30	–	–	4 (51)	8	4	7	4	4	6/2	4	1	–	2	1	–	1	2/16	–	–		LQFP128	90/盘

注："-"表示不支持，(1)表示xSPI仅支持4线

车规MCU

Series	Commerical Product Code	Core	Frenquency (MHz)	Flash (KB)	SRAM (KB)	I/O	Supply Voltage/ Operating Temperature	Timer		PWM		Analog Interface				LPRCNT	BEEPER	Connectivity									DMA/Channels	SEGMENT LCD	ETH	DVP	Cryptographic Algorithm	Package	SPQ(PCS)
								Timer	RTC	PWM	Complementary PWM	12-bit ADC Cell (CHs)	12-bit DAC CHs	OPAMP	COMP			USART/ISO7816/LIN	UART/LIN	LPUART	SPI/I²S	QSPI	I²C	USB Device	CAN	SDIO							
N32A455	N32A455CEL8	Arm® Cortex®-M4F	72	512	144	37	1.8V~3.6V/ -40~+125°C	8	1	23	6	4(16)	2	4	5	–	–	3	3	–	3/2	1(1)	3	–	2	–	2/16	–	–	–	DES/3DES、AES、SHA1/SHA224/ SHA256、SM1、SM3、SM4、SM7、 MD5、CRC16/CRC32、TRNG	LQFP48 7mmx7mm	250/盘
	N32A455REL8		72	512	144	51		8	1	24	12	4 (22)	2	4	7	–	–	3	4	–	3/2	1	4	–	2	1	2/16	–	–	–		LQFP64 10mmx10mm	160/盘
	N32A455VEL8		72	512	144	80		8	1	24	12	4(38)	2	4	7	–	–	3	4	–	3/2	1	4	–	2	1	2/16	–	–	–		LQFP100 14mmx14mm	90/盘
	N32A455CEL7		144	512	144	37	1.8V~3.6V/ -40~+105°C	8	1	23	6	4(16)	2	4	5	–	–	3	3	–	3/2	1(1)	3	–	2	–	2/16	–	–	–		LQFP48 7mmx7mm	250/盘
	N32A455REL7		144	512	144	51		8	1	24	12	4(22)	2	4	7	–	–	3	4	–	3/2	1	4	–	2	1	2/16	–	–	–		LQFP64 10mmx10mm	160/盘
	N32A455VEL7		144	512	144	80		8	1	24	12	4(38)	2	4	7	–	–	3	4	–	3/2	1	4	–	2	1	2/16	–	–	–		LQFP100 14mmx14mm	90/盘

注："-"表示不支持, (1)表示仅单线

通用MCU

Series	Commerical Product Code	Core	Frenquency (MHz)	Flash (KB)	SRAM (KB)	I/O	Supply Voltage/ Operating Temperature	Timer		PWM		Analog Interface				LPRCNT	BEEPER	Connectivity									DMA/Channels	SEGMENT LCD	ETH	DVP	Cryptographic Algorithm	Package	SPQ(PCS)
								Timer	RTC	PWM	Complementary PWM	12-bit ADC Cell (CHs)	12-bit DAC CHs	OPAMP	COMP			USART/ISO7816/LIN	UART/LIN	LPUART	SPI/I²S	QSPI	I²C	USB Device	CAN	SDIO							
N32G457	N32G457RCL7	Arm® Cortex®-M4F	144	256	144	51	1.8V~3.6V/-40~+105°C	8	1	24	12	4(22)	2	4	7	–	–	3	4	–	3/2	1	4	1	2	1	2/16	–	1	1	DES/3DES, AES, SHA1/SHA224/SHA256, SM1, SM3, SM4, SM7, MD5, CRC16/CRC32, TRNG	LQFP64 (10mmx10mm)	160/盘
	N32G457REL7		144	512	144	51		8	1	24	12	4(22)	2	4	7	–	–	3	4	–	3/2	1	4	1	2	1	2/16	–	1	1		LQFP64 (10mmx10mm)	160/盘
	N32G457MCL7		144	256	144	65		8	1	24	12	4(33)	2	4	7	–	–	3	4	–	3/2	1	4	1	2	1	2/16	–	1	1		LQFP80	119/盘
	N32G457MEL7		144	512	144	65		8	1	24	12	4(33)	2	4	7	–	–	3	4	–	3/2	1	4	1	2	1	2/16	–	1	1		LQFP80	119/盘
	N32G457VCL7		144	256	144	80		8	1	24	12	4(38)	2	4	7	–	–	3	4	–	3/2	1	4	1	2	1	2/16	–	1	1		LQFP100	90/盘
	N32G457VEL7		144	512	144	80		8	1	24	12	4(38)	2	4	7	–	–	3	4	–	3/2	1	4	1	2	1	2/16	–	1	1		LQFP100	90/盘
	N32G457QEL7		144	512	144	97		8	1	24	12	4(40)	2	4	7	–	–	3	4	–	3/2	1	4	1	2	1	2/16	–	1	1		LQFP128	90/盘
N32G455	N32G455TBQ7		144	128	80	26		8	1	23	6	4(11)	2	4	5	–	–	2	1	–	1/1	1(1)	2	1	2	–	2/16	–	–	–		QFN36	490/盘
	N32G455CBL7		144	128	80	37		8	1	23	6	4(16)	2	4	5	–	–	3	3	–	3/2	1(1)	3	1	2	–	2/16	–	–	–		LQFP48	250/盘
	N32G455CCL7		144	256	144	37		8	1	23	6	4(16)	2	4	5	–	–	3	3	–	3/2	1(1)	3	1	2	–	2/16	–	–	–		LQFP48	250/盘
	N32G455CEQ7		144	512	144	42		8	1	23	6	4(16)	2	4	7	–	–	3	4	–	3/2	1	3	–	2	1	2/16	–	–	–		QFN48	490/盘
	N32G455CEL7		144	512	144	37		8	1	23	6	4(16)	2	4	7	–	–	3	4	–	3/2	1	3	1	2	1	2/16	–	–	–		LQFP48	250/盘
	N32G455RBQ7		144	128	80	51		8	1	24	12	4(22)	2	4	7	–	–	3	4	–	3/2	1	4	1	2	1	2/16	–	–	–		QFN64	260/盘
	N32G455RCQ7		144	256	144	51		8	1	24	12	4(22)	2	4	7	–	–	3	4	–	3/2	1	4	1	2	1	2/16	–	–	–		QFN64	260/盘
	N32G455REQ7		144	512	144	51		8	1	24	12	4(22)	2	4	7	–	–	3	4	–	3/2	1	4	1	2	1	2/16	–	–	–		QFN64	260/盘
	N32G455RBL7		144	128	80	51		8	1	24	12	4(22)	2	4	7	–	–	3	4	–	3/2	1	4	1	2	1	2/16	–	–	–		LQFP64 (10mmx10mm)	160/盘
	N32G455RCL7		144	256	144	51		8	1	24	12	4(22)	2	4	7	–	–	3	4	–	3/2	1	4	1	2	1	2/16	–	–	–		LQFP64 (10mmx10mm)	160/盘
	N32G455REL7		144	512	144	51		8	1	24	12	4(22)	2	4	7	–	–	3	4	–	3/2	1	4	1	2	1	2/16	–	–	–		LQFP64 (10mmx10mm)	160/盘
	N32G455MBL7		144	128	80	65		8	1	24	12	4(33)	2	4	7	–	–	3	4	–	3/2	1	4	1	2	1	2/16	–	–	–		LQFP80	119/盘
	N32G455MCL7		144	256	144	65		8	1	24	12	4(33)	2	4	7	–	–	3	4	–	3/2	1	4	1	2	1	2/16	–	–	–		LQFP80	119/盘
	N32G455MEL7		144	512	144	65		8	1	24	12	4(33)	2	4	7	–	–	3	4	–	3/2	1	4	1	2	1	2/16	–	–	–		LQFP80	119/盘
	N32G455VBL7		144	128	80	80		8	1	24	12	4(38)	2	4	7	–	–	3	4	–	3/2	1	4	1	2	1	2/16	–	–	–		LQFP100	90/盘
	N32G455VCL7		144	256	144	80		8	1	24	12	4(38)	2	4	7	–	–	3	4	–	3/2	1	4	1	2	1	2/16	–	–	–		LQFP100	90/盘
	N32G455VEL7		144	512	144	80		8	1	24	12	4(38)	2	4	7	–	–	3	4	–	3/2	1	4	1	2	1	2/16	–	–	–		LQFP100	90/盘

注："-"表示不支持，(1)表示仅单线

通用MCU

Series	Commerical Product Code	Core	Frenquency (MHz)	Flash (KB)	SRAM (KB)	I/O	Supply Voltage/ Operating Temperature	Timer		PWM		Analog Interface				LPRCNT	BEEPER	Connectivity									DMA/Channels	SEGMENT LCD	ETH	DVP	Cryptographic Algorithm	Package	SPQ(PCS)
								Timer	RTC	PWM	Complementary PWM	12-bit ADC Cell (CHs)	12-bit DAC CHs	OPAMP	COMP			USART/ISO7816/LIN	UART/LIN	LPUART	SPI/I²S	QSPI	I²C	USB Device	CAN	SDIO							
N32G452	N32G452CBL7	Arm® Cortex®-M4F	144	128	80	37	1.8V~3.6V/-40~+105°C	8	1	23	6	2(10)	2	–	–	–	–	3	3	–	3/2	1(1)	3	1	2	–	2/16	–	–	–	DES/3DES、AES、SHA1/SHA224/SHA256、SM1、SM3、SM4、SM7、MD5、CRC16/CRC32、TRNG	LQFP48	250/盘
	N32G452CCL7		144	256	144	37		8	1	23	6	2(10)	2	–	–	–	–	3	3	–	3/2	1(1)	3	1	2	–	2/16	–	–	–		LQFP48	250/盘
	N32G452CEL7		144	512	144	37		8	1	23	6	2(10)	2	–	–	–	–	3	3	–	3/2	1(1)	3	1	2	–	2/16	–	–	–		LQFP48	250/盘
	N32G452RBL7		144	128	80	51		8	1	24	12	2(16)	2	–	–	–	–	3	4	–	3/2	1	4	1	2	1	2/16	–	–	–		LQFP64 (10mmx10mm)	160/盘
	N32G452RCL7		144	256	144	51		8	1	24	12	2(16)	2	–	–	–	–	3	4	–	3/2	1	4	1	2	1	2/16	–	–	–		LQFP64 (10mmx10mm)	160/盘
	N32G452REL7		144	512	144	51		8	1	24	12	2(16)	2	–	–	–	–	3	4	–	3/2	1	4	1	2	1	2/16	–	–	–		LQFP64 (10mmx10mm)	160/盘
	N32G452MBL7		144	128	80	65		8	1	24	12	2(16)	2	–	–	–	–	3	4	–	3/2	1	4	1	2	1	2/16	–	–	–		LQFP80	119/盘
	N32G452MCL7		144	256	144	65		8	1	24	12	2(16)	2	–	–	–	–	3	4	–	3/2	1	4	1	2	1	2/16	–	–	–		LQFP80	119/盘
	N32G452MEL7		144	512	144	65		8	1	24	12	2(16)	2	–	–	–	–	3	4	–	3/2	1	4	1	2	1	2/16	–	–	–		LQFP80	119/盘
	N32G452VCL7		144	256	144	80		8	1	24	12	2(16)	2	–	–	–	–	3	4	–	3/2	1	4	1	2	1	2/16	–	–	–		LQFP100	90/盘
	N32G452VEL7		144	512	144	80		8	1	24	12	2(16)	2	–	–	–	–	3	4	–	3/2	1	4	1	2	1	2/16	–	–	–		LQFP100	90/盘
	N32G452QCL7		144	256	144	97		8	1	24	12	2(18)	2	–	–	–	–	3	4	–	3/2	1	4	1	2	1	2/16	–	–	–		LQFP128	90/盘
	N32G452QEL7		144	512	144	97		8	1	24	12	2(18)	2	–	–	–	–	3	4	–	3/2	1	4	1	2	1	2/16	–	–	–		LQFP128	90/盘
N32G451	N32G451CBL7		144	128	48	37		8	1	23	6	3(13)	2	–	–	–	–	3	3	–	3/2	–	3	1	1	–	2/16	–	–	–		LQFP48	250/盘
	N32G451CCL7		144	256	96	37		8	1	23	6	3(13)	2	–	–	–	–	3	3	–	3/2	–	3	1	1	–	2/16	–	–	–		LQFP48	250/盘
	N32G451CEL7		144	512	96	37		8	1	23	6	3(13)	2	–	–	–	–	3	3	–	3/2	–	3	1	1	–	2/16	–	–	–		LQFP48	250/盘
	N32G451RBL7		144	128	48	51		8	1	24	12	3(19)	2	–	–	–	–	3	4	–	3/2	–	4	1	1	1	2/16	–	–	–		LQFP64 (10mmx10mm)	160/盘
	N32G451RCL7		144	256	96	51		8	1	24	12	3(19)	2	–	–	–	–	3	4	–	3/2	–	4	1	1	1	2/16	–	–	–		LQFP64 (10mmx10mm)	160/盘
	N32G451REL7		144	512	96	51		8	1	24	12	3(19)	2	–	–	–	–	3	4	–	3/2	–	4	1	1	1	2/16	–	–	–		LQFP64 (10mmx10mm)	160/盘
	N32G451VCL7		144	256	96	80		8	1	24	12	3(31)	2	–	–	–	–	3	4	–	3/2	–	4	1	1	1	2/16	–	–	–		LQFP100	90/盘
	N32G451VEL7		144	512	96	80		8	1	24	12	3(31)	2	–	–	–	–	3	4	–	3/2	–	4	1	1	1	2/16	–	–	–		LQFP100	90/盘

注："-"表示不支持，(1)表示仅单线

通用MCU

Series	Commerical Product Code	Core	Frequency (MHz)	Flash (KB)	SRAM (KB)	I/O	Supply Voltage/ Operating Temperature	Timer		PWM		Analog Interface				LPRCNT	BEEPER	Connectivity									DMA/Channels	SEGMENT LCD	ETH	DVP	Cryptographic Algorithm	Package	SPQ(PCS)
								Timer	RTC	PWM	Complementary PWM	12-bit ADC Cell (CHs)	12-bit DAC CHs	OPAMP	COMP			USART/ISO7816/LIN	UART/LIN	LPUART	SPI/I²S	QSPI	I²C	USB Device	CAN	SDIO							
N32G4FR	N32G4FRKCQ7	Arm® Cortex®-M4F	144	256	144	24	1.8V~3.6V/-40~+105℃	8	1	10	6	2(7)	2	–	–	–	–	1	3	–	2/1	1	3	1	1	–	2/16	–	–	–	DES/3DES、AES、SHA1/SHA224/SHA256、SM1、SM3、SM4、SM7、MD5、CRC16/CRC32、TRNG	QFN32 (4mmx4mm)	490/盘
	N32G4FRKEQ7		144	512	144	24		8	1	10	6	2(7)	2	–	–	–	–	1	3	–	2/1	1	3	1	1	–	2/16	–	–	–		QFN32 (4mmx4mm)	490/盘
	N32G4FRHCQ7		144	256	144	32		8	1	12	6	2(11)	2	–	–	–	–	2	4	–	3/2	1	4	1	2	–	2/16	–	–	1		QFN40	490/盘
	N32G4FRHEQ7		144	512	144	32		8	1	12	6	2(11)	2	–	–	–	–	2	4	–	3/2	1	4	1	2	–	2/16	–	–	1		QFN40	490/盘
	N32G4FRREL7		144	512	144	51		8	1	24	12	2(16)	2	–	–	–	–	3	4	–	3/2	1	4	1	2	1	2/16	–	–	1		LQFP64 (10mmx10mm)	160/盘
	N32G4FRMEL7		144	512	144	65		8	1	24	12	2(16)	2	–	–	–	–	3	4	–	3/2	1	4	1	2	1	2/16	–	–	1		LQFP80	119/盘
N32G435	N32G435G8Q7		108	64	16	24		10	1	16	6	1(10)	1	2	2	–	–	2	2	1	1/1	–	2	–	–	–	1/8	–	–	–		QFN28	490/盘
	N32G435GBQ7		108	128	32	24		10	1	16	6	1(10)	1	2	2	–	–	2	2	1	1/1	–	2	–	–	–	1/8	–	–	–		QFN28	490/盘
	N32G435K8L7		108	64	16	26		10	1	17	6	1(10)	1	2	2	–	–	2	2	1	2/2	–	2	1	1	–	1/8	–	–	–		LQFP32	250/盘
	N32G435KBL7		108	128	32	26		10	1	17	6	1(10)	1	2	2	–	–	2	2	1	2/2	–	2	1	1	–	1/8	–	–	–		LQFP32	250/盘
	N32G435C8L7		108	64	24	38		10	1	24	6	1(10)	1	2	2	–	–	3	2	1	2/2	–	2	1	1	–	1/8	–	–	–		LQFP48	250/盘
	N32G435CBL7		108	128	32	38		10	1	24	6	1(10)	1	2	2	–	–	3	2	1	2/2	–	2	1	1	–	1/8	–	–	–		LQFP48	250/盘
	N32G435R8L7		108	64	24	52		10	1	28	12	1(16)	1	2	2	–	–	3	2	1	2/2	–	2	1	1	–	1/8	–	–	–		LQFP64 10mmx10mm	160/盘
	N32G435RBL7		108	128	32	52		10	1	28	12	1(16)	1	2	2	–	–	3	2	1	2/2	–	2	1	1	–	1/8	–	–	–		LQFP64 10mmx10mm	160/盘
	N32G435RBL7-1		108	128	32	52		10	1	28	12	1(16)	1	2	2	–	–	3	2	1	2/2	–	2	1	1	–	1/8	–	–	–		LQFP64 7mmx7mm	250/盘
N32G432	N32G432K8L7		108	64	24	26		10	1	17	6	1(10)	1	–	–	–	–	2	2	1	2/2	–	2	1	1	–	1/8	–	–	–		LQFP32	250/盘
	N32G432KBL7		108	128	32	26		10	1	17	6	1(10)	1	–	–	–	–	2	2	1	2/2	–	2	1	1	–	1/8	–	–	–		LQFP32	250/盘
	N32G432C8L7		108	64	24	38		10	1	24	6	1(10)	1	–	–	–	–	3	2	1	2/2	–	2	1	1	–	1/8	–	–	–		LQFP48	250/盘
	N32G432CBL7		108	128	32	38		10	1	24	6	1(10)	1	–	–	–	–	3	2	1	2/2	–	2	1	1	–	1/8	–	–	–		LQFP48	250/盘
	N32G432R8L7		108	64	24	52		10	1	28	6	1(16)	1	–	–	–	–	3	2	1	2/2	–	2	1	1	–	1/8	–	–	–		LQFP64 10mmx10mm	160/盘
	N32G432RBL7		108	128	32	52		10	1	28	6	1(16)	1	–	–	–	–	3	2	1	2/2	–	2	1	1	–	1/8	–	–	–		LQFP64 10mmx10mm	160/盘

注："-"表示不支持

通用MCU

Series	Commerical Product Code	Core	Frequency（MHz）	Flash（KB）	SRAM（KB）	I/O	Supply Voltage/ Operating Temperature	Timer		PWM		Analog Interface				LPRCNT	BEEPER	Connectivity									DMA/Channels	SEGMENT LCD	ETH	DVP	Cryptographic Algorithm	Package	SPQ(PCS)
								Timer	RTC	PWM	Complementary PWM	12-bit ADC Cell（CHs）	12-bit DAC CHs	OPAMP	COMP			USART/ISO7816/LIN	UART/LIN	LPUART	SPI/I²S	QSPI	I²C	USB Device	CAN	SDIO							
N32G430	N32G430F6Q7	Arm® Cortex®-M4F	128	32	16	16	2.4V~3.6V/-40~+105°C	8	1*	11	10	1 (7)	–	–	3	–	1	2*	1	–	2/2	–	2	–	1	–	1/8	–	–	–	CRC16/CRC32	UQFN20	490/盘
	N32G430F8Q7		128	64	16	16		8	1*	11	10	1 (7)	–	–	3	–	1	2*	1	–	2/2	–	2	–	1	–	1/8	–	–	–		UQFN20	490/盘 5000/卷
	N32G430G6Q7		128	32	16	24		8	1*	19	14	1 (10)	–	–	3	–	1	2*	2	–	2/2	–	2	–	1	–	1/8	–	–	–		QFN28	490/盘
	N32G430G8Q7		128	64	16	24		8	1*	19	14	1 (10)	–	–	3	–	1	2*	2	–	2/2	–	2	–	1	–	1/8	–	–	–		QFN28	490/盘
	N32G430K6Q7		128	32	16	26		8	1*	20	14	1 (10)	–	–	3	–	1	2	2	–	2/2	–	2	–	1	–	1/8	–	–	–		QFN32 (4mmx4mm)	490/盘
	N32G430K8Q7		128	64	16	26		8	1*	20	14	1 (10)	–	–	3	–	1	2	2	–	2/2	–	2	–	1	–	1/8	–	–	–		QFN32 (4mmx4mm)	490/盘
	N32G430C6Q7		128	32	16	40		8	1	24	14	1 (16)	–	–	3	–	1	2	2	–	2/2	–	2	–	1	–	1/8	–	–	–		QFN48	490/盘
	N32G430C8Q7		128	64	16	40		8	1	24	14	1 (16)	–	–	3	–	1	2	2	–	2/2	–	2	–	1	–	1/8	–	–	–		QFN48	490/盘
	N32G430F6S7		128	32	16	16		8	1*	11	10	1 (9)	–	–	3	–	1	2*	1	–	2/2	–	2	–	1	–	1/8	–	–	–		TSSOP20	70/管
	N32G430F8S7		128	64	16	16		8	1*	11	10	1 (9)	–	–	3	–	1	2*	1	–	2/2	–	2	–	1	–	1/8	–	–	–		TSSOP20	70/管
	N32G430F6S7-1		128	32	16	16		8	1*	11	10	1 (9)	–	–	3	–	1	2*	1	–	2/2	–	2	–	1	–	1/8	–	–	–		TSSOP20	70/管
	N32G430F8S7-1		128	64	16	16		8	1*	11	10	1 (9)	–	–	3	–	1	2*	1	–	2/2	–	2	–	1	–	1/8	–	–	–		TSSOP20	70/管
	N32G430K6L7		128	32	16	26		8	1*	20	14	1 (10)	–	–	3	–	1	2	2	–	2/2	–	2	–	1	–	1/8	–	–	–		LQFP32	250/盘
	N32G430K8L7		128	64	16	26		8	1*	20	14	1 (10)	–	–	3	–	1	2	2	–	2/2	–	2	–	1	–	1/8	–	–	–		LQFP32	250/盘
	N32G430C6L7		128	32	16	40		8	1	24	14	1 (16)	–	–	3	–	1	2	2	–	2/2	–	2	–	1	–	1/8	–	–	–		LQFP48	250/盘
	N32G430C8L7		128	64	16	40		8	1	24	14	1 (16)	–	–	3	–	1	2	2	–	2/2	–	2	–	1	–	1/8	–	–	–		LQFP48	250/盘
N32G401	N32G401F6Q7		72	32	8	16		8	1	11	10	1 (7)	–	–	3	–	1	2	1	–	2/2	–	2	–	–	–	1/8	–	–	–		UQFN20	490/盘
	N32G401F8Q7		72	64	8	16		8	1	11	10	1 (7)	–	–	3	–	1	2	1	–	2/2	–	2	–	–	–	1/8	–	–	–		UQFN20	490/盘
	N32G401G6Q7		72	32	8	24		8	1	19	14	1 (10)	–	–	3	–	1	2	2	–	2/2	–	2	–	–	–	1/8	–	–	–		QFN28	490/盘
	N32G401G8Q7		72	64	8	24		8	1	19	14	1 (10)	–	–	3	–	1	2	2	–	2/2	–	2	–	–	–	1/8	–	–	–		QFN28	490/盘
	N32G401K6Q7		72	32	8	26		8	1	20	14	1 (10)	–	–	3	–	1	2	2	–	2/2	–	2	–	–	–	1/8	–	–	–		QFN32 (4mmx4mm)	490/盘
	N32G401K8Q7		72	64	8	26		8	1	20	14	1 (10)	–	–	3	–	1	2	2	–	2/2	–	2	–	–	–	1/8	–	–	–		QFN32 (4mmx4mm)	490/盘
	N32G401K8Q7-1		72	64	8	28		8	1	20	14	1 (11)	–	–	3	–	1	2	2	–	2/2	–	2	–	–	–	1/8	–	–	–		QFN32 (5mmx5mm)	490/盘
	N32G401K8Q7-2		72	64	16	28		8	1	22	12	1 (14)	–	–	3	–	1	2	2	–	2/2	–	2	–	–	–	1/8	–	–	–		QFN32 (4mmx4mm)	490/盘
	N32G401C6Q7		72	32	8	40		8	1	24	14	1 (16)	–	–	3	–	1	2	2	–	2/2	–	2	–	–	–	1/8	–	–	–		QFN48	490/盘
	N32G401C8Q7		72	64	8	40		8	1	24	14	1 (16)	–	–	3	–	1	2	2	–	2/2	–	2	–	–	–	1/8	–	–	–		QFN48	490/盘
	N32G401F6S7-1		72	32	8	16		8	1	11	10	1 (9)	–	–	–	–	1	2	1	–	2/2	–	2	–	–	–	1/8	–	–	–		TSSOP20	70/管
	N32G401F8S7-1		72	64	8	16		8	1	11	10	1 (9)	–	–	–	–	1	2	1	–	2/2	–	2	–	–	–	1/8	–	–	–		TSSOP20	70/管
	N32G401K6L7		72	32	8	26		8	1	20	14	1 (10)	–	–	3	–	1	2	2	–	2/2	–	2	–	–	–	1/8	–	–	–		LQFP32	250/盘
	N32G401K8L7		72	64	8	26		8	1	20	14	1 (10)	–	–	3	–	1	2	2	–	2/2	–	2	–	–	–	1/8	–	–	–		LQFP32	250/盘
	N32G401C6L7		72	32	8	40		8	1	24	14	1 (16)	–	–	3	–	1	2	2	–	2/2	–	2	–	–	–	1/8	–	–	–		LQFP48	250/盘
	N32G401C8L7		72	64	8	40		8	1	24	14	1 (16)	–	–	3	–	1	2	2	–	2/2	–	2	–	–	–	1/8	–	–	–		LQFP48	250/盘

注：1.“-”表示不支持

2. “*”表示非所有功能管脚都引出，具体参见数据手册的引脚复用定义

3. N32G430F6S7和N32G430F8S7的Pin2/Pin3为OSC_IN/OSC_OUT；N32G430F6S7-1和N32G430F8S7-1的Pin2/Pin3为OSC32_IN/OSC32_OUT

通用MCU

Series	Commerical Product Code	Core	Frenquency (MHz)	Flash (KB)	SRAM (KB)	I/O	Supply Voltage/ Operating Temperature	Timer		PWM		Analog Interface				LPRCNT	BEEPER	Connectivity									DMA/Channels	SEGMENT LCD	LED	DVP	Cryptographic Algorithm	Package	SPQ(PCS)
								Timer	RTC	PWM	Complementary PWM	12-bit ADC Cell (CHs)	12-bit DAC CHs	OPAMP	COMP			USART/ISO7816/LIN	UART/LIN	LPUART	SPI/I²S	QSPI	I²C	USB Device	CAN	SDIO							
N32G052	N32G052KBQ7	Arm® Cortex®-M0	64	128+8	16	29	2.0V~5.5V/-40~+105°C	6	1	38	4	1(8)	1	–	3	–	1	–	5	–	3/0	–	2	–	1	–	1/5	4x11/ 2x13	–	–	CRC16	QFN32 (5mmx5mm)	490/盘 2500/卷
	N32G052SBL7A		64	128+8	16	41		6	1	38	4	1(15)	1	–	4	–	1	–	5	–	3/0	–	2	–	1	–	1/5	3x27	–	–		LQFP44 (10mmx10mm) pinouts 2	160/盘
	N32G052CBL7		64	128+8	16	45		6	1	38	4	1(12)	1	–	4	–	1	–	5	–	3/0	–	2	–	1	–	1/5	8x22/ 4x26/ 3x27	–	–		LQFP48 (7mmx7mm)	250/盘
	N32G052RBL7		64	128+8	16	61		6	1	50	4	1(15)	1	–	4	–	1	–	5	–	3/0	–	2	–	1	–	1/5	8x32/ 4x36/ 3x37	–	–		LQFP64 14mmx14mm)	90/盘
	N32G052RBL7B		64	128+8	16	61		6	1	50	4	1(15)	1	–	4	–	1	–	5	–	3/0	–	2	–	1	–	1/5	8x32/ 4x36/ 3x37	–	–		LQFP64 (10mmx10mm	160/盘
	N32G052RBL7C		64	128+8	16	61		6	1	50	4	1(15)	1	–	4	–	1	–	5	–	3/0	–	2	–	1	–	1/5	8x32/ 4x36/ 3x37	–	–		LQFP64 (7mmx7mm	250/盘
N32G033	N32G033F8S7		64	64	6	17		4	–	10	6	1(9)	–	1	1	–	–	–	2	1	2/-	–	2	–	–	–	1/3	–	–	–	–	TSSOP20	3500/卷 70/管
	N32G033F8Q7		64	64	6	19		4	–	10	6	1(9)	–	2	1	–	–	–	2	1	2/-	–	2	–	–	–	1/3	–	–	–		QFN20 (3mmx3mm)	490/盘 5000/卷
	N32G033F8Q7-1		64	64	6	19		4	–	10	6	1(9)	–	2	1	–	–	–	2	1	2/-	–	2	–	–	–	1/3	–	–	–		QFN20 (3mmx3mm)	490/盘 5000/卷
	N32G033K8L7		64	64	6	27		4	–	10	8	1(10)	–	3	1	–	–	–	2	1	2/-	–	2	–	–	–	1/3	–	–	–		LQFP32	250/盘
	N32G033K8Q7		64	64	6	29		4	–	10	8	1(11)	–	3	1	–	–	–	2	1	2/-	–	2	–	–	–	1/3	–	–	–		QFN32 (5mmx5mm)	490/盘 2500/卷
	N32G033K8Q7-1		64	64	6	29		4	–	10	8	1(11)	–	3	1	–	–	–	2	1	2/-	–	2	–	–	–	1/3	–	–	–		QFN32 (4mmx4mm)	490/盘
N32G032	N32G032F6U7		48	32	8	16	1.8V~5.5V/-40~+105°C	6	1	11	3	1(7)	–	1	2	–	2	2	1	2	1/1	–	2	–	1	–	1/8	–	–	–	AES,SM4,CRC16/CRC32,TRNG	UFQFPN20	490/盘 5000/卷
	N32G032F6S7		48	32	8	16		6	1	11	3	1(9)	–	1	3	–	1	2	1	2	1/1	–	2	–	1	–	1/8	–	–	–		TSSOP20	70/管
	N32G032F8S7		48	64	16	16		6	1	11	3	1(9)	–	1	3	–	1	2	1	2	1/1	–	2	–	1	–	1/8	–	–	–		TSSOP20	70/管
	N32G032P6W7		48	32	8	21		6	1	15	3	1(10)	–	1	3	–	2	2	2	2	2/1	–	2	–	1	–	1/8	–	–	–		WLCSP25	3000/卷
	N32G032P8W7		48	64	16	21		6	1	15	3	1(10)	–	1	3	–	2	2	2	2	2/1	–	2	–	1	–	1/8	–	–	–		WLCSP25	3000/卷
	N32G032K6Q7		48	32	8	28		6	1	17	6	1(10)	–	1	3	–	2	2	2	2	2/1	–	2	–	1	–	1/8	–	–	–		QFN32	490/盘
	N32G032K6L7		48	32	8	26		6	1	17	6	1(10)	–	1	3	–	2	2	2	2	3/2	–	2	–	1	–	1/8	–	–	–		LQFP32	250/盘
	N32G032K8L7		48	64	16	26		6	1	17	6	1(10)	–	1	3	–	2	2	2	2	3/2	–	2	–	1	–	1/8	–	–	–		LQFP32	250/盘
	N32G032C8L7		48	64	16	40		6	1	17	6	1(10)	–	1	3	–	2	2	2	2	3/1	–	2	–	1	–	1/8	–	–	–		LQFP48	250/盘
	N32G032R8L7		48	64	16	56		6	1	17	6	1(16)	–	1	3	–	2	2	2	2	3/1	–	2	–	1	–	1/8	–	–	–		LQFP64 (10mmx10mm)	160/盘

注："-"表示不支持

通用MCU

Series	Commerical Product Code	Core	Frenquency (MHz)	Flash (KB)	SRAM (KB)	I/O	Supply Voltage/ Operating Temperature	Timer		PWM		Analog Interface				LPRCNT	BEEPER	Connectivity									DMA/Channels	SEGMENT LCD	LED	DVP	Cryptographic Algorithm	Package	SPQ(PCS)
								Timer	RTC	PWM	Complementary PWM	12-bit ADC Cell (CHs)	12-bit DAC CHs	OPAMP	COMP			USART/ISO7816/LIN	UART/LIN	LPUART	SPI/I²S	QSPI	I²C	USB Device	CAN	SDIO							
N32G031x8	N32G031F8U7	Arm® Cortex®-M0	48	64	8	16	1.8V~5.5V/-40~+105℃	5	1	11	3	1(7)	–	1	1	–	2	2	–	1	2/1	–	2	–	–	–	1/5	–	–	–	CRC16/CRC32	UFQFPN20	490/盘 5000/卷
	N32G031F8S7		48	64	8	16		5	1	11	3	1(9)	–	1	1	–	1	2	–	1	2/1	–	2	–	–	–	1/5	–	–	–		TSSOP20	70/管 3500/卷
	N32G031K8Q7		48	64	8	28		5	1	14	6	1(10)	–	1	1	–	2	2	–	1	2/1	–	2	–	–	–	1/5	–	–	–		QFN32 (5mmx5mm)	490/盘 2500/卷
	N32G031K8Q7-1		48	64	8	28		5	1	14	6	1(10)	–	1	1	–	2	2	–	1	2/1	–	2	–	–	–	1/5	–	–	–		QFN32 (4mmx4mm)	490/盘
	N32G031K8L7		48	64	8	26		5	1	14	6	1(10)	–	1	1	–	2	2	–	1	2/1	–	2	–	–	–	1/5	–	–	–		LQFP32	250/盘
	N32G031C8L7		48	64	8	40		5	1	14	6	1(12)	–	1	1	–	2	2	–	1	2/1	–	2	–	–	–	1/5	–	–	–		LQFP48	250/盘
N32G031x6	N32G031F6U7		48	32	8	16		5	1	11	3	1(7)	–	1	1	–	2	2	–	1	2/1	–	2	–	–	–	1/5	–	–	–		UFQFPN20	490/盘 5000/卷
	N32G031F6S7		48	32	8	16		5	1	11	3	1(9)	–	1	1	–	1	2	–	1	2/1	–	2	–	–	–	1/5	–	–	–		TSSOP20	70/管
	N32G031K6Q7		48	32	8	28		5	1	14	6	1(10)	–	1	1	–	2	2	–	1	2/1	–	2	–	–	–	1/5	–	–	–		QFN32 (5mmx5mm)	490/盘
	N32G031K6Q7-1		48	32	8	28		5	1	14	6	1(10)	–	1	1	–	2	2	–	1	2/1	–	2	–	–	–	1/5	–	–	–		QFN32 (4mmx4mm)	490/盘
	N32G031K6L7		48	32	8	26		5	1	14	6	1(10)	–	1	1	–	2	2	–	1	2/1	–	2	–	–	–	1/5	–	–	–		LQFP32	250/盘
N32G030	N32G030F6U7		48	32	8	16		5	1	11	3	1(7)	–	1	1	–	1	2	–	1	2/1	–	2	–	–	–	1/5	–	–	–		UFQFPN20	490/盘 5000/卷
	N32G030F6S7		48	32	8	16		5	1	11	3	1(9)	–	1	1	–	1	2	–	1	2/1	–	2	–	–	–	1/5	–	–	–		TSSOP20	70/管
	N32G030F8S7		48	64	8	16		5	1	11	3	1(9)	–	1	1	–	1	2	–	1	2/1	–	2	–	–	–	1/5	–	–	–		TSSOP20	70/管
	N32G030K6Q7		48	32	8	28		5	1	14	6	1(10)	–	1	1	–	1	2	–	1	2/1	–	2	–	–	–	1/5	–	–	–		QFN32 (5mmx5mm)	490/盘
	N32G030K6Q7-1		48	32	8	28		5	1	14	6	1(10)	–	1	1	–	1	2	–	1	2/1	–	2	–	–	–	1/5	–	–	–		QFN32 (4mmx4mm)	490/盘
	N32G030K6L7		48	32	8	26		5	1	14	6	1(10)	–	1	1	–	1	2	–	1	2/1	–	2	–	–	–	1/5	–	–	–		LQFP32	250/盘
	N32G030K8L7		48	64	8	26		5	1	14	6	1(10)	–	1	1	–	1	2	–	1	2/1	–	2	–	–	–	1/5	–	–	–		LQFP32	250/盘
	N32G030K8Q7-1		48	64	8	28		5	1	14	6	1(10)	–	1	1	–	1	2	–	1	2/1	–	2	–	–	–	1/5	–	–	–		QFN32 (4mmx4mm)	490/盘
	N32G030C8L7		48	64	8	40		5	1	14	6	1(12)	–	1	1	–	1	2	–	1	2/1	–	2	–	–	–	1/5	–	–	–		LQFP48	250/盘

注:“-”表示不支持

通用MCU

Series	Commerical Product Code	Core	Frenquency (MHz)	Flash (KB)	SRAM (KB)	I/O	Supply Aoltage/ Operating Temperature	Timer		PWM		Analog Interface				LPRCNT	BEEPER	Connectivity									DMA/Channels	SEGMENT LCD	ETH	DVP	Cryptographic Algorithm	Package	SPQ(PCS)
								Timer	RTC	PWM	Complementary PWM	12-bit ADC Cell (CHs)	12-bit DAC CHs	OPAMP	COMP			USART/ISO7816/LIN	UART/LIN	LPUART	SPI/I²S	QSPI	I²C	USB Device	CAN	SDIO							
N32G003	N32G003F4Q7	Arm® Cortex®-M0	48	16	3	18	2V~5.5V/-40~+105°C	3	–	2	6	1 (9)	–	–	1	–	1	–	2(1)	–	1/–	–	1	–	–	–	–	–	–	–	CRC16	QFN20 (3mmx3mm)	490/盘 5000/卷
	N32G003F5Q7		48	29.5	3	18		3	–	2	6	1 (9)	–	–	1	–	1	–	2(1)	–	1/–	–	1	–	–	–	–	–	–	–		QFN20 (3mmx3mm)	490/盘
	N32G003F4S7		48	16	3	18		3	–	2	6	1 (9)	–	–	1	–	1	–	2(1)	–	1/–	–	1	–	–	–	–	–	–	–		TSSOP20	70/管
	N32G003F5S7		48	29.5	3	18		3	–	2	6	1 (9)	–	–	1	–	1	–	2(1)	–	1/–	–	1	–	–	–	–	–	–	–		TSSOP20	70/管

注:“-”表示不支持, (1)不支持LIN模式

低功耗MCU

Series	Commerical Product Code	Core	Frenquency (MHz)	Flash (KB)	SRAM (KB)	I/O	Supply Voltage/ Operating Temperature	Timer		PWM		Analog Interface				LPRCNT	BEEPER	Connectivity									DMA/Channels	SEGMENT LCD	ETH	DVP	Cryptographic Algorithm	Package	SPQ(PCS)
								Timer	RTC	PWM	Complementary PWM	12-bit ADC Cell (CHs)	12-bit DAC CHs	OPAMP	COMP			USART/ISO7816/LIN	UART/LIN	LPUART	SPI/I²S	QSPI	I²C	USB Device	CAN	SDIO							
N32L43x	N32L436C8L7	Arm® Cortex®-M4F	108	64	24	38	1.8V~3.6V/-40~+105°C	10	1	24	6	1(10)	1	2	2	Y	–	3	2	1	2/2	–	2	1	1	–	1/8	4x20	–	–	DES/3DES, AES, SHA1/SHA224/SHA256, SM1, SM3, SM4, SM7, MD5, CRC16/CRC32, TRNG	LQFP48	250/盘
	N32L436CBL7		108	128	32	38		10	1	24	6	1(10)	1	2	2	Y	–	3	2	1	2/2	–	2	1	1	–	1/8	4x20	–	–		LQFP48	250/盘
	N32L436R8L7		108	64	24	52		10	1	28	12	1(16)	1	2	2	Y	–	3	2	1	2/2	–	2	1	1	–	1/8	4x34 8x30	–	–		LQFP64 (10mmx10mm)	160/盘
	N32L436RBL7		108	128	32	52		10	1	28	12	1(16)	1	2	2	Y	–	3	2	1	2/2	–	2	1	1	–	1/8	4x34 8x30	–	–		LQFP64 (10mmx10mm)	160/盘
	N32L436MBL7		108	128	32	64		10	1	28	12	1(16)	1	2	2	Y	–	3	2	1	2/2	–	2	1	1	–	1/8	4x44 8x40	–	–		LQFP80	119/盘
	N32L433K8L7		108	64	24	26		10	1	17	6	1(10)	1	2	2	–	–	2	2	1	2/2	–	2	1	1	–	1/8	–	–	–		LQFP32	250/盘
	N32L433KBL7		108	128	32	26		10	1	17	6	1(10)	1	2	2	–	–	2	2	1	2/2	–	2	1	1	–	1/8	–	–	–		LQFP32	250/盘
N32L40x	N32L406C8Q7		64	64	16	38		10	1	24	6	1(10)	1	2	2	–	–	3	2	1	2/2	–	2	1	1	–	1/8	4x20	–	–		QFN48	490/盘
	N32L406CBQ7		64	128	24	38		10	1	24	6	1(10)	1	2	2	–	–	3	2	1	2/2	–	2	1	1	–	1/8	4x20	–	–		QFN48	490/盘
	N32L406CBL7		64	128	24	38		10	1	24	6	1(10)	1	2	2	–	–	3	2	1	2/2	–	2	1	1	–	1/8	4x20	–	–		LQFP48	250/盘
	N32L406CDL7		64	384	24	38		10	1	24	6	1(10)	1	2	2	–	–	3	2	1	2/2	–	2	1	1	–	1/8	4x20	–	–		LQFP48	250/盘
	N32L406R8Q7		64	64	16	52		10	1	28	12	1(16)	1	2	2	–	–	3	2	1	2/2	–	2	1	1	–	1/8	4x34 8x30	–	–		QFN64	260/盘
	N32L406RBL7		64	128	24	52		10	1	28	12	1(16)	1	2	2	–	–	3	2	1	2/2	–	2	1	1	–	1/8	4x34 8x30	–	–		LQFP64 (10mmx10mm)	160/盘
	N32L406RBL7-1		64	128	24	52		10	1	28	12	1(16)	1	2	2	–	–	3	2	1	2/2	–	2	1	1	–	1/8	4x34 8x30	–	–		LQFP64 (7mmx7mm)	250/盘
	N32L406RDL7		64	384	24	52		10	1	28	12	1(16)	1	2	2	–	–	3	2	1	2/2	–	2	1	1	–	1/8	4x34 8x30	–	–		LQFP64 (10mmx10mm)	160/盘
	N32L406MBL7		64	128	24	64		10	1	28	12	1(16)	1	2	2	–	–	3	2	1	2/2	–	2	1	1	–	1/8	4x34 8x30	–	–		LQFP80	119/盘
	N32L403K8Q7		64	64	16	26		10	1	17	6	1(10)	1	2	2	–	–	2	2	1	2/2	–	2	1	1	–	1/8	–	–	–		QFN32 (4mmx4mm)	490/盘
	N32L403KBQ7		64	128	24	26		10	1	17	6	1(10)	1	2	2	–	–	2	2	1	2/2	–	2	1	1	–	1/8	–	–	–		QFN32 (4mmx4mm)	490/盘
	N32L402C8Q7		64	64	16	38		10	1	24	6	1(10)	1	2	2	–	–	3	2	1	2/2	–	2	1	–	–	1/8	4x20	–	–		QFN48	490/盘
	N32L402C8L7		64	64	16	38		10	1	24	6	1(10)	1	2	2	–	–	3	2	1	2/2	–	2	1	–	–	1/8	4x20	–	–		LQFP48	490/盘
	N32L402CBQ7		64	128	16	38		10	1	24	6	1(10)	1	2	2	–	–	3	2	1	2/2	–	2	1	–	–	1/8	4x20	–	–		QFN48	490/盘 3000/卷
	N32L402CBL7		64	128	16	38		10	1	24	6	1(10)	1	2	2	–	–	3	2	1	2/2	–	2	1	–	–	1/8	4x20	–	–		LQFP48	250/盘 2000/卷
	N32L402R8L7		64	64	16	52		10	1	28	12	1(16)	1	2	2	–	–	3	2	1	2/2	–	2	1	–	–	1/8	4x34 8x30	–	–		LQFP64 (10mmx10mm)	160/盘
	N32L402RBL7		64	128	16	52		10	1	28	12	1(16)	1	2	2	–	–	3	2	1	2/2	–	2	1	–	–	1/8	4x34 8x30	–	–		LQFP64 (10mmx10mm)	160/盘
	N32L402RDL7		64	384	16	52		10	1	28	12	1(16)	1	2	2	–	–	3	2	1	2/2	–	2	1	–	–	1/8	4x34 8x30	–	–		LQFP64 (10mmx10mm)	160/盘

注："-"表示不支持

N32WB BLE

Series	Commerical Product Code	Core	Frequency (MHz)	Flash (KB)	SRAM (KB)	I/O	Supply Voltage/ Operating Temperature	Timer		PWM		Analog Interface			LPRCNT	Connectivity									DMA/Channels	SEGMENT LCD	AMIC	IRC	BLE	DVP	Sensitivity	dBm	Power Consumption			Cryptographic Algorithm	Package	SPQ(PCS)
								Timer	RTC	PWM	Complementary PWM	10-bit ADC Cell (CHs)	12-bit ADC Cell (CHs)	12-bit DAC CHs		USART/ISO7816/LIN	UART/LIN	LPUART	SPI/I²S	QSPI	I²C	USB Device	CAN	SDIO									ShuntDown	Sleep	Run(Typ)			
N32WB452	N32WB452CEQ6	Arm® Cortex®-M4F+M0	144	512	144	29	1.8V~3.6V -40~+85℃	8	1	23	6	–	2(6)	2	–	3	2	–	3/2	–	2	1	2	–	2/16	–	–	–	BLE5.0	–	-94dBm	最大+3dBm	0.1μA	1.2μA	Rx:3.5mA@3.3V Tx:3.6mA @0dBm/3.3V	AES/DES/3DES/SHA/SM1/SM3/SM4/SM7/MD5、CRC16/CRC32、TRNG	QFN48	490/盘
	N32WB452REQ6		144	512	144	43		8	1	24	6	–	2(11)	2	–	3	3	–	3/2	–	3	1	2	–	2/16	–	–	–		–							QFN64	348/盘
	N32WB452LEQ6		144	512	144	65		8	1	24	6	–	2(16)	2	–	3	4	–	3/2	–	4	1	2	1	2/16	–	–	–		1							QFN88	168/盘
N32WB436	N32WB436RFQ7	Arm® Cortex®-M4F+M0	108	640	80	49	1.8V~3.6V -40~+105℃	8	1	24	6	–	1(16)	1	–	3	1	1	2/2	–	2	1	1	–	1/8	4x31 8x27	–	–	BLE5.1	–	-94dBm@BLE 1Mbps	最大+6dBm	–	4.6μA	Rx:3.8mA@3.3V Tx:4.2mA @0dBm/3.3V	AES/DES/3DES/SHA/SM1/SM3/SM4/SM7/MD5、CRC16/CRC32、TRNG	QFN64	260/盘
N32WB031	N32WB031KCQ6-1	Arm® Cortex®-M0	64	256	64	21	1.8V~3.6V -40~+85℃	3	1	8	6	1(8)	–	–	–	2	–	1	2/2	–	1	–	–	–	1/5	–	1	1	BLE5.1	–	-96dBm @BLE 1Mbps -93dBm @BLE 2Mbps	最大+6dBm	0.13μA	1.4μA	Rx:3.8mA@3.3V Tx:4.2mA @0dBm/3.3V	CRC16/32	QFN32 (4mmx4mm)	490/盘
	N32WB031KEQ6-1		64	512	64	21	1.8V~3.6V -40~+85℃	3	1	8	6	1(8)	–	–	–	2	–	1	2/2	–	1	–	–	–	1/5	–	1	1										
	N32WB031KEQ7-1		64	512	64	21	1.8V~3.6V -40~+105℃	3	1	8	6	1(8)	–	–	–	2	–	1	2/2	–	1	–	–	–	1/5	–	1	1										
	N32WB031KEQ6-2		64	512	64	21	2.32V~3.6V -40~+85℃	3	1	8	6	1(8)	–	–	–	2	–	1	2/2	–	1	–	–	–	1/5	–	1	1										

注:“-”表示不支持

电控MCU

Series	Commerical Product Code	Core	Frenquency (MHz)	Flash (KB)	SRAM (KB)	I/O	Supply Voltage/ Operating Temperature	Timer		PWM		Analog Interface				LPRCNT	BEEPER	Connectivity									DMA/Channels	SEGMENT LCD	ETH	DVP	Cryptographic Algorithm	Package	SPQ(PCS)
								Timer	RTC	PWM	Complementary PWM	12-bit ADC Cell (CHs)	12-bit DAC CHs	OPAMP	COMP			USART/ISO7816/LIN	UART/LIN	LPUART	SPI/I²S	QSPI	I²C	USB Device	CAN	SDIO							
N32M418	N32M418K8L7	Arm® Cortex® -M4F	128	64	16	23	MCU:2.4V~3.6V LDO:3.6V~18V/ -40~+105°C	8	1	7	10	1(8)	–	2	3	–	1	2	2	–	2/2	–	2	–	1	–	1/8	–	–	–	CRC16/CRC32	LQFP32	250/盘
N32M016	N32M016H8Q7	Arm® Cortex® -M0	64	64	6	21	MCU:2.0V~5.5V LDO:7V~20V 预驱:7V~20V 浮地电压:150V /-40~+105°C	4	–	10	6	1(11)	–	3	1	–	–	–	2	1	2/0	–	2	–	–	–	1/3	–	–	–	–	QFN40	490/盘

注:“-”表示不支持

安全芯片

Series	Commerical Product Code	Core	Frenquency (MHz)	Flash (KB)	ROM (KB)	EEPROM (KB)	SRAM (KB)	I/O	Supply Voltage/ Operating Temperature	Timer			Complementary PWM	Analog Interface					LCD	Three Track Megnetic Head	Connectivity						Complementary PWM	ESD（HM）		Power Consumption			SecurityManagement	Cryptographic Algorithm	Package	Certification					Turnkey Delivery	SPQ(PCS)
										Timer	SysTick	RTC		12-bit ADC CHs	10-bit ADC CHs	10-bit DAC CHs	Capture	COMP			ISO7816	UART	SPI/I²S	I²C	USB Device	ISO14443		Contact(KV)	Contactless(KV)	PowerDown	Standby	Run(Typ)				CCTCC	CITSEC	BCTC	NIST	USB-IF		
多用途安全芯片	N32S033	Arm® Cortex®-M0	80	512	–	–	33	30	1.8V~5.5V/ -40~+85°C	5	1	1	1	–	12	–	5	1	–	–	1	2	2/1	2	1	–	1/6	±4	–	0.1uA	80uA	125uA /MHz	•	AES/DES/3DES/SM1/ SM4, RSA/ECC/SM2/ SM9, SHA1/224/256/ 384/512/SM3	QFN48 QFN32 SOP8	二级	EAL4+	–	–	USB IF认证	Yes	490/盘
	N32S032		80	320	–	–	21	30	1.8V~5.5V/ -40~+105°C	5	1	1	8	12	–	1	5	1	–	–	1	3	2/–	2	1	–	1/8	±4	–	0.1uA	80uA	110uA /MHz	•		QFN48 QFN32 QFN20/SOP8 SOP8	二级	EAL5+	–	FIPS140-2 CAVP 认证	USB IF认证	Yes	490/盘
	N32S032（车规）																																									
	N32S035		80	100	–	–	–	5	1.8±5%V, 3.3±10%V/ -40 ~ 105°C	–	–	–	–	–	–	–	–	–	–	–	–	1	–	1	–	–	–	±4	±0.5	2uA	75uA	12mA	•	RSA2048/ECDSA (NISTp256/p384/p521), ECDH (NISTp256/p384/ p521)/SM2/AES(128/ 192/256)/SM4/SM3/ SHA-1/SHA-224/SHA-256/ SHA-384/SHA-512	DFN8	–	EAL5+	–	FIPS 140-3 level3 CMVP 认证	–	Yes	5000/卷
	N32S003		48	64	–	–	6	5 6 4	1.8V~5.5V/ -40~+85°C	2	1	–	–	–	–	–	–	–	–	–	1	1	–	1	–	–	–	±6	–	0.5uA	85uA	2.85 mA	•	AES/DES/ 3DES/SM4, RSA/ECC/ SM2, SHA256/ SM3	DFN8-3 DFN8/SOP8 DFN6	二级	EAL4+	–	–	–	Yes	3000/卷 5000/卷 490/盘 –
	N32S002-1		16	32	–	–	6	5	2.0 ~ 3.6V/ -40 ~ 85°C	2	1	–	–	–	–	–	–	–	–	–	–	–	–	1	–	–	–	±4	–	360uA	500uA	1mA	•	SM2/SM3/ SM4/SHA256/ AES/ECC	DFN8			–	–	–	–	3000/卷
	N32S002-2							4																											SOT23-6							
	Z32HUA-1		80	512	–	–	51	33	2.4V~5.5V/ -25~+85°C	5	1	1	–	3	–	1	–	–	–	•	3	1	3/–	1	1	–	1/8	±4	–	1uA	130uA	20 mA	•	AES/DES/3DES/SM1/SM4, RSA/ ECC/SM2/SM9, SHA1/224/256/ 384/512/SM3	QFN68	二级	EAL4+	终端芯片安全评估，个人支付终端安全评估	FIPS 140-2 CAVP 认证	USB IF认证	Yes	260/盘
	Z32HUA-2							20						–						–	–		1/–												QFN32							490/盘
	Z32HUB		60	320	–	–	16	22	2.7V~5.5V/ -25~+85°C	2	1	–	1	–	–	–	–	1	–	–	–	1	1/–	–	1	–	2/1	±4	–	1uA	130uA	500uA /MHz	•		QFN32	二级	EAL4+	–	FIPS 140-2 CAVP 认证	USB IF认证	Yes	490/盘 2500/卷

注："·"表示支持，"-"表示不支持

电池电量计量

Series	Commerical Product Code	Battery Type	Cells Number	Berttery Capcity (mAh)	Sampling Precision (Typ.)	Voltameter Precision	LED Segment	Communication	Safety Protection	Feature	Supply Voltage (V)	Operating Temperature (°C)	Package
NB401	NB401KBQ6C	Li-ion/Li-poly	2-4	100~29000	电压±1mV 电流±1mA 温度±2°C	1%(常温) 3%(全温)	0-6	SMBus	OLD SCC SCD1/2	· High side NMOS*2 · 均衡 · 看门狗 · SHA/ECC认证	2.3~26	-40~+85	QFN32 (4mm x 4mm)

注："-"表示不支持

PD快充芯片

Series	Commerical Product Code	Core	Frenquency (MHz)	Flash (KB)	Supply Voltage/ Operating Temperature	CC1/CC2	DP/DM	Type-C Port Role	Vol. and Cur. Sense	Integrated Driver	Protections	Interface	PD	Protocol	Package	SPQ(PCS)
NP11	NP11E6Q7	Arm® Cortex®-M0	48	29.5	3V~25V/-40~+85°C	1	1	DRP*1	1*5mΩ	NMOS*1	OVP/UVP/OCP /SCP/OTP	I2C/FB/OPTO	PD3.1/PPS/ QC4.0	QC/FCP/SCP/ AFC/UFCS	QFN24	490/盘
NP12	NP12E8Q7	Arm® Cortex®-M4	128	64	3V~25V/-40~+85°C	1	1	DRP*1	1*5mΩ	NMOS*1	OVP/UVP/OCP /SCP/OTP	I2C/FB/OPTO	PD3.1/PPS/ QC4.0	QC/FCP/SCP/ AFC/UFCS	QFN24	490/盘
NP21	NP21H8Q7	Arm® Cortex®-M4	128	64	3V~25V/-40~+85°C	2	2	DRP*2	2*5mΩ	NMOS*2	OVP/UVP/OCP /SCP/OTP	I2C/FB/OPTO	PD3.1/PPS/ QC4.0	QC/FCP/SCP/ AFC/UFCS	QFN40	490/盘

封装尺寸

WLCSP

SOP8
4.8mm*3.8mm

DFN8
3mm*3mm/
3mm*2mm

DFN12
2.5mm*4mm

TSSOP20
6.5mm*4.4mm

UFQFPN20
3mm*3mm

UQFN20
3mm*3mm

UQFN48
7mm*7mm

QFN20
3mm*3mm/
4mm*4mm

QFN28
4mm*4mm

QFN32
4mm*4mm/
5mm*5mm

QFN36
6mm*6mm

QFN40
5mm*5mm

QFN48
6mm*6mm

QFN64
8mm*8mm

QFN88
10mm*10mm

BGA64
5mm*5mm



BGA72
4.40mm*3.76mm



BGA81
4.40mm*3.76mm

BGA100
8mm*8mm



BGA144
7mm*7mm



UFBGA169
7mm*7mm



UFBGA176+25
10mm*10mm



TFBGA240+25
14mm*14mm



LQFP32
7mm*7mm

LQFP44
10mm*10mm

LQFP48
7mm*7mm

TQFP48
7mm*7mm

LQFP64
7mm*7mm
10mm*10mm
14mm*14mm

LQFP80
12mm*12mm

LQFP100
14mm*14mm

LQFP128
14mm*14mm

LQFP144
20mm*20mm

LQFP176
24mm*24mm

LQFP208
28mm*28mm

MCU生态

开发生态

芯片选型 Selection

芯片产品选型手册

应用方案

电机方案

安全方案

存储加密、读写保护、分区保护

技术支持与交流

国民技术 NSING加油站

21ic 电子技术论坛 bbs.21ic.com

开发设计与样机调试 Development&Debug

手册文档　应用笔记　移植指南

软件开发工具　图形化配置工具　调试工具

iar　KEIL　GCC　N32Cube　NS-LINK J-Link　ULink

开发评估板

RTOS支持

OpenHarmony　RTOS　阿里云　腾讯云　RT-Thread　µC/OS

样片小批量线上线下采购

AE+FAE线上线下支持

量产升级 Mass Production

量产烧录工具

创芯工坊

SEGGER

MaxWiz Technology　阿莫智能设备

HI-LO SYSTEMS　CHiRKER

安全差分FOTA

国民云

开发板

·最小系统板



·全功能开发板

N32H787XKB7_EVB

N32G457QE_EVB

N32L436MBL7_EVB

·方案开发板

电机驱动开发板（单电阻/双电阻）

·智能门锁开发板

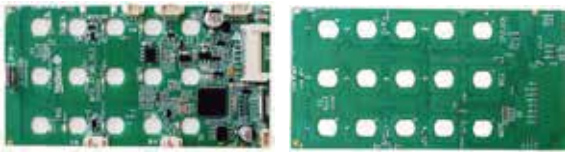

全自动门锁方案

半自动门锁方案

·智能表计开发板

NS-LINK离线烧录器

NS-LINK-Pro

国民技术天猫旗舰店（gmjs.tmall.com）等平台提供销售服务