


1. DUAL-MCU (ESP32 + ATTINY1604) & LEVEL SHIFTER

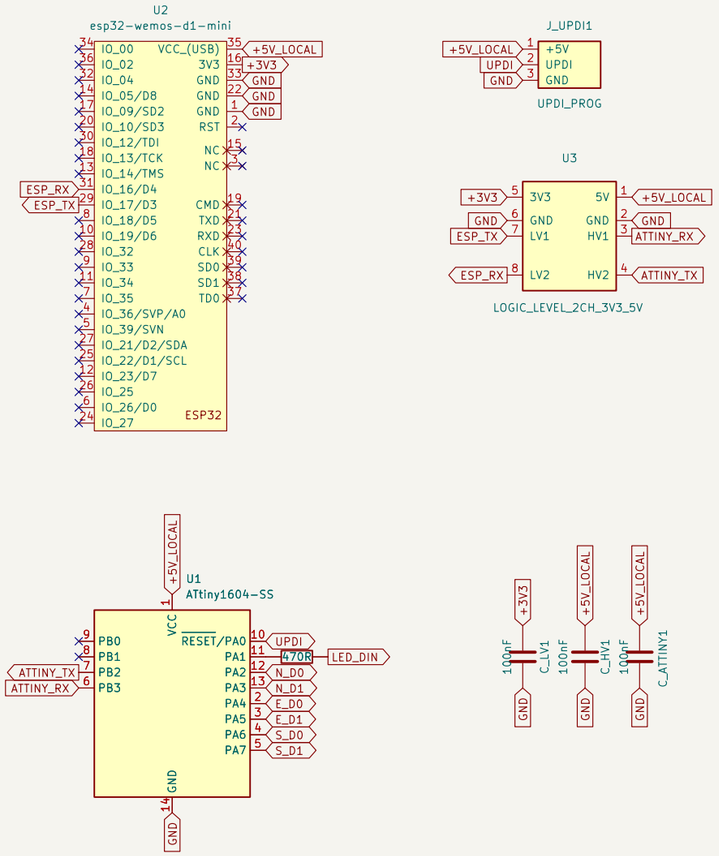

2. 12V USB-C PD INPUT, PROTECTION & 5V 3A STEP-DOWN

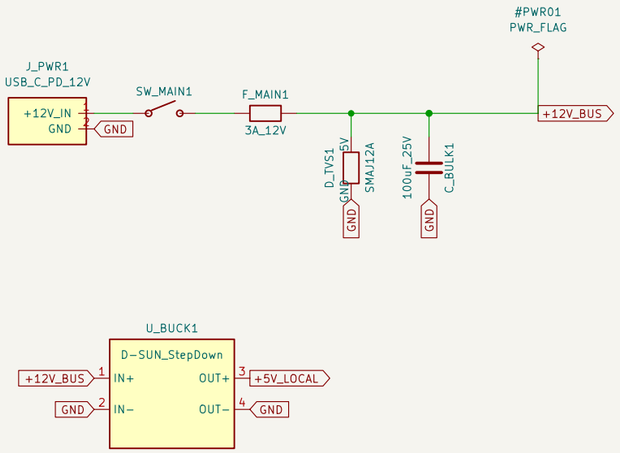

3. 6-PIN MAGNETIC EDGE CONNECTORS: NORTH, EAST, SOUTH

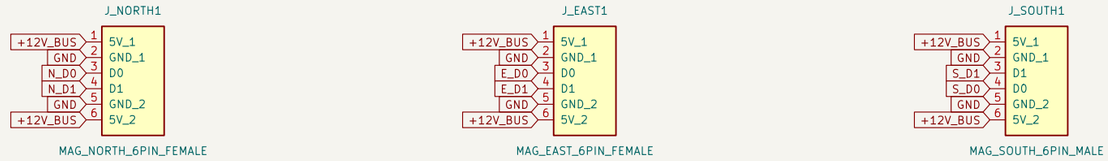

4. SMART LED MATRIX 4x4 (64 LEDs): WS2812 2x2 DAISY-CHAIN

