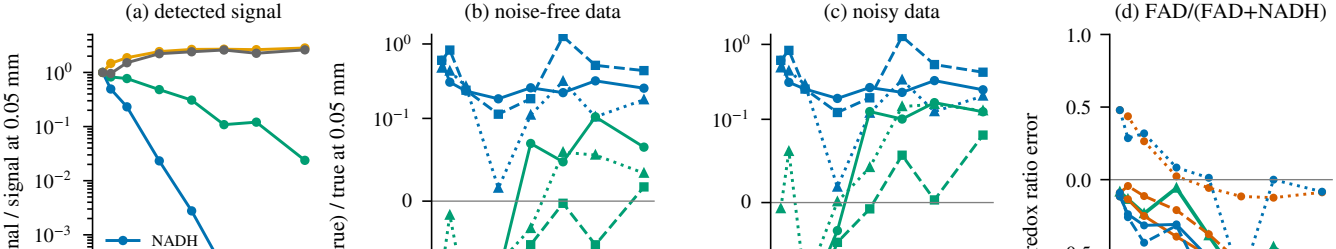
(a) detected signal
(b) noise-free data
(c) noisy data
(d) FAD/(FAD+NADH)
true signal / signal at 0.05 mm
(est - true) / true at 0.05 mm
redox ratio error
cover thickness (mm)
NADH
FAD
matrix
scatter
thin-cover library
right depth
right depth, per layer
NADH
FAD
thin library
right depth
per layer
joint8
joint4
365 nm only