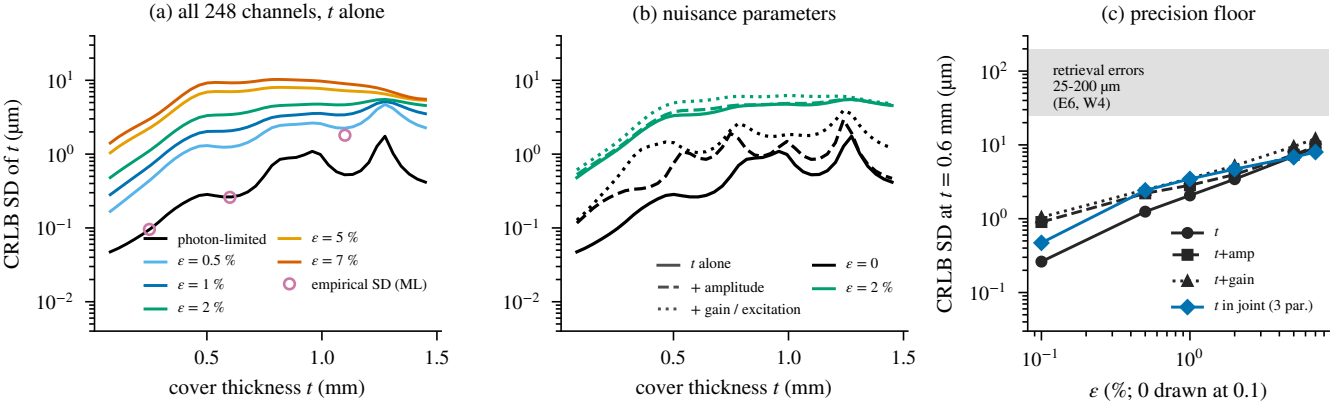
(a) all 248 channels, t alone
CRLB SD of t (µm)
cover thickness t (mm)
photon-limited
ε = 0.5 %
ε = 1 %
ε = 2 %
ε = 5 %
ε = 7 %
empirical SD (ML)
(b) nuisance parameters
cover thickness t (mm)
t alone
+ amplitude
+ gain / excitation
ε = 0
ε = 2 %
(c) precision floor
CRLB SD at t = 0.6 mm (µm)
retrieval errors
25-200 µm
(E6, W4)
t
t+amp
t+gain
t in joint (3 par.)
ε (%; 0 drawn at 0.1)