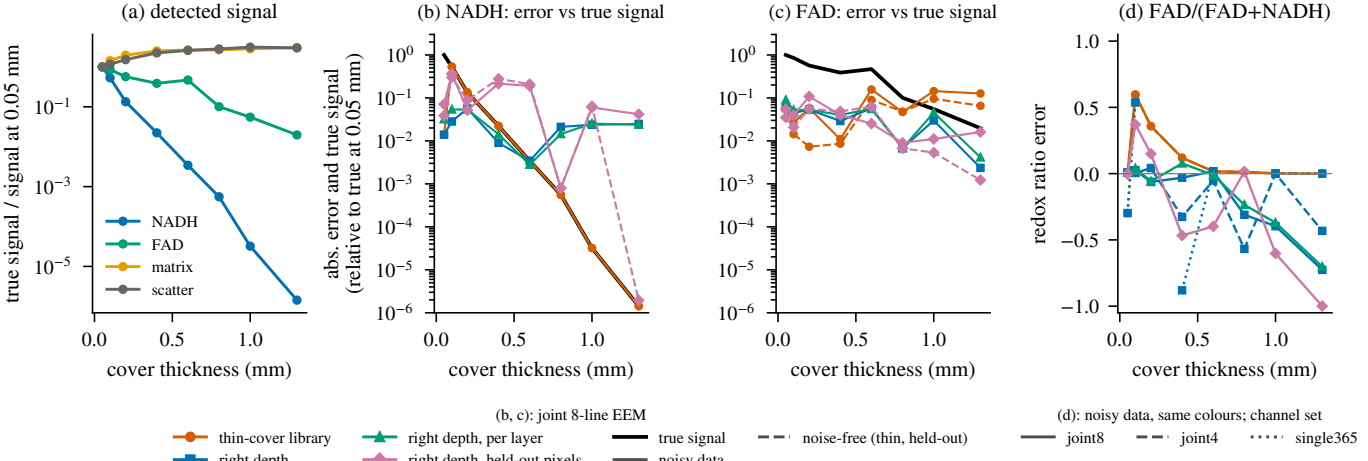
(a) detected signal
(b) NADH: error vs true signal
(c) FAD: error vs true signal
(d) FAD/(FAD+NADH)
true signal / signal at 0.05 mm
abs. error and true signal (relative to true at 0.05 mm)
redox ratio error
cover thickness (mm)
NADH
FAD
matrix
scatter
(b, c): joint 8-line EEM
thin-cover library
right depth
right depth, per layer
right depth, held-out pixels
true signal
noisy data
noise-free (thin, held-out)
(d): noisy data, same colours; channel set
joint8
joint4
single365