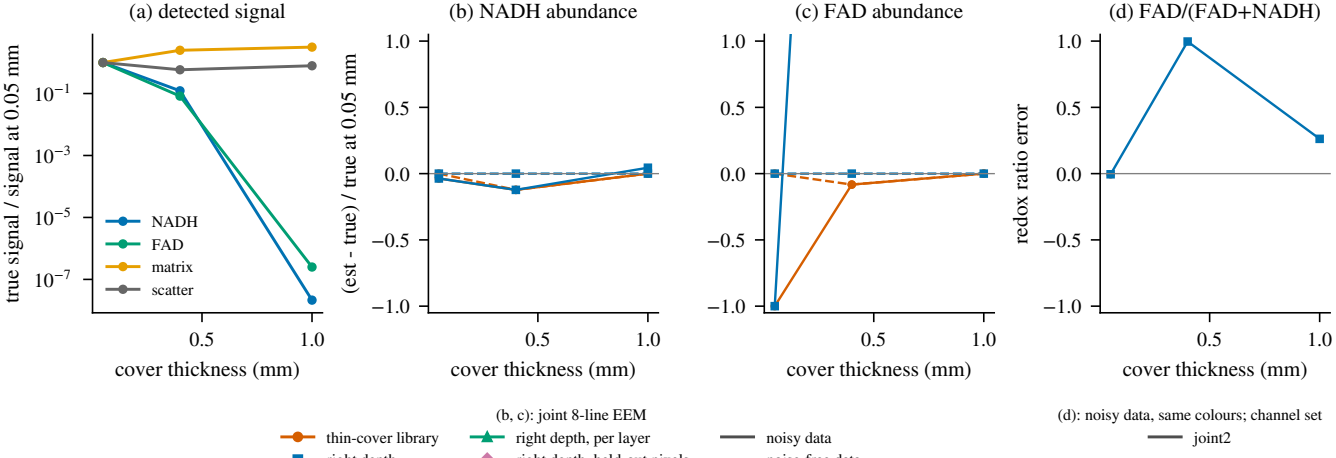
(a) detected signal
(b) NADH abundance
(c) FAD abundance
(d) FAD/(FAD+NADH)
true signal / signal at 0.05 mm
(est - true) / true at 0.05 mm
redox ratio error
cover thickness (mm)
NADH
FAD
matrix
scatter
(b, c): joint 8-line EEM
thin-cover library
right depth
right depth, per layer
right depth, held-out pixels
noisy data
noise-free data
(d): noisy data, same colours; channel set
joint2