

OWNERSHIP CERTIFICATE

To Whom It May Concern

This is to certify that the following equipment listed below is the sole property of Sudhir Equipment Rental Company:

Equipment	AWP
Brand / Make	JLG
Asset ID	S38SJP-1092
Model Number	1200SJP
Serial Number	300198725
Working Height	38 Meter
Type	Diesel Telescopic Boom
Manufacturing Year	2015

This certification is issued to confirm the ownership status of the aforementioned equipment. Sudhir Equipment Rental Company holds full legal ownership rights over the listed equipment and retains all associated benefits and responsibilities. Should there be any queries or requests for verification regarding the ownership of the mentioned equipment, please do not hesitate to contact us at : Info@sudhirrentals.com

Sincerely,

Ajay Koul
General Manager
Sudhir Equipment Rental Company





بروج للتأمين التعاوني
Buruj Cooperative Insurance

شهادة التأمين - CERTIFICATE OF INSURANCE

Policy Holder Name	:	Sudhir Equipment Rental Company	:	اسم حامل الوثيقة
Policy Number	:	01/CPM/ 2025/000002	:	رقم الوثيقة
Policy Period	:	05/04/ 2025 to 04/04/2026	:	فترة الوثيقة
Description of Machinery / Equipment	:	JLG-AWPS-1200SJP	:	وصف المعدة/ال لة
Chassis / Serial No.	:	300198725	:	رقم الهيكل/ التسلسلي
Year of Manufacturing	:	2015	:	سنة الصنع
Asset ID No.	:	S38SJP-1092	:	رقم ال صل
Location	:	Kingdom of Saudi Arabia.	:	الموقع

BURUJ Cooperative Insurance Company certifies that above client is holding a Machinery/Equipment Insurance Policy for the above-mentioned Equipment in accordance with the above-mentioned Insurance Policy.

With effect from: 05/04/ 2025 to 04/04/2026

This Certificate has been issued upon Insured's request as per all terms and conditions, exclusions, warranties mentioned in the policy.

تشهد شركة بروج للتأمين التعاوني بأن السادة أعل ه مؤمنين لديها تأمين المكان/المعدات المذكورة أعل ه وذلك حسب وثيقة التأمين المذكورة أعل ه

والتي يبدأ تاريخ سريانها من ٢٠٢٥/٠٤/٠٥ إلى ٢٠٢٦/٠٤/٠٤

تم إصدار هذه الشهادة بناءً على طلب المؤمن له وذلك حسب الشروط وال استثناءات وال شتراطات المذكورة في الوثيقة.

Important Notices:

1. This Certificate does not pay any fines, penalties, bonds or cautions that may be imposed.
2. Original certificates are only accepted.
3. Due to the importance of correct information being stated in this certificate, kindly examine the document carefully and advise the Company of any difference.
4. In the event of changes in the above information, kindly contact +966-11-2938383

مل حظات هامة:

- ١) ل تطبق هذه الشهادة التأمين على الغرامات والعقوبات المالية بما في ذلك المخالفات أو الضمانات أو الكفالات التي قد تقرر.
- ٢) تقبل الشهادة ال صلية فقط.
- ٣) نظراً ل همية صحة البيانات الخاصة بكم في هذه الشهادة، الرجاء التأكد منها وإشعار الشركة في حالة وجود أي اختل فات.
- ٤) عند الحاجة إلى تعديل البيانات أعل ه يرجى ال اتصال على شركة بروج للتأمين التعاوني ٢٩٣٨٣٨٣-١١-٩٦٦+



BURUJ Cooperative Insurance Company

P.O. Box 51855, Riyadh 11553,

National Address 3385, Al Thomamah Road, An-Nada District.

800 124 0201 | burujinsurance.com

Issue Date: 3 April 2025

**ENGINEERING CORNER for INSPECTION**

P.O.Box 235, Rastanura 31941 Kingdom of Saudi Arabia

Tel. No's : (013)667 6999/6676895 Fax#:(013)667 6894

Email: Address: eci@eccgroupksa.com / info@eccgroupksa.com / Website : www.eccgroupksa.com



RPO No.

N/A

CRM No

N/A

No:

029741

LIFTING EQUIPMENT INSPECTION REPORT	Area:	Inspection Date:	Inspection Time:	Previous sticker	
	GCP-5, L&T SITE, JAFURAH	19-Oct-2025	10.00 AM	No. 24-5564	Issued by: B.v
Department/Contractor SUDHAIR RENTALS	Equipment No. S38SJP-1092	Equipment Location: GCP-5, L&T SITE, JAFURAH	Inspection Result : Pass	New sticker No. 31014	
Manufacturer: JLG	Model: 1200 SJP	Capacity: 500 lbs Type: BOOM SUPPORTED ELEVATING WORK PLATFORM/MAN LIFT/TELESCOPIC	Equipment S.No. 0300198725	Sticker Expiration 18-Apr-2026	

Above Equipment was inspected by Engineering Corner for Inspection in accordance with applicable Saudi Aramco Gi's, ASME and ANSI Standards. Deficiencies that require corrective action are listed below. Specific repairs to correct each deficiency Should be Noted in the corrective action taken column.

NO.	DEFICIENCIES	CORRECTIVE ACTION TAKEN
	BOOM SUPPORTED ELEVATING WORK PLATFORM (MANLIFT-TELESCOPIC) PERIODIC VISUAL INSPECTION AND FUNCTIONAL TEST PERFORMED PASSED AS PER ARAMCO G.I.7.030 AND ANSI/ SAIA A92.5 STANDARD.	

USER NAME:	Apu sarker	TECHNICAL REVIEWER NAME:	INSPECTOR NAME:	ABDUL KHADER, 80019238
		Received Date: 20-Oct-2025		
BADGE	369	SIGNATURE	SIGNATURE	
		Reviewed Date: -		

SAUDI ARAMCO INSPECTION CHECKLIST		SAIC NUMBER SAIC-U-7017	ISSUE DATE 1-Jan-23	DISCIPLINE ELEVATING/LIFTING EQUIPMENT
MAN BASKET				
PROJECT TITLE		WBS/BI/JO NUMBER 3067	INSPECTION COMPANY ECI	

EQUIPMENT ID NUMBER S38SJP-1092	EQUIPMENT DESCRIPTION/TYPE MAN LIFT/TELESCOPIC		SERIAL NO 0300198725	REPORT No 029741
CAPACITY (SWL) 500 lbs	MANUFACTURER JLG		FACILITY / LOCATION GCP-5, L&T SITE, JAFURAH	
REQUESTED INSPECTION DATE 19-Oct-2025	RFI No	TASK COMPLETED DATE 19-Oct-2025	EQUIPMENT OWNER SUDHAIR RENTALS	

ITEM. NO	ACCEPTANCE CRITERIA	REFERENCE	PASS	FAIL	N/A	Remarks
1	GENERAL REQUIREMENTS					
1.1	Equipment documentation is available	ANSI/SAIA A92.5, Sec: 4.16.1.1 G.I. 7.030	☒	☐	☐	
1.2	Previous inspection reports are checked	ANSI/SAIA A92.5, Sec: 5.11.1.3 G.I. 7.030	☒	☐	☐	
1.3	Daily pre-operational inspection checklists are checked (if applicable)	GI 7.030 Para: 5.1.2	☒	☐	☐	
1.4	Preventive Maintenance is established and updated records are maintained	ANSI/SAIA A92.5, Sec: 6.4.1	☒	☐	☐	
1.5	Equipment is operated by a qualified operator	ANSI/SAIA A92.5 Sec:4,13,13	☒	☐	☐	
1.6	Warning notice, cautions or restrictions for safe operation and maintenance are clearly displayed and legible	ANSI/SAIA A92.5 Sec: 4.13.1	☒	☐	☐	
1.7	A sign is posted warning the operator not to rely solely on any automatic device as a substitute for safe operating practice	G.I. 7.030 Para: 5.6.2	☒	☐	☐	
1.8	Manufacturer name, address, serial number and model are clearly marked or tagged	ANSI/SAIA A92.5 Sec: 4.13.2	☒	☐	☐	
1.9	Safe working load and number of persons are clearly marked on the work platform	ANSI/SAIA A92.5, Sec: 4.13.3	☒	☐	☐	
1.10	Maximum platform height and reach are clearly marked	ANSI/SAIA A92.5 Sec: 4.13.4 & 5	☒	☐	☐	
1.11	Maximum travel height and travel directions are clearly marked	ANSI/SAIA A92.5 Sec: 4.13.9	☒	☐	☐	
1.12	Power rating are provided and marked (for AC and/or DC)	ANSI/SAIA A92.5 Sec: 4.13.6	☒	☐	☐	
1.13	Platform and guardrails electrical insulation data are provided	ANSI/SAIA A92.5 Sec: 4.13.10	☒	☐	☐	
2	INSPECTION POINTS					
2.1	Platform surfaces are at least 18" (width & length) and are slip-resestant	ANSI/SAIA A92.5 Sec: 4.12.1	☒	☐	☐	
2.2	Platform guardrails are provided and secure	ANSI/SAIA A92.5 Sec: 4.12.2	☒	☐	☐	
2.3	Platform guardrails are 42" height (+/- 3")	ANSI/SAIA A92.5 Sec: 4.12.2.1	☒	☐	☐	

SAUDI ARAMCO INSPECTION CHECKLIST		SAIC NUMBER SAIC-U-7017	ISSUE DATE 1-Jan-23	DISCIPLINE ELEVATING/LIFTING EQUIPMENT
MAN BASKET				
PROJECT TITLE		WBS/BI/JO NUMBER 3067	INSPECTION COMPANY ECI	

EQUIPMENT ID NUMBER S38SJP-1092	EQUIPMENT DESCRIPTION/TYPE MAN LIFT/TELESCOPIC		SERIAL NO 0300198725	REPORT No 029741
CAPACITY (SWL) 500 lbs	MANUFACTURER JLG		FACILITY / LOCATION GCP-5, L&T SITE, JAFURAH	
REQUESTED INSPECTION DATE 19-Oct-2025	RFI No	TASK COMPLETED DATE 19-Oct-2025	EQUIPMENT OWNER SUDHAIR RENTALS	

ITEM. NO	ACCEPTANCE CRITERIA	REFERENCE	PASS	FAIL	N/A	Remarks
2.4	Platform toeboard is fitted and at least 4" high	ANSI/SAIA A92.5 Sec: 4.12.3	☒	☐	☐	
2.5	Moving parts are guarded	ANSI/SAIA A92.5 Sec: 4.11	☒	☐	☐	
2.6	Personnel on the platform is protected against the hazards of moving parts of the aerial platforms.	ANSI/SAIA A92.5 Sec: 7.10	☒	☐	☐	
2.7	Access to the platform is provided	ANSI/SAIA A92.5 Sec: 4.12.4	☒	☐	☐	
2.8	Access gates or openings shall be properly closed per the manufacturer's instructions	ANSI/SAIA A92.5 Sec: 4.12.4	☒	☐	☐	
2.9	Electrical cables, wiring and components are undamaged	ANSI/SAIA A92.5 Sec:8.3	☒	☐	☐	
2.10	Safety harness anchorage is fitted in the platform	ANSI/SAIA A92.5 Sec: 4.12.5.1	☒	☐	☐	
2.11	Battery is secure, guarded and ventilated	ANSI/SAIA A92.5 Sec: 4.15.2	☒	☐	☐	
2.12	Outrigger position microswitches and interlocks are fully functional at their contril panel	ANSI/SAIA A92.5 Sec: 4.7	☐	☐	☒	
2.13	Air, Hydraulic and fuel systems are not leaking	ANSI/SAIA A92.5 Sec: 6.6.5	☒	☐	☐	
2.14	Emergency stop button is available at ground control station	ANSI/SAIA A92.5 Sec: 4.6.3	☒	☐	☐	
2.15	There are no loose nuts, bolts, missing, worn or damaged parts around the structure	ANSI/SAIA A92.5 Sec: 6.6.2	☒	☐	☐	
2.16	The equipment is free of defective and/or corroded members/joints	ANSI/SAIA A92.5 Sec:6.4.3	☒	☐	☐	
2.17	Working environment is hazard free and machine ca be safely operated	ANSI/SAIA A92.5 Sec:7.9	☒	☐	☐	
2.18	An hour meter is fitted	ANSI/SAIA A92.5 Sec:4.15.3	☒	☐	☐	
2.19	A fire extinguisher is fitted (type depends on operating location)	ANSI/SAIA A92.5 General	☒	☐	☐	
2.20	All moving parts are lubricated	ANSI/SAIA A92.5 Sec: 6.6.5	☒	☐	☐	
2.21	All fluid levels for oil, water and hydraulic are adequate	ANSI/SAIA A92.5 Sec: 6.6.5	☒	☐	☐	
2.22	Platform controls operate the machine correctly	ANSI/SAIA A92.5 Sec: 6.6.1	☒	☐	☐	
2.23	Platform controls are clearly marked with direction and mode of operation	ANSI/SAIA A92.5 Sec: 4.6.1.6	☒	☐	☐	

SAUDI ARAMCO INSPECTION CHECKLIST		SAIC NUMBER SAIC-U-7017	ISSUE DATE 1-Jan-23	DISCIPLINE ELEVATING/LIFTING EQUIPMENT
MAN BASKET				
PROJECT TITLE		WBS/BI/JO NUMBER 3067	INSPECTION COMPANY ECI	

EQUIPMENT ID NUMBER S38SJP-1092	EQUIPMENT DESCRIPTION/TYPE MAN LIFT/TELESCOPIC		SERIAL NO 0300198725	REPORT No 029741
CAPACITY (SWL) 500 lbs	MANUFACTURER JLG		FACILITY / LOCATION GCP-5, L&T SITE, JAFURAH	
REQUESTED INSPECTION DATE 19-Oct-2025	RFI No	TASK COMPLETED DATE 19-Oct-2025	EQUIPMENT OWNER SUDHAIR RENTALS	

ITEM. NO	ACCEPTANCE CRITERIA	REFERENCE	PASS	FAIL	N/A	Remarks
2.24	Platform controls accessible to the operator	ANSI/SAIA A92.5 Sec: 4.6.1.1	☒	☐	☐	
2.25	Platform controls return to "off" or "neutral" position when released	ANSI/SAIA A92.5 Sec: 4.6.1.4	☒	☐	☐	
2.26	Platform controls are protected against inadvertent operation	ANSI/SAIA A92.5 Sec: 1.3	☒	☐	☐	
2.27	Over-ride control for power functions is fitted at ground level control panel	ANSI/SAIA A92.5 Sec: 4.6.2.1	☒	☐	☐	
2.28	Ground controls return to "off" or "neutral" position when released	ANSI/SAIA A92.5 Sec: 4.6.2.4	☒	☐	☐	
2.29	Ground controls are clearly marked for direction and mode of operation	ANSI/SAIA A92.5 Sec: 4.6.2.6	☒	☐	☐	
2.30	Ground controls do not include drive and steering functions	ANSI/SAIA A92.5 Sec: 4.6.2.2	☒	☐	☐	
2.31	Ground controls are protected against inadvertent operation	ANSI/SAIA A92.5 Sec: 4.6.2.5	☒	☐	☐	
2.32	Boom raise/extend is operable from platform and ground control	ANSI/SAIA A92.5 Sec: 4.6.2.2	☒	☐	☐	
2.33	Boom lower/retract is operable from platform and ground control	ANSI/SAIA A92.5 Sec: 4.6.2.2	☒	☐	☐	
2.34	Platform rotation is operable from both platform and ground controls	ANSI/SAIA A92.5 Sec: 4.6.2.2	☒	☐	☐	
2.35	Emergency stop button is operable from both platform and ground controls	ANSI/SAIA A92.5 Sec: 4.6.3	☒	☐	☐	
2.36	Auxiliary/emergency lowering is operable from platform and ground controls	ANSI/SAIA A92.5 Sec: 4.6.4	☒	☐	☐	
2.37	Auxiliary/emergency retracting is operable from platform and ground controls	ANSI/SAIA A92.5 Sec: 4.6.4	☒	☐	☐	
2.38	Auxiliary/emergency rotating is operable from platform and ground controls	ANSI/SAIA A92.5 Sec: 4.6.4	☒	☐	☐	
2.39	Hydraulic/Pneumatic systems are leak-free with platform raised	ANSI/SAIA A92.5 Sec: 4.10.2	☒	☐	☐	
2.40	Tilt alarm is operable (5 degrees out of level) (manually depress the edge of the tilt switch to cause alarm condition)	ANSI/SAIA A92.5 Sec: 4.7.3	☒	☐	☐	
2.41	Aerial platforms is fitted with a warning device at the platform which activates automatically when the aerial platform is at and beyond the slope	ANSI/SAIA A92.5 Sec: 4.6.6	☒	☐	☐	
2.42	Tilt alarm is not combined with boom raise cut-out (dependent on machine manufacturer)	ANSI/SAIA A92.5 Sec: 4.6.6	☒	☐	☐	

SAUDI ARAMCO INSPECTION CHECKLIST		SAIC NUMBER SAIC-U-7017	ISSUE DATE 1-Jan-23	DISCIPLINE ELEVATING/LIFTING EQUIPMENT
MAN BASKET				
PROJECT TITLE		WBS/BI/JO NUMBER 3067	INSPECTION COMPANY ECI	

EQUIPMENT ID NUMBER S38SJP-1092	EQUIPMENT DESCRIPTION/TYPE MAN LIFT/TELESCOPIC		SERIAL NO 0300198725	REPORT No 029741
CAPACITY (SWL) 500 lbs	MANUFACTURER JLG		FACILITY / LOCATION GCP-5, L&T SITE, JAFURAH	
REQUESTED INSPECTION DATE 19-Oct-2025	RFI No	TASK COMPLETED DATE 19-Oct-2025	EQUIPMENT OWNER SUDHAIR RENTALS	

ITEM. NO	ACCEPTANCE CRITERIA	REFERENCE	PASS	FAIL	N/A	Remarks
2.43	Steering is properly working when moving forward and in reverse directions	ANSI/SAIA A92.5 Sec: 6.6.3.1	☒	☐	☐	
2.44	Brakes are in good working condition and can hold the machine on any slope (parking and moving)	ANSI/SAIA A92.5 Sec: 4.14.1	☒	☐	☐	
2.45	Extendable axles function is satisfactory (where fitted)	ANSI/SAIA A92.5 Sec: 7.3.3.8	☒	☐	☐	
2.46	Outriggers (stabilizers) extention-retraction operation is satisfactory	ANSI/SAIA A92.5 Sec: 7.10.3	☐	☐	☒	
2.47	Extendable elevating assembly operation is satisfactory (retracted vs. extended)	ANSI/SAIA A92.5 Sec: 4.2.1	☒	☐	☐	
2.48	Elevating assembly operation is satisfactory (elevated vs. lowered)	ANSI/SAIA A92.5 sec: 4.2.1(c)	☒	☐	☐	
2.49	Wheels and tyres are serviceable and undamaged	ANSI/SAIA A92.5 Sec: 7.3.3 (6)	☒	☐	☐	
2.50	Travel alarm is operable	ANSI/SAIA A92.5 Sec: 6.6 (4)	☒	☐	☐	
2.51	Platform lowering alarm is operable	ANSI/SAIA A92.5 Sec: 6.6 (4)	☒	☐	☐	
2.52	Auxiliary power source is available (ready to be used in event of primary power loss)	ANSI/SAIA A92.5 Sec: 4.15.2	☒	☐	☐	
2.53	Platform does not descend when in raised position and the power is off	ANSI/SAIA A92.5 Sec: 4.6.3	☒	☐	☐	
2.54	Machine is safely drivable from the platform when raised (fast, slow, forward and reverse modes)	ANSI/SAIA A92.5 Sec: 6.6.3.1	☒	☐	☐	
2.55	The platform does not descend when in raised position and the power is off	ANSI/SAIA A92.5 Sec: 4.6.3	☒	☐	☐	
2.56	Engine powered machines fuel lines are supported to minimize chafing	ANSI/SAIA A92.5 Sec: 4.15.1	☒	☐	☐	
2.57	Engine powered machines fuel lines are positoned to minimize exposure to engine and exhaust heat	ANSI/SAIA A92.5 Sec: 4.15.1	☒	☐	☐	
2.58	Engine powered machines exhaust system is provided with muffler	ANSI/SAIA A92.5 Sec: 4.15.1	☒	☐	☐	
2.59	Installation of Anti- Entrapment device on work platform	Letter No. CIU-L-019/2016	☒	☐	☐	

SAUDI ARAMCO INSPECTION CHECKLIST		SAIC NUMBER SAIC-U-7017	ISSUE DATE 1-Jan-23	DISCIPLINE ELEVATING/LIFTING EQUIPMENT
MAN BASKET				
PROJECT TITLE		WBS/BI/JO NUMBER 3067	INSPECTION COMPANY ECI	

EQUIPMENT ID NUMBER S38SJP-1092	EQUIPMENT DESCRIPTION/TYPE MAN LIFT/TELESCOPIC		SERIAL NO 0300198725	REPORT No 029741
CAPACITY (SWL) 500 lbs	MANUFACTURER JLG		FACILITY / LOCATION GCP-5, L&T SITE, JAFURAH	
REQUESTED INSPECTION DATE 19-Oct-2025	RFI No	TASK COMPLETED DATE 19-Oct-2025	EQUIPMENT OWNER SUDHAIR RENTALS	

Remarks: This check list will be applied for Vehicle Mounted Elevating Work Platform - ANSI/SAIA A92.2.
- Inspected equipment v reference to ANSI/SAIA A92.5 shall be equipped with Anti- Entrapment device on work platform.

Reference Documents 1- ANSI/SAIA A92.5 - 2014 Issue: Boom - Supported Elevating Work Platforms 2- SAES-B067 - 2020 Issue: Safety Identification and Safety Colors 3- SA GI 7.025 -2018 Issue: Heavy Equipment Operator and Rigger Testing and Certification 4- SA GI 7.030 - 2023 Issue: Inspection and Testing Requirements for Elevating/Lifting Equipment	
Load Tested By (if Applicable): Name, Signature, & Date: Technical	
Inspected Witnessed by 3rd Party Certified Inspector: Name, Signature, Certificate No. & Company: ABDUL KHADER, 80019238	
User Representative: Name, Signature, & Date:	



Engineering Corner for Inspection (ECI)
P.O.Box 235 Rastanura 3941 Kingdom of Saudi Arabia
Tel.:(013)667-6999 / 667-6895 - Fax:(013)667-6894
E-mail: eci@eccgroupksa.com

No. **ECI - 31014**

EQUIP.S.N.: 0300198725

EQUIP. NO.: S38SJP-1092

EQUIP SWL: 500 lbs

INSPECTION DATE : 19-Oct-2025

NEXT INSPECTION DATE : 18-Apr-2026

INSPECTOR NAME : ABDUL KHADER

SAP# : 80019238

"S.A. INSPECTION DEPARTMENT APPROVED CONTRACTOR AGENCIES"



JLG® BIM Content Library

User Guide – Boom Lifts



Figure 1: The JLG Boom Lift Family

LOADING THE MODELS

How to Load the Boom Lift Family

It is recommended the steps outlined below are followed to properly load the BIM component into a project.

1. Open a Revit Project File (.RVT) and navigate to the Plan View
2. Go to the 'Insert' tab on the Revit ribbon and select 'Load Family'

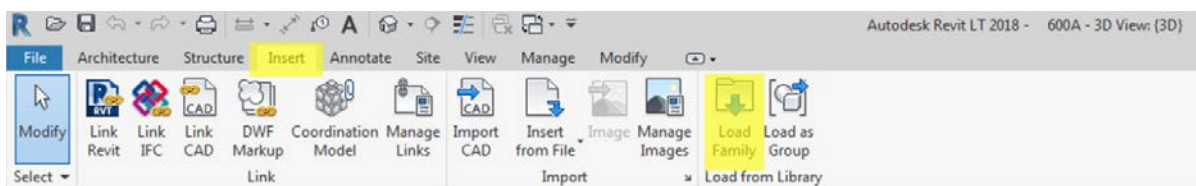


Figure 2: Loading the Family into a Project

3. Navigate to the location of the downloaded JLG® Boom Lift family component (RFA file)
4. Click 'OK' to load the component into the project

The family is now copied and embedded into the project. It can be selected from the components button located on the 'Architecture' tab on the main Revit Ribbon.



ACCESSING PRODUCT INFORMATION

How to Access the Data for the Boom Lift Family

To access the data embedded into the component, simply select the desired component and click the 'Edit Type' button at the head of the 'Properties' bar. This is typically located on the left-hand side of the screen.

All the product-specific information for the component selected is now displayed. From here, the component can be selected, as well as links to JLG.com to access documentation and product specifications

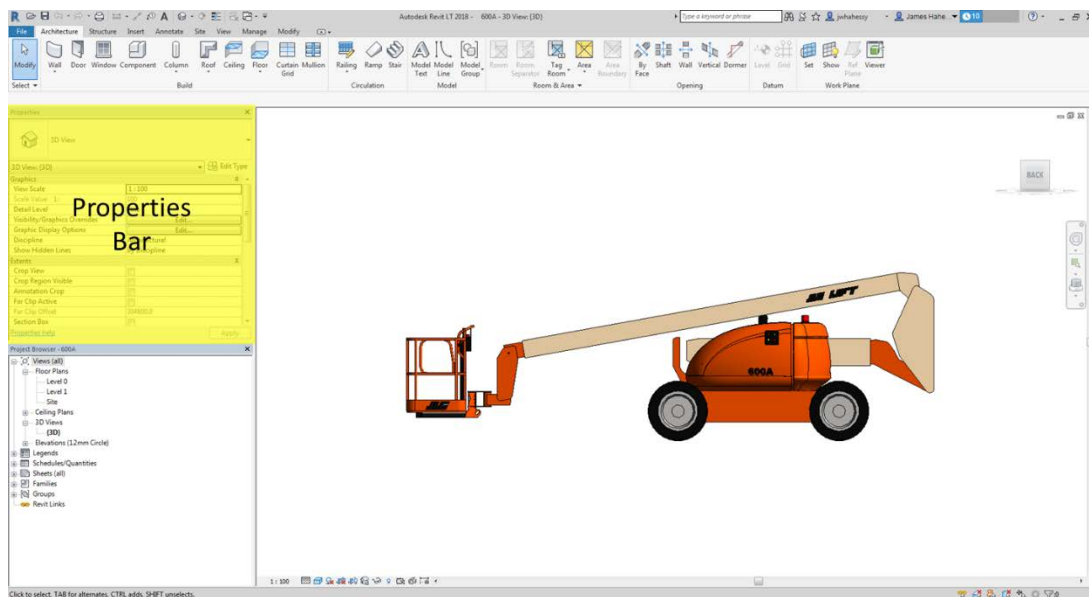


Figure 3: Accessing Additional Data

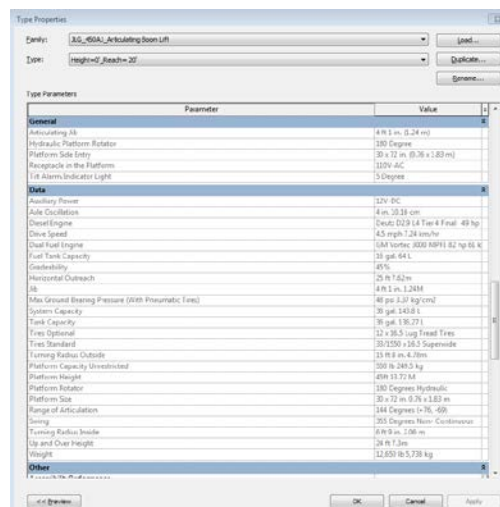


Figure 4: Additional Data for Model



USING THE MODELS

How to Use the Boom Lifts Component

All JLG® components have been created as mechanical models, once loaded the model can be placed anywhere within the project. When the component is in the desired location, the user should navigate to an appropriate elevation (plan view is advised). The align tool can then be used to lock the component to a specific location.

NOTE: While placing the component, it can be rotated by 90° by using the space key.

USING ADDITIONAL MODEL FEATURES

JLG® Boom Lifts components have been created parametrically. This allows the Height and Horizontal Reach of the platform; the Swing Angle, Platform Rotation and Jib Rotation to be changed. Tick-box options are also available for visibility control of the reach diagram, platform working area and turning radius.

Visibility Control

The visibility of the platform working area and turning radius can be toggled on or off. To access a component's visibility control, select the desired component and go to the 'Properties' bar. Then, simply uncheck the tick-box to control visibility.

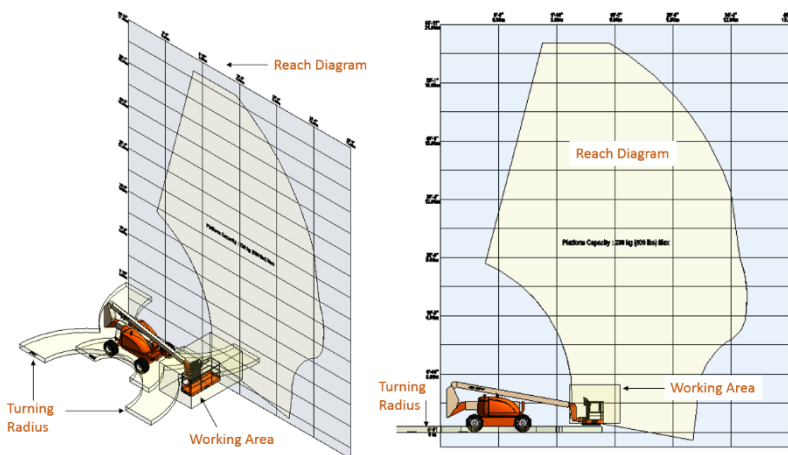


Figure 5: Illustration of Additional Visible Components

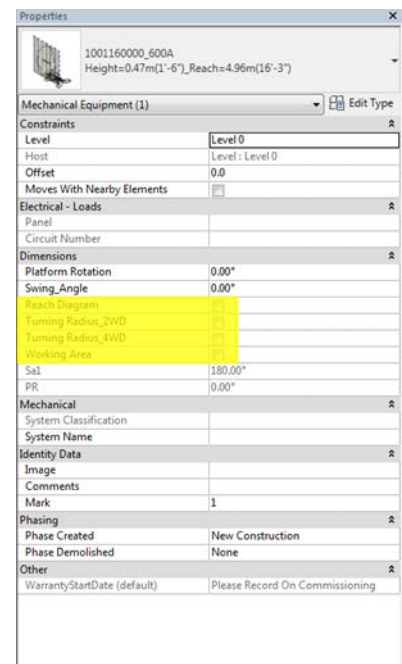


Figure 6: Visibility Control Tick-Boxes



Swing Angle, Platform Rotation & Jib Rotation

The Boom Swing Angle, Platform Rotation and Jib Rotation can be modified in the properties bar. Simply click in the box and type the desired value.

Note: Users can input any value into the controllable fields. However, if the capability of the JLG machine is exceeded the model will automatically update the value to reflect the maximum capacity of the machine.

The screenshot shows the 'Properties' window for a JLG machine. The 'Mechanical Equipment (1)' section is expanded, showing various configuration options. The 'Dimensions' section is highlighted, and the 'Swing Angle' field is set to 0.00°.

Mechanical Equipment (1)	
1001160000_600A Height=0.47m(1'-6")_Reach=4.96m(16'-3")	
Edit Type	
Constraints	
Level	Level 0
Host	Level : Level 0
Offset	0.0
Moves With Nearby Elements	☐
Electrical - Loads	
Panel	
Circuit Number	
Dimensions	
Platform Rotation	0.00°
Swing Angle	0.00°
Reach Diagram	☐
Turning Radius_2WD	☐
Turning Radius_4WD	☐
Working Area	☐
S&L	180.00°
PR	0.00°
Mechanical	
System Classification	
System Name	
Identity Data	
Image	
Comments	
Mark	1
Phasing	
Phase Created	New Construction
Phase Demolished	None
Other	
WarrantyStartDate (default)	Please Record On Commissioning

Figure 7: Rotation Configuration

Modify the Platform Height and Reach

To modify the height and reach of the platform simply select the component and choose from the pre-defined height and reach combinations in the types drop down box, this can be found at the top of the Properties bar. The platform will automatically move to the selected position.

Within the height and reach combinations, the user can select a 'Transport Condition/Stowed Position'. If selected the machine will move to its smallest and most suitable position for transportation.



Note: For types with the suffix (Platform Rotation 90°) the user must input '90' into the Platform Rotation parameter in the Properties bar. This will then give the correct height and reach.

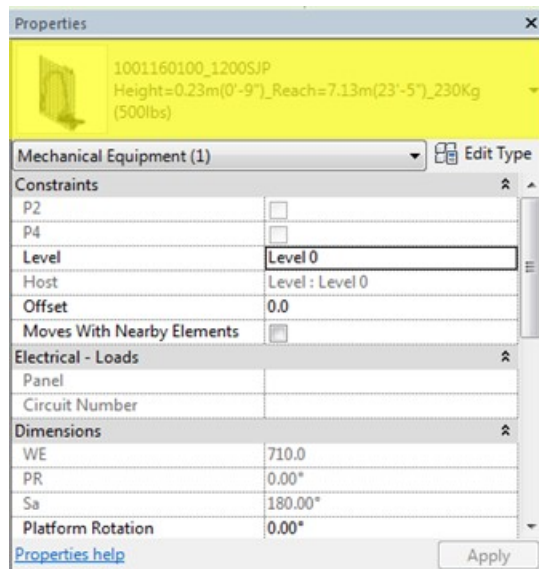


Figure 8: Height and Reach Control Menu

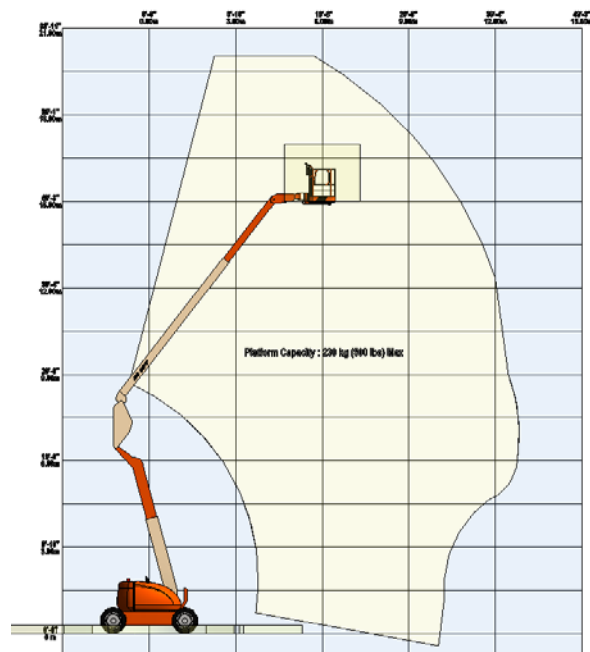


Figure 9: Each Height and Reach Option Corresponds to a Position in the Reach Diagram Grid

Family Types	
Type name:	Height=0.33m(1'-1")_Reach=3.80m(12'-6")
Search param:	Height=0.33m(1'-1")_Reach=3.80m(12'-6")
	Height=0.58m(1'-11")_Reach=5.39m(17'-8")
	Height=1.50m(4'-11")_Reach=3.24m(10'-8")_(Platform Rotation 90°)
	Height=1.50m(4'-11")_Reach=4.50m(14'-9")
	Height=1.50m(4'-11")_Reach=5.53m(18'-2")
	Height=10.29m(33'-9")_Reach=1.02m(3'-4")
Constraints	Height=10.29m(33'-9")_Reach=1.48m(4'-10")_(Platform Rotation 90°)
A1a	Height=3.00m(9'-10")_Reach=3.00m(9'-10")_(Platform Rotation 90°)
A2a	Height=3.00m(9'-10")_Reach=4.50m(14'-9")
AE	Height=3.00m(9'-10")_Reach=5.58m(18'-4")
AEa	Height=4.50m(14'-9")_Reach=1.56m(5'-1")_(Platform Rotation 90°)
	Height=4.50m(14'-9")_Reach=3.00m(9'-10")
Ja	Height=4.50m(14'-9")_Reach=4.50m(14'-9")
	Height=4.50m(14'-9")_Reach=5.69m(18'-8")
Reach	Height=5.05m(16'-7")_Reach=0.63m(2'-1")_(Platform Rotation 90°)
	Height=6.00m(19'-8")_Reach=0.79m(2'-7")_(Platform Rotation 90°)
Dimensions	Height=6.00m(19'-8")_Reach=1.50m(4'-11")
A1a1	Height=6.00m(19'-8")_Reach=3.00m(9'-10")
A2a1	Height=6.00m(19'-8")_Reach=4.50m(14'-9")
AEHa	Height=6.00m(19'-8")_Reach=5.57m(18'-3")
	Height=7.50m(24'-7")_Reach=0.71m(2'-4")_(Platform Rotation 90°)
AEHa1	Height=7.50m(24'-7")_Reach=1.50m(4'-11")
AEa1	Height=7.50m(24'-7")_Reach=3.00m(9'-10")
AHa	Height=7.50m(24'-7")_Reach=4.50m(14'-9")
AHa1	Height=7.50m(24'-7")_Reach=5.09m(16'-8")
	Height=9.00m(29'-6")_Reach=0.61m(2'-0")_(Platform Rotation 90°)
JHa	Height=9.00m(29'-6")_Reach=1.50m(4'-11")
JHa1	Height=9.00m(29'-6")_Reach=3.00m(9'-10")
	Height=9.00m(29'-6")_Reach=3.95m(13'-0")
Ja1	Height=9.44m(31'-3")_Reach=2.68m(8'-9")

Figure 10: Examples of Height and Reach Combinations