

一、主要技术参数Main technical parameters

1、产品性能参数 Product technical details

名称 Items	单位 Unit	参数 Parameters
最大起重力矩 Max lifting moment	kN•m	350
最大起升质量 Max lifting capacity	kg	14000
最大伸臂长度 Max boom length	m	17
最大起升高度 Max lifting height	m	18.2
吊臂长度 Boom length	m	5.92~17
变幅范围 Amplitude range	°	0~75°
回转角度 Rotation angel	°	360° continuous rotation
支腿跨距 Stabilizer span	m	2.47~7.76
自重 Crane weight	kg	4490

2、液压系统参数 Hydraulic system

参数项目 Items	单位 Unit	参数 Parameters
系统额定流量 Rated flow	L/min	63+40
额定工作压力 Rated working pressure	MPa	26
推荐功率 Recommended power	kW	49
工作环境温度 Working circumstance temperature	℃	-25℃—+40 ℃
液压油箱容积 Hydraulic oil tank volume	L	270

二、主要特点简介

1、多边形大圆弧超高强钢臂架结构，同步伸缩吊臂，起重能力超强，伸缩速度快。单缸同步伸缩机构全面加强升级，可靠性更高。

Polygonal large circular arc ultra-high strength steel boom structure, synchronous telescopic boom, lifting super capacity, fast expansion speed. The single cylinder synchronous expansion mechanism is comprehensively strengthened and upgraded, with higher reliability.

2、转台高位座椅操纵、可选四方位操纵等多种操纵形式，满足不同客户的需求。

Turn table high seat manipulation, optional four position manipulation and other forms of manipulation, to meet the needs of different customers.

3、终位自动收钩装置，最大限度的节省作业前后的准备时间，保证客户车辆在最短的时间内进入可行驶状态，并防止吊钩摆动所引发的起重装置损坏事故，提升行车安全性。

The final position automatic hook device saves the preparation time before and after the

operation to the maximum, ensure the customer vehicle enters the driving state in the shortest time, prevent the damage of the lifting device caused by the swing of the hook, and improve the driving safety.

4、过卷保护装置，因用户因疏忽或不熟悉起重操作原理而造成吊钩过卷，过卷报警装置将及时报警，提醒操作人员停止继续收钩，防止钢丝绳断裂所造成的人身与财产安全。

For the overroll protection device, if the user is negligent or not familiar with the lifting operation principle, the overroll alarm device will alarm in time to remind the operator to stop collecting the hook and prevent the personal and property safety caused by the fracture of the wire rope.

5、双泵比例合流液压系统，可实现吊机复合动作，卷扬效率更高；上车液压合流比例阀，微动性更好，操作更平稳；

Double pump proportional confluence hydraulic system can realize the compound action of the crane with higher hoisting efficiency; the loading hydraulic confluence proportional valve with better micromobility and smoother operation.

6、标配工作灯、散热器；高位座椅操纵标配远程点熄火装置，避免频繁上下吊机，使作业更加安全、高效。

Standard working light and radiator; high seat operation standard remote point extinguishing device to avoid frequent up and down crane and make the operation safer and more efficient.


7、双级大跨距同步伸缩支腿，整车稳定性更高；

Double-stage large span synchronous expansion leg, improving the vehicle stability.


8、标配 L-HM(CY)徐工专用宽温液压油，可以实现冬季夏季通用。

L-HM(CY) XCMG special wide temperature hydraulic oil is the standard equipment, which can be widely used in winter and summer.

三、产品外形尺寸图 Outside dimension

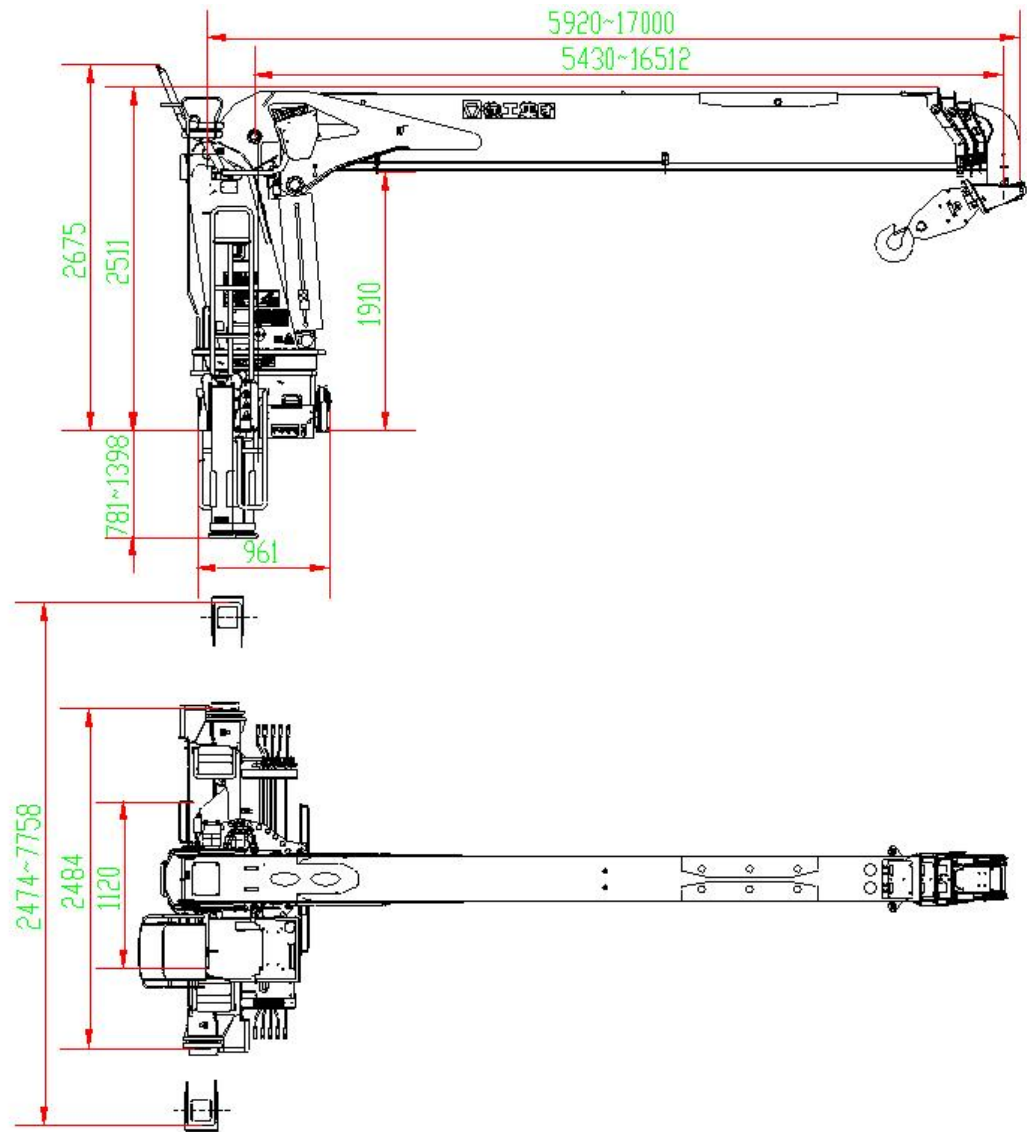

四、起升性能曲线图 Lifting chart

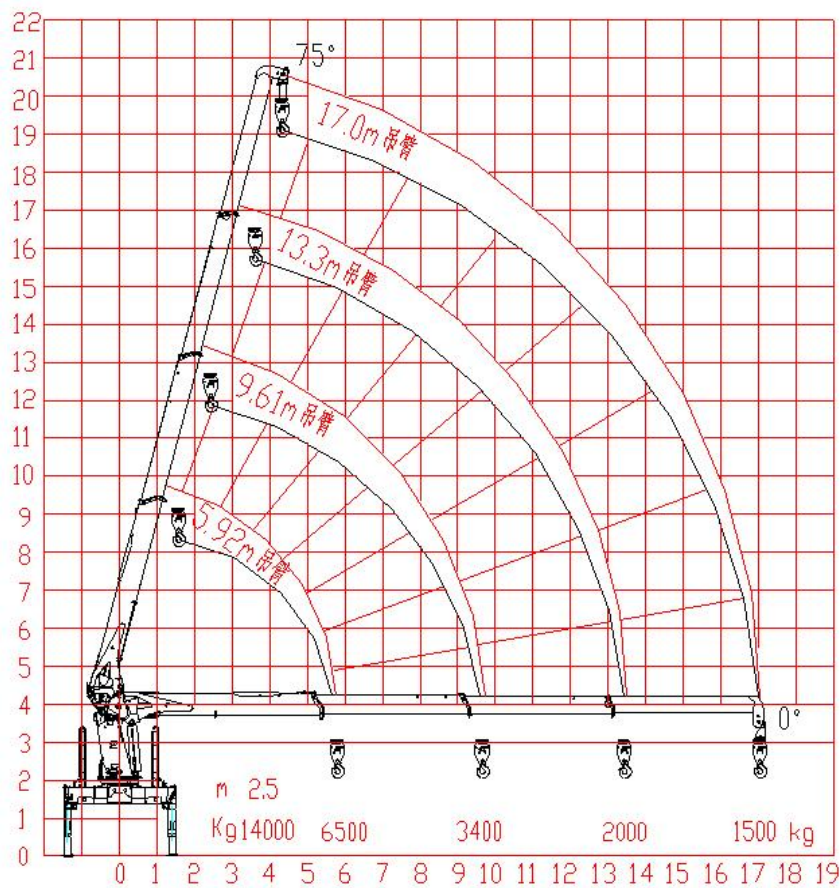

Lifting chart

		不同工作幅度下的最大起升载荷(kg)																	
臂长(m)\幅度(m)	2.2	2.5	3.0	3.5	4.0	5.0	6.0	7.0	8.0	9.0	10	11	12	13	14	15	16	16.5	
5.92	14000	14000	11660	10000	9000	7000	6500(5.5)												
9.61	7500	7500	7100	6550	6200	5600	5100	4500	3900	3600									
13.3			6000(3.04)	5500	5300	4800	4150	3650	3260	2850	2550	2350	2220	2000(12.8)					
17.0					4200(3.99)	4000	3600	3200	2850	2580	2350	2250	2150	2050	1950	1800	1600	1500	

七、产品经典作业工况