

Generator set data sheet



Model: C1250 D6
Frequency: 60
Fuel type: Diesel
kW rating: 1120 Data Center Continuous

Fuel consumption

	kW (kVA)			
Ratings	1120 (1400)			
Load	1/4	1/2	3/4	Full
US gph	23.6	41.6	58.7	76.9
L/hr	89	157	222	291

Engine

Engine manufacturer	Cummins
Engine model	KTA50-G3
Configuration	Cast iron, 60 ° V16 cylinder
Aspiration	Turbocharged and aftercooled
Gross engine power output, kWm	1220
BMEP at set rated load, kPa	1620
Bore, mm	159
Stroke, mm	159
Rated speed, rpm	1800
Piston speed, m/s	9.5
Compression ratio	13.9:1
Lube oil capacity, L	152
Overspeed limit, rpm	2070 ±50
Regenerative power, kW	168
Governor type	Electronic
Starting voltage	24V Volts DC

Fuel flow

Maximum fuel flow, L/hr	625
Maximum fuel inlet restriction, mm Hg	203
Maximum fuel inlet temperature, °C	70

Air

Combustion air, m ³ /min	104.8
Maximum air cleaner restriction, kPa	6.2

Exhaust

Exhaust gas flow at set rated load, m ³ /min	237.8
Exhaust gas temperature, °C	460
Maximum exhaust back pressure, kPa	6.7

Standard set-mounted radiator cooling

Ambient design, °C	40
Fan load, kW _m	36
Coolant capacity (with radiator), L	424
Cooling system air flow, m ³ /sec @ 12.7 mmH ₂ O	28.3
Total heat rejection, Btu/min	44000
Maximum cooling air flow static restriction mm H ₂ O	12.7

Weights*

	Open
Unit dry weight kgs	9190
Unit wet weight kgs	9613


* Weights represent a set with standard features. See outline drawing for weights of other configurations.

Dimensions

	Length	Width	Height
Standard open set dimensions	5105	2000	2238

Genset outline

Open set

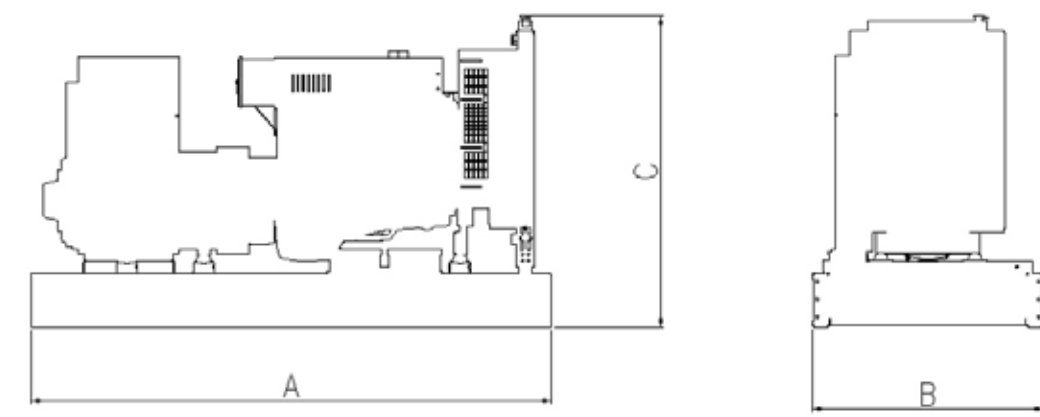

Outlines are for illustrative purposes only. Please refer to the genset outline drawing for an exact representation of this model.

Alternator data

Connection ¹	Temp rise °C	Duty ²	Alternator	Voltage
Wye, 3-phase	125/40	DCC	P7B	380-480V

Ratings definitions

Data Center Continuous (DCC): Applicable for supplying power continuously to a constant or varying electrical load for unlimited hours in a data center application.

Formulas for calculating full load currents:

Three phase output

$$\frac{\text{kW} \times 1000}{\text{Voltage} \times 1.73 \times 0.8}$$

See your distributor for more information.

Cummins Power Generation
Manston Park, Columbus Avenue
Manston, Ramsgate
Kent CT12 5BF, UK
Telephone: +44 (0) 1843 255000
Fax +44 (0) 1843 255902
E-mail: cpg.uk@cummins.com
Web: power.cummins.com



power.cummins.com

Our energy working for you.™

©2015 Cummins Power Generation Inc. All rights reserved.

Cummins Power Generation and Cummins are registered trademarks of Cummins Inc. PowerCommand, AmpSentry, InPower and "Our energy working for you." are trademarks of Cummins Power Generation. Other company, product, or service names may be trademarks or service marks of others. Specifications are subject to change without notice.

DS84f-CPGK-DC (9/15)