MSSQ Monitoring system

Raspberry Pi 4 model B+

On/Off button

Built-in analog input port

Communication Port (I2C)

Relay Output

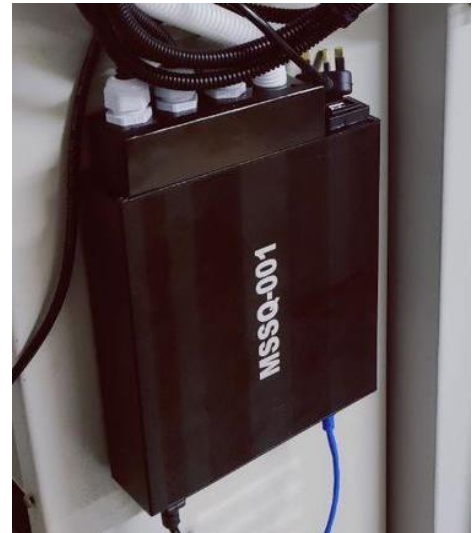Support HDMI

LAN port

USB port

Display options

HDMI
VNC Viewer (Wireless)

Range of Product	MSSQ Monitoring System
Product type	Programmable controller
Rate supply voltage	240VAC
Display	HDMI Or VNC Viewer
Communication Protocol	6 x Digital
	4 x Analog
	3 x I2C
	1 x PWM
	1x UART
	1x RS485 UART interface
Processor	Broadcom BCM2711, quad-core Cortex-A72 (ARM v8) 64-bit SoC @ 1.5GHz
Memory (RAM)	ARM Cortex-A72 CPU 1GB LPDDR4 SDRAM
Memory capacity (ROM)	USB 3.0 to SATA Hard Drive Converter with 120GB M.2 SATA
Connectivity	2.4 GHz and 5.0 GHz IEEE 802.11b/g/n/ac wireless LAN, Bluetooth 5.0, BLE Gigabit Ethernet
	1 × USB 2.0 ports. (Outside)
	2 × USB 3.0 ports.(Inside)
	2 × USB 2.0 ports.(Inside)
Support	Real Time Clock (RTC) On Board
Height	22cm
Depth	5cm
Width	17.5cm
Product Weight	1.2kg