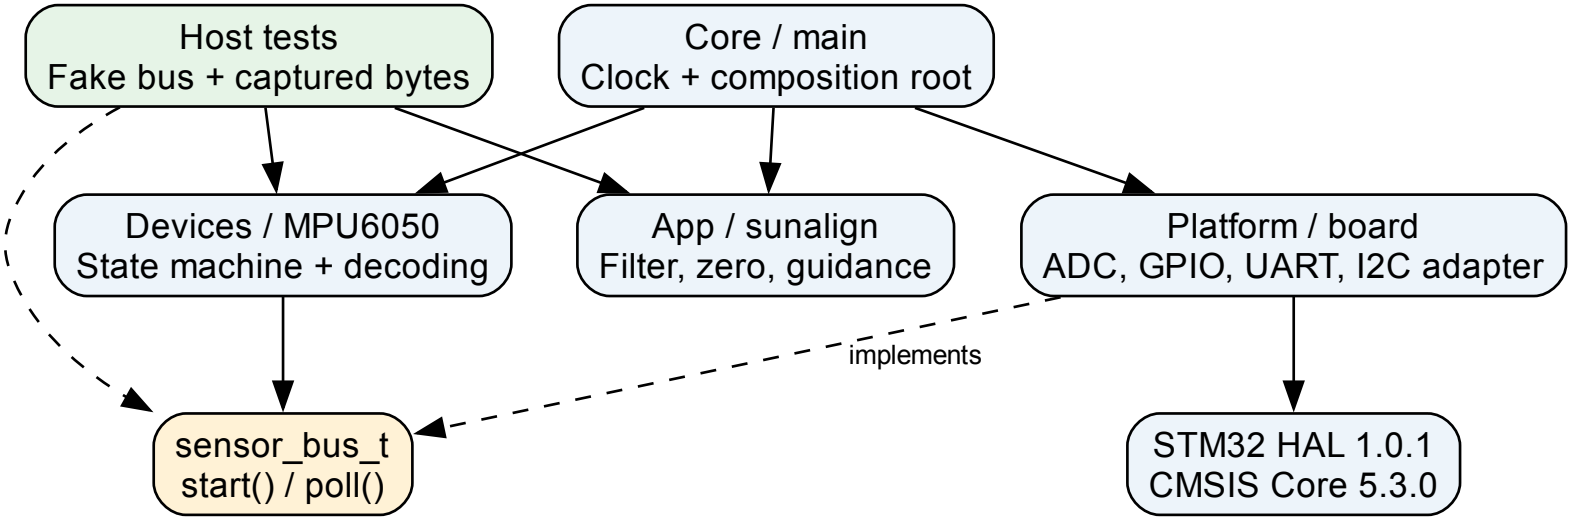
Host tests
Fake bus + captured bytes
Core / main
Clock + composition root
Devices / MPU6050
State machine + decoding
App / sunalign
Filter, zero, guidance
Platform / board
ADC, GPIO, UART, I2C adapter
implements
sensor_bus_t
start() / poll()
STM32 HAL 1.0.1
CMSIS Core 5.3.0