U1 Difference attenuator

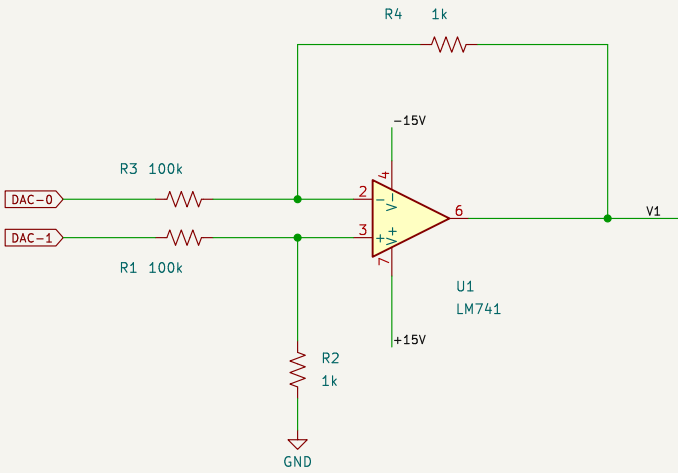

V1 = 0.01 (VREF − VSENSE)

U2 Non−inverting amplifier

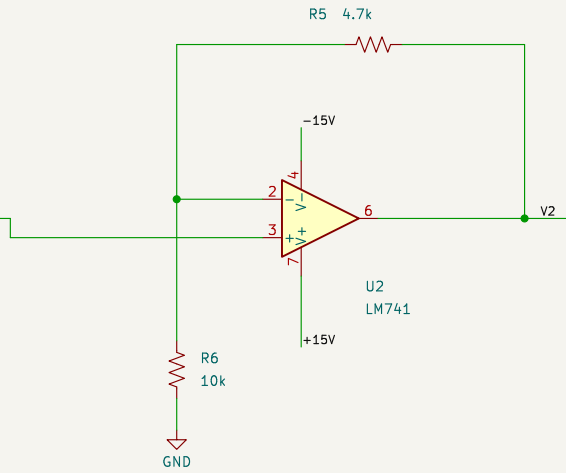

V2 = 1.47 V1

U3 Command and bias summer

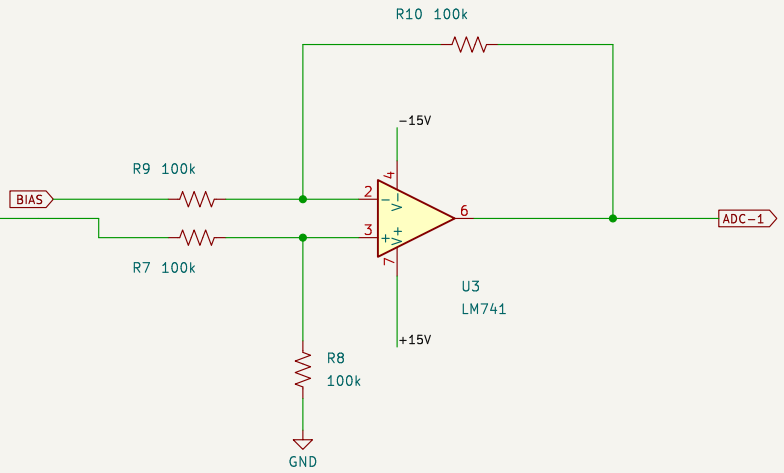

COMMAND −> ADC−1 (0 to 5 V)

Hover−bias adjustment

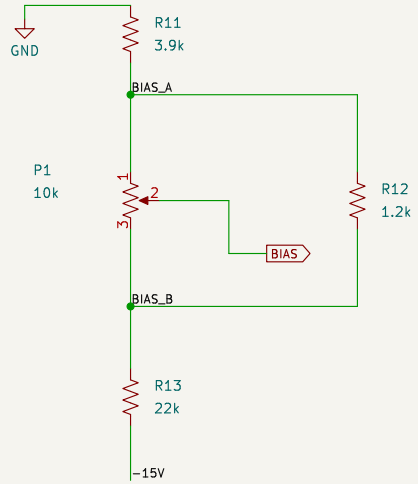

Set DAC−1 = DAC−0; trim P1

until ADC−1 = +2.500 V.

DAQ connections



J1 pin 2 and pin 4 share DAC−0.

J1/J2 numbers are schematic mappings.

LM741: 2 = IN−; 3 = IN+; 4 = −15 V; 6 = OUT; 7 = +15 V.

Supply input