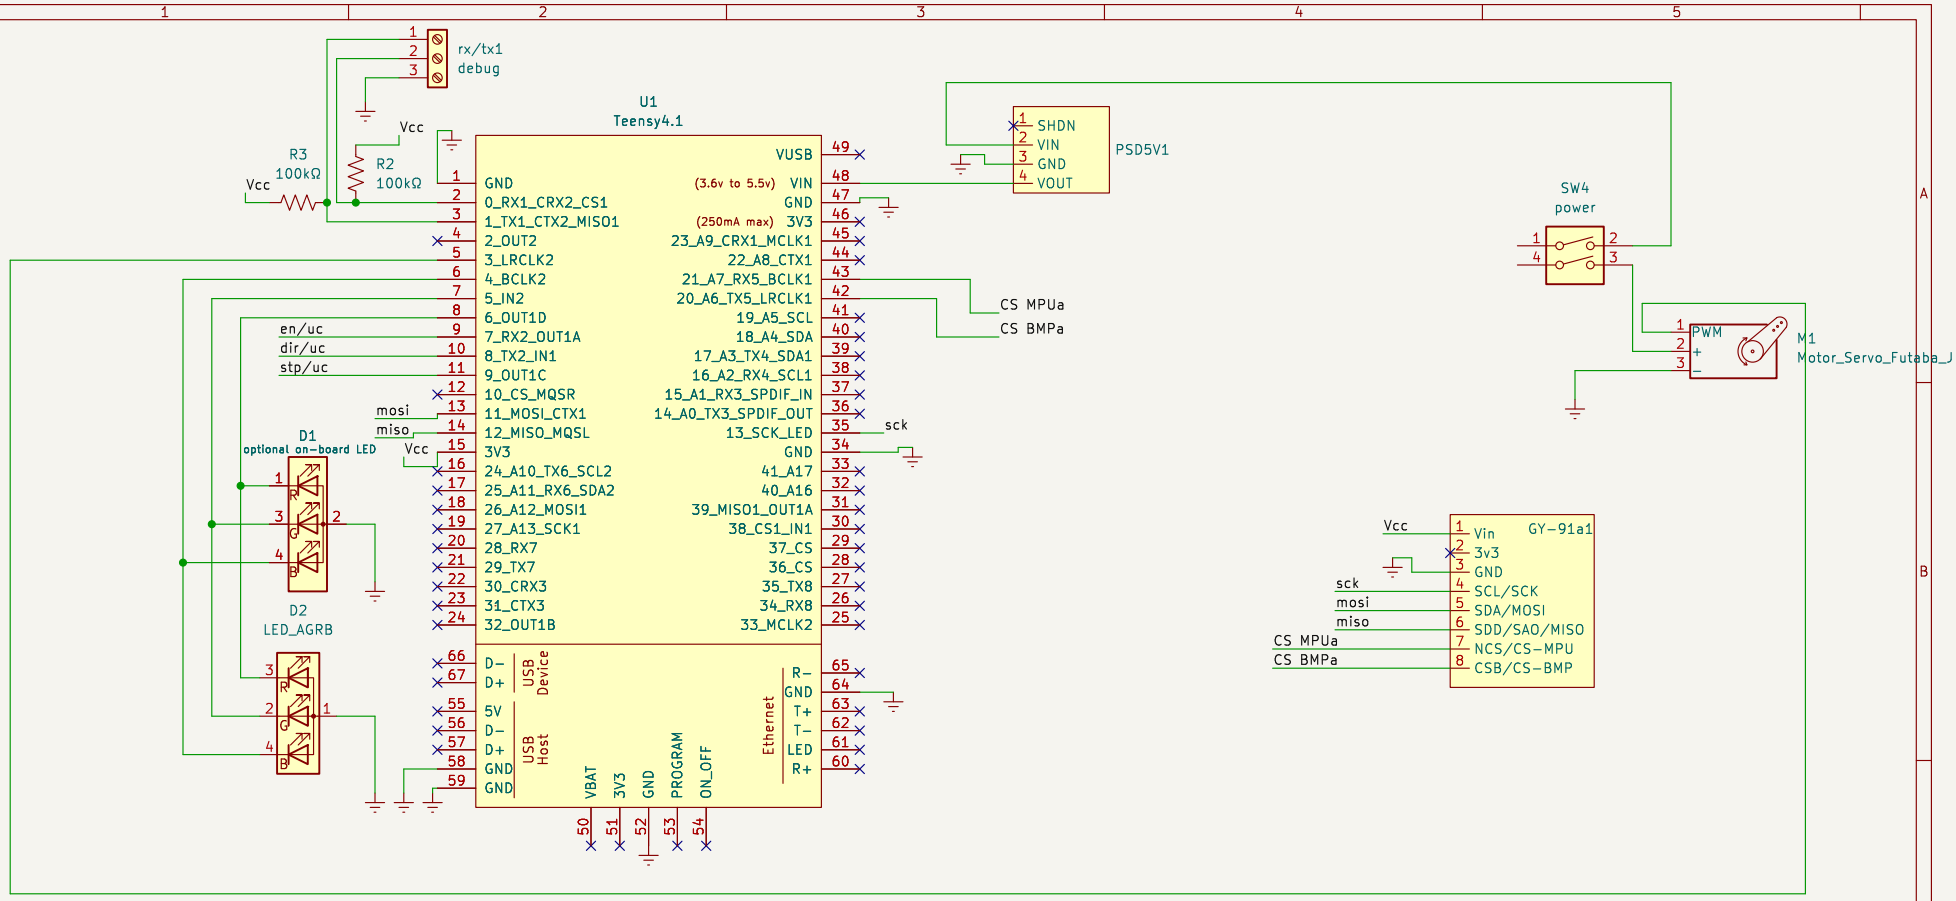


ACS Carrier: 2025 Baby Tweak

1. Thicc trace – Napkin heat transfer says steady state internal temp is 97C (Protip: Don't paint the rocket flat black). FR-4 melts around 135C, knock 25C off, max rise is then 13C.
   1oz copper on external layer + 3.5A = 1.44mm trace thickness (https://www.cirexx.com/trace-width-calculator/), future proofing for max 5.8A current with 3mm traces.

2. XA's are rated to 3A, servo wants up to 5.8A, which is a problem. No kill like overkill: XA headers replaced with VH. oh lawd she conducting

3. Added place for an optional SMD LED, less random wire bits during testing.

4. Earth pads are rounded squares.

5. Changed pads to only front/back and connected layers.

SVH-21T-P1.1 contacts fit AWG22-18. $22 icrimp sn-28 works great.

Rat hands out.

Aggie Blue Burners

Sheet: /
File: taurus_PCB_Jan2025.kicad_sch

Title: Aldebaran Teensy 4.1ver

Size: USLetter	Date: 2025-01-03	**Rev: 3**
KiCad E.D.A. 8.0.7		Id: 1/1