


Anchor fraction sensitivity: WOVEN is robust above ~15% anchors on concentrated signal

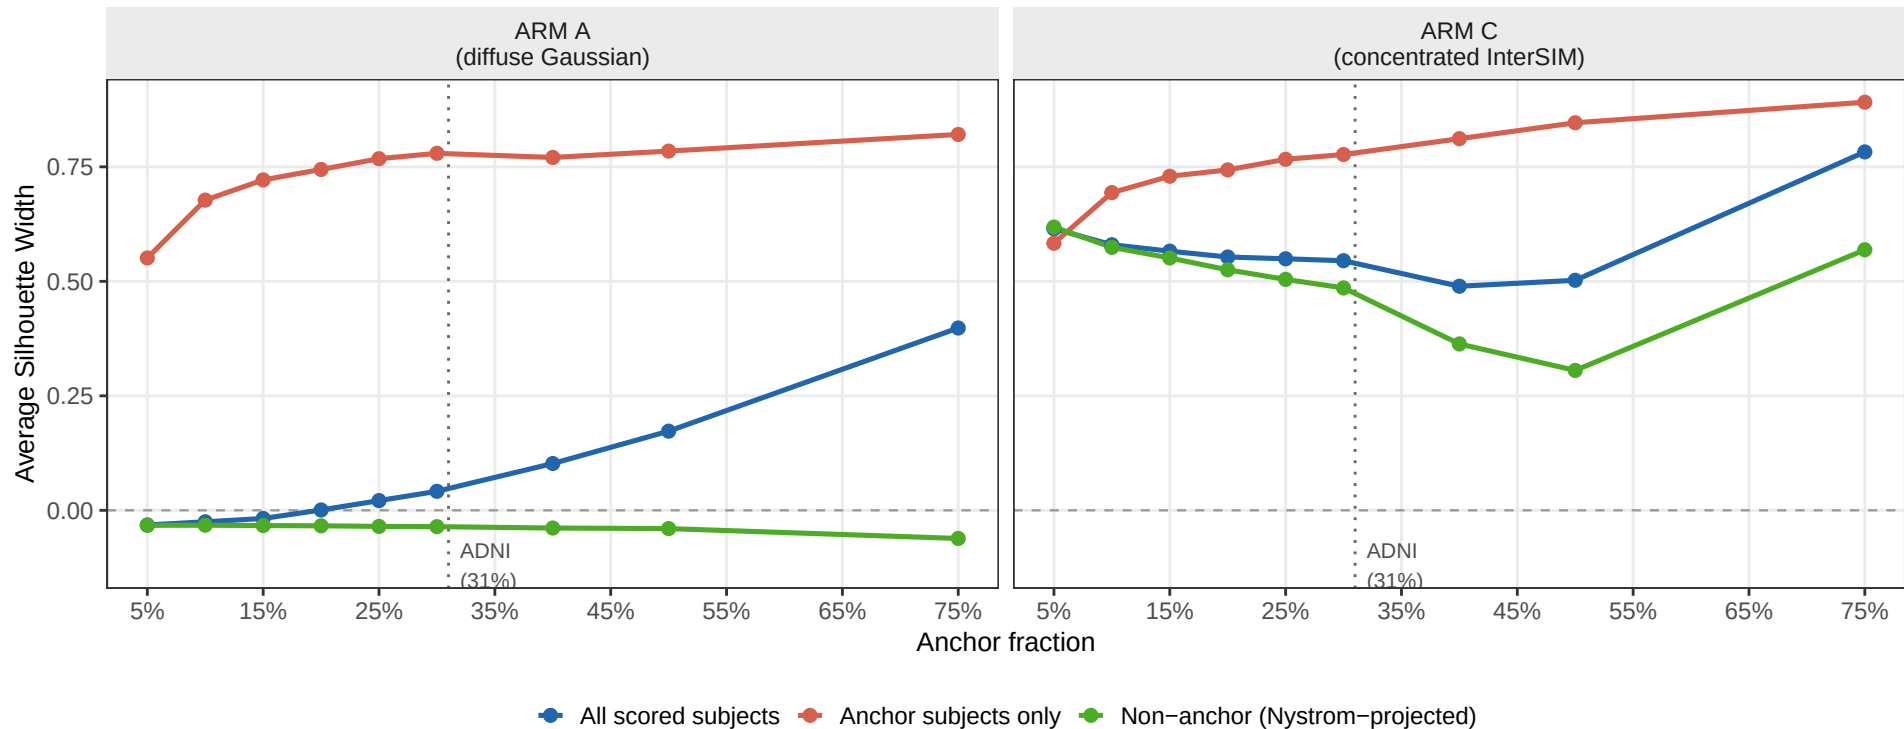

Vertical dotted line = ADNI anchor fraction (31%). ARM A: non-anchor silhouette flat regardless of anchor fraction (SNR bottleneck). ARM C: non-anchor silhouette degrades only below ~10% anchors (anchor-quantity bottleneck).