




VO Throughput vs P-EDCA STAs — nSta=30, 0.1Mbps (avg of 10 runs)

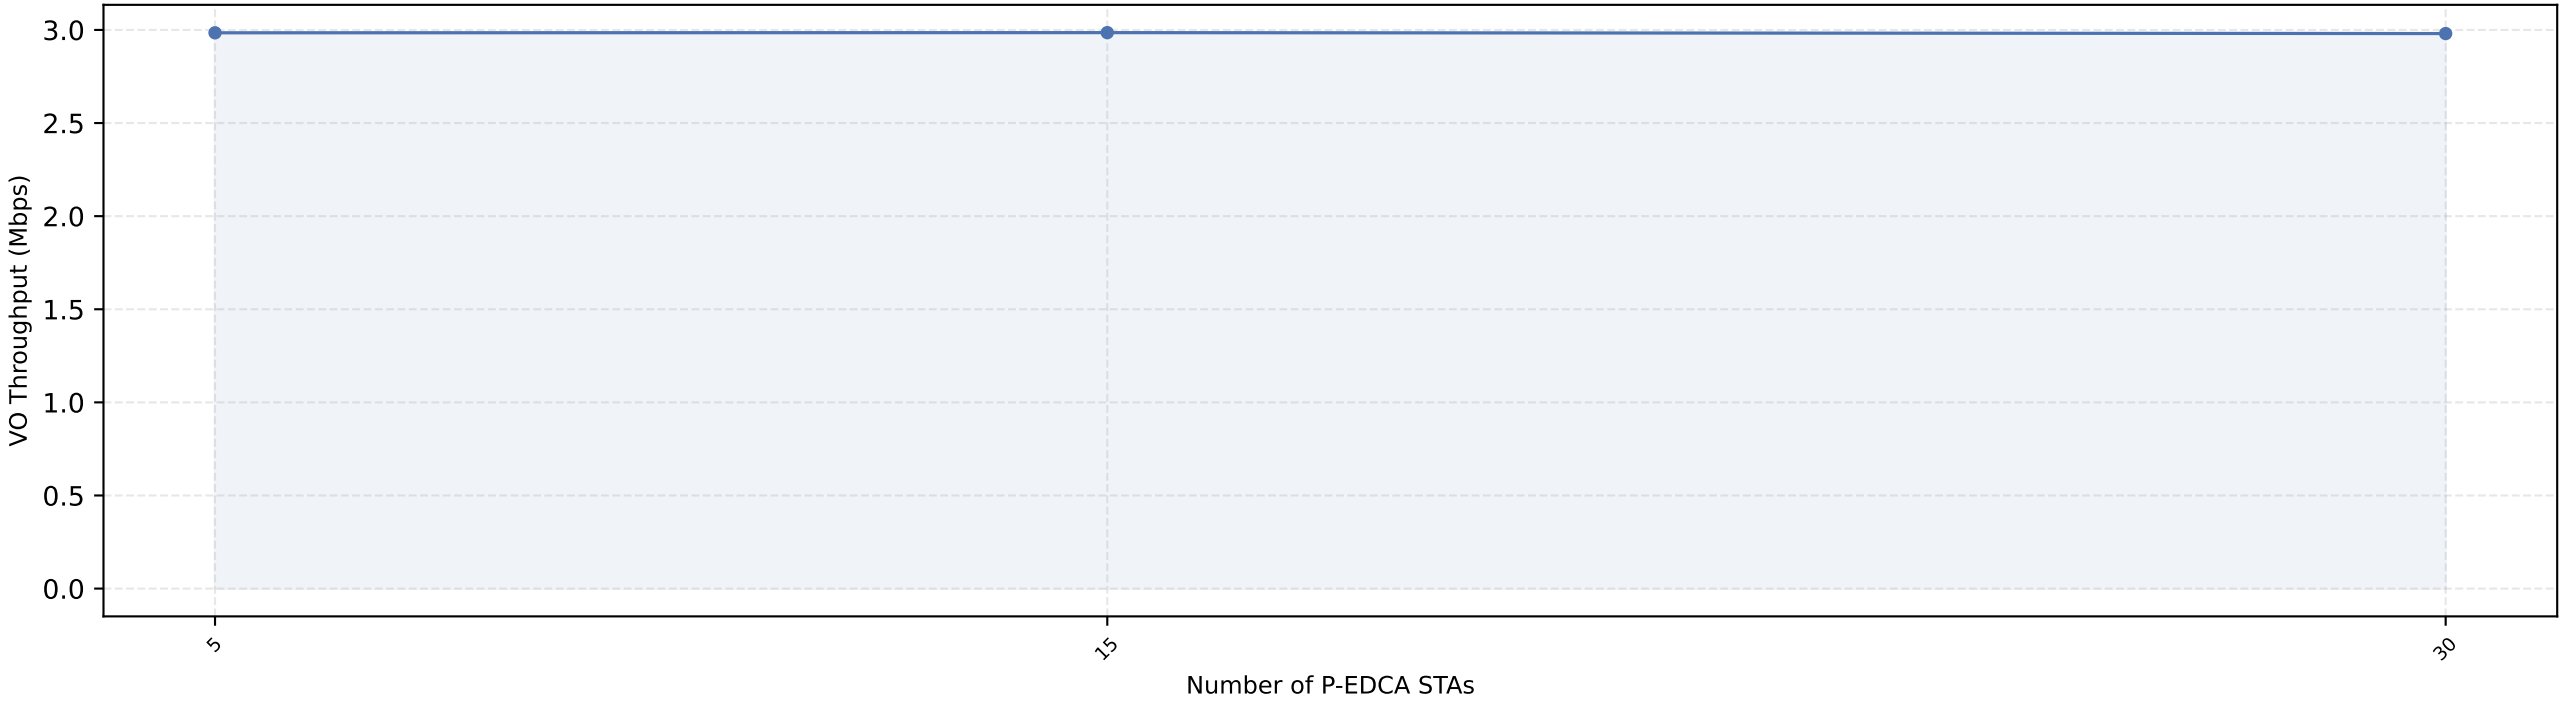


VO Packet Loss vs P-EDCA STAs — nSta=30, 0.1Mbps (avg of 10 runs)

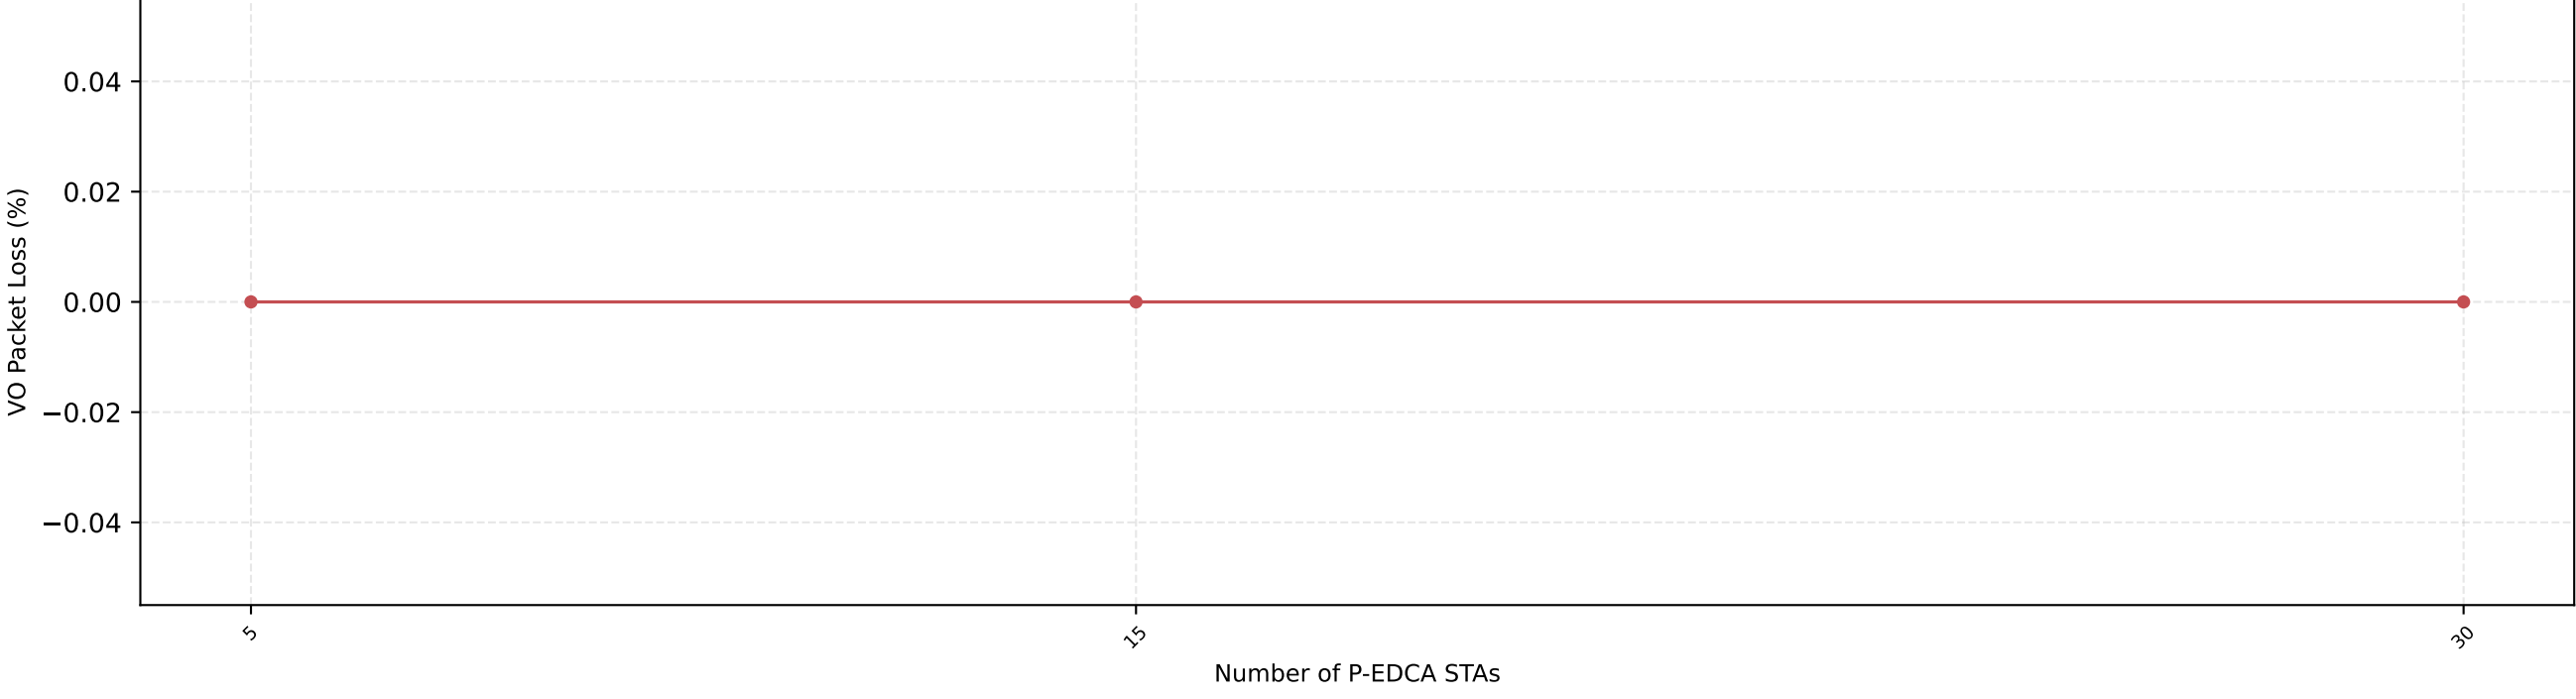


VO Avg MAC Delay vs P-EDCA STAs — nSta=30, 0.1Mbps (avg of 10 runs)

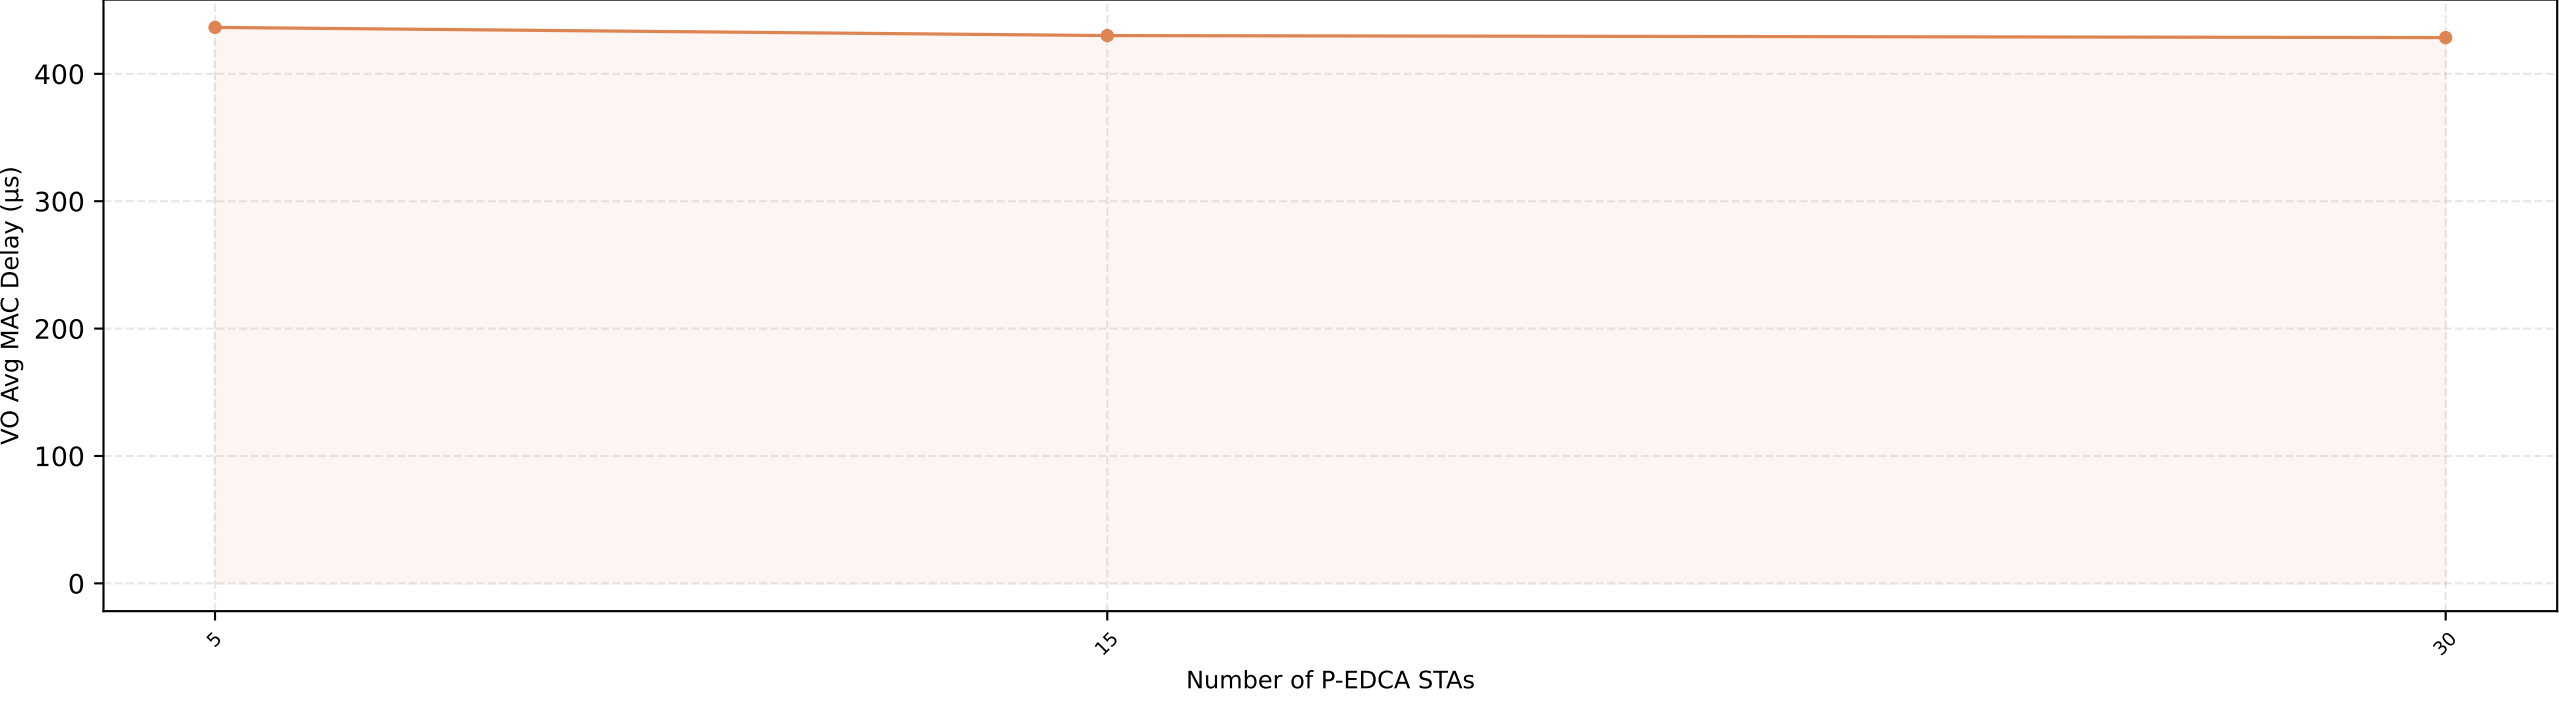


Channel Idle Time vs P-EDCA STAs — nSta=30, 0.1Mbps (avg of 10 runs)

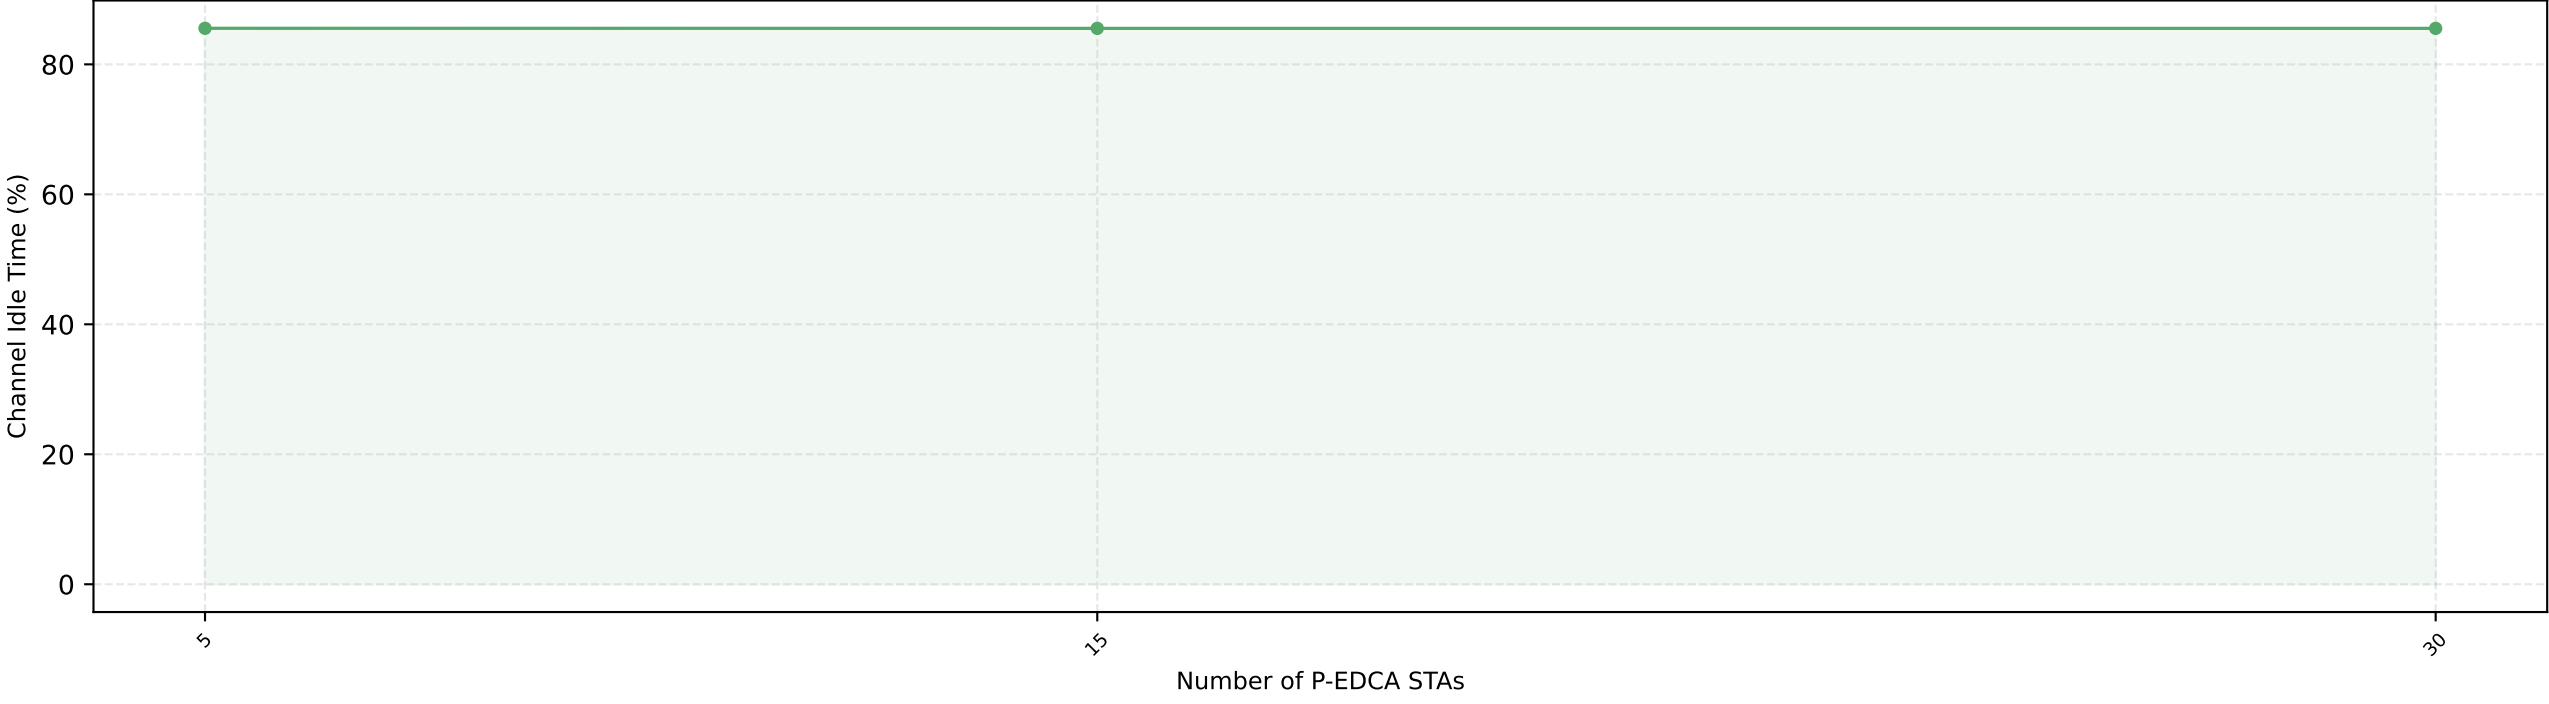

Per-P-EDCA-STA: pedcaTx / edcaTx — nSta=30, 0.1Mbps (avg of 10 runs)

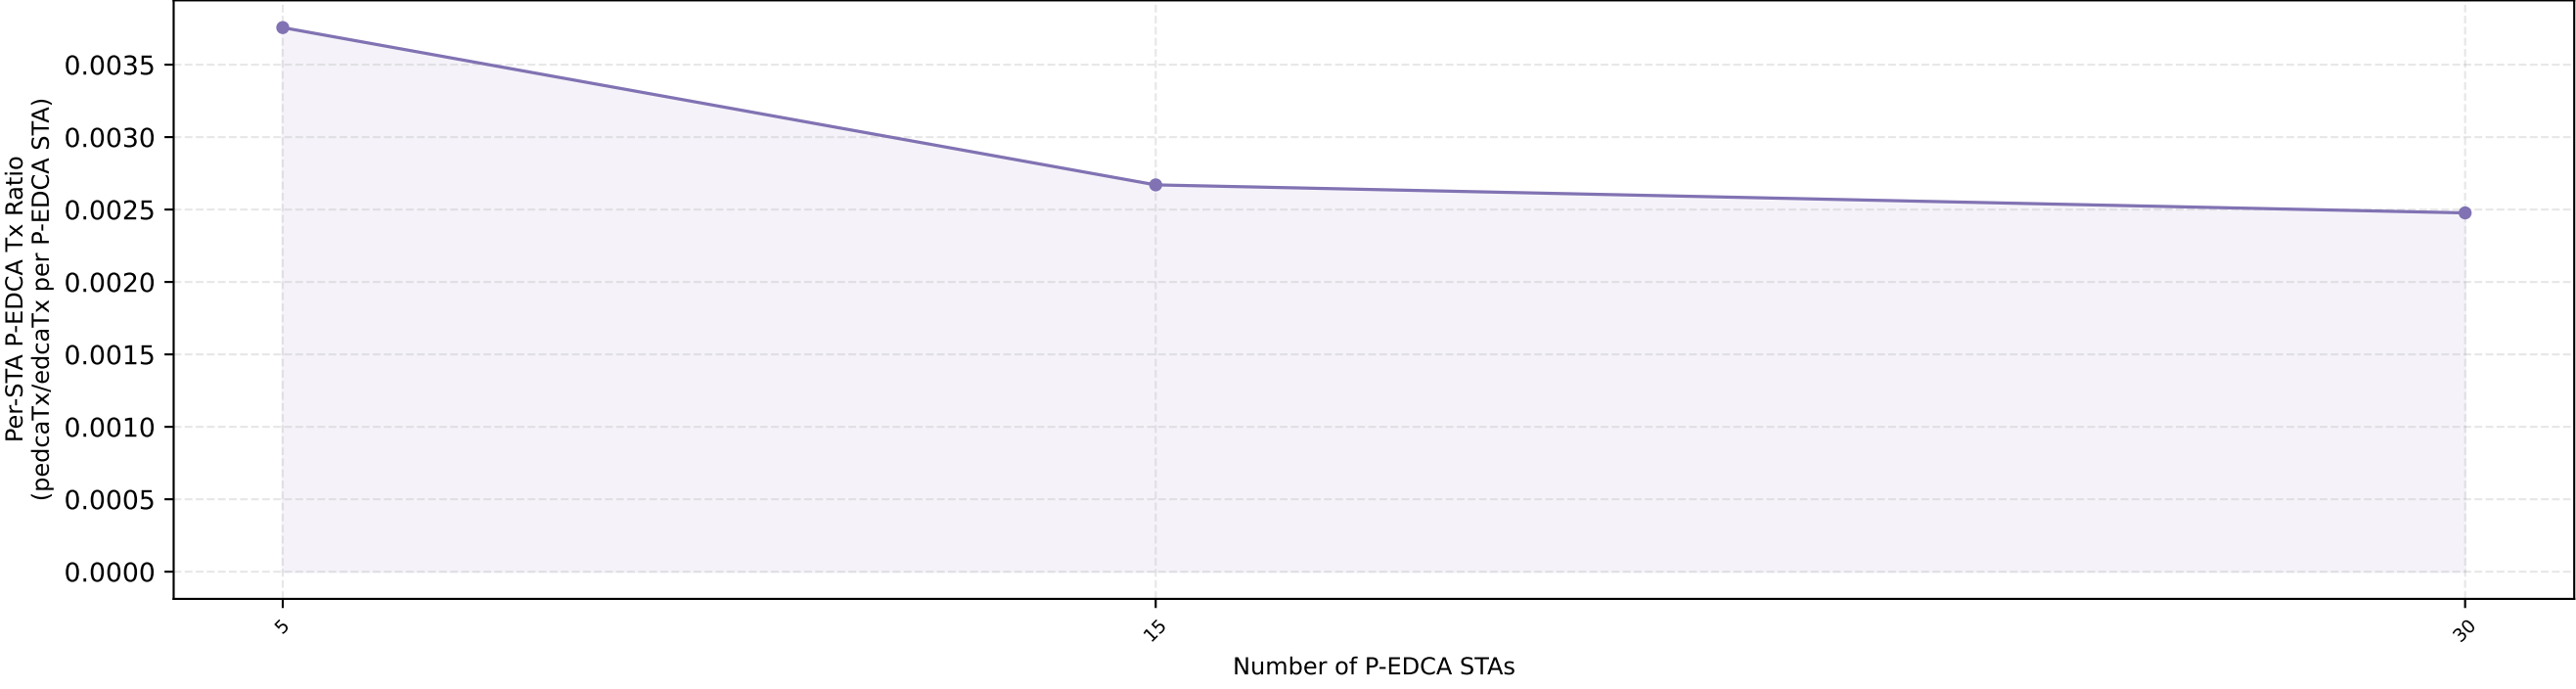

P-EDCA Success Rate: pedcaTx / pedcaAttempt — nSta=30, 0.1Mbps (avg of 10 runs)

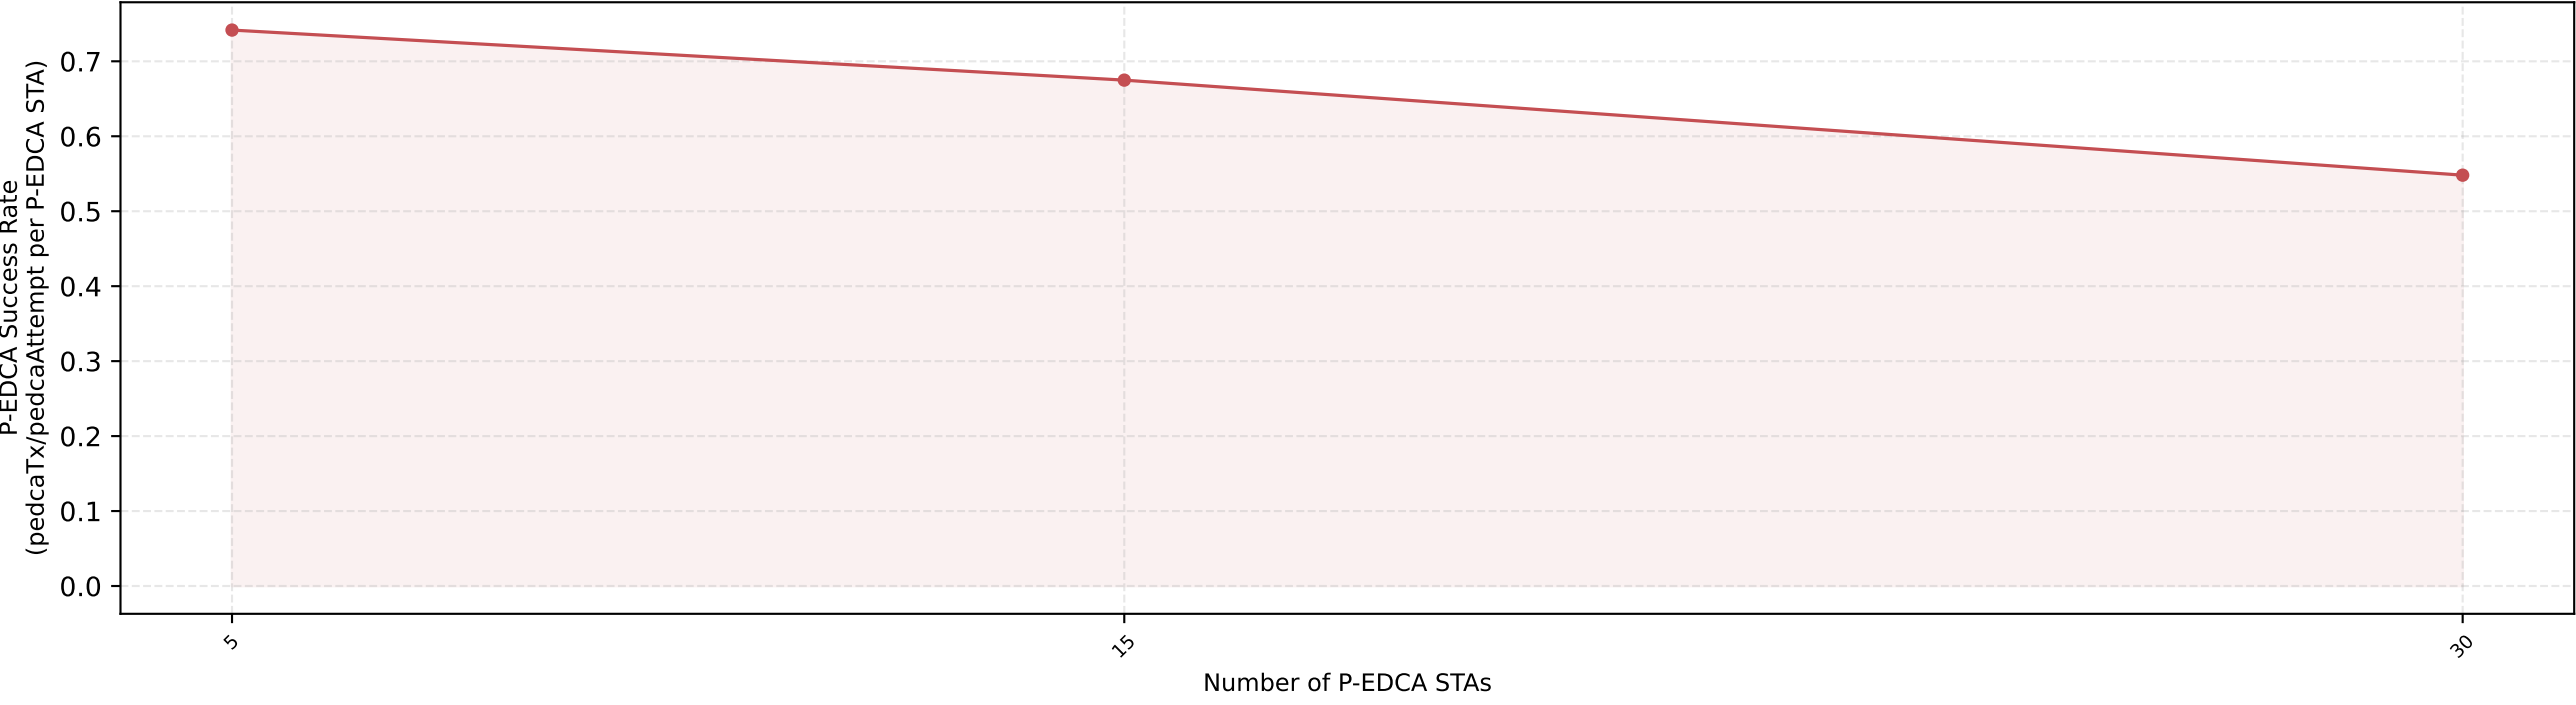

P-EDCA Tx / Total EDCA Tx — nSta=30, 0.1Mbps (avg of 10 runs)

