

Homework UPDATE ME

Nathan Rose

April 7, 2022

1. Consider the LTI SISO system with matrices:

$$A = \begin{bmatrix} 2 & 1 & 0 \\ 0 & 2 & 1 \\ 0 & 0 & 2 \end{bmatrix} B = \begin{bmatrix} 0 \\ 0 \\ 1 \end{bmatrix} \quad (1)$$

Assuming all state variables can be measures, find a state feedback control law such that the eigenvalues of the closed loop system become: $\lambda_{d_1} = \lambda_{d_2} = \lambda_{d_3} = -1$

- (a) Choose the desired eigenvalues and obtain the desired characteristic equation

$$\Delta_d(s) = (s - \lambda_1)(s - \lambda_2)(s - \lambda_3) = (s + 1)(s + 1)(s + 1) = s^3 + 3s^2 + 3s + 1 \quad (2)$$

$$\bar{\alpha} = [3 \quad 3 \quad 1] \quad (3)$$

- (b) Find the actual characteristic equation

$$\Delta(s) = |sI - A| = \begin{vmatrix} s-2 & -1 & 0 \\ 0 & s-2 & -1 \\ 0 & 0 & s-2 \end{vmatrix} \quad (4)$$

$$\Delta(s) = \begin{vmatrix} s-2 & -1 & 0 \\ 0 & s-2 & -1 \\ 0 & 0 & s-2 \end{vmatrix} = (s-2)^3 = s^3 - 6s^2 + 12s - 8 \quad (5)$$

$$\alpha = [-6 \quad 12 \quad -8] \quad (6)$$

- (c) Calculate \bar{k}

$$\bar{k} = \bar{\alpha} - \alpha = [3 \quad 3 \quad 1] - [-6 \quad 12 \quad -8] = [9 \quad -9 \quad 9] \quad (7)$$

(d) Calculate P

$$Q = P^{-1} = \begin{bmatrix} b & AB & A^2B \end{bmatrix} \begin{bmatrix} 1 & \alpha_1 & \alpha_2 \\ 0 & 1 & \alpha_1 \\ 0 & 0 & 1 \end{bmatrix} = \begin{bmatrix} 0 & 0 & 1 \\ 0 & 1 & 4 \\ 1 & 2 & 4 \end{bmatrix} \begin{bmatrix} 1 & -6 & 12 \\ 0 & 1 & -6 \\ 0 & 0 & 1 \end{bmatrix} = \begin{bmatrix} 0 & 0 & 1 \\ 0 & 1 & -2 \\ 1 & -4 & 4 \end{bmatrix} \quad (8)$$

$$P = Q^{-1} = \begin{bmatrix} 0 & 0 & 1 \\ 0 & 1 & -2 \\ 1 & -4 & 4 \end{bmatrix}^{-1} = \begin{bmatrix} 4 & 4 & 1 \\ 2 & 1 & 0 \\ 1 & 0 & 0 \end{bmatrix} \quad (9)$$

(e) Calculate k

$$k = \bar{k}P = \begin{bmatrix} 9 & -9 & 9 \end{bmatrix} \begin{bmatrix} 4 & 4 & 1 \\ 2 & 1 & 0 \\ 1 & 0 & 0 \end{bmatrix} = \begin{bmatrix} 27 & 27 & 9 \end{bmatrix} \quad (10)$$

(f) Confirm eigenvalues of $A - bk$

$$A - bk = \begin{bmatrix} 2 & 1 & 0 \\ 0 & 2 & 1 \\ 0 & 0 & 2 \end{bmatrix} \begin{bmatrix} 0 \\ 0 \\ 1 \end{bmatrix} \begin{bmatrix} 27 & 27 & 9 \end{bmatrix} = \begin{bmatrix} 2 & 1 & 0 \\ 0 & 2 & 1 \\ -27 & -27 & -7 \end{bmatrix} \quad (11)$$

eigenvalues are: $-1, -1, -1$

2. Consider a LTI MIMO system with matrices:

$$A = \begin{bmatrix} -2 & -2 & 0 \\ 0 & 0 & 1 \\ 0 & -3 & -4 \end{bmatrix} B = \begin{bmatrix} 1 & 0 \\ 0 & 0 \\ 0 & 1 \end{bmatrix} C = \begin{bmatrix} 1 & 0 & 1 \\ 0 & 1 & 0 \end{bmatrix} \quad (12)$$

Assuming all state variables can be measured find a state feedback control law such that the eigenvalues of the closed loop system become: $\lambda_{d1} = \lambda_{d2} = -3$ and $\lambda_{d3} = -4$. For this purpose use:

(a) Method 1 in slide 106 and verify the eigenvalues of the closed loop system

i. For each desired eigenvalue λ_{d_i} : solve:

$$[\lambda_{d_i}I - A \quad B] \bar{\phi}_i = \bar{0} \quad (13)$$

A. 1, 2

$$\begin{bmatrix} -1 & 2 & 0 & 1 & 0 \\ 0 & -3 & -1 & 0 & 0 \\ 0 & 3 & 1 & 0 & 1 \end{bmatrix} \phi_i = \bar{0} \quad (14)$$

$$\phi_1 = \begin{bmatrix} 1 \\ 0 \\ 0 \\ 1 \\ 0 \end{bmatrix} \quad \phi_2 = \begin{bmatrix} 2 \\ 1 \\ -3 \\ 0 \\ 0 \end{bmatrix} \quad (15)$$

B. 3

$$\begin{bmatrix} -2 & 2 & 0 & 1 & 0 \\ 0 & -4 & -1 & 0 & 0 \\ 0 & 3 & 0 & 0 & 1 \end{bmatrix} \phi_3 = \bar{0} \quad (16)$$

$$phi_3 = \begin{bmatrix} 1 \\ 1 \\ -4 \\ 0 \\ -3 \end{bmatrix} \quad (17)$$

C. split the matrix

$$[\bar{\psi}_1 \quad \bar{\psi}_2 \quad \bar{\psi}_3] = \begin{bmatrix} 1 & 2 & 1 \\ 0 & 1 & 1 \\ 0 & -3 & -4 \end{bmatrix} \quad (18)$$

$$[K\bar{\psi}_1 \quad K\bar{\psi}_2 \quad K\bar{\psi}_3] = \begin{bmatrix} 1 & 0 & 0 \\ 0 & 0 & -3 \end{bmatrix} \quad (19)$$

D. Solve for K

$$K = [K\bar{\psi}_1 \quad K\bar{\psi}_2 \quad K\bar{\psi}_3] [\bar{\psi}_1 \quad \bar{\psi}_2 \quad \bar{\psi}_3]^{-1} = \begin{bmatrix} 0 & 2 & 2 \\ -\frac{3}{2} & -\frac{3}{2} & 3 \end{bmatrix} \begin{bmatrix} 1 & 2 & 0 \\ 1 & 1 & -1 \\ -\frac{3}{2} & -\frac{3}{2} & 2 \end{bmatrix}^{-1} \quad (20)$$

$$K = \begin{bmatrix} 0 & 2 & 2 \\ -\frac{3}{2} & -\frac{3}{2} & 3 \end{bmatrix} \begin{bmatrix} 1 & 2 & 0 \\ 1 & 1 & -1 \\ -\frac{3}{2} & -\frac{3}{2} & 2 \end{bmatrix}^{-1} = \begin{bmatrix} 1 & -5 & -1 \\ 0 & 9 & 3 \end{bmatrix} \quad (21)$$

E. evalute eigenvalues of feedback matrix

$$A - BK = \begin{bmatrix} -2 & -2 & 0 \\ 0 & 0 & 1 \\ 0 & -3 & -4 \end{bmatrix} - \begin{bmatrix} 1 & 0 \\ 0 & 0 \\ 0 & 1 \end{bmatrix} \begin{bmatrix} 1 & -5 & -1 \\ 0 & 9 & 3 \end{bmatrix} = \begin{bmatrix} -3 & 3 & 1 \\ 0 & 0 & 1 \\ 0 & -12 & -7 \end{bmatrix} \quad (22)$$

eigenvalues of this are: $-3, -3, -4$

(b) Method 2 in slide 107 and verify the eigenvalues of the closed loop system

i. get a k_V where you have distinct eigenvalues

already done $k_v = 0$

ii. select a \bar{v} such that $(A, b\bar{v})$ is controllable:

$$\bar{v} = \begin{bmatrix} 0 \\ 1 \end{bmatrix} \quad (23)$$

$$Bv = \begin{bmatrix} 0 \\ 0 \\ 1 \end{bmatrix} \quad (24)$$

$$\begin{bmatrix} A^2Bv & ABv & Bv \end{bmatrix} = \begin{bmatrix} -2 & 0 & 0 \\ -4 & 1 & 0 \\ -13 & -4 & 1 \end{bmatrix} \quad (25)$$

full row rank \implies controllable

$$A = \begin{bmatrix} -2 & -2 & 0 \\ 0 & 0 & 1 \\ 0 & -3 & -4 \end{bmatrix} \quad B = \begin{bmatrix} 0 \\ 0 \\ 1 \end{bmatrix} \quad (26)$$

$$\Delta_d(s) = (s+3)(s+3)(s+4) = (s^2 + 6s + 9)(s+4) \quad (27)$$

$$\Delta_d(s) = s^3 + 10s^2 + 33s + 36 \quad (28)$$

$$\bar{\alpha} = [10 \quad 33 \quad 36] \quad (29)$$

$$\Delta(s) = |sI - A| = \begin{vmatrix} s+2 & 2 & 0 \\ 0 & s & -1 \\ 0 & 3 & s+4 \end{vmatrix} = (s+2)((s)(s+4) + 3) \quad (30)$$

$$\Delta(s) = (s+2)(s^2 + 4s + 3) = s^3 + 6s^2 + 11s + 6 \quad (31)$$

$$\alpha = [6 \quad 11 \quad 6] \quad (32)$$

$$\bar{k} = [4 \quad 22 \quad 30] \quad (33)$$

$$Q = P^{-1} = \begin{bmatrix} 0 & 0 & -2 \\ 0 & 1 & -4 \\ 1 & -4 & 13 \end{bmatrix} \begin{bmatrix} 1 & 6 & 11 \\ 0 & 1 & 6 \\ 0 & 0 & 1 \end{bmatrix} = \begin{bmatrix} 0 & 0 & -2 \\ 0 & 1 & 2 \\ 1 & 2 & 0 \end{bmatrix} \quad (34)$$

$$P = Q^{-1} = \begin{bmatrix} 0 & 0 & -2 \\ 0 & 1 & 2 \\ 1 & 2 & 0 \end{bmatrix} = \begin{bmatrix} -2 & -2 & 1 \\ 1 & 1 & 0 \\ -\frac{1}{2} & 0 & 0 \end{bmatrix} \quad (35)$$

$$k = \bar{k}P = [4 \quad 22 \quad 30] \begin{bmatrix} -2 & -2 & 1 \\ 1 & 1 & 0 \\ -\frac{1}{2} & 0 & 0 \end{bmatrix} = [-1 \quad 14 \quad 4] \quad (36)$$

$$K = K_v + \bar{v}k = 0 + \begin{bmatrix} 0 \\ 1 \end{bmatrix} [-1 \quad 14 \quad 4] = \begin{bmatrix} 0 & 0 & 0 \\ -1 & 14 & 4 \end{bmatrix} \quad (37)$$

$$A - Bk = \begin{bmatrix} 0 & 0 & 0 \\ -1 & 14 & 4 \\ 4 & -56 & -16 \end{bmatrix} \quad (38)$$

eigenvalues are $-3, -3, -4$

3. For the system in problem 2, design an output feedback control law such that two of the eigenvalues of the closed loop system become -3 and -4. Verify the eigenvalues of the closed loop system.

Assuming this question is asking to design an observer shooting for $-4, -3, -4$

$$[\mu_{d_i}I - A^T \quad C^T] \Phi_i = 0 \quad (39)$$

$$\begin{bmatrix} \mu_{d_i} + 2 & 0 & 0 & 1 & 0 \\ 2 & \mu_{d_i} & 3 & 0 & 1 \\ 0 & -1 & \mu_{d_i} + 4 & 1 & 0 \end{bmatrix} \Phi_i = 0 \quad (40)$$

$$\begin{bmatrix} -2 & 0 & 0 & 1 & 0 \\ 2 & -4 & 3 & 0 & 1 \\ 0 & -1 & 0 & 1 & 0 \end{bmatrix} \Phi_{1,2} = 0 \quad (41)$$

$$\Phi_{1,2} = \begin{bmatrix} 1 & 1 \\ 2 & 2 \\ 2 & 0 \\ 2 & 2 \\ 0 & 6 \end{bmatrix} \quad (42)$$

$$\begin{bmatrix} -1 & 0 & 0 & 1 & 0 \\ 2 & -3 & 3 & 0 & 1 \\ 0 & -1 & 1 & 1 & 0 \end{bmatrix} \Phi_{1,2} = 0 \quad (43)$$

$$\Phi_3 = \begin{bmatrix} 0 \\ 1 \\ 1 \\ 0 \\ 0 \end{bmatrix} \quad (44)$$

$$\bar{\Phi} = \begin{bmatrix} 1 & 1 & 0 \\ 2 & 2 & 1 \\ 2 & 0 & 1 \end{bmatrix} \quad (45)$$

$$L^T \bar{\Phi} = \begin{bmatrix} 2 & 2 & 0 \\ 0 & 6 & 0 \end{bmatrix} \quad (46)$$

$$\begin{bmatrix} 2 & 2 & 0 \\ 0 & 6 & 0 \end{bmatrix} \bar{\Phi}^{-1} = L = \begin{bmatrix} 2 & 0 \\ 0 & 3 \\ 0 & -3 \end{bmatrix} \quad (47)$$

checking with python values are correct

4. Consider the nonlinear control system in which it is desired to stabilize the origin

$$\dot{x}_1 = -2x_1 + x_2 + \sin(x_2) \quad (48)$$

$$\dot{x}_2 = -x_2 \cos(x_1) + \cos(2x_1)u \quad (49)$$

- (a) verify that $(x_1, x_2, u) = (0, 0, 0)$ is an equilibrium.

$$\dot{x}_1 = 0 + 0 + 0 = 0 \quad (50)$$

$$\dot{x}_2 = 0(1) + 1(0) = 0 \quad (51)$$

yes

- (b) linearize the system about the origin

$$\dot{x}_1 = -2x_1 + x_2 = -2x_1 + 2x_2 \quad (52)$$

$$\dot{x}_1 = -x_2 + u \quad (53)$$

$$\dot{x} = \begin{bmatrix} -2 & 1 \\ 0 & -1 \end{bmatrix} x + \begin{bmatrix} 0 \\ 1 \end{bmatrix} u \quad (54)$$

- (c) Study the controllability of the linearized system

$$\begin{bmatrix} B & AB \end{bmatrix} = \begin{bmatrix} 0 & 1 \\ 1 & -1 \end{bmatrix} \quad (55)$$

full rank, controllable

- (d) Assuming both state variables can be measured, find a state feedback control law such that both eigenvalues of the linearized closed-loop system -4

$$\Delta_d(s) = (s + 4)^2 = s^2 + 8s + 16 \quad (56)$$

$$\bar{\alpha} = \begin{bmatrix} 8 & 16 \end{bmatrix} \quad (57)$$

$$\Delta(s) = |sI - A| = \begin{vmatrix} s+2 & -1 \\ 0 & s+1 \end{vmatrix} = s^2 + 3s + 2 \quad (58)$$

$$\alpha = \begin{bmatrix} 3 & 2 \end{bmatrix} \quad (59)$$

$$\bar{k} = \bar{\alpha} - \alpha = \begin{bmatrix} 5 & 14 \end{bmatrix} \quad (60)$$

$$Q = P^{-1} = \begin{bmatrix} 0 & 1 \\ 1 & -1 \end{bmatrix} \begin{bmatrix} 1 & 3 \\ 0 & 1 \end{bmatrix} = \begin{bmatrix} 0 & 1 \\ 1 & 2 \end{bmatrix} \quad (61)$$

$$P = Q^{-1} = \begin{bmatrix} 0 & 1 \\ 1 & 2 \end{bmatrix}^{-1} = \begin{bmatrix} -2 & 1 \\ 1 & 0 \end{bmatrix} \quad (62)$$

$$k = \bar{k}P = \begin{bmatrix} 5 & 14 \end{bmatrix} \begin{bmatrix} -2 & 1 \\ 1 & 0 \end{bmatrix} = \begin{bmatrix} 4 & 5 \end{bmatrix} \quad (63)$$

confirming:

$$A - bk = \begin{bmatrix} -2 & 1 \\ 0 & -1 \end{bmatrix} - \begin{bmatrix} 0 \\ 1 \end{bmatrix} \begin{bmatrix} 4 & 5 \end{bmatrix} = \begin{bmatrix} -2 & 1 \\ 0 & -1 \end{bmatrix} - \begin{bmatrix} 0 & 0 \\ 4 & 5 \end{bmatrix} = \begin{bmatrix} -2 & 1 \\ -4 & -6 \end{bmatrix} \quad (64)$$

eigenvalues are: $\lambda = -4, -4$

- (e) Apply the state feedback control law obtained in part d to the non-linear system above. Simulate and plot the state response and closed-loop system using the following initial conditions and briefly interpret the results:

i. $\bar{x}_0 = \begin{bmatrix} 1 \\ 0 \end{bmatrix}$

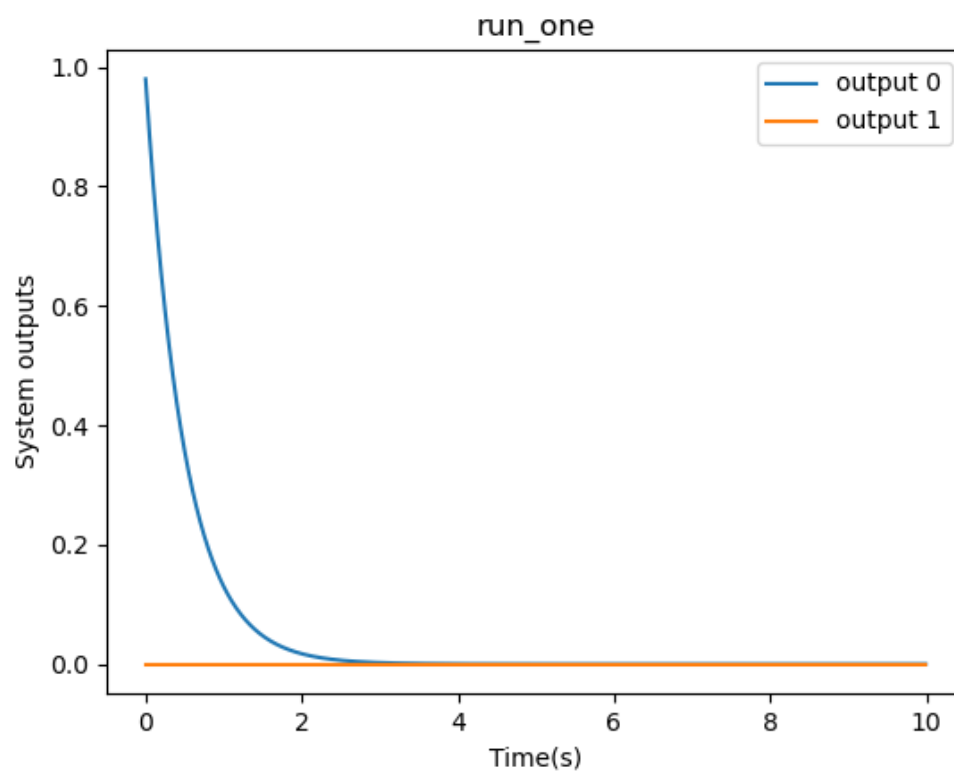


Figure 1: Run One

ii. $\bar{x}_0 = \begin{bmatrix} 1 \\ 1 \end{bmatrix}$

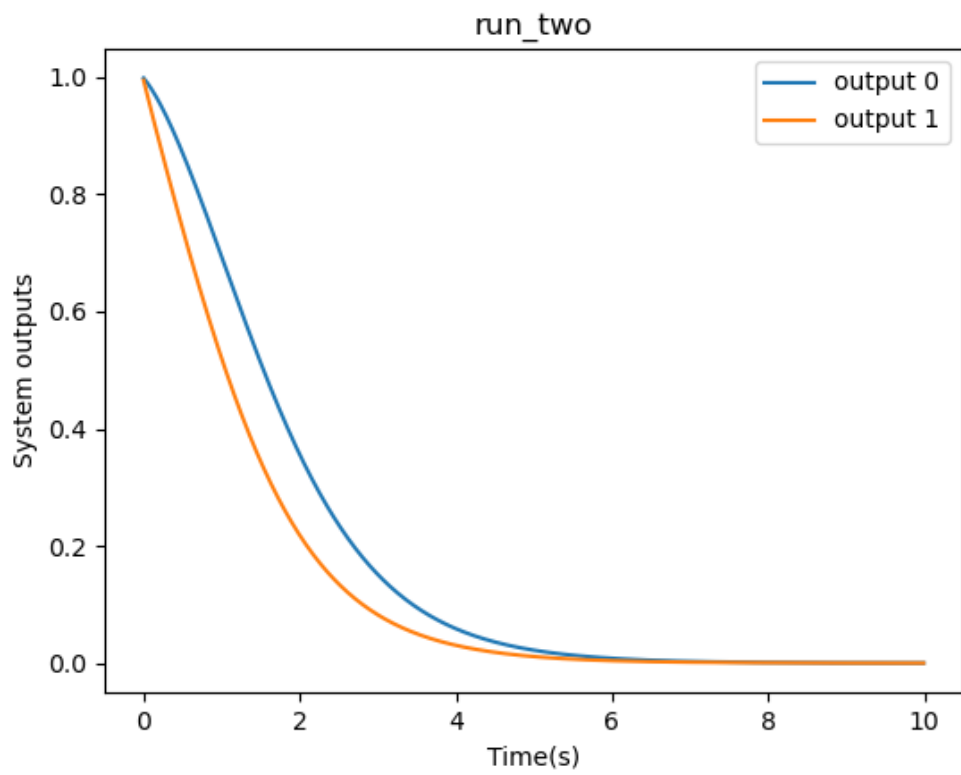


Figure 2: Run Two

iii. $\bar{x}_0 = \begin{bmatrix} -1 \\ 1 \end{bmatrix}$

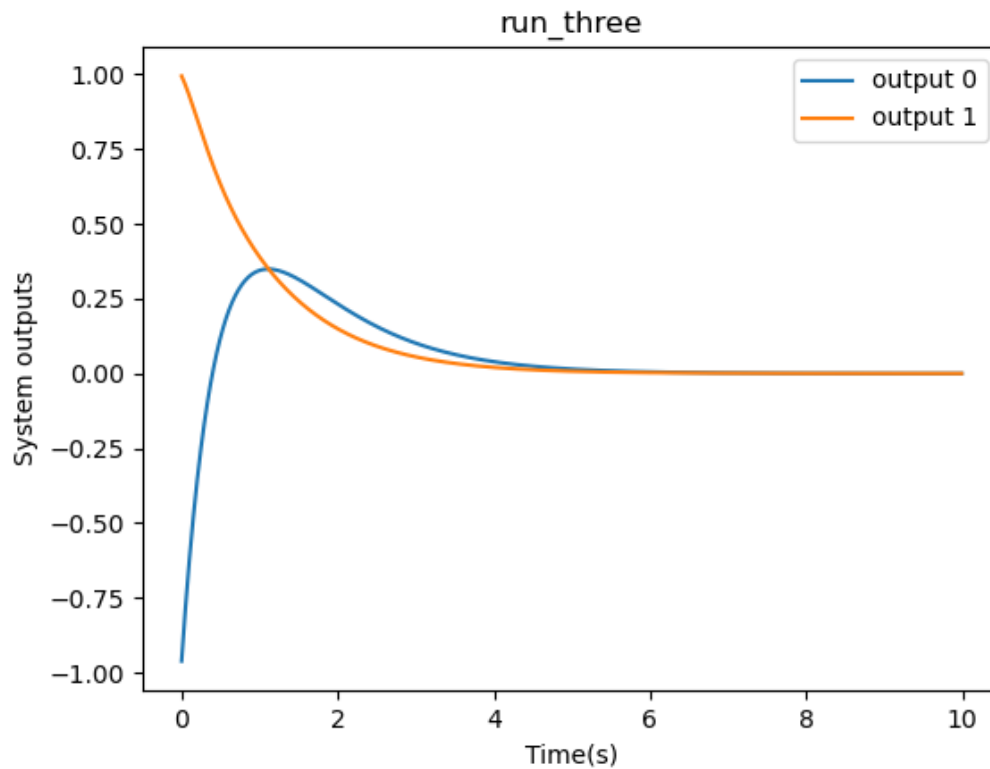


Figure 3: Run Three

as can be seen from Figure 1, Figure 2, and Figure 3. The system takes longer to converge and has a larger overshoot the further it is from point where the linearization was taken.

Just for fun, I wanted to see how the system would perform at a point much further out, and the result can be seen below in Figure 4. As can be seen.... it can't really control the system and bring the outputs to 0, thus showing the limits of linearizing a non-linear system.

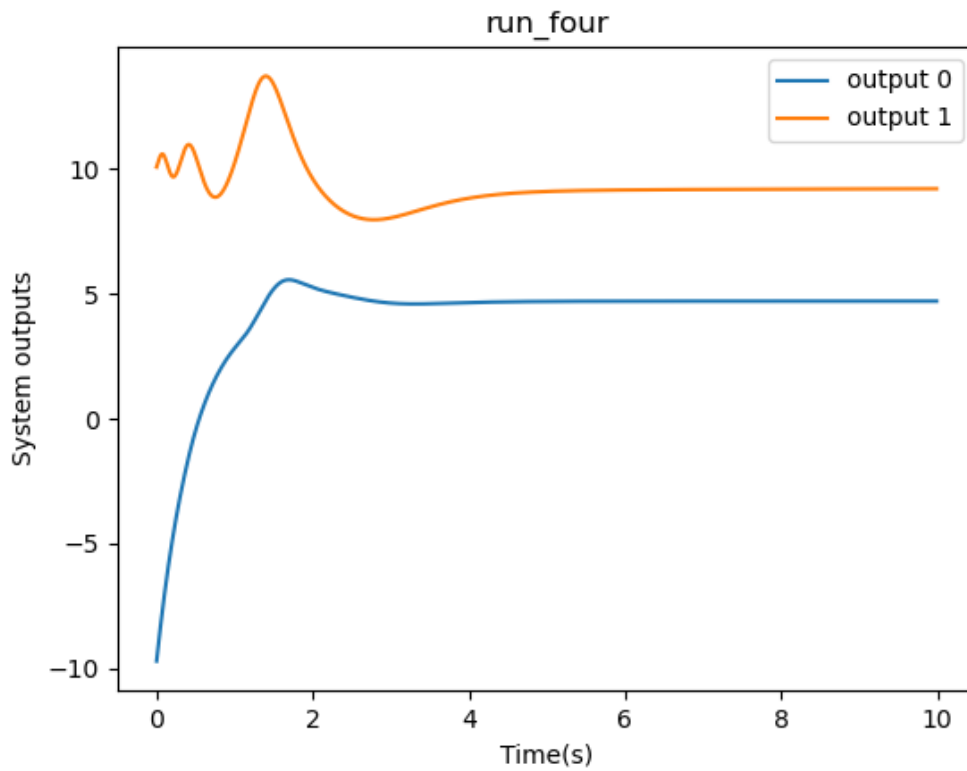


Figure 4: Run Four

1 Help Recieved

This section is a thank you for people who caught issues or otherwised helped(collaboration is allowed)

1. List people here