
Tile A (bottom left) · trim along the dashed line on edges that join another tile, butt the tiles together and line up the corner crosses



T1
r 250 mm, -50°
x 161 y +192 mm

cut r 125

cut r 100


cut r 75


cut r 50

100 mm: check with a ruler (print at 100 %, "actual size")

Tile B (bottom right) · trim along the dashed line on edges that join another tile, butt the tiles together and line up the corner crosses

T4
r 250 mm, +50°
x 161 y -192 mm



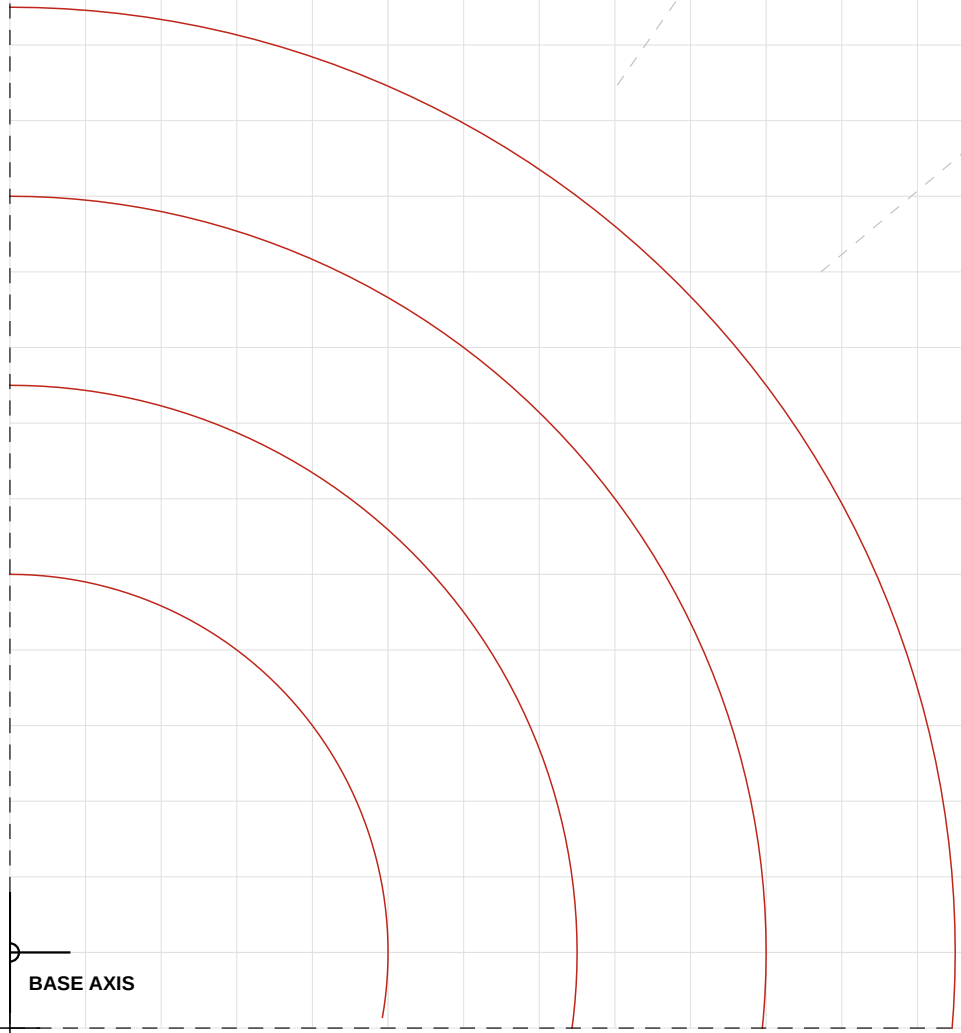


BASE AXIS


100 mm: check with a ruler (print at 100 %, "actual size")

WDD2 target mat: test 8.6 (accuracy and repeatability)


Scale 1:1, mm. Robot frame: x forward from the base axis, y to the LEFT, z up; angle + = to the RIGHT (seen from behind the arm).
Rings every 2 mm; bold ring = 10 mm (R12 limit). Grey arcs every 50 mm in radius. Grid 10 mm, aligned to the base axis.
Set-up: cut along the red ring that clears the base, slide the mat up so the axis cross sits under the base axis,
then turn the mat until the 0° line runs under the arm at base 0°. Check: M,0,35,40 must point at the +35° ray.

100 mm: check with a ruler (print at 100 %, "actual size")






T6
r 350 mm, -35°
x 287 y +201 mm



T5
r 350 mm, -50°
x 225 y +268 mm



T2
r 250 mm, -35°
x 205 y +143 mm

Tile D (top right) · trim along the dashed line on edges that join another tile, butt the tiles together and line up the corner crosses

100 mm: check with a ruler (print at 100 %, "actual size")

r 350

0° (arm straight forward)

r 300

r 250

r 200

T7
r 350 mm, +35°
x 287 y -201 mm

+35°

T8
r 350 mm, +50°
x 225 y -268 mm

+50°

T9
r 300 mm, +45°
x 212 y -212 mm

R: repeatability (also T10, 500 g)

T3
r 250 mm, +35°
x 205 y -143 mm

