

ROTAX[®]
AIRCRAFT ENGINES



INSTALLATION MANUAL

FOR ROTAX[®] ENGINE TYPE 912 i SERIES



WARNING

Before starting with engine installation, please read the Installation Manual completely as it contains important safety relevant information.

This Installation Manual for the ROTAX® aircraft engines should only be used as a general installation guide for the installation of ROTAX® engines into airframes. It should not be used as instruction for the installation of a ROTAX® aircraft engine in a specific type of airframe or airplane. BRP-Powertrain GmbH & Co. KG does not assume any warranty or liability in this context.

In no event shall the Installation Manual be used without following the specific instructions and/or requirements of the manufacture of an airframe or airplane ("Manufacturer"). For verification and/or for release of the engine installation, the respective Manufacturer must be contacted. Any modifications or adaptations to the airframe or airplane shall be carried out and/or be verified and released by the Manufacturer only.

Improper use of the Installation Manual and/or non compliance with the installation requirements of the Manufacturers can cause personal injury or property damage. BRP-Powertrain GmbH & Co. KG disclaims any liability for any and all damage and/or injuries (including death) resulting from the improper use of Installation Manual and non compliance with the installation requirements of the Manufacturer.

These technical data and the information embodied therein are the property of BRP-Powertrain GmbH & CO. KG, Austria, acc, BGBl 1984 no. 448, and shall not, without prior written permission of BRP-Powertrain GmbH & Co. KG, be disclosed in whole or in part to third parties. This legend shall be included on any reproduction of these data, in whole or in part. The Manual must remain with the engine/aircraft in case of sale.

Copyright 2015 © - all rights reserved.

ROTAX® is a trade mark of BRP-Powertrain GmbH & Co. KG. In the following document the short form of BRP-Powertrain GmbH & Co. KG = BRP-Powertrain is used.

Other product names in this documentation are used purely for ease of identification and may be trademarks of the respective company or owner.

Approval of translation has been done to best knowledge and judgement - in any case the original text in german language is authoritative.

BRP-Powertrain
INSTALLATION MANUAL

Chapter: INTRO
GENERAL NOTE

Foreword

Before starting with the engine installation, read this Installation Manual carefully. The Manual will provide you with basic information on correct engine installation, a requirement for safe engine operation.

If any passages of this Manual are not clearly understood or if you have any questions, please contact an authorized distributor- or Service Center for ROTAX aircraft engines.

BRP-Powertrain GmbH & Co KG (hereinafter “BRP-Powertrain”) wishes you much pleasure and satisfaction flying your aircraft powered by this ROTAX aircraft engine.

Chapter structure

The structure of the Manual follows whenever it is possible the structure of the ATA (Air Transport Association) standards. The aim is the compatibility with the aircraft manufacturer's documentation, which means they must then adapt the documentation to their standard.

The Installation Manual is subdivided into the following chapters:

Subject	Chapter
Introduction	Chapter INTRO
List of effective pages	Chapter LEP
Table of amendments	Chapter TOA
General note	Chapter 00-00-00
Storage & Installation	Chapter 10-10-00
Electric system	Chapter 24-00-00
Propeller drive	Chapter 61-00-00
Engine	Chapter 72-00-00
Fuel system	Chapter 73-00-00
Ignition system	Chapter 74-00-00
Cooling system	Chapter 75-00-00
Engine management	Chapter 76-00-00
Exhaust system	Chapter 78-00-00
Lubrication system	Chapter 79-00-00
Electric starter	Chapter 80-00-00

BRP-Powertrain
INSTALLATION MANUAL

NOTES

d05150.fm

BRP-Powertrain
INSTALLATION MANUAL

Chapter: LEP
LIST OF EFFECTIVE PAGES

chapter	page	date	chapter	page	date
	Title page		24-00-00	1	08 01 2015
INTRO	1	01 01 2012		2	01 01 2012
	2	01 01 2012		3	08 01 2015
LEP	1	08 01 2015		4	08 01 2015
	2	08 01 2015		5	08 01 2015
	3	01 01 2014		6	08 01 2015
	4	01 01 2012		7	08 01 2015
TOA	1	08 01 2015		8	08 01 2015
	2	08 01 2015		9	01 01 2014
	3	08 01 2015		10	01 01 2014
	4	01 01 2012		11	08 01 2015
00-00-00	1	08 01 2015		12	01 01 2014
	2	01 01 2012		13	08 01 2015
	3	08 01 2015		14	01 01 2014
	4	08 01 2015		15	01 01 2014
	5	01 01 2014		16	01 01 2014
	6	08 01 2015		17	08 01 2015
	7	01 01 2012		18	08 01 2015
	8	01 01 2014		19	08 01 2015
	9	01 01 2014		20	08 01 2015
	10	01 01 2012		21	01 01 2014
	11	01 01 2014		22	01 01 2014
	12	08 01 2015		23	08 01 2015
	13	08 01 2015		24	08 01 2015
	14	01 01 2012		25	08 01 2015
	15	01 01 2012		26	08 01 2015
	16	01 01 2012		27	08 01 2015
	17	01 01 2012		28	08 01 2015
	18	01 01 2012		29	08 01 2015
10-10-00	1	01 01 2012		30	08 01 2015
	2	01 01 2012	61-00-00	1	01 01 2012
	3	01 01 2012		2	01 01 2012
	4	01 01 2012		3	01 01 2012
	5	01 01 2012		4	01 01 2014
	6	08 01 2015		5	01 01 2012
	7	01 01 2012		6	01 01 2012
	8	01 01 2012			
	9	01 01 2012			
	10	08 01 2015			
	11	01 01 2012			
	12	01 01 2012			

d06200.fm

BRP-Powertrain
INSTALLATION MANUAL

chapter	page	date	chapter	page	date
72-00-00	1 2 3 4 5 6 7 8 9 10 11 12	01 01 2012 01 01 2012 01 01 2012 01 01 2012 01 01 2012 01 01 2012 01 01 2014 01 01 2014 08 01 2015 01 01 2012 07 01 2012 07 01 2012	75-00-00	15 16 17 18 19 20 21 22	01 01 2012 01 01 2012 01 01 2014 01 01 2014 01 01 2014 01 01 2014 01 01 2014 01 01 2014
73-00-00	1 2 3 4 5 6 7 8 9 10 11 12 13 14 15 16	01 01 2014 08 01 2015 08 01 2015 01 01 2014 08 01 2015 08 01 2015 08 01 2015 01 01 2014 01 01 2014 01 01 2014 01 01 2014 01 01 2014 01 01 2014 01 01 2014	76-00-00	1 2 3 4 5 6 7 8 9 10 11 12 13 14 15 16	01 01 2014 01 01 2014 01 01 2014 01 01 2014 01 01 2014 01 01 2014 01 01 2014 08 01 2015 01 01 2014 01 01 2014 01 01 2014 01 01 2014 01 01 2014 01 01 2014 01 01 2014
74-00-00	1 2 3 4	07 01 2012 01 01 2012 07 01 2012 01 01 2012	78-00-00	1 2 3 4 5 6 7 8 9 10 11 12 13 14	01 01 2014 01 01 2014 01 01 2012 01 01 2012 01 01 2014 01 01 2014 01 01 2014 01 01 2012 01 01 2014 01 01 2014 01 01 2014 01 01 2014 01 01 2014 01 01 2014
75-00-00	1 2 3 4 5 6 7 8 9 10 11 12 13 14	01 01 2012 01 01 2012	79-00-00	1 2 3 4 5 6 7 8	01 01 2012 01 01 2012 01 01 2012 01 01 2012 07 01 2012 01 01 2012 01 01 2012 01 01 2012

d06200.fm

BRP-Powertrain
INSTALLATION MANUAL

chapter	page	date
79-00-00	9	01 01 2012
	10	01 01 2012
	11	01 01 2012
	12	01 01 2012
	13	01 01 2012
	14	01 01 2012
	15	01 01 2012
	16	01 01 2012
	17	01 01 2012
	18	01 01 2012
	19	01 01 2012
	20	01 01 2012
	21	01 01 2012
	22	01 01 2012
	23	01 01 2012
	24	01 01 2012
	25	01 01 2012
	26	01 01 2012
	27	01 01 2012
	28	01 01 2012
	29	01 01 2012
	30	01 01 2012
80-00-00	1	01 01 2012
	2	01 01 2012
	3	01 01 2012
	4	01 01 2012
	5	01 01 2012
	6	01 01 2012
	Rear page	

BRP-Powertrain
INSTALLATION MANUAL

NOTES

BRP-Powertrain
INSTALLATION MANUAL

Chapter: TOA
TABLE OF AMENDMENTS

Approval*

The technical content of this document is approved
under the authority of DOA no. EASA.21.J.048

no.	chapter	page	date of change	remark for approval	date of approval from authorities	date of inclusion	signature
0	INTRO	all	01 01 2012				
0	LEP	all	01 01 2012				
0	TOA	all	01 01 2012				
0	00-00-00	all	01 01 2012				
0	10-10-00	all	01 01 2012				
0	24-00-00	all	01 01 2012				
0	61-00-00	all	01 01 2012				
0	72-00-00	all	01 01 2012				
0	73-00-00	all	01 01 2012				
0	74-00-00	all	01 01 2012				
0	75-00-00	all	01 01 2012				
0	76-00-00	all	01 01 2012				
0	78-00-00	all	01 01 2012				
0	79-00-00	all	01 01 2012				
0	80-00-00	all	01 01 2012				
1	LEP	1, 2	07 01 2012	DOA*			
1	TOA	1, 3	07 01 2012	DOA*			
1	00-00-00	4, 5	07 01 2012	DOA*			
1	24-00-00	1,4,5,9,22,24-	07 01 2012	DOA*			
1	72-00-00	26	07 01 2012	DOA*			
1	73-00-00	1,11,12	07 01 2012	DOA*			
1	74-00-00	1,3,5,6	07 01 2012	DOA*			
1	76-00-00	1,3	07 01 2012	DOA*			
1	78-00-00	1,3,7,9,12	07 01 2012	DOA*			
1	79-00-00	5,7 5	07 01 2012	DOA*			
2	LEP	1,2,3	01 01 2014	DOA*			
2	TOA	1,2,3	01 01 2014	DOA*			
2	00-00-00	8,9,11,12	01 01 2014	DOA*			
2	24-00-00	1,3-36	01 01 2014	DOA*			
2	61-00-00	4	01 01 2014	DOA*			
2	72-00-00	7,8,9	01 01 2014	DOA*			

d06201.fm

Effectivity: 912 i Series
Edition 1/Rev. 3

TOA

BRP-Powertrain
INSTALLATION MANUAL

no.	chapter	page	date of change	remark for approval	date of approval from authorities	date of inclusion	signature
2	73-00-00	1-16	01 01 2014	DOA*			
2	75-00-00	17-22	01 01 2014	DOA*			
2	76-00-00	1-16	01 01 2014	DOA*			
2	78-00-00	1,5,6,7,9-14	01 01 2014	DOA*			
3	TOA	1,2	08 01 2015	DOA*			
3	RV	1,2,3	08 01 2015	DOA*			
3	00-00-00	1,3,4,6,12,13	08 01 2015	DOA*			
3	10-00-00	6,10	08 01 2015	DOA*			
3	24-00-00	1,3-8,11,13, 17-20,23-30	08 01 2015	DOA*			
3	72-00-00	9	08 01 2015	DOA*			
3	73-00-00	2,3,5,6,7	08 01 2015	DOA*			
3	76-00-00	8,13	08 01 2015	DOA*			

Chapter: TOA

SUMMARY OF AMENDMENTS

Content Summary of the relevant amendments in this context, but without any claim to completeness.

Current No.	chapter	page	date of change	Comment
1 1	00-00-00 24-00-00	5 4,9, 23	2012 07 01 2012 07 01	Chap. 2.1 Standard version: Fuel pump assy. Chap. 1.1 Electromagnetic compatibility: Change of text
1 1	73-00-00 76-00-00	1,3,5,6 9, 12	2012 07 01 2012 07 01	Chap. 1.5+1.7.2 Coarse+fine filter: mesh size Chap. 3 Internal generator: Change of text Chap. 5.3 Wiring diagram: New graphics
1	78-00-00	5,7	2012 07 01	Chap. 2 Exhaust system requirements: Text Chap. 3 Positioning the sensor: Text Chap. 3.1 Pin assignment for maintenance tool: Text Chap. 4.1 Pin assignment for display: New graphics
1	79-00-00	5	2012 07 01	Chap. 1.3 Measurement of crankcase pressure: Text
2 2	00-00-00 24-00-00	11,12 5 6-14, 15-36	2014 01 01 2014 01 01	Chap.4 New Symbol Tip Chap. 4.1 Safety information: Text Chap. 1.2.1 Technical Data: Text New Text position and change of text Change of text in chapter
2 2	61-00-00 72-00-00	4 7,8	2014-01-01 2014 01 01	Chap. 1.1: Technical data: New graphic Chap. 2.1 Weight: Text, Chap. 2.2 Installation dimensions: Text
2	73-00-00	1-16	2014 01 01	Overview fuel system: New graphic
2	75-00-00	17-22	2014 01 01	Chap. 1 Requirements of the fuel system: Text Chap.4 General notes on the cooling system: Text, New graphic, New text position
2	76-00-00	1,3,6, 7-16	2014 01 01	New text, Chap. 1.4 Installation position of the ECU: Text Chap. 2.2 Connections: Text, Chap. 4 Display:Text New graphic
2	78-00-00	5,6 7,9-14	2014 01 01	Chap. 2 Exhaust requirements: Text Chap. 2.2 If a genuine ROTAX exhaust is not used: Text Chap. 3 Installation of the exhaust system: Text deleted Chap. 4 Change of text Chap 4.1 Exhaust system assy.: New graphic
3 3 3 3 3	00-00-00 10-10-00 24-00-00 73-00-00 76-00-00	1,4,6,12 6,10 3-8,18 23,24,25, 29,30 2,3-7 8,13	2015 08 01 2015 08 01 2015 08 01 2015 08 01 2015 08 01 2015 08 01	Chap. 2 Type description: change of text Chap. 2 change of text Chap. 4.1 Safety information: change of text Chap. 1, 2, 3 change of text Chap. 5.4 change of text Change of text, new graphic Chap. 2.2, Chap. 5 change of text

d06201.fm

Effectivity: 912 i Series
Edition 1/Rev. 3

TOA

BRP-Powertrain
INSTALLATION MANUAL

NOTES

BRP-Powertrain
INSTALLATION MANUAL

Chapter: 00-00-00
GENERAL NOTE

Introduction

This section describes the installation of engine type ROTAX 912 i Series.

NOTE: ROTAX 912 i Series includes 912 iS, 912 iS Sport and 912 iSc Sport.

Table of contents

This chapter of the Installation Manual contains general and safety information concerning the operation and maintenance of the aircraft engine.

Subject	Page
General note	Page 3
Type description Standard version	Page 4 Page 5
Abbreviations and terms used in this Manual Conversion table	Page 7 Page 10
Safety notice Safety information Instruction Technical documentation	Page 11 Page 12 Page 14 Page 15

BRP-Powertrain
INSTALLATION MANUAL

NOTES

BRP-Powertrain
INSTALLATION MANUAL

1) General note

Purpose	The purpose of this Installation Manual is to acquaint (iRMT) trained maintenance service staff with some necessary technical requirements for installing the engine into the aircraft in compliance with the relevant installation and safety instructions provided by the engine manufacturer.
Documentation	<p>For more detailed information regarding installation, maintenance, safety- or flight operation, consult the documentation provided by the aircraft manufacturer and/or dealer.</p> <p>For additional information on engines, maintenance or parts, you can also contact your nearest authorized ROTAX-aircraft engine distributor.</p>
ROTAX Distributors	For ROTAX Authorized Distributors for Aircraft Engines see latest Operators Manual or on the Internet at the official Website www.FLYROTAX.com .
Engine serial number	When making inquiries or ordering parts, always indicate the engine serial number, as the manufacturer might make modifications to the engine in the course of product improvement. The engine serial number (1) is on the top of the crankcase, behind the propeller gearbox.

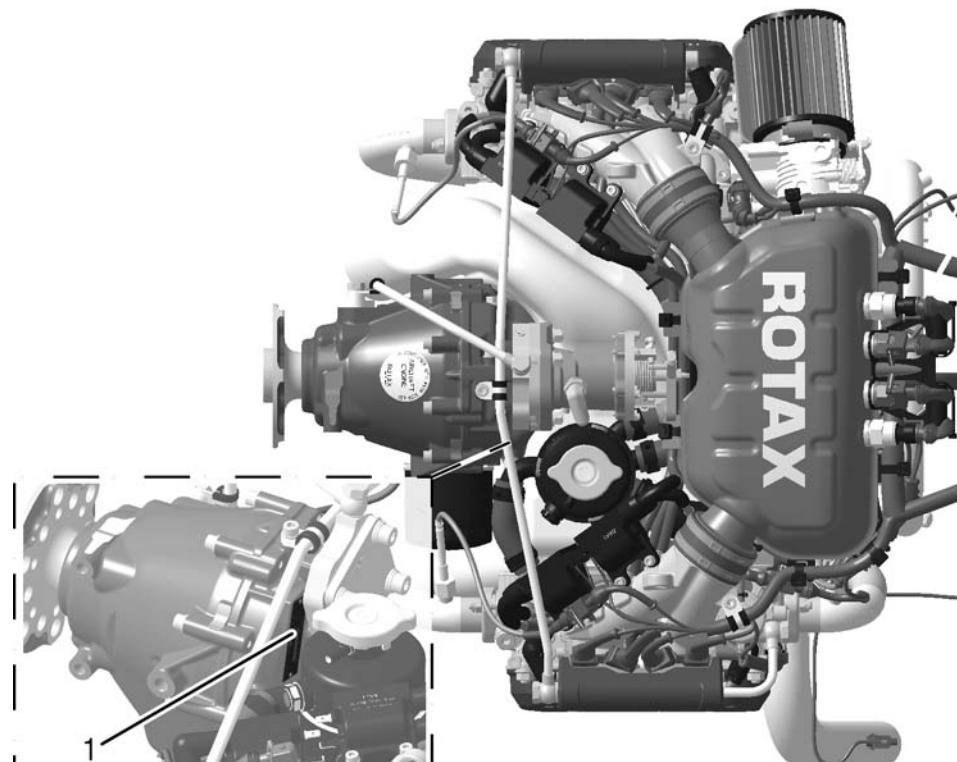


Fig. 1

d06202.fm


Effectivity: 912 i Series
Edition 1/Rev. 3

00-00-00

BRP-Powertrain
INSTALLATION MANUAL

2) Type description

| e.g. 912 iSc 3 The type description consists of the following parts:

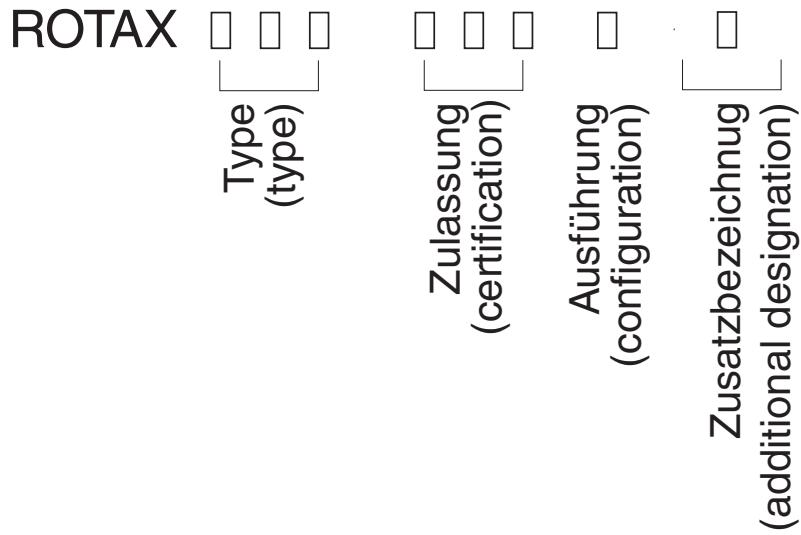

Designation

Designation		Description
Type	912	4-cyl. horizontally opposed, normal aspirated engine
Certification	iSc	Certified to EASA CS-E (TC No. EASA.E.121)
	iS	Approved to ASTM F2339
Configuration	2	Prop shaft with flange for fixed prop.
	3	Prop shaft with flange for constant speed propeller and drive for hydraulic governor for constant speed propeller.
Additional designation		standard version
	Sport	version with improved torque curve

Options

Available options (optional equipment) for the engine type mentioned above:

	external alternator	vacuum pump	governor	exhaust system
for configuration 2	YES	YES	NO	YES
for configuration 3	YES	NO	YES	YES

BRP-Powertrain
INSTALLATION MANUAL

2.1) Standard version

- Serial production**
- 4-stroke, 4 cylinder horizontally opposed, spark ignition engine, single central camshaft push rods - OHV
 - Liquid cooled cylinder heads
 - Ram air cooled cylinders
 - Dry sump forced lubrication
 - Fully redundant electronic engine management (EMS) includes fuel injection, ignition characteristics, etc.
 - Propeller drive via integrated gearbox with mechanical shock absorber and overload clutch
 - Oil tank
 - Electric starter (12 V 0.8 kW)
 - Fuel pump assy.
-
- | Optional**
- Preparation for hydraulic governor for constant speed propeller: (configuration 3 only)
 - Exhaust system
 - Cooling air baffle
 - Engine suspension frame
-

BRP-Powertrain
INSTALLATION MANUAL

Auxiliary equipment certified

NOTE:

The following equipment is not included as part of the standard engine version!

NOTICE

Any equipment which is not part of the standard engine version, and thus no component of the engine, is not included in the scope of supply.
Components especially developed and tested for this engine are readily available at BRP-Powertrain.

The following auxiliary equipment has been tested on ROTAX engine type 912 i for safety and durability in compliance with the standards of aviation.

The furnishing of proof in accordance to the latest FAR or EASA has to be conducted by the aircraft manufacturer.

- external alternator
- oil cooler with connections
- coolant radiator
- coolant overflow bottle

Auxiliary equipment not certified

The following auxiliary equipment has not been tested for safety and durability in compliance with the standards of aviation.

⚠ WARNING

Non-compliance can result in serious injuries or death!
The user assumes all risks possibly arising by utilizing auxiliary equipment.

The furnishing of proof in accordance to the latest FAR or EASA has to be conducted by the aircraft manufacturer.

- intake filter
- shock mount
- starter relay

The representation of components that are not scope of the delivery is purely symbolic. It does not constitute the specification of the engine version and shall therefore only be seen functionally. The actual interpretation/selection of corresponding regulations is the aircraft manufacturer's responsibility.

BRP-Powertrain
INSTALLATION MANUAL

3) Abbreviations and terms used in this Manual

Abbreviations

Abbreviation	Description
*	Reference to another section
	center of gravity
	The drop symbol indicates use of sealing agents, adhesives or lubricants (only in the Illustrated Parts Catalog).
°C	Degrees Celsius (Centigrade)
°F	Degrees Fahrenheit
912 iS	see OM (Type designation)
912 iSc	see OM (Type designation)
A	Ampere
a.c.	alternating current
Ah	Ampere hour
A/C	Aircraft
AD	Airworthiness Directive
A/F	Across-flat dimension
ASB	Alert Service Bulletin
ACG	Austro Control GmbH
AKI	Anti Knock Index
API	American Petrol Institute
ASTM	American Society for Testing and Materials
ATA	Air Transport Association
AWG	American Wire Gauge
BUDS	BRP Utility and Diagnostic Software
CAN	Controller Area Network
CAN/CGSB	Canadian General Standards Board
CPS 1+2	Crankshaft Position Sensor 1+2
CSA	Constant Speed Actuator
CTS	Cooling Temperature Sensor
CW	Clockwise
CCW	Counter-clockwise
DCDI	Dual Capacitor Discharge Ignition
d.c.	direct current
DOA	Design Organisation Approval
DOT	Department of Transport
EASA	European Aviation Safety Agency
ECU	Engine Control Unit
EGT	Exhaust Gas Temperature

d06202 fm

Effectivity: 912 i Series
Edition 1/Rev. 0

00-00-00

page 7
January 01/2012

BRP-Powertrain
INSTALLATION MANUAL

Abbreviation	Description
EMS	Engine Management System
EN	European Norm
ETFE	Ethylene Tetrafluoroethylene
FAA	Federal Aviation Administration
FAR	Federal Aviation Regulation
hr.	hours
IFR	Instrument Flight Rules
IM	Installation Manual
INJ 1-8	Injector 1-8
INTRO	Introduction
IPC	Illustrated Parts Catalog
iRMT	Independent ROTAX Maintenance Technician
ISA	International Standard Atmosphere
kg	kilograms
LEP	List of Effective Pages
MAPS 1+2	Manifold Air Pressure Sensor 1+2
MATS 1+2	Manifold Air Temperature Sensor 1+2
MM	Maintenance Manual
MON	Motor Octane Number
MAG	Magneto Side
N	new part (only Illustrated Parts Catalog)
n.a.	not available
nB	as necessary (only Illustrated Parts Catalog)
NDT	non-destructive testing
Nm	Newtonmeter
OHM	Overhaul Manual
OM	Operators Manual
part no.	Part number
PTFE	Polytetrafluoroethylene
PTO side	power take off side
Rev.	Revision
RON	Research Octane Number
ROTAX	is a trade mark of BRP-Powertrain GmbH & Co KG
rpm	Revolutions per minute
SB	Service Bulletin
SI	Service Instruction
SL	Service Letter
SMD	Surface Mounted Devices

d06202.fm

BRP-Powertrain
INSTALLATION MANUAL

Abbreviation	Description
S/N	Serial Number
s.v.	still valid (only Illustrated Parts Catalog)
TBO	Time Between Overhaul
TOA	Table of amendments
TOC	Table of Contents
TSN	Time Since New
TSNP	Time Since New Part
TSO	Time Since Overhaul
V	Volt
VFR	Visual Flight Rules
XXX	shows the serial component number

BRP-Powertrain
INSTALLATION MANUAL

3.1) Conversion table

Units of length: 1 mm = 0.03937 in 1 in = 25.4 mm 1 ft = 12 in = 0.3048 m	Units of power: 1 kW = 1.341 hp 1 hp = 0.7457 kW 1 kW = 1.3596 PS 1 PS = 0.7355 kW
Units of area: 1 cm ² = 0.155 sq. in (in ²) 1 sq. in (in ²) = 6.4516 cm ²	Units of temperature: K = °C - 273.15 °C = (°F - 32) / 1.8 °F = (°C x 1.8) + 32
Units of volume: 1 cm ³ = 0.06102 cu in (in ³) 1 cu in (in ³) = 16.3871 cm ³ (in ³) 1 dm ³ = 1 l 1 dm ³ = 0.21997 gal (UK) 1 gal (UK) = 4.5461 dm ³ 1 dm ³ = 0.26417 gal (US) 1 gal (US) = 3.7854 dm ³	Units of velocity: 1 m/s = 3.6 km/h 1 ft/min = 0.3048 m/min = 0.00508 m/sec 1 m/s = 196.85 ft/min 1 kt = 1.852 km/h 1 km/h = 0.53996 kn
Units of mass: 1 kg = 2.2046 lb 1 lb. = 0.45359 kg	spec. fuel consumption: 1 g/kWh = 0.001644 lb/hph 1 lb./hph = 608.277 g/kWh
Density: 1 g/cm ³ = 0.016018 lb/ft ³ 1 lb/ft ³ = 62.43 g/cm ³	Units of torque: 1 Nm = 0.737 ft lb. = 8.848 in lb. 1 ft lb = 1.356 Nm 1 in lb = 0.113 Nm
Units of force: 1 N = 0.224809 lbf 1 lbf = 4.4482 N	Cable cross-section: Conversion table-Wire Gauge: AWG-mm²
Units of pressure: 1 Pa = 1N/m ² 1 bar = 100000 Pa/1000 hPa/ 100 kPa 1 bar = 14.5037 lbf/in ² (psi) 1 in Hg = 33.8638 hPa	AWG 4 6 8 10 12 14 16 18 20 mm ² 21 13 8.4 5.3 3.3 2.1 1.3 0.8 0.52

BRP-Powertrain
INSTALLATION MANUAL

4) Safety notice

General note Although the reading of such information does not eliminate the hazard, it promotes the understanding and application of the information contained herein for correct use of the engine. Always use common workshop safety practice.

The information and description of components and system contained in this Manual are correct at the time of publication. BRP-Powertrain maintains a policy of continuous improvement of its products without imposing upon itself any obligation to retrofit products previously manufactured.

Rewards BRP-Powertrain reserves the right to remove, replace or discontinue any design, specification, feature or otherwise at any time and without incurring obligation.

Measurement Specifications are given in the SI metric system with the USA equivalent in parenthesis.

Symbols used This Manual uses the following symbols to emphasize particular information. This information is important and must be observed.

⚠ WARNING Identifies an instruction which, if not followed, may cause serious injury including the possibility of death.

⚠ CAUTION Identifies an instruction which, if not followed, may cause minor or moderate injury.

NOTICE Denotes an instruction which, if not followed, may severely damage the engine or other components.

NOTE: Indicates supplementary information which may be needed to fully complete or understand an instruction.

ENVIRONMENTAL NOTE

Environmental notes give you tips on environmental protection.

| A revision bar outside the page margin indicates a change to text or graphic.

| **Tip**

This information gives you additional advice and tips.

4.1) Safety information

Use for intended purpose



Non-compliance can result in serious injuries or death!

Only certified technicians (iRMT, see also Maintenance Manual Line) trained on this product are qualified to work on these engines.



Non-compliance can result in serious injuries or death!

Never fly the aircraft equipped with this engine at locations, airspeeds, altitudes, or other circumstances which do not allow a successful no-power landing after sudden engine stoppage.

- This engine is not suitable for aerobatics (inverted flight, etc.). Flight attitudes outside the permissible limits are not allowed.
- This engine shall not be used on rotorcrafts whose rotors are driven by the engine throughout the flight (e.g. helicopters).
- It should be clearly understood that the choice, selection and use of this particular engine on any aircraft is at the sole discretion and responsibility of the aircraft manufacturer, assembler and owner/user.
- Due to the varying designs, equipment and types of aircraft, BRP-Powertrain grants no warranty or representation on the suitability of its engine's use on any particular aircraft. Further, BRP-Powertrain grants no warranty or representation of this engine's suitability with any other part, component or system which may be selected by the aircraft manufacturer, assembler or user for aircraft application.



Non-compliance can result in serious injuries or death!

For each use of DAY VFR, NIGHT VFR or IFR in an aircraft the applicable legal requirements and other existing regulations must be adhered to.

- In addition to observing the instructions in our Manual, general safety and accident preventative measures, legal regulations and regulations of any aeronautical authority must be observed.
- Where differences exist between this Manual and regulations provided by any authority, the more stringent regulation should be applied.

BRP-Powertrain

INSTALLATION MANUAL

- For continuing airworthiness see Maintenance Manual Line.
 - Unauthorized modifications of engine or aircraft will automatically exclude any liability of the manufacturer for sequential damage.
-

Engine run

- In the interest of safety, the aircraft must not be left unattended while the engine is running.
 - To eliminate possible injury or damage, ensure any loose equipment or tools are properly secured before starting the engine.
 - When in storage protect the engine and fuel system from contamination and exposure.
 - Never operate the engine and gearbox without sufficient quantities of lubricating oil.
 - Never exceed the maximum permitted operational limits.
 - Allow the engine to cool at idle for several minutes before turning off the engine.
 - Propeller and its attachment with a moment of inertia in excess of the specified value must not be used and releases the engine manufacturer from any liability.
 - Improper engine installation and use of unsuitable piping for fuel, cooling and lubrication system releases the engine manufacturer from any liability.
-

BRP-Powertrain
INSTALLATION MANUAL

4.2) Instruction

General note	Engines require instructions regarding their installation, application, use, operation, maintenance and repair. Technical documentation and directions are useful and necessary complementary elements for personal instruction, but can by no means substitute theoretical and practical instructions. These instructions should cover explanation of the technical context, advice for operation, maintenance, use and operational safety of the engine.
Safety notice	In this technical Manual passages concerning safety are especially marked. Pass on safety warnings to other users!
Accessories	This engine must only be operated with accessories supplied, recommended and released by BRP-Powertrain. Modifications are only allowed after consent by the engine manufacturer.
Spare parts	<p>NOTICE Spare parts must meet the requirements defined by the engine manufacturer. This is only warranted by use of GENUINE-ROTAX spare parts and/or accessories (see latest IPC). Spare parts are available at the authorized ROTAX Distributor and their Service Centers. Any warranty by BRP-Powertrain becomes null and void if spare parts and or accessories other than GENUINE-ROTAX spare parts and/or accessories are used (see latest Warranty Conditions).</p>
Tools	<p>NOTICE In principle use only tools and appliances which are either cited in the Manual or in the Illustrated Parts Catalog.</p>
State of delivery	<p>⚠ WARNING Engine and gearbox are delivered in "dry" conditions (without oil). Before putting the engine into operation it must be filled with oil. Use only oil as specified (consult Operators Manual and SI-912 i-001 "Selection of suitable operating fluids" current issue).</p>

BRP-Powertrain
INSTALLATION MANUAL

4.3) Technical documentation

General note These documents form the instructions ensuring continued airworthiness of ROTAX aircraft engines.

The information contained is based on data and experience that are considered applicable for authorized mechanics (iRMT, see Maintenance Manual Line) under normal conditions.

Due to the fast technical progress and fulfilment of particular specifications of the customers it may occur that existing laws, safety prescriptions, constructional and operational regulations cannot be transferred completely to the object bought, in particular for special constructions, or may not be sufficient.

Documentation

- Installation Manual
- Operators Manual
- Maintenance Manual (Line and Heavy Maintenance)
- Overhaul Manual
- Illustrated Parts Catalog
- Alert Service Bulletin
- Service Bulletin
- Service Instruction
- Service Letter



Status

The status of the Manuals can be determined with the aid of the table of amendments. The first column indicates the revision state.

This figure should be compared with the revision provided on ROTAX-Aircraft Engines Website: www.FLYROTAX.com.

Amendments and current versions can be downloaded free of charge.

Replacement pages

Furthermore the Manual is constructed in such a way that single pages can be replaced instead of the complete document. The list of effective pages is given in the chapter LEP. The particular edition and revision number is given on the footer of each page.

BRP-Powertrain
INSTALLATION MANUAL

Reference

NOTICE

This Manual for engine installation is only part of the Technical Documentation and will be supplemented by the respective Operators Manual, Maintenance Manual and Illustrated Parts Catalog.
Pay attention to references to other documentation, found in various parts of this Manual.

Any reference to a document refers to the latest edition issued by BRP-Powertrain, if not stated otherwise.

Illustrations

The illustrations in this Manual are mere sketches and show a typical arrangement. They may not represent in full detail or the exact shape of the parts which have the same or similar function. Therefore deduction of dimensions or other details from illustrations is not permitted.

NOTE: The Illustrations in this Manual are stored in a graphic data base system and are provided with a consecutive irrelevant number.
This number (e.g. 00277) is of no significance for the content.


Installation drawings

Installation drawings and a DMU-model for (virtual) installation analysis are available from the ROTAX Authorized Distributors or their Service Centers.

BRP-Powertrain
INSTALLATION MANUAL

Graphic

Installation drawing

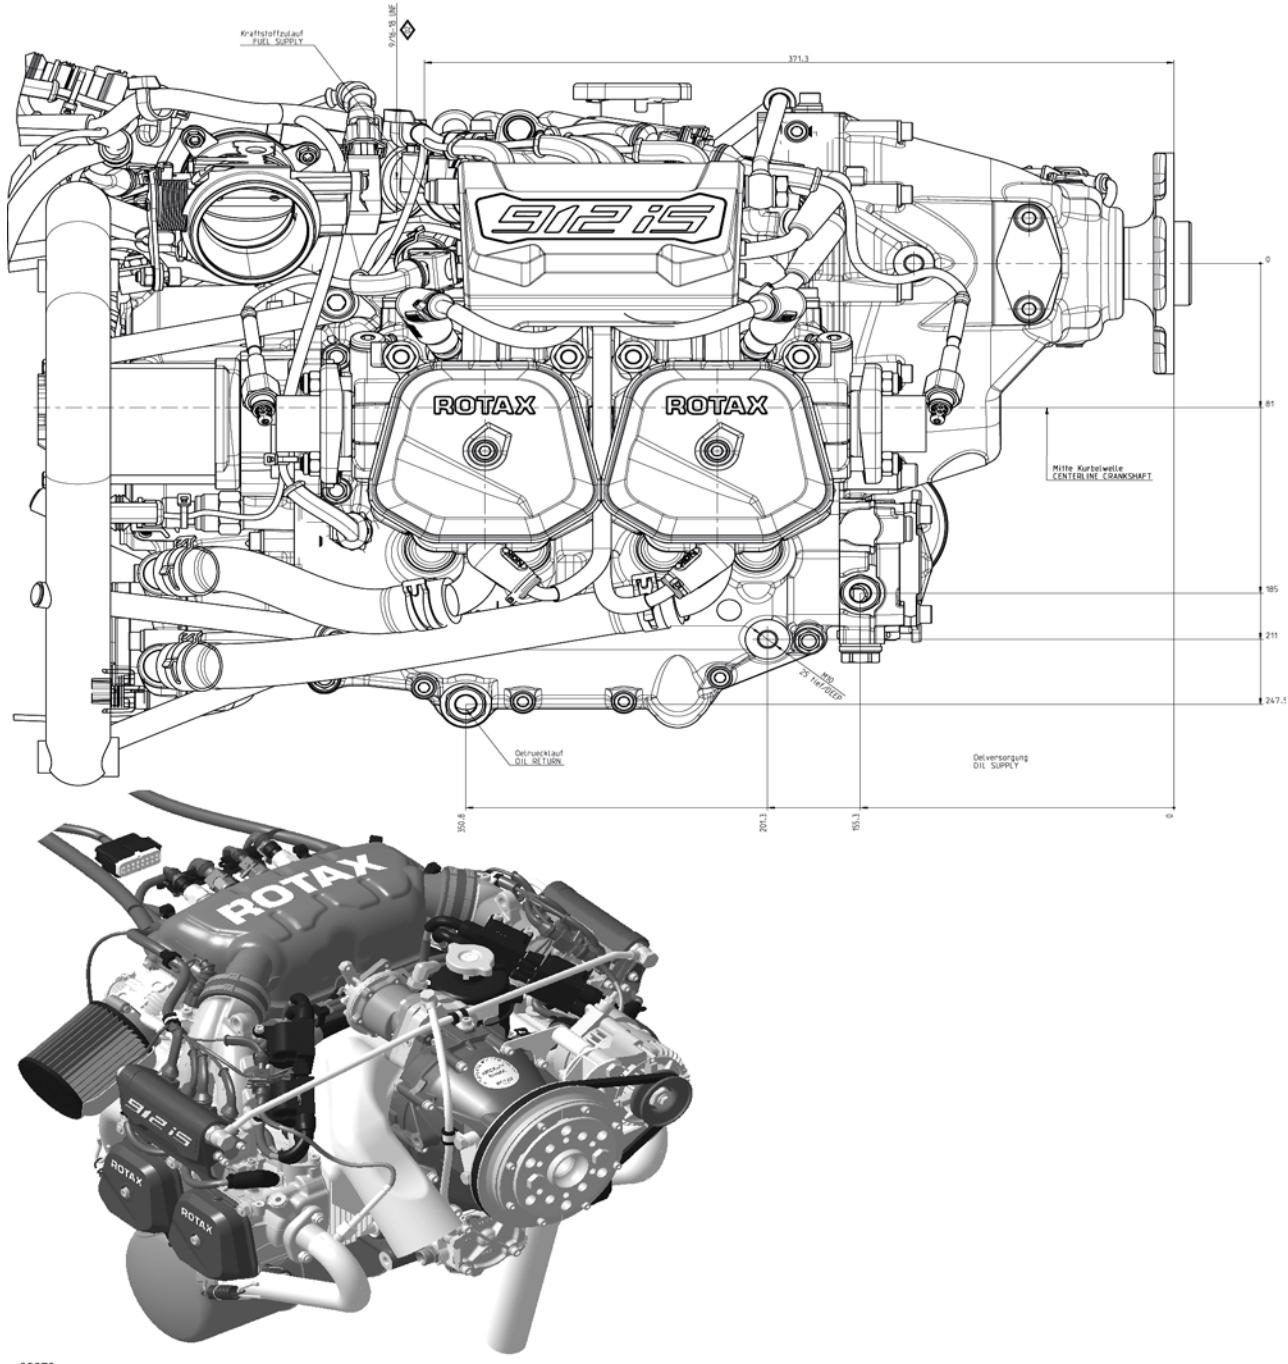

08870

d06202 fm

**Effectivity: 912 i Series
Edition 1/Rev. 0**

00-00-00

**page 17
January 01/2012**

BRP-Powertrain
INSTALLATION MANUAL

NOTES

BRP-Powertrain
INSTALLATION MANUAL

Chapter: 10-10-00
STORAGE AND INSTALLATION

Introduction

NOTICE

The stated directives are measures that must be observed during every engine installation to prevent any accidents and engine damage.

Table of contents

This section of the installation manual contains state of delivery, transport, storage and aircraft engine installation.

Subject	Page
Preparations for engine installation State of delivery Unpacking/handling of the engine Preservation and storage of the engine Protective coverings	Page 3 Page 3 Page 3 Page 4 Page 4
Engine suspension and installation position Engine suspension instructions Attachment points Definition of attachment points Permissible installation positions	Page 6 Page 6 Page 8 Page 9 Page 11

BRP-Powertrain
INSTALLATION MANUAL

NOTES

1) Preparations for engine installation

1.1) State of delivery

Attachment

NOTICE

Risk of consequential damage to engine and aircraft as a result of corrosion and damage.
Under no circumstances is a corroded or damaged engine to be installed in an aircraft!

NOTICE

The attachment screws are only for transport and must not be used in the aircraft.

The engine can be attached with steel angles anchored on a timber plate.

- When the engine is delivered, check that the GENUINE-ROTAХ packing is not damaged.
- If the packing is damaged, contact the authorized distributor- or Service Center for ROTAХ aircraft engines.

1.2) Unpacking/handling of the engine

Unpacking the engine

To unpack a new engine, proceed as follows:

Step	Procedure
1	Remove the wooden cover.
2	Remove the protective packaging.
3	Remove the protective film around the engine.

After unpacking

To check the state of delivery, proceed as follows:

Step	Procedure
1	Check that the serial number and engine type designation on the type plate are identical to those shown on the delivery note.
2	Check the engine for damage or corrosion. If everything is deemed "OK", the engine can be accepted.

Suspension point

The engine is attached to the pivot point (A) of the governor using a special tool and lifted up to the intake manifolds using two straps or hooks. See Fig. 1

NOTICE

Do not use the fuel line assy. to lift the engine!

BRP-Powertrain
INSTALLATION MANUAL

Graphic Governor pivot point (A)

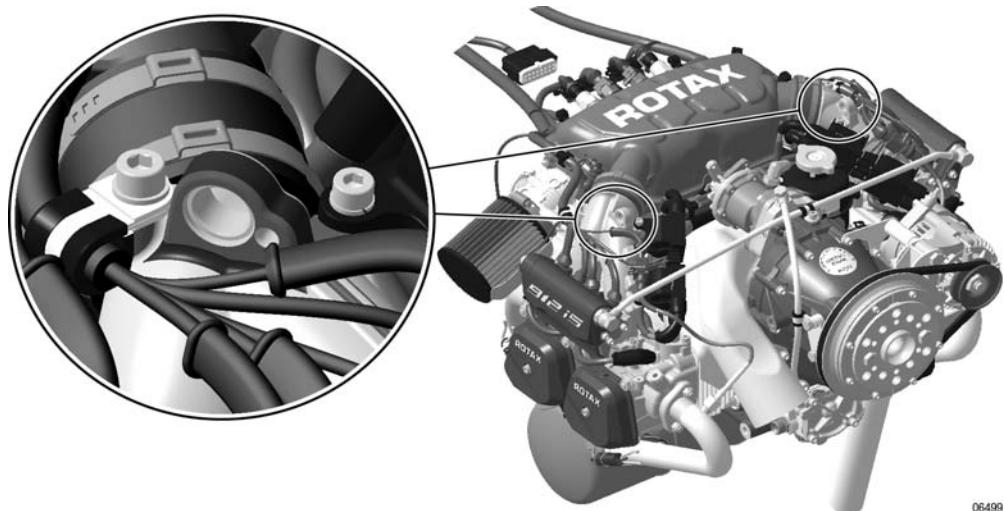


Fig. 1

1.3) Preservation and storage of the engine

General note

The engine is preserved at BRP-Powertrain thus guaranteeing proper protection against corrosion damage for at least 24 months after the date of delivery from BRP-Powertrain.

Warranty

This warranty is subject to the following conditions:

- The engine must be stored in the GENUINE-ROTAХ packing as supplied by BRP-Powertrain.
- The covers on various openings must not be removed.
- The engine must be stored in a suitable place (at min. -40 °C/-40 °F and max. +80 °C/176 °F).
- The flat bag (blue) surrounding the engine must not be damaged or removed, as it protects the engine from corrosion and oxidation.

Storage

If the engine is stored for a period longer than 12 months (not stored in the GENUINE-ROTAХ packing) then maintenance tasks must be carried out every 3 months as per the currently valid Maintenance Manual, section "Preservation of a new engine".

1.4) Protective coverings

General note

NOTICE

Protective coverings are only for use during transport and engine installation. They must be removed before the engine is operated.

BRP-Powertrain

INSTALLATION MANUAL

All openings are protected against ingress of contamination and dampness. It is recommended to leave the protective plugs in place until installation of the specific feed line.


NOTE: The transport equipment and plugs must be reattached if the engine will be sent to the manufacturer or distributor.

Protective coverings

List of protective coverings. See [Fig. 2](#).

Pos.	Installation location
1	Exhaust sockets
2	Fuel rail (outlet) / fuel pressure regulator
3	Fuel rail (inlet)
4	Oil inlet/outlet
5	Supply and discharge of coolant
6	Throttle valve support assy.
7	Propeller shaft

Graphic

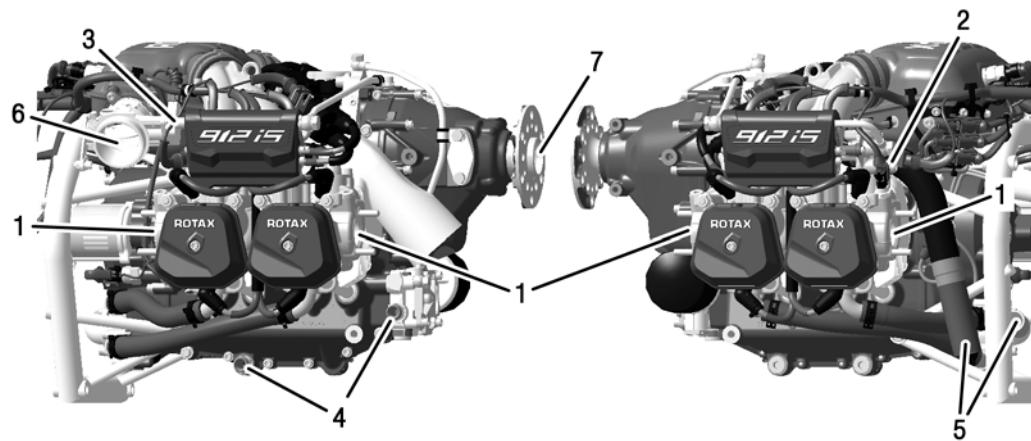

[Fig. 2](#)

2) Engine suspension and installation position

General note

NOTICE

During engine installation take into account the total engine weight and ensure careful handling.

Engine suspen-
sion

The engine suspension is essentially determined by the aircraft design. Eight attachment points are provided (4 on the engine if the ring mount is used, if not: 2 on the engine and 2 on the engine suspension frame).

Engine suspen-
sion frame

NOTICE

If the engine suspension frame is not used or if modified, certification in accordance with the latest regulations, such as FAR or EASA, must be conducted by the aircraft manufacturer.

The engine is supplied with a tested and certified suspension frame for the fireproof bulk head. Installation in the aircraft is carried out using standard captive rubber mounts which also isolate vibration and noise from the aircraft frame.

NOTICE

The engine suspension frame has been verified to follow limit manoeuvring load factors:

n = 6 downwards/upwards

n = 2 sideways

2.1) Engine suspension instructions

General note

NOTICE

The rubber mounts for neutralising vibrations and all engine suspension components not in the scope of delivery must be ground run tested at the specified loads and tested for vibration behaviour.

Certification to the latest regulations, such as FAR and EASA, must be conducted by the aircraft manufacturer.

Noise emission
and vibration

NOTICE

The engine suspension must be designed to prevent excessive engine movement and to minimise noise emission and vibration on the airframe.

NOTICE


If the GENUINE-ROTAX engine suspension frame is not being used, a vibration test must be carried out. See SL-912-010.

BRP-Powertrain
INSTALLATION MANUAL

NOTE: With suspension on the 4 top lugs L3, R3, L4 and R4 only, the tilting moment due to the pull of the propeller will be avoided while, if attached on the bottom lugs only, the moment of tilting has to be taken care of accordingly.

Standard aircraft industry damping elements (e.g. Lord) are suitable. See [Fig. 3](#).

Graphic Engine suspension

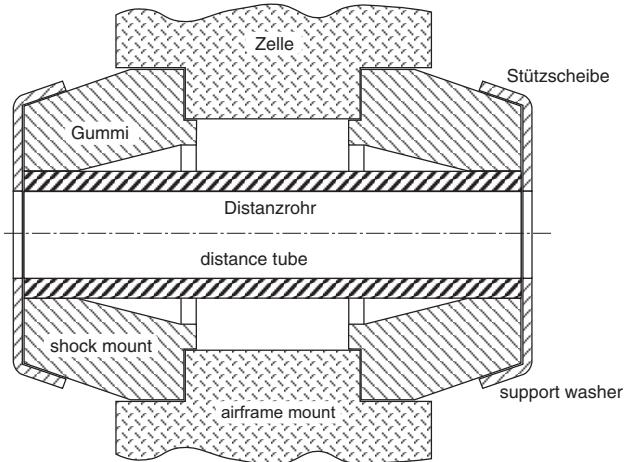

NOTE: The illustration shows Lord j 3608-1 or J 3608-2 rubber mounts. Consult the manufacturer for the dimensions of the rubber mounts.

Fig. 3

07600

Vibration neutralisation

The vibration and acoustic insulation factor is dependent on the cell manufacturer. Perform the determination as described in SL-912-010.

Damping elements

NOTICE

All elements for neutralising vibrations must be captive.

Vertical axis

The y-axis must be perpendicular to the longitudinal axis of the aircraft.

Deviation

Permissible deviation from perpendicular: $\pm 10^\circ$.
See [Fig. 4](#).

BRP-Powertrain
INSTALLATION MANUAL

Graphic

Deviation

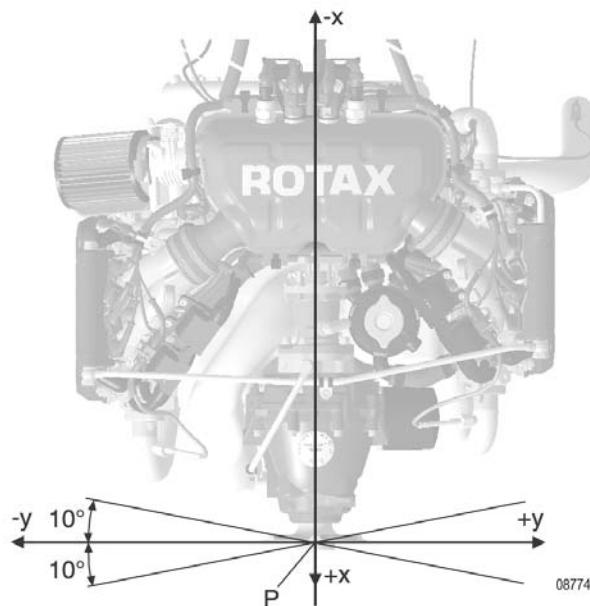


Fig. 4

2.2) Attachment points

General note

See [Fig. 5](#).

NOTICE

The hex. screws M10x60 in the attachment points are for transport only and must not be used for engine suspension.

It is recommended that the 4 stated attachment points R2, L2, R3 and L3 of the engine suspension frame are used.

NOTICE

A minimum of 4 attachment points must be used. These must be distributed symmetrically between the left (L) and right (R) sides.

2.3) Definition of attachment points

General note

See Fig. 5.



Non-compliance can result in serious injuries or death!

The aircraft or fuselage manufacturer must design the engine suspension so that it can safely carry the maximum occurring operational loads without exceeding the max. allowable forces and bending moments on the engine housing and attachment points.

Tighten all engine suspension screws as specified by the aircraft manufacturer.

Graphic

Attachment points

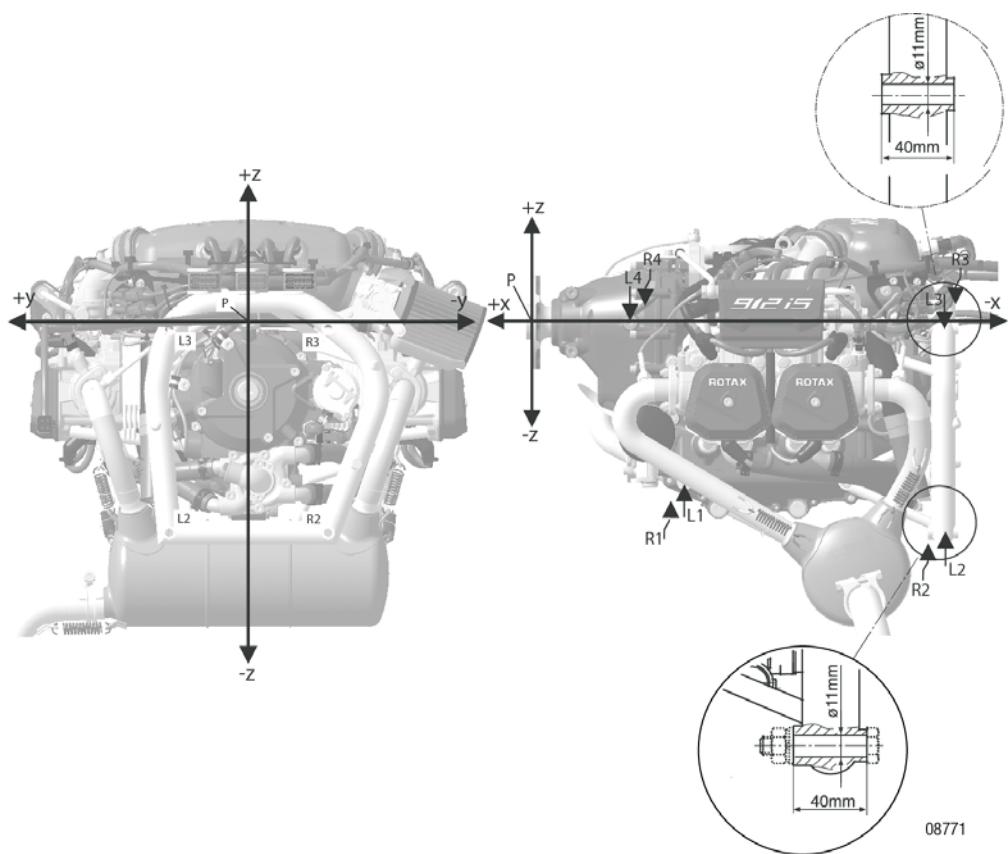


Fig. 5

BRP-Powertrain
INSTALLATION MANUAL

Attachment points	x-axis mm/in	y-axis mm/in	z-axis mm/in
L1	-200.8/-7.90	-71.0/-2.80	-211.0/-8.31
R1	-200.8/-7.90	-71.0/-2.80	-211.0/-8.31
L2	-564.0/-22.20	105.0/4.13	-277.0/-10.91
R2	-564.0/-22.20	-105.0/-4.13	-277.0/-10.91
L3	-564.0/-22.20	105.0/4.13	-7.0/-0.28
R3	-564.0/-22.20	-105.0/-4.13	-7.0/-0.28
L4	-128.3/-5.05	87.0/3.43	0
R4	-128.3/-5.05	-87.0/-3.43	0

Attachment points	Max. permissible force (secure load) in (N) in. x, y, and z axis	Max. permissible bending moment (secure load) in (Nm) in. x, y, and z axis
L1	5000/196.85	77/3.03
R1		
L4	1900/74.80	39/1.54
R4		

Attachment points	Max. permissible force (secure load) in (N) in. x axis	Max. permissible force (secure load) in (N) in. y axis	Max. permissible force (secure load) in (N) in. z axis	Max. permissible bending moment (secure load) in (Nm) in. x, y and z axis
L2	5000/196.85	2000/78.74	3000/118.11	100/3.94
R2				
L3				
R3				

Attachment points	Thread	Max. usable Thread length
L1	M10	25 mm/0.98 in.
R1		
L4	M10	16 mm/0.63 in.
R4		

2.4) Permissible installation positions

General note

NOTICE

The oil system, fuel system and the cooling system are unsuitable for upside-down/inverted installation of the engine.

NOTE: Dimensions are always from zero reference point and the coordinate system position remains unchanged.

Installation positions

The following installation position details refer to the aircraft in parked position (aircraft on ground, ready for take off).

- Engine suitable for propeller in tractor or pusher arrangement
- Installation only with propeller shaft above cylinders

Propeller axis

The centres of attachment points L1 and R1 must be on a y2 axis parallel to the y-axis.

Permissible deviation from parallel: $\pm 5^\circ$

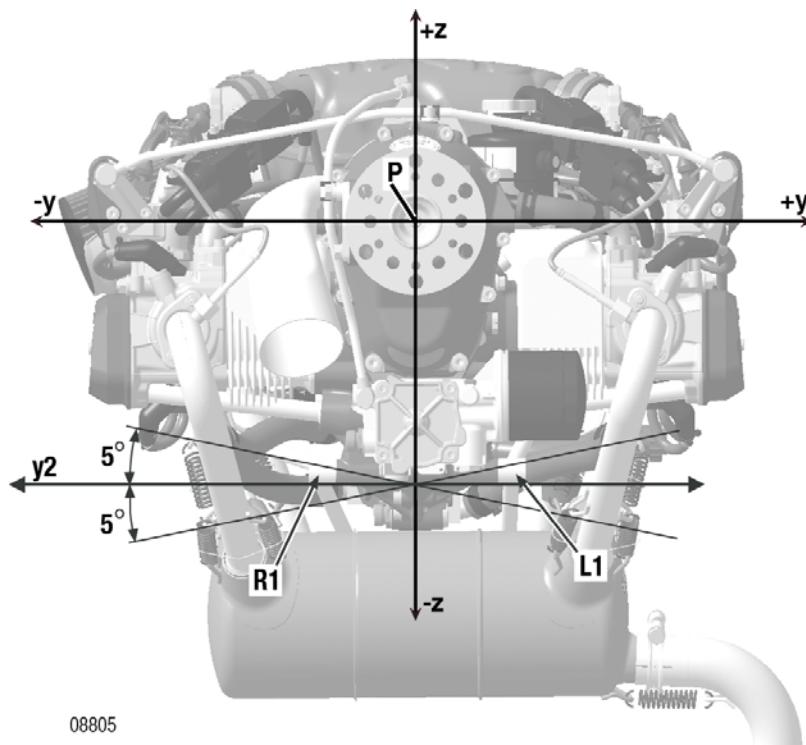


Fig. 6

BRP-Powertrain
INSTALLATION MANUAL

Vertical axis

The y-axis must be perpendicular to the longitudinal axis of the aircraft.
Permissible deviation from perpendicular: $\pm 10^\circ$

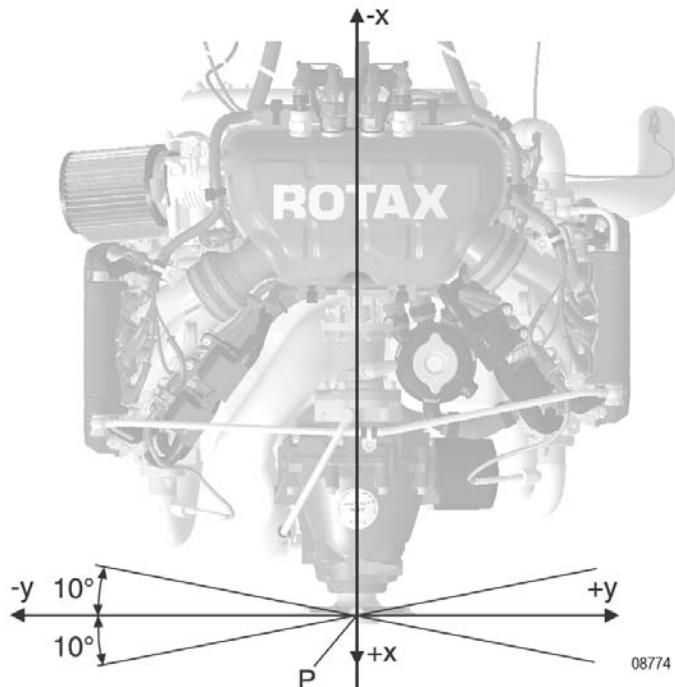


Fig. 7

BRP-Powertrain
INSTALLATION MANUAL

Chapter: 24-00-00
ELECTRICAL SYSTEM

Introduction

This section describes the general requirements for the circuit wiring, electromagnetic compatibility, grounding cables, battery and optional components. More details can be found in the Overhaul Manual.

Table of contents

This section of the installation manual lists the electrical and wiring diagrams of the aircraft engine.

Subject	Page
Requirements for the circuit wiring Approval of electric and electronic components	Page 3 Page 4
Battery Technical data	Page 5 Page 5
Grounding cables (EMS ground point/engine/ground point) Regulator boards on the FUSE BOX FUSE BOX connections	Page 7 Page 8 Page 10
Technical data and connection of the electric components Internal generator Rectifier regulator	Page 11 Page 11 Page 13
External alternator (optional extra) Technical data Connections Requirements for correct operation of the integrated rectifier regulator	Page 15 Page 15 Page 15 Page 16
Engine wiring harness Fitting the Faston connector to the Harness Interface Connector Switch and warning lamp requirements Wiring diagram	Page 19 Page 20 Page 23 Page 26
Wiring diagram: Installation wiring diagram	Page 28
Energy management	Page 29

BRP-Powertrain
INSTALLATION MANUAL

NOTES

1) Requirements for the circuit wiring

General note

NOTICE

The connections have to be made by the aircraft manufacturer in accordance with applicable regulations and the enclosed wiring diagram.

NOTICE

The power supply to the various consumers (e.g. battery) must be adequately protected by fuses. Using incorrectly rated fuses may result in destruction of the equipment.

Under no circumstances must consumer cables (e.g. battery) be routed alongside the ignition cable. There is a risk of electromagnetic interference or damage.

NOTICE

Do not bend, kink, pinch or otherwise improperly stress the wiring harness. Use proper routing, clamping and strain relief on wiring harnesses.

NOTE:

Follow the relevant building regulations (licensing conditions) of the maintenance staff, during manufacturing of the wiring harness and repairs or modifications of the aircraft.

The representation of components (such as switches, protection devices etc.) that are not included in the scope of engine delivery is purely symbolic. It does not constitute a specification of the version and shall therefore only be seen functionally.

The actual interpretation / selection of the corresponding regulations and specified characteristics is the task of the aircraft manufacturer.

BRP-Powertrain
INSTALLATION MANUAL

**1.1) Approval of electric and electronic components
(Equipment Qualification according to RTCA/DO-160)**

RTCA/DO-160 RTCA/DO-160 defines a series of minimum standard environmental test conditions and applicable test procedures for airborne equipment. The purpose of these tests is to provide a laboratory means of determining the performance characteristics of airborne equipment in environmental conditions representative of those which may be encountered in airborne operation of the equipment.

Electric and electronic components (incl. wiring harness, ECU, Fuse Box, PMA, Sensors and Actuators) of the 912 iS Sport/ 912 iSc Sport are considered as part of the equipment and have been tested and qualified according to the following table:

DO-160G, Section 4 - Temperature and Altitude	Cat. B3V*
DO-160G, Section 5 - Temperature Variation	Cat.B
DO-160G, Section 6 - Humidity	Cat.B
DO-160G, Section 7 - Operational Shocks and Crash Safety	Cat.B
DO-160G, Section 8 - Vibration	Cat.S (L general, M for ECU)
DO-160G, Section 9 - Explosion Proofness	X
DO-160G, Section 10 - Water Proofness	Cat. S
DO-160G, Section 11 - Fluids Susceptibility	Cat. F
DO-160G, Section 12 - Sand and Dust	Cat. D
DO-160G, Section 13 - Fungus Resistance	X
DO-160G, Section 14 - Salt Spray	Cat. S
DO-160G, Section 15 - Magnetic Effect	Cat. A
DO-160G, Section 16 - Power Input	Cat.BXX
DO-160G, Section 17 - Voltage Spike	Cat.B
DO-160G, Section 18 - AF Cond. Susceptibility	Cat. Z
DO-160G, Section 19 - Induced Signal Susceptibility §19.3.5 Spikes Induced Into Interconnecting Cables	Cat. ZC
DO-160G, Section 20 - RF Susceptibility	Cat. R
DO-160G, Section 21 - Emission RF Energy	Cat.B
DO-160G, Section 22 - Lightening Induced Trans. Suscept.	Cat. A3G3L3
DO-160G, Section 23 - Lightening Direct Effects	X
DO-160G, Section 24 - Icing	X
DO-160G, Section 25 - Electrostatic Discharge	Cat. A

X.....Test not performed

*Components were tested at „operating low temperature“ of
- 25° C (- 13° F) instead of - 45° C (- 49° F) and „Altitude“ of 18.000 ft
instead of 25.000 ft.

d06204.fm

1.2) Battery

1.2.1) Technical data

General note

NOTICE

The size of the battery needs to be adequate for essential flight equipment and has to meet the airworthiness requirements of its place of operation.

When sizing the battery ensure that during each operating state and also during the transition between two operation states a sufficient supply of the display is guaranteed (e. g. during engine start).

Furthermore, it must be ensured that at least 30 minutes after failure of the primary power supply the display is supplied with sufficient energy, if it is necessary for a safe operation of the aircraft.

Tip

Furthermore, it must be ensured that at least 30 minutes after failure of the primary power supply the display is supplied with sufficient energy, if it is necessary for a safe operation of the aircraft.

NOTE:

If the aircraft is regularly used at temperatures below -5 °C (23 °F) (i.e. the engine start is carried out at these engine and ambient temperatures) it is recommended to provide a connection for an external power supply and that adequate engine pre-heating is applied.

Specification

Nominal voltage	12 V
Internal resistance	Maximal 10 mΩ at -18 °C (-0.4 F°)
Capacity	At least 16 Ah
Cold Cranking Ampere (cca)	At least 350 A at -18 °C (-0.4 F°) (SAE J537)

NOTE:

The responsibility to use a lower capacity battery is up to the aircraft manufacturer. It should be noted that additional electrical loads, which are in some cases required by law, affect the battery performance during the starting process, (e.g. ACL (Anti Collision Light), Navigation Light, Avionic).

NOTICE

The use of rechargeable batteries with lithium, ion technology is not permitted unless a suitable battery management system is available and can be used. The responsibility is up to the aircraft manufacturer. The consent and approval of the relevant aeronautical authority is necessary.

BRP-Powertrain
INSTALLATION MANUAL

The selected battery has to provide a min. voltage of 9 V on the ECU BUS during start-up (also in cold weather conditions). The ECU BUS voltage is displayed via the CAN BUS. The ECU BUS voltage can also be displayed using the BUDS Aircraft diagnostic tool.

Whether the required minimum voltage of 9 V is actually provided (e. g. during engine start) can only be determined with an oscilloscope.

This must also be ensured during the operation of the electric starter. During its first installation in an aircraft model, the voltage must be measured at 3 places.

- Battery voltage (separate voltmeter)
- Voltage on electric starter (separate voltmeter)
- ECU BUS voltage (displayed in BUDS diagnostic tool or on display).

NOTICE

The connection from the battery to the EMS system must be kept separate from the one to the starter relay in order to avoid unnecessary voltage drop.

2) Grounding cables (EMS ground point/aircraft ground point)

Introduction

During installation, a distinction is made between 2 circuits

- Aircraft circuit
- Electronic engine management circuit (EMS circuit).

At the engine start (dynamic condition), the two circuits are connected to each other through the FUSE BOX.

The routing of the grounding cables (EMS ground and aircraft ground) is an essential point to be considered when installing the engine electronics.

The electrical system of EMS works isolated from the rest of the aircraft.

The engine block must be connected to the aircraft using a properly sized line (minimum the same cable cross section as starter supply), for the purpose to cause the starter current and to avoid static electricity between the engine and the aircraft.

Components that must not be connected to the aircraft ground or that can be decoupled from the firewall or in the cockpit:

- ECU (must be installed in the cockpit or an area protected from fire and water/humidity)
- Regulator A of FUSE BOX (the fuse box must be mounted in the engine compartment only)
- Starter relay

Checks

For checking purposes, use a multimeter to carry out a continuity test between rectifier regulator A and rectifier regulator B in the static condition.

NOTE: A continuity must not be present. See Fig. 1.


NOTE: EMS ground must be mounted to the regulator plate A (heat sink of the fuse box) only.

Regulator B represents the negative pole of the internal generator for the supply of the aircraft. Connection of regulator B to the airframe ground or the negative pole of the battery is necessary.

BRP-Powertrain
INSTALLATION MANUAL

Graphic

Continuity check

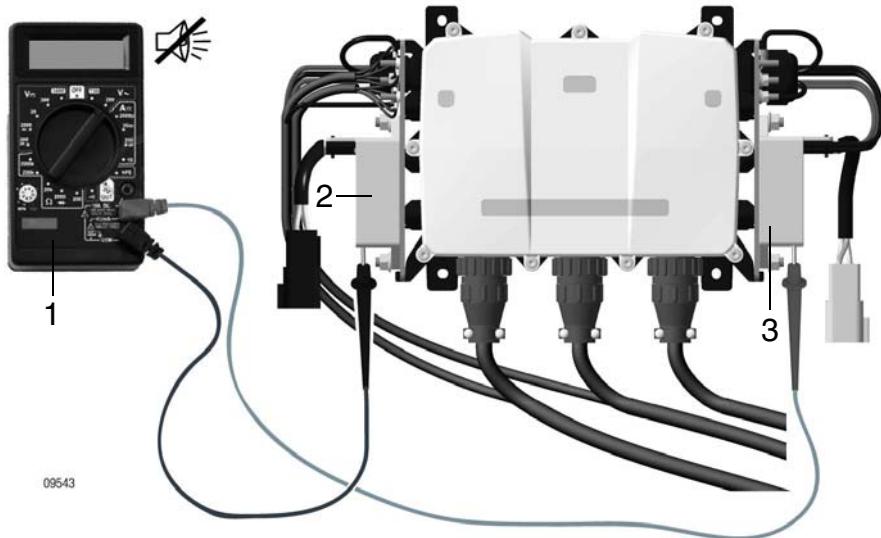

Part	Function
1	Multimeter
2	Rectifier regulator A (black wire connector)
3	Rectifier regulator B (grey wire connector)

Fig. 1

2.1) Regulator boards on the FUSE BOX

See [Fig. 2](#) and [Fig. 3](#).

The EMS grounding cables of the wiring harness (labelled: "Regulator A" or cables with cable lugs) must be connected to the 3 attachment points of the EMS ground (Regulator A). Each cable bundle of ground lines from the wiring harness has to be connected to one of the free fixing points.

EMS ground has 3 interconnected ground connections which may be used interchangeably.


Airframe ground (Regulator B) also has 3 interconnected ground connections which may be used interchangeably, one of which must be connected to the airframe ground.

NOTE: Airframe ground is independent of EMS ground and must NOT be interconnected.

BRP-Powertrain
INSTALLATION MANUAL

Graphic

FUSE BOX

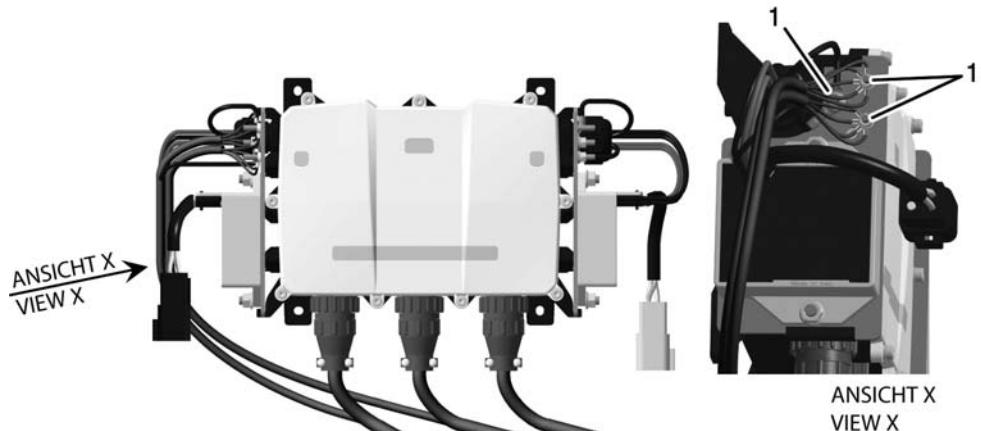

Part	Function
1	EMS ground attachment points

Fig. 2


09544

BRP-Powertrain
INSTALLATION MANUAL

2.2) FUSE BOX connections

Graphic

Connections

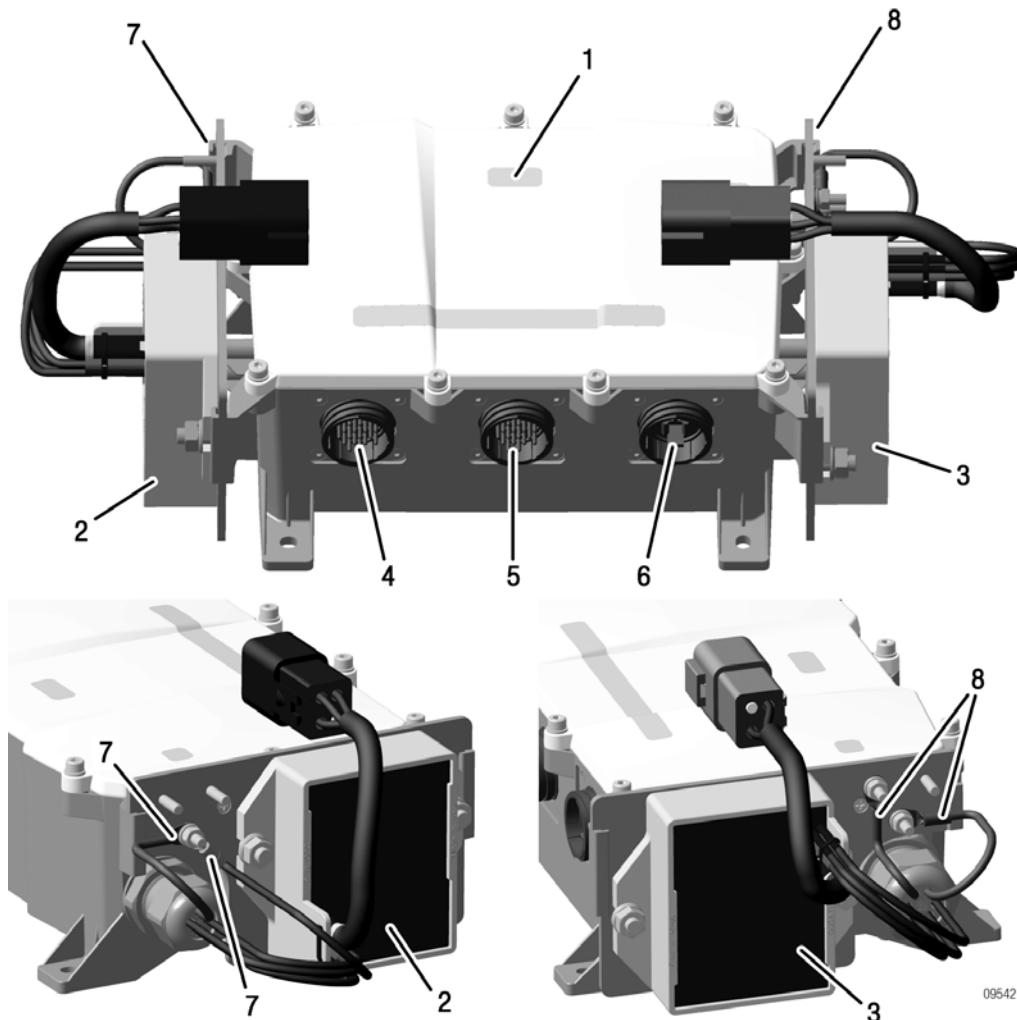

Part	Function
1	FUSE BOX assy.
2	Rectifier regulator A (black plug)
3	Rectifier regulator B (grey plug)
4	Plug connection X1 (LANE A)
5	Plug connection X2 (LANE B)
6	Plug connection X3
7	EMS ground (Generator A)
8	Aircraft ground (Generator B)

Fig. 3

3) Technical data and connection of the electric components

3.1) Internal generator

General note

See Fig. 4.

The internal generator has two isolated coils integrated (individual generators). During the starting operation, the EMS system is powered by the battery. With sufficient speed generator B takes over this function. After the EMS system check, generator A takes over the supply of the EMS system (engine), if the switching threshold is exceeded. Generator B is then used to supply the aircraft instruments and for charging the battery. While the engine is running, generator B can be used for the board instrumentation.

- Generator A 14.2 V/16 A (220 W nominal capacity at 20°C/68 °F)
- Generator B 14.2 V/30 A (420 W nominal capacity at 20°C/68 °F)

NOTICE

If generator A fails, generator B takes over its functions. The onboard computer and the instruments will be supplied by the battery. The battery will no longer be charged!

NOTICE

If generator B fails, the battery will no longer be charged. The engine still runs on generator A and the instruments will be supplied by the battery. The function of the instruments depends on the state of charge of the battery.

The charging of the battery from generator B is not monitored by the EMS. A possibly necessary load control has to be provided by the aircraft manufacturer according to the latest requirements.

Graphic

Performance diagram showing engine speed against amps

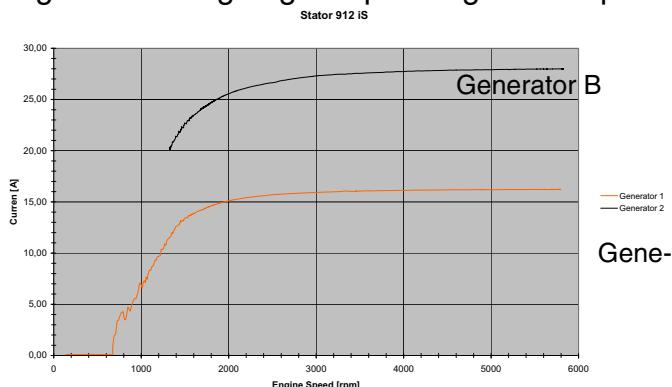


Fig. 4

NOTE:

The measurement is taken at an oil temperature of 135 °C (275 °F).

06591

BRP-Powertrain
INSTALLATION MANUAL

Connections

See Fig. 5.


Power supply wires (1) from the internal generator (exciting from the left side (cylinders 2/4) of the ignition housing) to the regulators on FUSE BOX.

DEUTSCH connector:

- black for generator A/regulator A
- grey for generator B/regulator B

Graphic

Connections

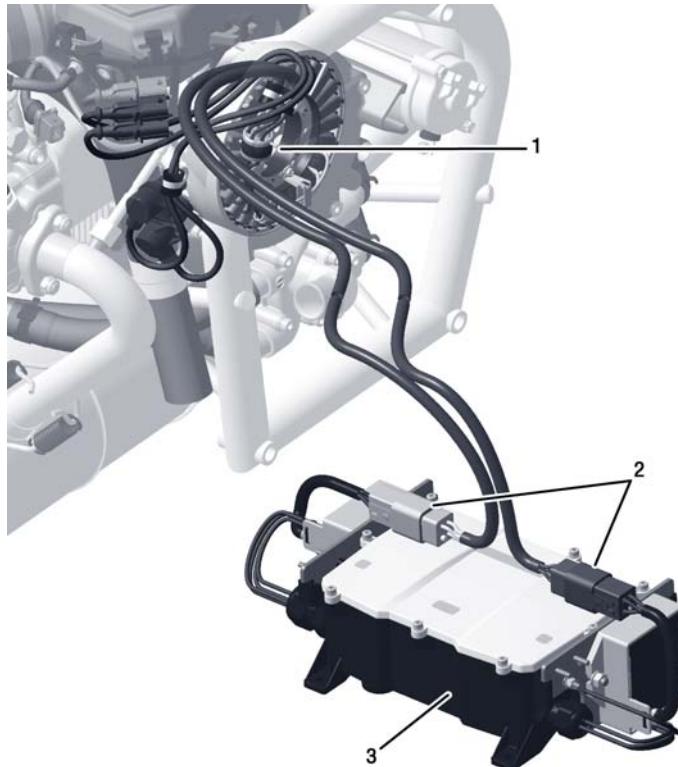

09545


Part	Function
1	Stator
2	DEUTSCH connector
3	FUSE BOX with regulator

Fig. 5

3.2) Rectifier regulator

See Fig. 6.

Version	Three-phase short rectifier regulator.
Output voltage	14.2 V \pm 0.3 (from 1000 \pm 250 r.p.m.).
Component temperature	Max. permissible component temperature: 80 °C (176 °F) (measured in area (2)). NOTE: The performance specifications are given for optimally cooled components.
Weight	See chap. 72-00-00 section 2) Subsection 2.1: Weight.
Graphic	Measurement area for component temperature

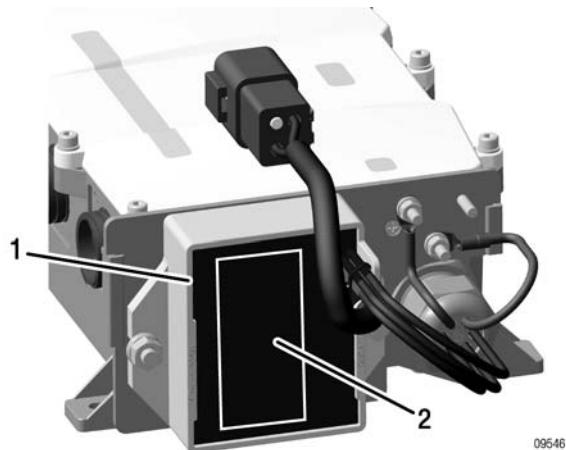

Part	Function
1	Rectifier regulator
2	Measuring area for component temperature

Fig. 6

06385

BRP-Powertrain
INSTALLATION MANUAL

NOTES

BRP-Powertrain
INSTALLATION MANUAL

4) External alternator (optional extra)

General note See Fig. 7.

4.1) Technical data

General note NOTE: The voltage regulator is integrated in the alternator.

Output	Output: Max. 550 W/DC at 6000 r.p.m. (complies ~ 4800 r.p.m. crank-shaft speed)
Output voltage	Output voltage: 13.5 V
Ambient temperature range	Ambient temperature: Min. -30 °C (-22 °F) Max. +90 °C (194 °F)
Weight	See chap. 72-00-00 section 2) Subsection 2.1: Weight.


4.2) Connections

Power supply wires	Power supply wires to external alternator (1) have to be installed depending on the mounting position and according to the regulations of the aircraft manufacturer.
Positive terminal	Positive terminal (2): <ul style="list-style-type: none">- M6 screw connection suitable for cable terminal according to DIN 46225 (tightening torque 4 Nm (35 in.lb)).
Grounding	Via engine block.
Control wiring	Control wiring (3): <ul style="list-style-type: none">- via supplied standard plug (Sumitomo 6111-2568) and 6.3 x 0.8 Faston connectors (female).

BRP-Powertrain
INSTALLATION MANUAL

Graphic

External alternator

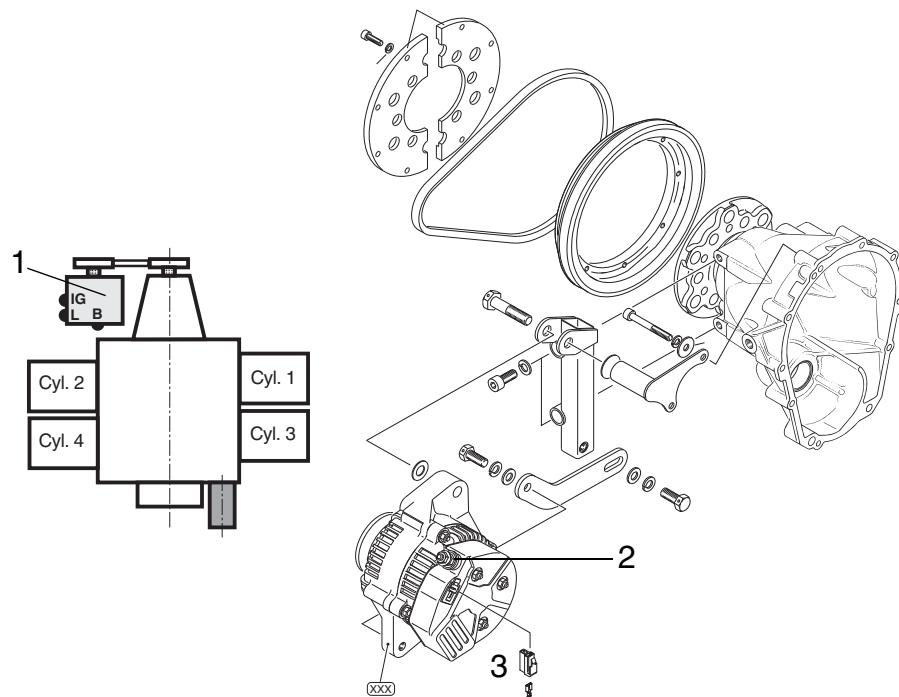

Part	Function
1	External alternator
2	Positive terminal
3	Control wiring

Fig. 7

03199,02764,00547

4.2.1) Requirements for correct operation of the integrated rectifier regulator

Fuse

The rectifier regulator must be protected by a slow blowing fuse or circuit breaker. Fuse or circuit breaker rating must be determined by load, wire size and length.

Load distribution

Due to slightly different output voltages of the regulators (alternator and regulator A/B of fuse box) the power is drawn by the generator with the higher output voltage at low load.

Amperage**NOTICE**

The current over engine speed graph was determined and is only effective under the following conditions:

- Ambient temperature: 20 °C (68 °F)
- Voltage: constant 13.5 V
- Tolerance: max. ± 5 %

NOTE: The speed of the external alternator is 1.24 times the crankshaft speed or 3 times the propeller speed.

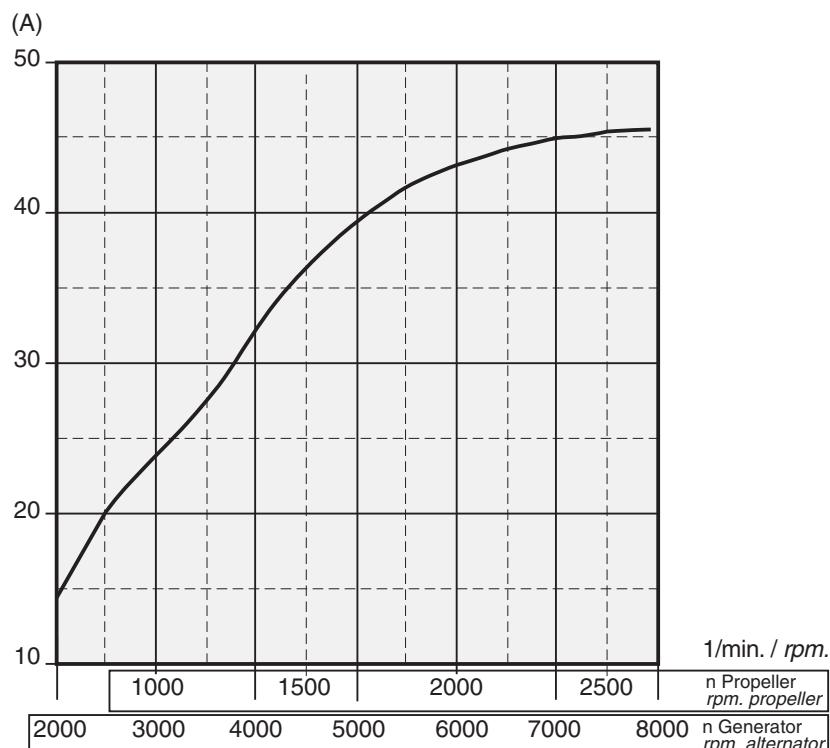
Graphic

Fig. 8

00547

Wiring diagram

Wiring diagram: External alternator.
See Installation wiring diagram page [28](#).

BRP-Powertrain
INSTALLATION MANUAL

NOTES

5) Engine wiring harness

General note	The function of the engine wiring harness is the connection between: <ul style="list-style-type: none">- Control unit (ECU)- FUSE BOX assy.- Cockpit (switch, instruments, maintenance connection)- Engine (sensors, injectors, ignition coils)
	<p>NOTICE The wiring harness must not be shortened or modified.</p>
Sensors/actuators	The sensors and actuators are fitted at factory and connected to the engine wiring harness. Depending on the engine version the exhaust gas temperature sensors are included or already fitted to the GENUINE-ROTAХ exhaust system.
ECU/FUSE BOX connector	Install and lock the connectors of the ECU and/or FUSE BOX with gasket. NOTE: Connectors with gasket difficult to push/pull.
HIC	The HIC (Harness Interface Connectors) connects the control and monitoring instruments and maintenance ports to the engine.

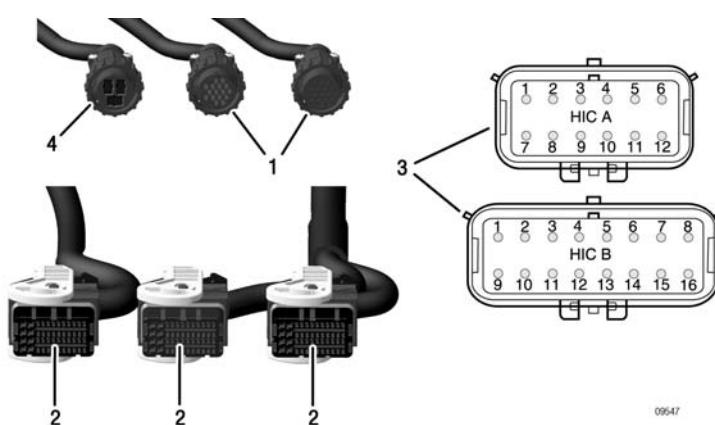


Fig. 9

Effectivity: 912 i Series
Edition 1/Rev. 3

24-00-00

BRP-Powertrain
INSTALLATION MANUAL

5.1) Fitting the Faston connector to the Harness Interface Connector

General note See Fig. 10.

The Faston connector represents the counterpart to the HIC interface on engine side. The specification is within the competence of the aircraft manufacturer, who must ensure that the applicable building regulations are complied with and the technical configurations are supported on aircraft side.

NOTE: Faston connectors (1) are supplied loosely. The Faston connectors and connector casings for the airframe are included in the scope of delivery.

I Special tools

The following special tools are necessary for fitting the Faston connector.

Part number	Description
n.a.	MOLEX Crimping crap 64016-0035/63811-4400
n.a.	MOLEX Disassembly tool 63813-1500

Procedure

Fitting the Faston connector


Step	Procedure
1	Strip cable (2) as required (A).
2	Use suitable crimping tool (3) to fit the Faston connector (B).
3	Press down white integral terminal position assurance (TPA) with needle nose pliers.
4	Push the Faston connector in the corresponding slot (4) of the Harness Interface Connector receptacle until it is locked in place (C).
5	Check for tight fit.

NOTE: The TPA pin holder must not be pushed with excessive force.

BRP-Powertrain
INSTALLATION MANUAL

Graphic

Fitting the Faston connector

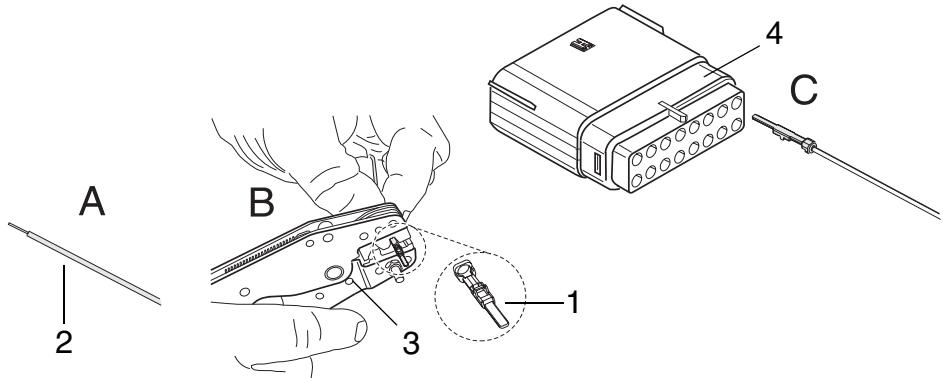

Part	Function
1	Faston connector
2	Wiring (airframe)
3	Crimping tool
4	Harness Interface Connector

Fig. 10

06334

Harness Interface Connector

Pin assignment

PIN No.	Pin assignment	
	HIC A	HIC B
1	LANE_SEL_SW_A_1	LANE_SEL_SW_B_1
2	SUPP_WARN_LAMP_A	SUPP_WARN_LAMP_B
3	SIG_FUEL_PUMP_1	SIG_FUEL_PUMP_2
4	CAN_GND_1_A	CONN_STARTER_REL_SW
5	CAN_LOW_1_A	-
6	CAN_HIGH_1_A	CAN_GND_1_B
7	LANE_SEL_SW_A_2	CAN_LOW_1_B
8	WARN_LAMP_A	CAN_HIGH_1_B
9	GND_FUEL_PUMP_1	LANE_SEL_SW_B_2
10	CAN_GND_2_A ¹	WARN_LAMP_B
11	CAN_LOW_2_A ¹	GND_FUEL_PUMP_2
12	CAN_HIGH_2_A ¹	SUPP_START_SWITCH
13	-	-
14	-	CAN_GND_2_B ²
15	-	CAN_LOW_2_B ²
16	-	CAN_HIGH_2_B ²


¹Maintenance Port LANE A

²Maintenance Port LANE B

d06204.fm

BRP-Powertrain
INSTALLATION MANUAL

Graphic Harness Interface Connector (HIC)

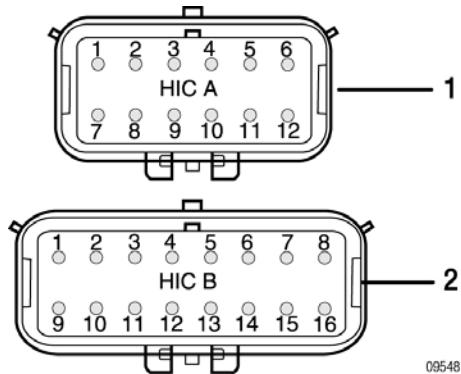

Part	Function
1	HIC A-pin 1 to 12
2	HIC B-pin 1 to 16

Fig. 11

5.2) Switch and warning lamp requirements

Switches

See following table.

The representation of components (such as switches, protection devices etc.) that are not included in the scope of engine delivery is purely symbolic. It does not constitute a specification of the version and shall therefore only be seen functionally.

The actual interpretation / selection of the corresponding regulations is the task of the aircraft manufacturer.

LANE SELECT SWITCH A	Requirement	Connector/slot
Switch type	Toggle-SPST	HIC A
Nominal voltage	28 VDC	
Nominal current	7.5 A	
Number of poles	1-pole	
Designation on wiring harness	LANE_SEL_SW_A_1 LANE_SEL_SW_A_2	1 7

LANE SELECT SWITCH B	Requirement	Connector/slot
Switch type	Toggle-SPST	HIC B
Nominal voltage	28 VDC	
Nominal current	7.5 A	
Number of poles	1-pole	
Designation on wiring harness	LANE_SEL_SW_B_1 LANE_SEL_SW_B_2	1 9

Lane Select Switch A and B must be designed to allow Lane A or B to be enabled or disabled independently from each other.

BATTERY BACKUP SWITCH	Requirement	Connector/slot
Switch type	Toggle (but with mechanical interlock to prevent switch on during standard operation).	FUSE BOX Battery (+)
Nominal voltage	28 VDC	
Nominal current	20 A	
Number of poles	2-pole	
Designation on wiring harness	Not connected to the wiring harness.	
FUSE BOX	Must be installed by the aircraft manufacturer.	

BRP-Powertrain
INSTALLATION MANUAL

FUEL PUMP SWITCH 1	Requirement	Connector/slot
Switch type	Toggle-SPST	HIC A
Nominal voltage	28 VDC	
Nominal current	10 A	
Number of poles	1-pole	
Designation on wiring harness	SIG_FUEL_PUMP_1	3
	GND_FUEL_PUMP_1	9

FUEL PUMP SWITCH 2	Requirement	Connector/slot
Switch type	Toggle-SPST	HIC B
Nominal voltage	28 VDC	
Nominal current	10 A	
Number of poles	1-pole	
Designation on wiring harness	-SIG_FUEL_PUMP_2	3
	+SUB_FUEL_PUMP_2	11

START POWER SWITCH	Requirement	Connector/slot
Switch type	Toggle-SPST, function as described in OM chapter "Engine start"	
Nominal voltage	28 VDC	
Nominal current	20 A	
Number of poles	2-pole	
Designation on wiring harness	Not connected to the wiring harness.	

START SWITCH*	Requirement	Connector/slot
Switch type	Toggle-SPST (non-lockable)	HIC B
Nominal voltage	28 VDC	
Nominal current	5 A	
Number of poles	1-pole	
Designation on wiring harness	CONN_STARTER_REL_SW	4
	SUPP_START_SWITCH	12

External alternator (optional)

EXTERNAL ALTERNATOR SWITCH	Requirement	Connector/slot
Switch type	Toggle-SPST	
Nominal voltage	28 VDC	
Nominal current	5 A	
Number of poles	1-pole	
Designation on wiring harness	Not connected to the wiring harness.	

d06204.fm

BRP-Powertrain
INSTALLATION MANUAL

Warning lamps

WARNING LAMP A	Requirement	Connector/slot
Lamp colour	In accordance with the regulations	HIC A
Nominal voltage	12 V	
Nominal current	Maximum 120 mA	
Designation on wiring harness	SUPP_WARN_LAMP_A WARN_LAMP_A	
		2 8

WARNING LAMP B	Requirement	Connector/slot
Lamp colour	In accordance with the regulations	HIC B
Nominal voltage	12 V	
Nominal current	Maximum 120 mA	
Designation on wiring harness	SUPP_WARN_LAMP_B WARN_LAMP_B	
		2 10

NOTICE

If using LED they will always glow, even with no alarm or warning shown!

Remedy: The use of 2 resistors as shown on page 27.

External alternator indicator lamp (optional)

EXTERNAL ALTERNATOR INDICATOR LAMP	Requirement	Connector/slot
Lamp colour	In accordance with the regulations	
Nominal voltage	12 V	
Nominal current	Maximum 300 mA	
Designation on wiring harness	Not connected to the wiring harness.	

5.3) Wiring diagram

General note	Installation wiring diagram see 24-00-00 page 28 .
Cable cross-section EMS	The cable cross-sections in the EMS diagram (aircraft interface) are minimum data and should be increased in case of voltage drop and upstream fuses according to the situation in the aircraft.
Cable cross-section to the starter	The minimum cable cross-section for the line from the battery to the starter relay and from there to the electric starter and for the ground line (start system) depends on the cable length "l" (= Sum of the supply line and ground line of the electric starter) and has to be calculated according to the following table.

I [m]	I [ft]	A_{min.} [mm²]	A_{min.} [in²]	A_{max.} [mm²]	A_{max.} [in²]	AWG_{min.}
<4	<13	20.408	0.031	25	0.039	4
4<I<4.5	13<I<14.8	22.959	0.036	35	0.054	3
4.5<I<5	14.8<I<16.4	25.51	0.04	35	0.054	3
5<I<5.5	16.4<I<18	28.061	0.043	35	0.054	2
5.5<I<6	18<I<19.7	30.612	0.047	35	0.054	2
6<I<6.5	19.7<I<21.3	33.163	0.051	35	0.054	2
6.5<I<7	21.3<I<23	35.714	0.055	50	0.078	1
7<I<7.5	23<I<24.6	38.265	0.059	50	0.078	1
7.5<I<8	24.6<I<26.2	40.816	0.063	50	0.078	1
8<I<8.5	26.2<I<27.9	43.367	0.067	70	0.109	0
8.5<I<9	27.9<I<29.5	45.918	0.071	70	0.109	0
9<I<9.5	29.5<I<31.2	48.469	0.075	70	0.109	0
9.5<I<10	31.2<I<32.8	51.02	0.079	70	0.109	0

The internal resistance of the battery and the resistance of the electrical system (wires, contact points, relay contacts) largely determine the performance of the starting system. Therefore, the total loop resistance (R_{Smax}) may not exceed 0.015 Ω .

$$R_{Smax} = \sum R = R_{iBatt} + R_C \text{ Starter relay } + R_L + R_{Other}$$

BRP-Powertrain
INSTALLATION MANUAL

Legend

R _{iBatt}	Internal resistance battery
R _{CStarter relay}	Contact resistance starter relay
R _L	Line resistance
R _{Other}	Any other resistors (e.g. Master relays, contact resistance)

Scope of delivery

The representation of components (such as switches, protection devices etc.) that are not included in the scope of engine delivery is purely symbolic. It does not constitute a specification of the version and shall therefore only be seen functionally.

The actual interpretation / selection of the corresponding regulations is the task of the aircraft manufacturer.

Graphic

Installation wiring diagram. See also page [28](#).


NOTICE

Items/components which are not included in the standard scope of engine delivery must be certified the aircraft or fuselage manufacturer in accordance with the latest regulations, such as FAR or EASA.

BRP-Powertrain

INSTALLATION MANUAL

Installation wiring dia- gramm

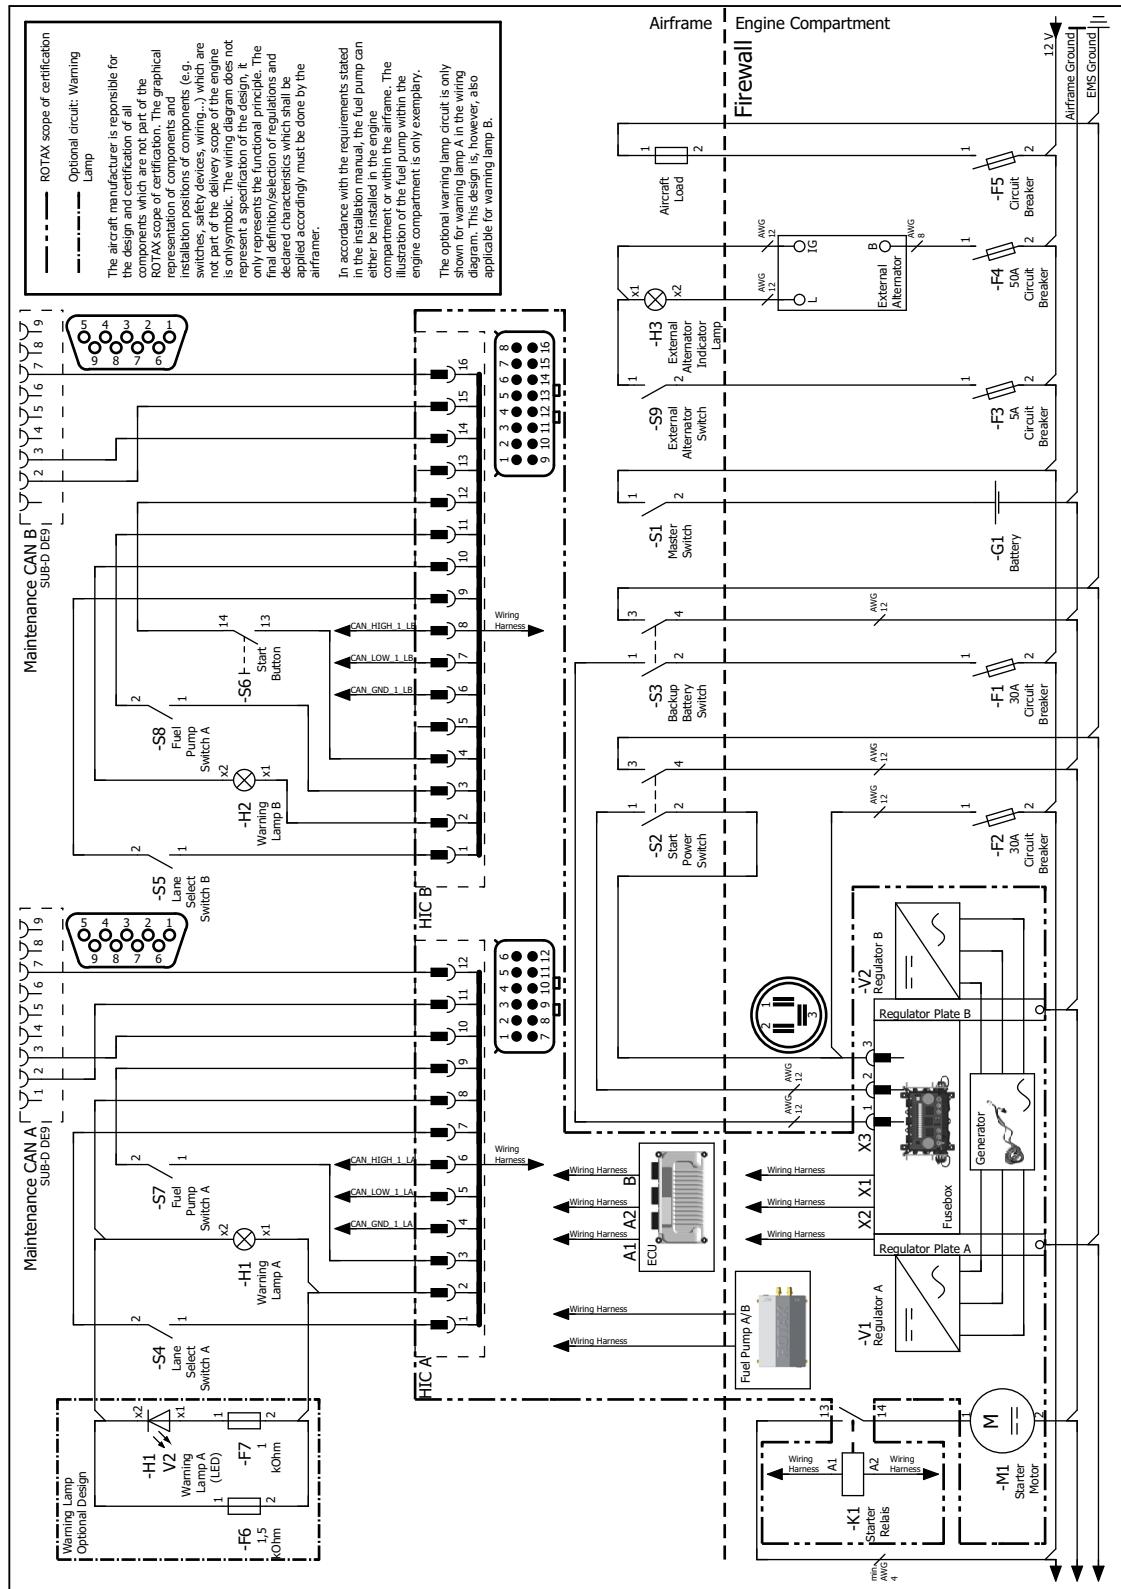

d06204.fm

6) Energy management

General note



The battery and all loads in the aircraft must be dimensioned so, that even if one of the generators fails, a safe flight is ensured.

See the performance diagrams of the internal and external alternators as a function of engine speed.

Possible malfunctions of the supply system have to be taken into consideration by the aircraft manufacturer.

Components

Power consumption of EMS components

Components	Current consumption
Fuel pump (main pump)	min. 10 A
Fuel pump	min. 10 A
ECU	~ 1.2 A
Warning lamp A	max. 120 mA
Warning lamp B	max. 120 mA
FUSE BOX	~ 400 mA

NOTE: A complete analysis of the current consumption of all the fitted consumers is to be carried out by the aircraft or airframe manufacturer.

BRP-Powertrain
INSTALLATION MANUAL

NOTES

BRP-Powertrain
INSTALLATION MANUAL

Chapter: 61-00-00
PROPELLER DRIVE

Introduction



Danger of explosion.

Never operate the engine without propeller as this results in serious engine damage from overspeeding.
Never fit the propeller directly on the crankshaft.

Table of contents

This section of the Installation Manual contains information on the engine propeller component.

Subject	Page
Propeller drive	Page 3
Technical data	Page 3
Operating limits	Page 4
Hydraulic governor for constant speed propeller	Page 5
Technical data for connections	Page 5

BRP-Powertrain
INSTALLATION MANUAL

NOTES

BRP-Powertrain
INSTALLATION MANUAL

1) Propeller drive

General note	The propeller in tractor or pusher arrangement must be fitted on the propeller flange in accordance with applicable regulations. As required utilize one of the three possible pitch circle diameters (P.C.D) on the flange.
	The propeller design must be certified in accordance with applicable regulations, such as FAR or EASA, by the aircraft manufacturer.

1.1) Technical data

Direction of rotation	See Fig. 1 Direction of rotation of the propeller flange: - left, counter clockwise, looking towards face of flange
------------------------------	---

Graphic	Direction of rotation
----------------	-----------------------

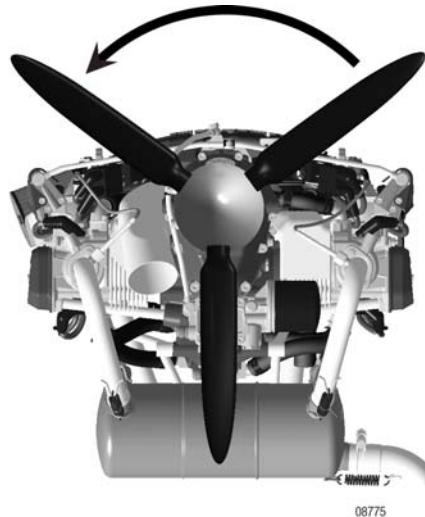


Fig. 1

Transmission	Gear transmission: - $i = 2.4286$ (51 Teeth/21 T)
---------------------	--

BRP-Powertrain
INSTALLATION MANUAL

Propeller shaft flange

See Fig. 2

Attachment of propeller on prop shaft flange:

Pitch circle diameter 75 mm (2.95 in.)	6x through holes 8 mm (0.31 in.)
Pitch circle diameter 80 mm (3.15 in.)	6x through holes 11.5 mm (0.45 in.)
Pitch circle diameter 101.6 mm (4")	6x through holes 13 mm (0.51 in.)
Hub diameter	47 mm (1.85 in.)

| Graphic

Propeller shaft flange

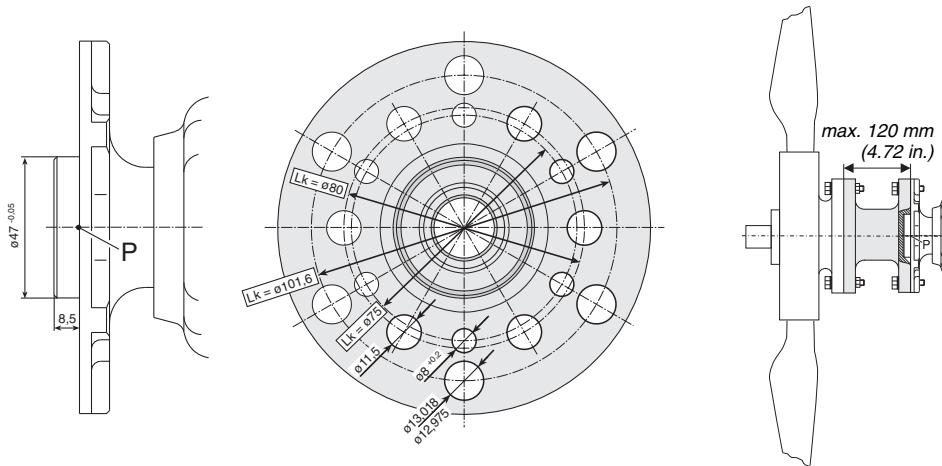


Fig. 2

02581, 09193

1.2) Operating limits

Torque

NOTICE

Modification of the propeller shaft is not permitted.

Max. torque:

- 340 Nm (250.77 ft.lb.) (on propeller)

Max. moment of inertia

Max. permissible moment of inertia on propeller:

- 6000 kgcm² (14.238 lb ft²)
- Normal between 1500 kg cm² and 6000 kg cm² (3.559 lb ft² and 14.238 lb/ft²)

Extension of propeller shaft

- Max. extension of the propeller shaft: 120 mm (4.72 in.)

Out of balance

Dynamic balancing of the propeller as specified by the propeller manufacturer must be carried out.

2) Hydraulic governor for constant speed propeller

2.1) Technical data for connections

General note

See Fig. 3

NOTE: See also SB-912-052 "Installation/use of governors for ROTAX engine type 912 Series", latest issue.

Drive


Drive via propeller gearbox.

- Position of the propeller connection (1) on the governor flange.

Point of support	Axes		
	x-axis mm	y-axis mm	z-axis mm
	-206.3 mm (-8.12 in.)	0	51.5 mm (2.03 in.)

Graphic

Crankcase flange

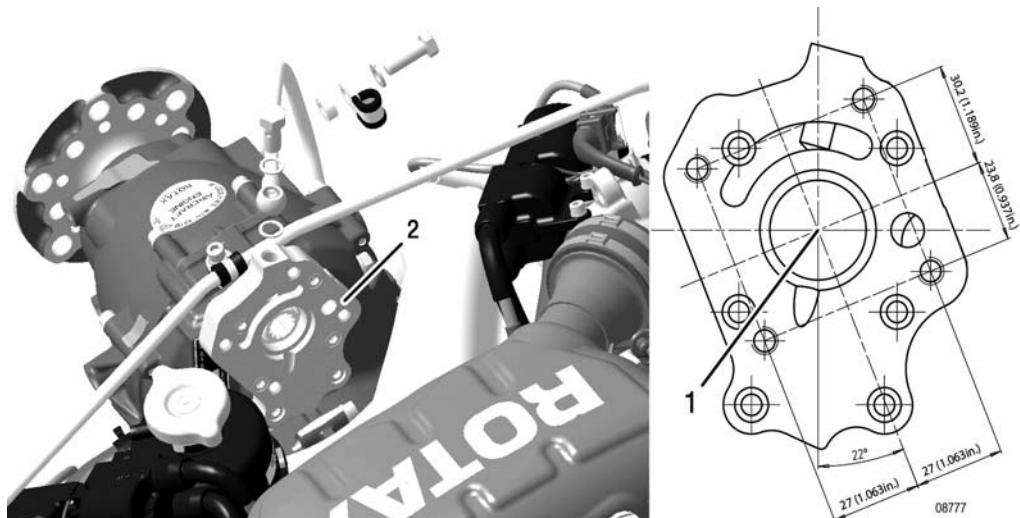

Part	Function
1	Connection for propeller governor
2	Governor flange

Fig. 3

BRP-Powertrain
INSTALLATION MANUAL

Connection

NOTICE

Pay attention to manufacturers specifications!

Gear ratio

NOTE: Gear ratio from crankshaft to hydraulic governor is 1.842, i.e. the propeller governor runs at 0.54 times engine speed.

Mounting pad	AND20010
Thread	M8
Thread length	Max. 14 mm (0.55 in.)
Governor drive	Internal spline 20/40 SMS 1834 NA 14x1.27x30x12
Power consumption	Max. 600 W
Operating pressure	Max. 30 bar (435 psi)

BRP-Powertrain
INSTALLATION MANUAL

Chapter: 72-00-00
ENGINE

Introduction

NOTICE

Certification in accordance with the latest regulations, such as FAR or EASA, must be carried out by the aircraft or fuselage manufacturer.

Table of contents


This section of the Installation Manual contains views of the aircraft engine, technical data and installation dimensions of the engine.

Subject	Page
Engine components, engine views, cylinder designation Side view Front view Top view, rear view	Page 3 Page 3 Page 4 Page 5
Technical data Weight Installation dimensions Centre of gravity of engine and standard accessories Moments of inertia	Page 7 Page 7 Page 8 Page 8 Page 8
Operating limits Deviation from the apparent perpendicular Crankshaft drive	Page 9 Page 9 Page 11

BRP-Powertrain
INSTALLATION MANUAL

Overview

Engine

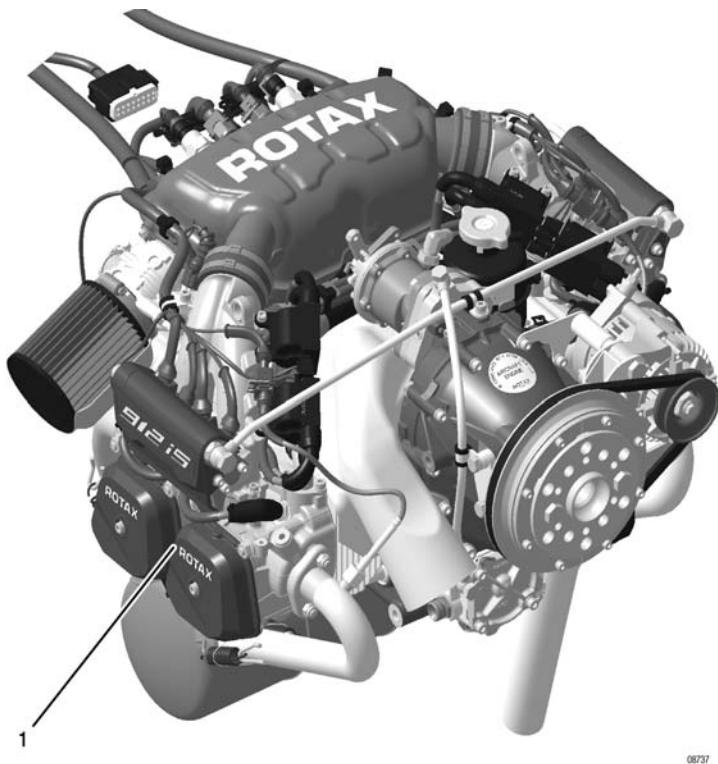

Part	Function
1	Engine Type 912 i Series

Fig. 1

1) Engine components, engine views, cylinder designation

General note

See Fig. 2 to Fig. 4

PTO power take off side

MS magneto side

A points of attachment (for engine transport) - centre of gravity

P zero reference point for all dimensions


NOTE: Allow ± 1 mm on all stated dimensions as manufacturing tolerance.

x, y, z axes for system of coordinates

Cyl. 1 Cylinder 1 **Cyl. 3** Cylinder 3

Cyl. 2 Cylinder 2 **Cyl. 4** Cylinder 4

Side view

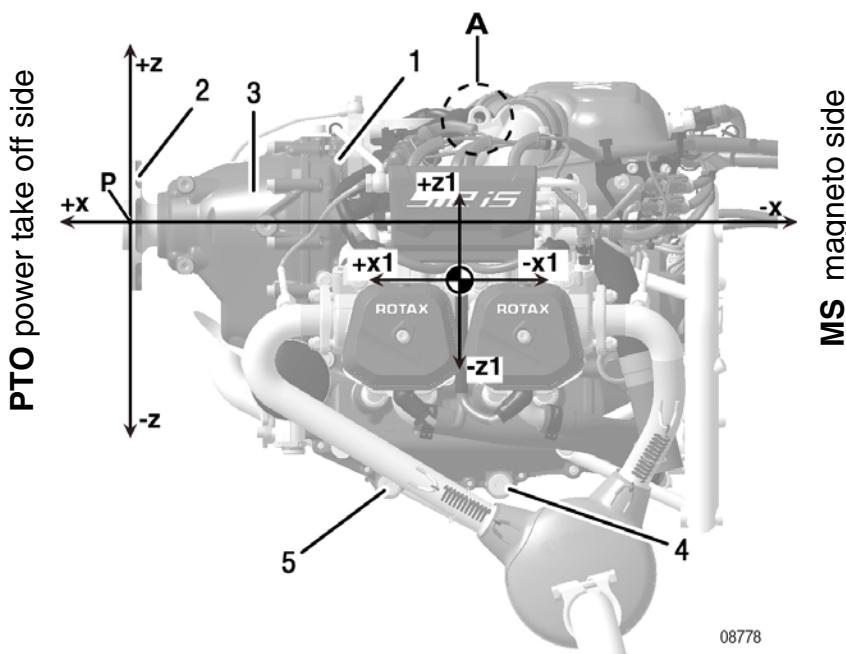


Part	Function
1	Engine number
2	Propeller flange
3	Propeller gearbox
4	Connection for return line (tractor)
5	Connection for return line (pusher)

Fig. 2

BRP-Powertrain
INSTALLATION MANUAL

Front view

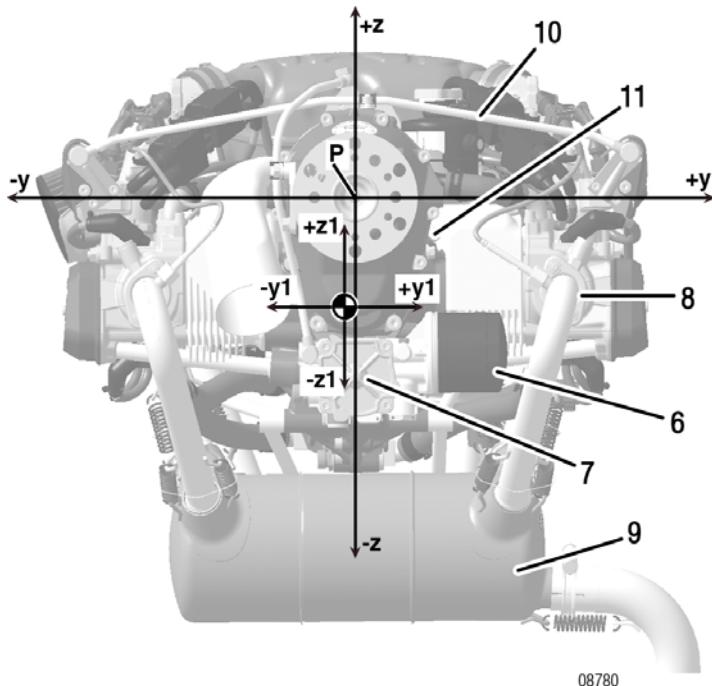


Part	Function
6	Oil filter
7	Oil pump
8	Exhaust flange
9	Muffler assy.
10	Fuel hose assy.
11	Crankshaft locking screw position

Fig. 3

08780

BRP-Powertrain
INSTALLATION MANUAL

Top view, rear
view

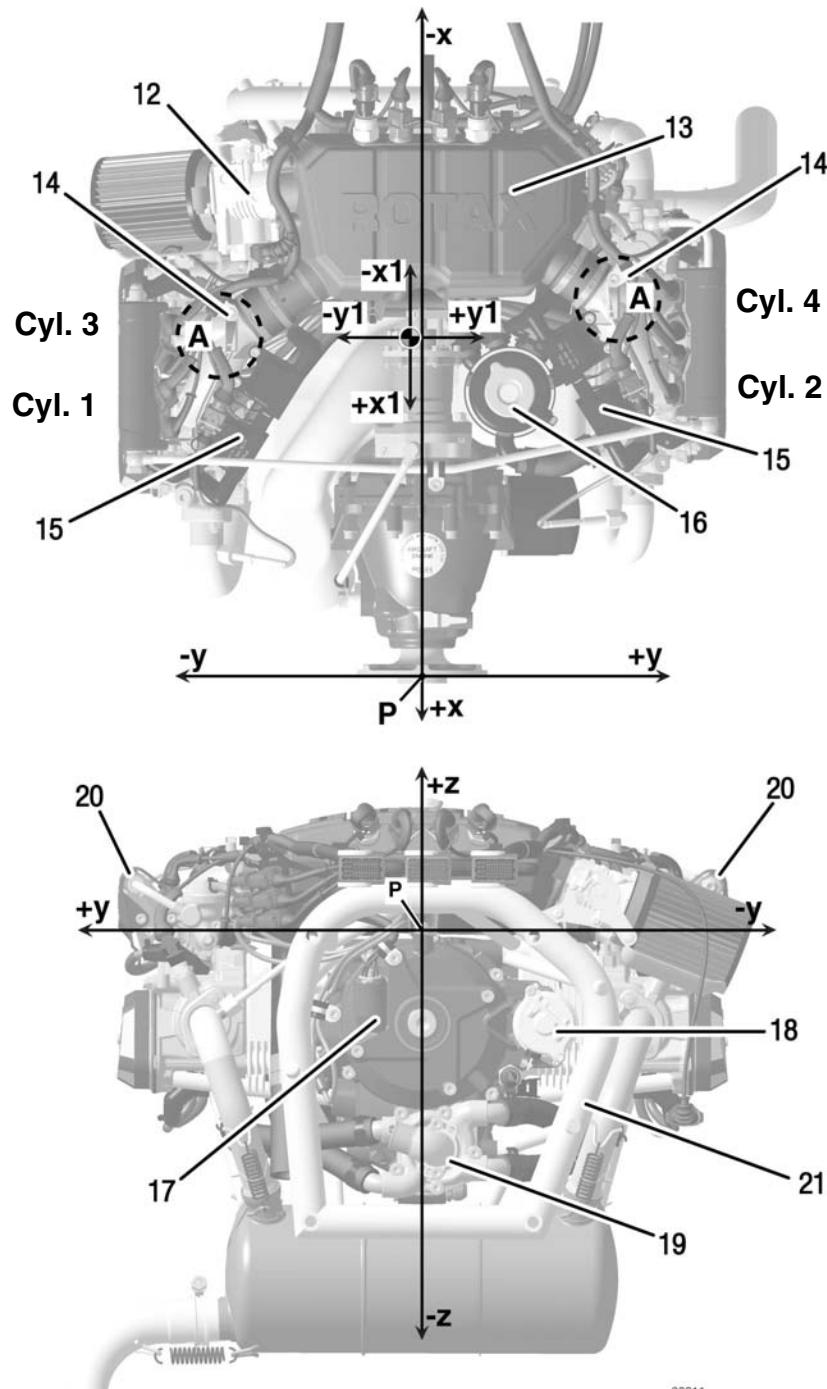

d06205.fm

Effectivity: 912 i Series
Edition 1/Rev. 0

72-00-00

Page 5
January 01/2012

BRP-Powertrain
INSTALLATION MANUAL

Part	Function
12	Throttle valve support assy.
13	Airbox
14	Suspension points
15	Dual ignition coils
16	Expansion tank assy.
17	Ignition housing
18	Electric starter
19	Water pump housing
20	Fuel rail (right, left)
21	Engine suspension frame (ring mount)

Fig. 4

d06205.fm

2) Technical data

General note

To maintain clarity, only data relevant for engine installation and operation will be stated in the Manual.

NOTE: Connecting sizes, capacities, gear and reduction ratios, electric power, permissible temperatures, etc. can be found in the respective section of engine installation or other relevant engine type documentation.

2.1) Weight

General note

The engine weight is defined by the following conditions:

- incl. oil tank
- incl. electrical system: wiring harness, ECU, FUSE BOX, starter relay

Version

Overview

Version	Weight
912 iSc/iS	63,6 kg (140.21 lb)

Accessories

Overview

Accessories	Weight	spare part	optional*
Engine suspension frame	2.0 kg (4.41 lb)	X	X
Exhaust system	4.7 kg (10.36 lb)	X	X
Fuel pumps assy.	1.6 kg (3.53 lb)	X	
Cooling air baffle	0.36 kg (0.79 lb)	X	X
External alternator	3.0 kg (6.61 lb)	X	
Radiator	1.0 kg (2.2 lb)	X	
Air filter	0.15 kg (0.33 lb)	X	
Oil cooler	0.6 kg (1.32 lb)	X	

* Can be installed original to the engine at the factory (also available as a spare part).

BRP-Powertrain
INSTALLATION MANUAL

2.2) Installation dimensions

Standard engine version See Fig. 2 to Fig. 4.

NOTE: All dimensions from zero reference point (P).

	Standard engine version		
	Pos. (+)	Neg. (-)	Total
Max. dimension along x-axis (mm)	8.5 (0.33 in.)	-656.6 (-25.85 in.)	665.1 (26.19 in.)
Max. dimension along y-axis (mm)	288 (11.34 in.)	-288 (-11.34 in.)	576 (22.68 in.)
Max. dimension along z-axis (mm)	247 (9.73 in.)	-311 (-12.24 in.)	531 (20.91 in.)

2.3) Centre of gravity of engine and standard accessories

See Fig. 2 to Fig. 4.

NOTE: All dimensions from zero reference point (P).

	Standard engine version 3	External alternator	Hydraulic governor
Centre of gravity on x-axis (mm)	-327 (-12.87 in.)	-100 (-3.94 in.)	-276 (-10.87 in.)
Centre of gravity on y-axis (mm)	-9 (-0.35 in.)	139 (5.47 in.)	0
Centre of gravity on z-axis (mm)	-102 (-4.02 in.)	6 (0.24 in.)	56 (2.20 in.)

2.4) Moments of inertia

See Fig. 2 to Fig. 4.

	Engine version 2	Engine version 3
Moment of inertia around axis x1-x1 (kg cm ²)	20470 (48.576 lb ft ²)	21210 (50.332 lb ft ²)
Moment of inertia around axis y1-y1 (kg cm ²)	24560 (58.282 lb ft ²)	25450 (60.394 lb ft ²)
Moment of inertia around axis z1-z1 (kg cm ²)	26520 (62.933 lb ft ²)	27480 (65.211 lb ft ²)

d06205.fm

BRP-Powertrain
INSTALLATION MANUAL

3) Operating limits

Manual Documentation overview

Operating limits	Manual
Engine speed	See OM 912 iSc/iS Sport section 2.1
Acceleration	See OM 912 iSc/iS Sport section 2.1
Oil pressure	See OM 912 iSc/iS Sport section 2.1
Oil temperature	See OM 912 iSc/iS Sport section 2.1
Coolant temperature	See OM 912 iSc/iS Sport section 2.1
Ambient temperature for start up	See OM 912 iSc/iS Sport section 2.1
Fuel pressure	See OM 912 iSc/iS Sport section 2.1
Governor	See OM 912 iSc/iS Sport section 2.1
External alternator	See OM 912 iSc/iS Sport section 2.1
Deviation from the apparent perpendicular	See OM 912 iSc/iS Sport section 2.1
Exhaust gas temperature	See OM 912 iSc/iS Sport section 2.1

3.1) Deviation from the apparent perpendicular

General note

See [Fig. 5.](#)

The engine has been designed for a conventional, non-aerobatic, tractor or pusher configuration with the oil return port in the optimum position. In due consideration of these points, the engine will be properly lubricated in all flight profiles.

Bank angle


The resulting bank angle β (depending on acceleration/deceleration) may never exceed the max. bank angle.

NOTE: Pitch or roll angle α is not equal with β , except in a stabilized condition (without acceleration).

BRP-Powertrain
INSTALLATION MANUAL

Graphic

Bank angle

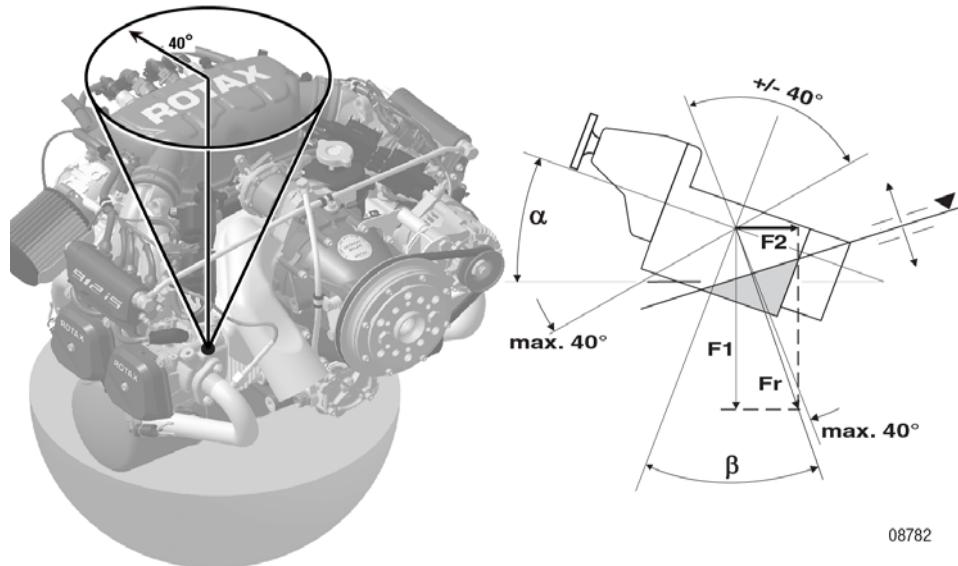


α	Bank or rotation	F_1	Gravity
β	Bank angle	F_2	Acceleration
		F_r	Result of F_1 and F_2

Fig. 5

3.2) Crankshaft drive

See Fig. 6 to Fig. 7.

Max. moment of inertia 15 kg cm² (0.036 lb ft²).

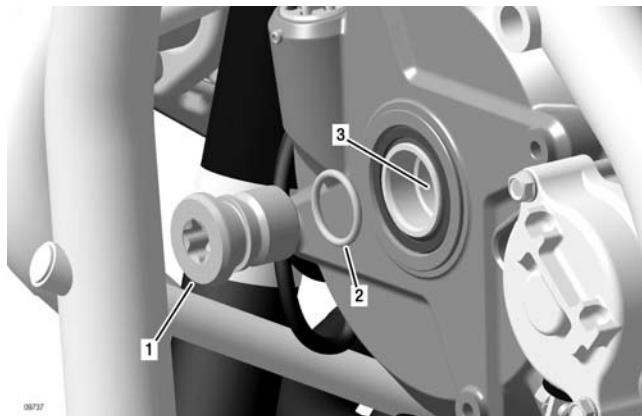

Part	Function
1	Plug screw M22x1,5
2	O-Ring 18x2.5
3	Support bearing

Crankshaft

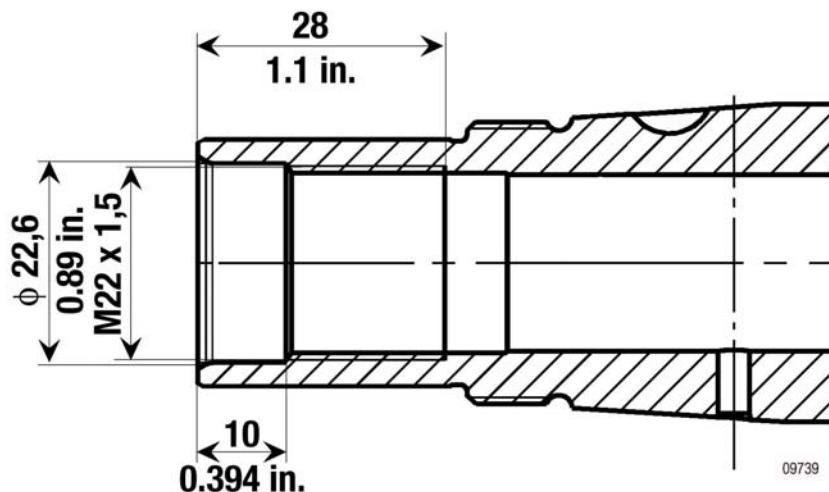


Fig. 6

BRP-Powertrain
INSTALLATION MANUAL

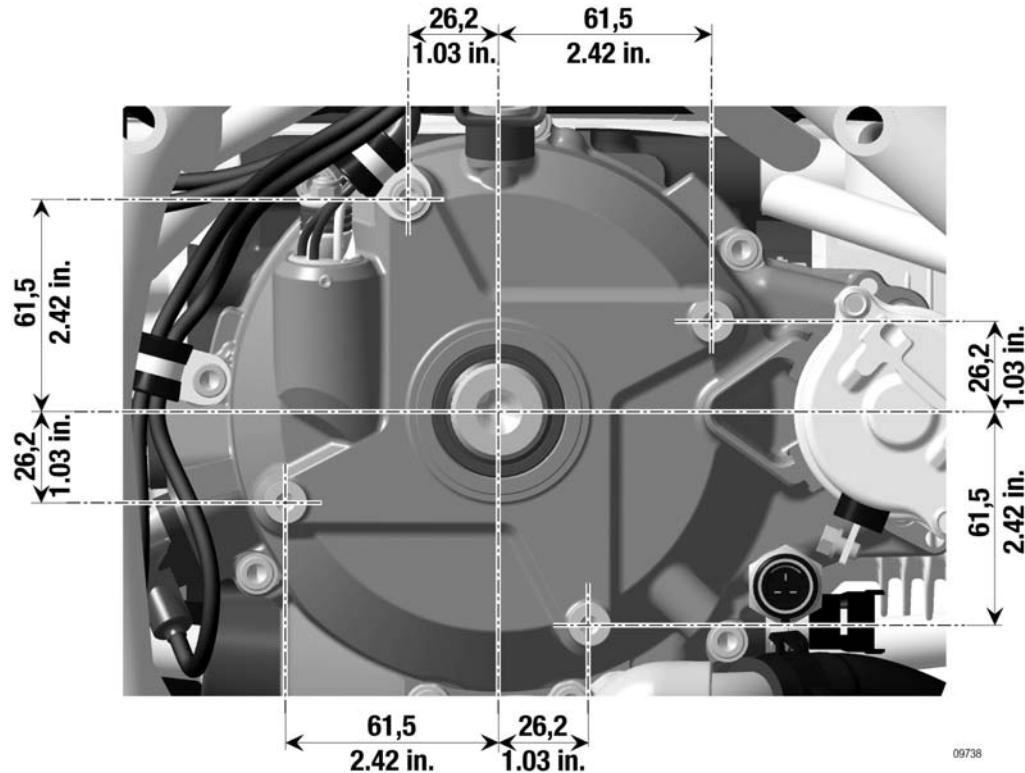


Fig. 7

BRP-Powertrain
INSTALLATION MANUAL

Chapter: 73-00-00
FUEL SYSTEM

Table of contents

This section of the Installation Manual contains information on the aircraft engine fuel system.

Subject	Page
Requirements for the fuel system Operating limits Fuel temperature Fuel pressure indicator Fuel lines Coarse filter Water separator Fine filter GENUINE- ROTAX fuel pump assy. General requirements placed on the fuel pump	Page 5 Page 5 Page 5 Page 5 Page 6 Page 8 Page 8 Page 8 Page 8 Page 12
Connections for Bowden cable actuation and permissible load Technical data Requirements on cable actuation	Page 15 Page 15 Page 15

BRP-Powertrain
INSTALLATION MANUAL

Introduction

NOTICE

The design of the fuel system is the responsibility of the aircraft manufacturer, who has to make sure that the applicable building regulations are complied with and the technical implementation on the aircraft side is ensured.

The fuel system must be designed to ensure that the engine is supplied with sufficient fuel at the correct pressure in every operational situation. Operating limits must be adhered to!

NOTICE

Parallel hydraulic operation of the fuel pumps is not permitted. The fuel pressure regulator can not cope with the flow rate in this case and generator A can not deploy the high consumption of current (Error entry in the ECU).

NOTE:

It should be noted that the engine has an Eco and/or a Power-Mode. The Power-Mode is always active in Single-Lane operation and can be decisive for the range calculation. The fuel consumption charts are available in the Operators Manual.

The fuel delivery is provided by two electric pumps connected in series with bypass valves and engine will operate with either one or both pumps running. The system has to allow both fuel pumps to be tested separately.


There are 2 injectors per cylinder (8 in total). During engine run both injectors per cylinder are in operation. If a failure is detected in any one injector the injection period of the other one on the same cylinder is adjusted to compensate this failure.

The ECU controls all fuel injectors. A single blocked injector will be compensated automatically. If a failure in a fuel injector occurs, this will be reported to the ECU and the pilot will be informed via the instrument panel.

The representation of components that are not included in the scope of engine delivery is purely symbolic. It does not constitute a specification of the version and shall therefore only be seen functionally. The actual interpretation / selection of the corresponding regulations and characteristics is the task of the aircraft manufacturer.

Overview

Fuel system

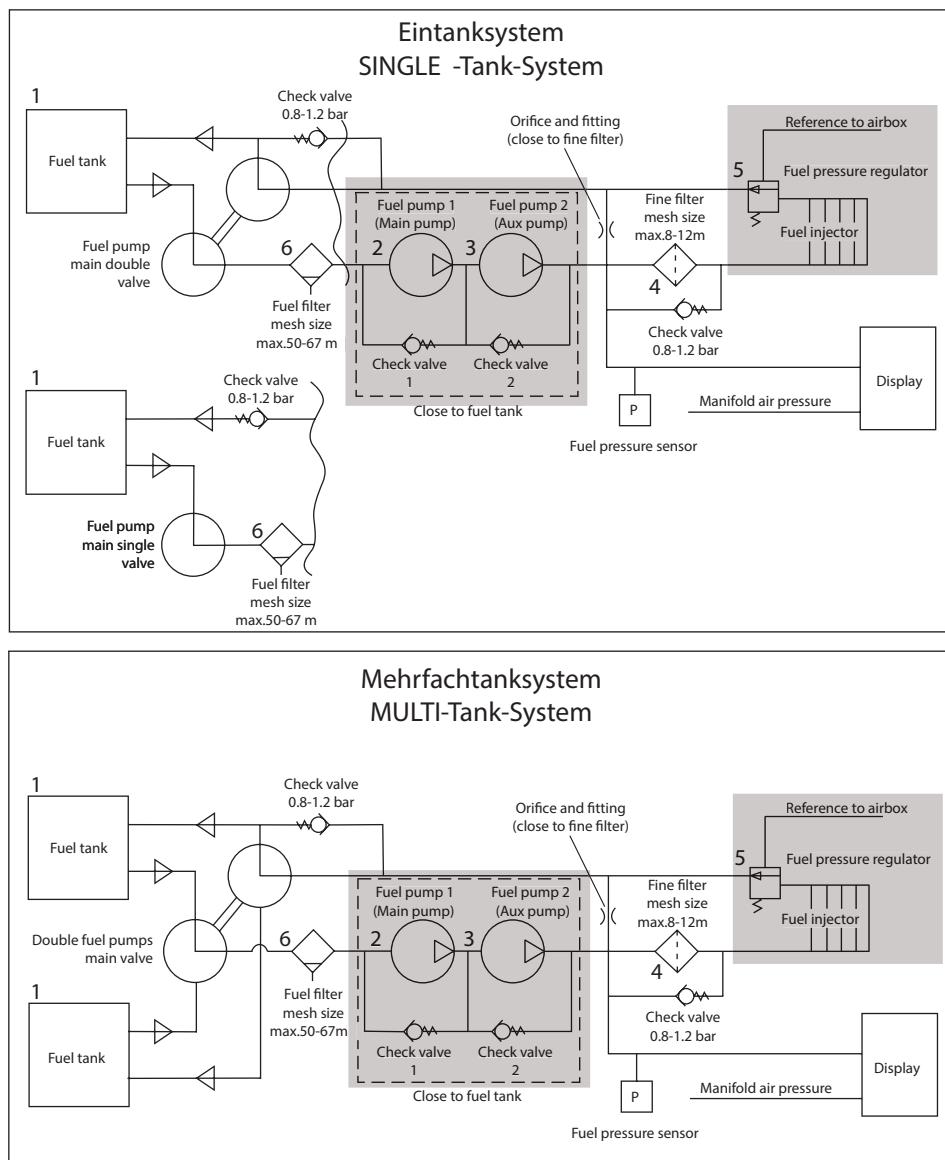

Part	Function
1	Fuel tank
2	Fuel pump 1
3	Fuel pump 2
4	Fine filter
5	Fuel pressure regulator
6	Coarse filter/water trap

Fig. 1

09970_a

BRP-Powertrain
INSTALLATION MANUAL

NOTES

1) Requirements for the fuel system

1.1) Operating limits

General note

NOTICE

The design and layout of the entire fuel system must ensure engine operation within the specified operating limits.

NOTICE

In case of deviations in fuel pressure, the certification according to the latest requirements such as FAR or EASA must be carried out by the aircraft manufacturer.

See 912 i series Operators Manual, section 2.1) Operating Limits.

1.2) Fuel temperature

The fuel system must be designed considering vapour lock depending on the ambient conditions (e.g. pressure and temperature) and the used fuel types (vapour pressure class). Vapour lock may result in engine stoppage.

Depending on the building regulations on aircraft level e.g. the "Hot Fuel Test" has to be passed.

Should problems occur during the test period, the affected components, e.g. the supply line to the fuel pumps, must be cooled.

1.3) Fuel pressure

General

The fuel pressure is adjusted by a mechanical pressure regulator. The pressure regulator is installed in the fuel line after Cyl. 4.

The reference pressure of the fuel system is the airbox pressure.

The operating limit of the fuel pressure must be maintained at the inlet of the fuel pressure regulator.

A fuel pressure sensor is required to monitor the operating limits of the engine. The position of the fuel pressure sensor should be selected so that it is possible to recognize resistances in operation (filter load/contamination).

A fuel pressure gauge must be installed in the aircraft and it should be visible for the pilot.

Tip

The fuel pressure sensor must be placed before the fine filter, so the filter load can be checked. An increase of fuel pressure over the allowed limit means that the fine filter is becoming contaminated. The fine filter should be checked and replaced if necessary.

1.3.1) Pressure measurement at "first installation"

The fuel system must be checked at "first installation" ¹⁾ of the 912 iS engine. A single measurement of the fuel pressure in reference to the intake manifold pressure at inlet of pressure regulator is required by the engine manufacturer. Operating limits regarding to fuel pressure must be observed under all operating conditions. For this measurement a calibrated measuring tool must be used. An appropriate verification must be available by the aircraft manufacturer.

1) "first installation" = Approval of aircraft type.

Tip

For the actual display of (display limits depending on installation) fuel pressure the filter load must also be considered.

1.4) Fuel lines

Safety



Non-compliance can result in serious injuries or death!

Certification according to the latest regulations, such as FAR or EASA, must be conducted by the aircraft or fuselage manufacturer.

NOTICE

To prevent problems with vapour formation, all the fuel lines must be insulated against heat in the engine compartment, routed at distance from hot engine components, without kinks and protected appropriately.

Inlet line

Connection thread on the right-hand injection line (Cyl. 1/3): M14x1.5 or AN-6 (9/16-18 UNF). The inlet line must have an inner diameter of minimum 7,5 mm (0.3 in.) (AN-6 or 3/8").

d06206.fm

BRP-Powertrain

INSTALLATION MANUAL

| Return line

NOTICE

With the engine switched off (with both fuel pumps switched on), the pressure on the output of the fuel pressure regulator must not exceed 0.5 bar (10.15 psi) (relative to ambient pressure).

Connection thread on fuel pressure regulator: 9/16-18 UNF. The return line must have a minimum inner diameter of 7,5 mm (0.3 in.) (AN-6 or 3/8").

NOTICE

If no bypass line is installed, the pressure release in the fuel lines is very slow. This must be noted accordingly in the manuals of the aircraft manufacturer (fuel lines are possibly under full operating pressure even after engine stop).

The fuel lines must have a minimum inner diameter of 7,5 mm (0.3 in.) (AN-6 or 3/8")

Bypass line

Tip

To allow venting of the fuel system after a potential inclusion of air, install a restricted bypass line between the inlet (pressure side of the fuel pump module) and the return line. In this bypass line a restricted jet must be installed so that there is an ideal balance between short venting time and minimum fuel flow rate.

The positioning and dimensioning of the jet is up to the aircraft manufacturer.

Tip

For better heat dissipation select fuel lines made of metal whenever practicable (except for flex hoses to/ from engine).

NOTE:

The switching between several fuel tanks at power loss due to fuel shortage must be given within a defined period of time and without falling below the minimum performance limit and must be ensured by the aircraft manufacturer. Refer to the latest requirements such as FAR or EASA.

Screw clamp

Secure fuel lines with suitable screw clamps or by crimp connection.

1.5) Coarse filter

The coarse filter must be installed such that it is easily accessible for maintenance work and can be inspected as per the maintenance overview.

A coarse filter with mesh size from 50 - 67 micron (0.0019 in.-0.0026 in.) must be provided in the supply line between the tank and the fuel pumps. This filter must be of sufficient capacity to prevent complete blockage between maintenance intervals.

1.6) Water separator / Gascolator

The installation of a water separator/gascolator must be carried out by the aircraft or fuselage manufacturer and verified according to the latest regulations, such as FAR or EASA.

1.7) Fine filter

The fine filter must be installed so that it is easily accessible for maintenance work and can be inspected as per the maintenance overview.

The fine filter with following specifications must be installed between the fuel pumps (modul) and the injection rail (cylinder 1/3):

Filter mesh size: 8 - 12 micrometer (0.0003-0.0005 in.)

Fuel flow rate: min. 90 l/h

Differential pressure: min. 0.02 bar (0.29 psi)

1.8) GENUINE-ROTAX fuel pump assy.

NOTICE

Fuel pumps are only permitted in connection with the GENUINE-ROTAX steel housing. When not using this assy., the aircraft manufacturer has to perform all tests according to the latest construction regulations.

NOTE: The GENUINE-ROTAX fuel pump unit has been tested and approved according to CS-E-130. Thus, the fuel pump unit can be installed on the firewall without additional fire protection.

The electrical fuel pump must be attached near the tank, taking advantage of a "cool" installation position in order to ensure a safe fuel supply, especially with regard to the risk of vapour lock.

BRP-Powertrain
INSTALLATION MANUAL

NOTE: The cable length for the fuel pumps can be extended, if necessary. For this a ROTAX plug kit is available.

NOTICE

Do not connect additional load (additional fuel pumps, lamps, LED, etc.) to the power supply of the fuel pumps.

The wiring is manufactured for the GENUINE ROTAX fuel pump assy. only.

1.8.1) Current input (Operating condition of the fuel pumps: ON)

Voltage	Current
12 V	9.1 A
14 V	10.1 A
16 V	11.2 A

1.8.2) Technical data

Graphic

The technical data of the fuel pumps provided by ROTAX is shown below.
See [Fig. 2](#) and [Fig. 3](#).

a) Dimensions: Connection 9/16-18 UNF

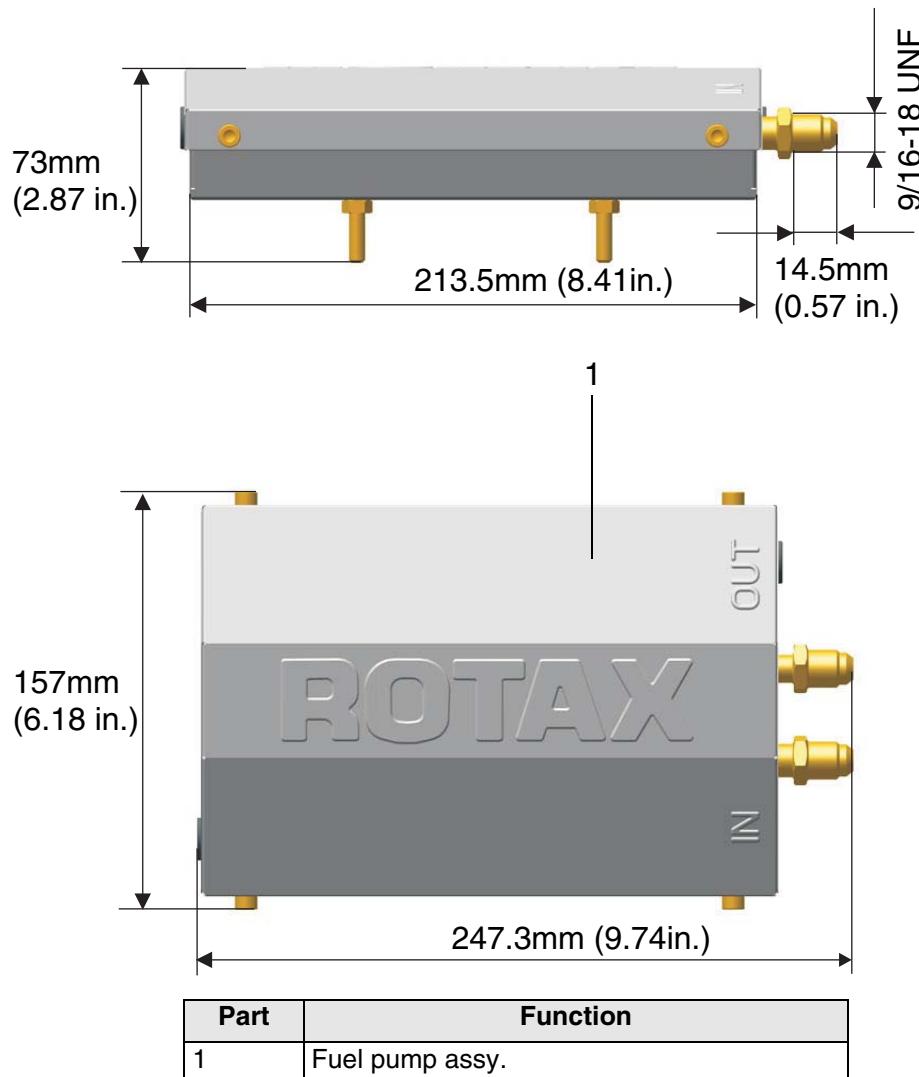



Fig. 2

06333

d06206.fm

BRP-Powertrain
INSTALLATION MANUAL

b) Dimensions: Connection M14x1.5 metric

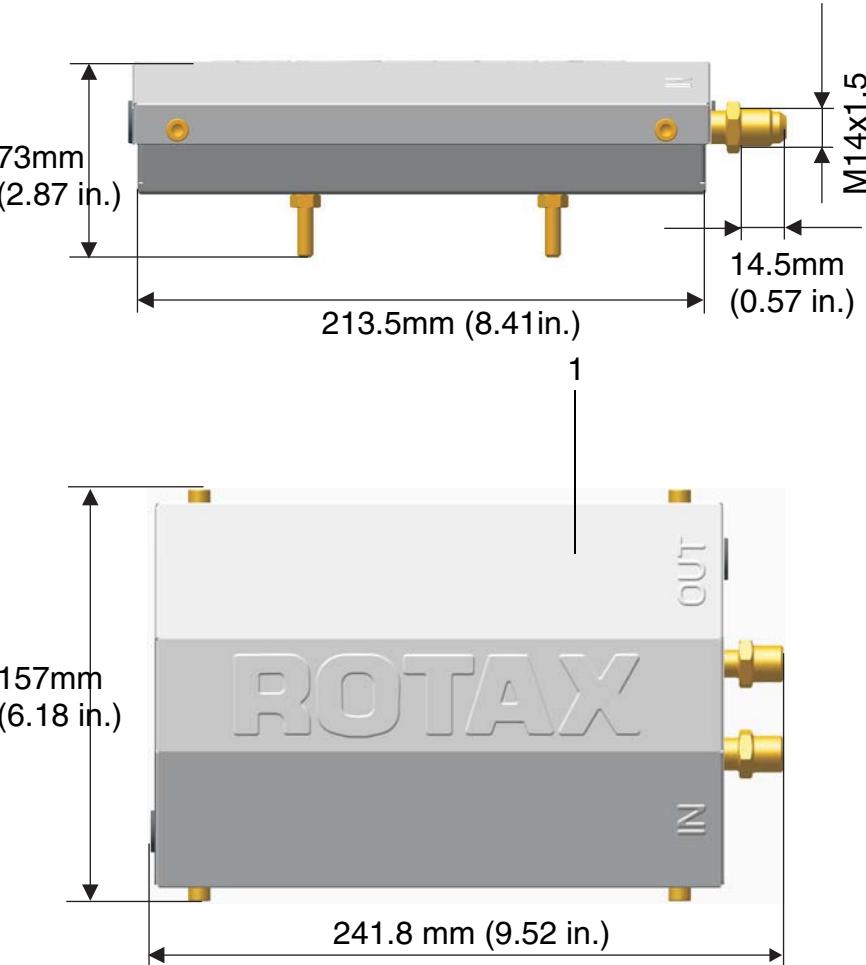

Part	Function
1	Fuel pump assy.

Fig. 3

06398

- Housing: stainless steel
Nominal voltage: 12 V
Capacity: approx. 120 l/h (31.7 US gal/h)
Pressure: min. 4.5 bar (65.3 psi) (absolute pressure)
Absorption capacity: up to -400 mbar (-5.8 psi) compared to ambient (depending on the vapor pressure of the fuel used)
Check valves:
a) opening pressure max. 70 mbar (1.02 psi)
b) resistance max. 70 mbar at 75 l/h (19.8 US gal/h)
c) pressure safe up to 20 bar (290 psi)

d06206.fm

Effectivity: 912 i Series
Edition 1/Rev. 2

73-00-00

Page 11
January 01/2014

1.8.3) General requirements placed on the fuel pumps

⚠ WARNING

Non-compliance can result in serious injuries or death!

The pressure in the return line must not exceed the value stipulated in section 1.4.

Requirement	regarding delivery
Min. delivery rate	56 l/h (14.79 US gal/h)
Min. fuel pump pressure	4.5 bar (65.26 psi) absolutely (at sea level)

Power supply wires

NOTE: If the length of the power supply line is insufficient, it can be extended. A ROTAX connector set is available.

NOTICE

The responsibility for correct implementation and use of the power supply wires between harness connector and fuel pump is up to the aircraft manufacturer or the authorized Service Center, which performs the work.

For use as a power supply line for supplying the fuel pumps off the standard wiring harness, a line insulated with PTFE, ETFE or higher has to be used. The construction regulations for each aircraft class are mandatory and have to be applied and complied with.

Wire size

The cross-section of the power supply wire must be at least 1.5 mm²/16 AWG (0.0023 in²) of stranded, coated copper. The length of the power supply wire between the harness connector and fuel pump must be selected so that the voltage drop along the additional wire does not exceed < 500 mV.

In accordance with the construction regulations, the aircraft manufacturer or the approved Service Center can also develop their own cable design.

NOTICE

The aircraft manufacturer or the approved Service Center must ensure that the fuel pump is supplied with sufficient electrical energy to maintain the required minimum values for the engine and the fuel pressure and volume flow in each operating state and in every flight attitude.

Wire construction The wire construction must be a shielded twisted pair cable (STP, 40x twisted per meter) to meet the requirements of the EMC Directive (electromagnetic compatibility).

Tip**Tip**

In case of supply problems of the fuel pump, the fuel tank should be emptied and filled with AVGAS. If the problem does not occur at the next test (with AVGAS), then this is a sign of formation of vapor bubbles when using MOGAS (or auto fuel).

Tip

Tips that will have a favorable impact on the installation of the 912 iS/iSc:

- Single tank (large volume of fuel in the tank, just a few fuel lines)
- Catchtanks in the wing tanks. This provides the fuel supply in every flight situation/position

Headertank (the following reference values should be considered):

- Tank should be made of light metal
- Tank volume at least 5 l (1.32 US gal)
- A sump should be integrated into the headertank
- Provide connection for a "Low Fuel" sensor
- The venting line from header tank to wing tank should generally be on an incline to avoid trapping bubbles. The venting line must have an inner diameter of at least 12 mm (0.50 in)
- Fuel feed lines from the wing tanks to the header tank should be on a steady decline

Tip

Information about properties which have proved unfavorable impact on the installation of the 912 iS/iSc:

- Fuel lines smaller than 7.5 mm (0.30 in) (AN-6 or 3/8") of inner diameter
- Multi-tank systems without Catch-, Headertank
- Coarse or fine filter not in use
- Fuel cock position on the pressure side of the fuel system (after the fuel pump module)

BRP-Powertrain
INSTALLATION MANUAL

Tip

Fuel pressure regulators have very precise tolerances and are generally reliable. Pressure fluctuations are not caused by the pressure regulator, they have to be searched in other areas (filter clogged, pulsation of lines, kinks in the hoses, etc.) of the fuel system, before troubleshooting the pressure regulator.

Tip

Vapor bubbles in the return line must be efficiently vented out of the fuel system to atmosphere. Adequate fuel tank venting system design is imperative. Large vent lines with (most) direct routing avoiding low points are desired.

Tip

A header tank design that efficiently jets vapour bubbles back to the fuel tanks and atmosphere without possibility of re-entry into the suction line, is critical.

Tip

Non drainable low points in feed, return and vent lines must be avoided.
Any low points must allow for drainage of water and other contaminants.

⚠ WARNING

At the low points, accumulations of water can freeze and cut off the flow.

d06206.fm

2) Connections for throttle bowden cable actuation and permissible load

General note

NOTICE

The specified permissible loads must never be exceeded!

2.1) Technical data

Connections

Connection for throttle valve:

Connection on throttle lever:	Set screw M6x12
Tightening torque:	4 Nm (3.32 lb ft) (suitable for flexible cable), 1.5 mm (0.06 in.) steel rope or single-strand wire)
Cable travel:	65 mm (2.56 in.)
Actuating force:	Min. 7.5 N (1.69 lb-force) Max. 20 N (4.5 lb-force)
Max. permissible actuating force:	20 N (4.5 lb-force)

2.2) Requirements on cable actuation

Throttle lever not connected

⚠ WARNING

Non-compliance can result in serious injuries or death! With throttle lever not connected the throttle valve will remain fully open. **The starting position of the throttle valve is therefore full throttle!** Therefore never start the engine without connecting the throttle lever.

⚠ WARNING

Non-compliance can result in serious injuries or death!
The cable actuators being used must not be affected at all by vibrations emanating from the engine or the airframe.

Bowden cable

The Bowden cable must be adjusted so there is free travel of 1 mm (0.039 in.).



Throttle lever stop

The idle speed must not be adjusted by a throttle stop in the cockpit. The throttle lever must contact the idle speed stop screw on the engine (idle speed, see latest Operators Manual).

BRP-Powertrain
INSTALLATION MANUAL

Graphic

Cable actuation

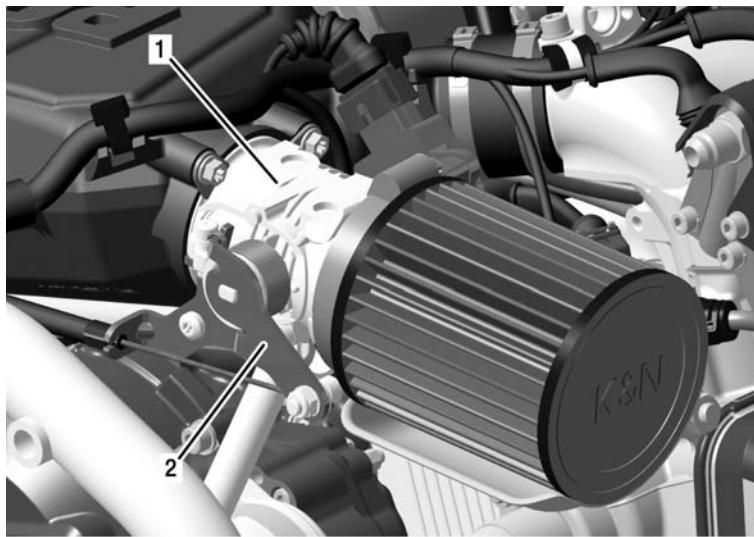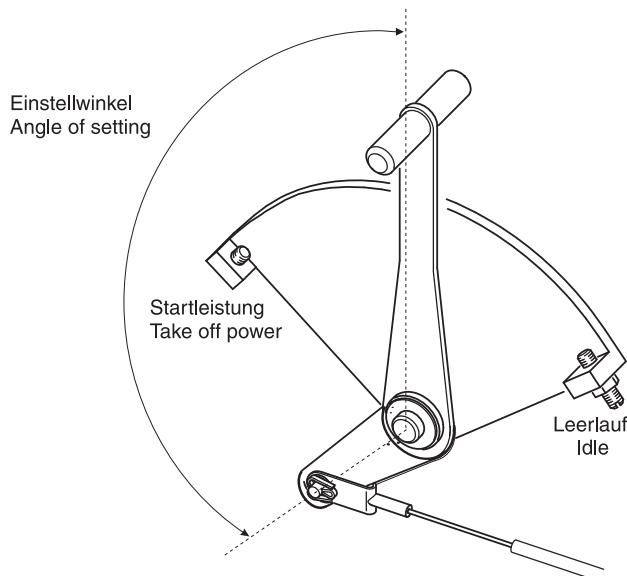

Part	Function
1	Throttle valve
2	Throttle lever

Fig. 4

⚠ WARNING

Non-compliance can result in serious injuries or death!
Adjust Bowden cable such that throttle valve can be
fully opened and closed. Use Bowden cable with mini-
mized friction so that the return spring on the throttle
valve can open the throttle valve completely.

d06206.fm

BRP-Powertrain
INSTALLATION MANUAL

Chapter: 74-00-00
IGNITION SYSTEM

Introduction

The ignition system is powered by the ECU and has fully mapped variable timing. It is completely doubled up. Either of the ECU's can operate the double ignition coils. If a fault occurs with the ignition system the ECU informs the pilot by warning lamps through the display in the instrument panel.

NOTE: All components are installed on the aircraft engine as standard.

Table of contents


This section of the Installation Manual contains information on the aircraft engine ignition system.

Subject	Page
Connection to rectifier regulator	Page 3

BRP-Powertrain
INSTALLATION MANUAL

Overview

Ignition system

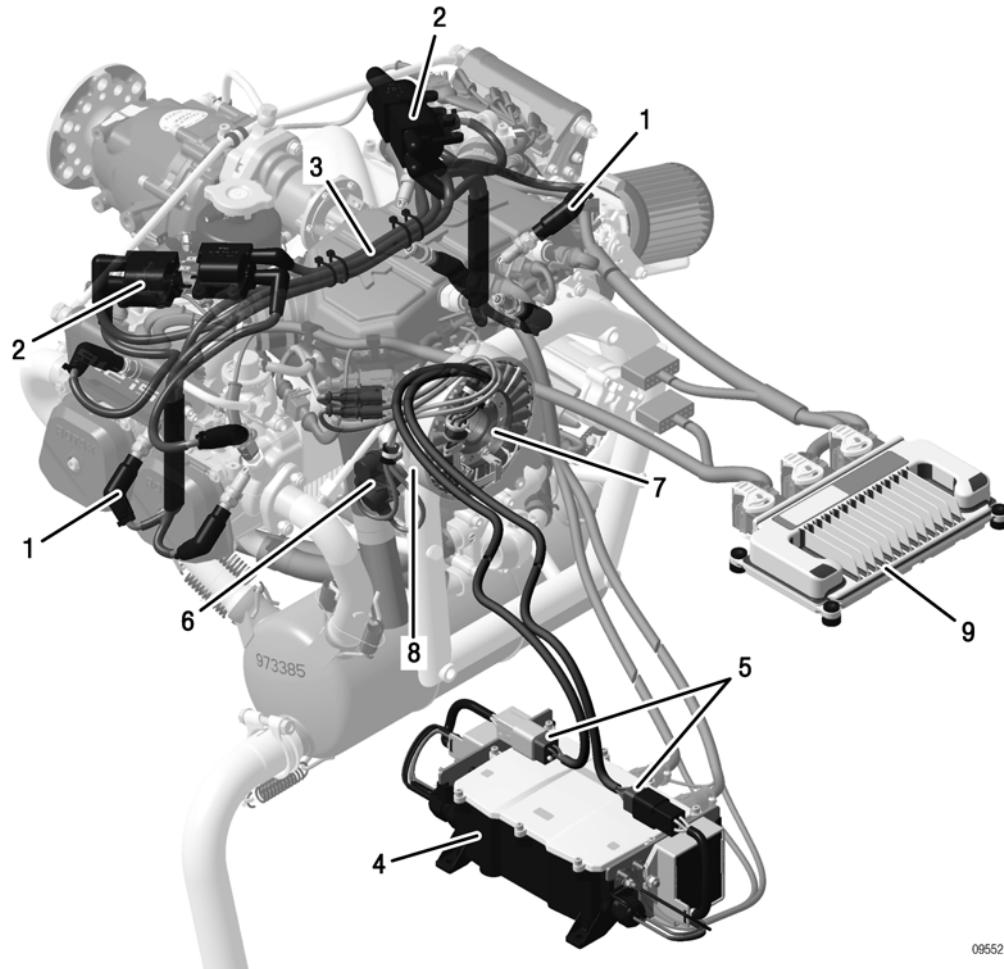

Part	Function
1	Resistance spark plug connector
2	Dual ignition coil
3	Ignition cable
4	FUSE BOX assy.
5	Electrical LINE A+B with connectors
6	Crankshaft position sensors
7	Stator assy.
8	Fly wheel
9	ECU

Fig. 1

1) Connection to rectifier regulator

General note

WARNING

Non-compliance can result in serious injuries or death!

The general safety information must be observed for all work on the aircraft engine and its surrounding components.

The following components must be connected for proper operation of the ignition system.

NOTICE

Connecting the components incorrectly will mean that there will not be enough energy for the on-board power supply or to charge the battery!

NOTICE

The two connectors are coloured differently to prevent them being connected incorrectly:

- Black for generator A LINE - rectifier regulator (A)
- Grey for generator B LINE - rectifier regulator (B)

NOTE:


Generator A is only used for electronic engine components (ignition, injection and sensors).

Generator B is used primarily to start the engine (Generator B is in use till 2400 rpm longer than 3 sec, then the ECU automatically switch over to generator A) and to charge the aircraft battery.

BRP-Powertrain
INSTALLATION MANUAL

Graphic

Ignition system

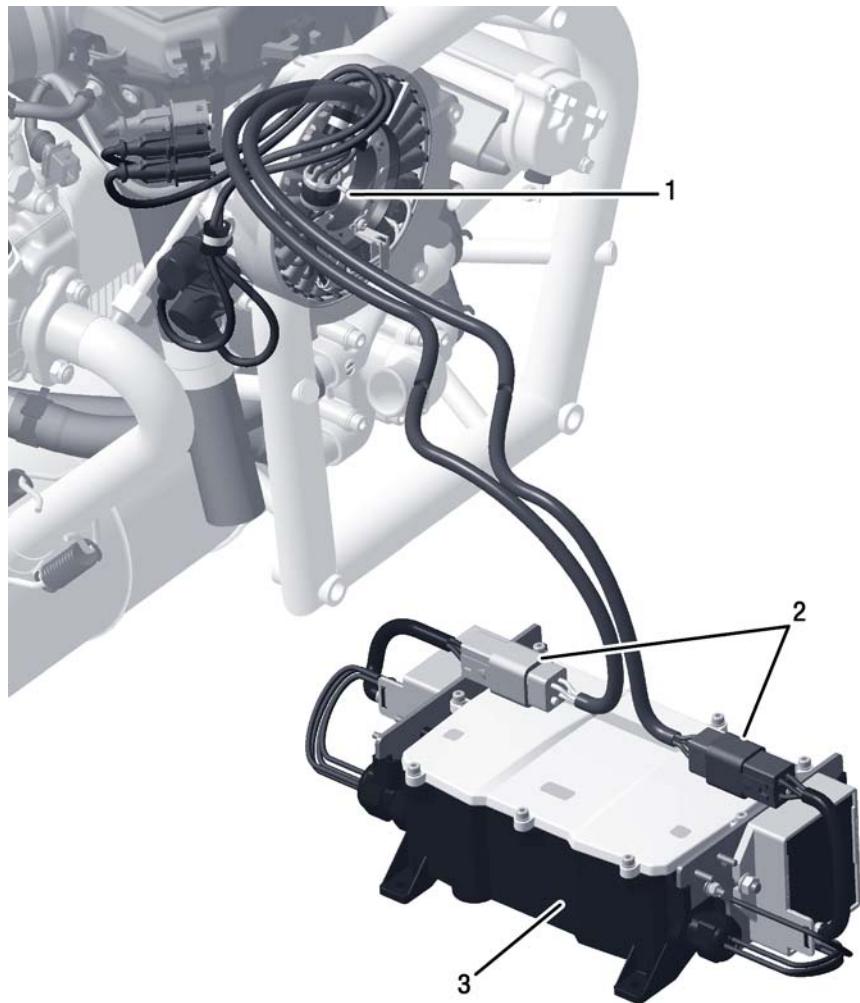

09545

Part	Function
1	Internal generator
2	Electrical LINE A+B with connectors
3	FUSE BOX assy.

Fig. 2

06326

BRP-Powertrain
INSTALLATION MANUAL

Chapter: 75-00-00
COOLING SYSTEM

General note

The shape, size and position of the radiator(s) depends mainly on the space available in the aircraft.

When correctly installed in the aircraft, the optionally available BRP-Powertrain radiator has enough cooling capacity to keep within the standard specified operating limits. The flow resistance of the radiator coolant is correctly adjusted to the cooling system. The tube size must be sufficient. The size, shape, orientation of all cooling components must not compromise the engine cooling under all operation conditions.

Table of contents


This chapter of the Installation Manual contains system description, operating limits and requirements for the aircraft engine cooling system.

Subject	Procedure
Cooling system System description Operating limits Coolant types	Page 3 Page 3 Page 5 Page 6
Checking the efficiency of the cooling system Cooling system requirements	Page 7 Page 8
Connecting sizes and position of connections Requirements, permissible position and installation position of radiator, expansion tank, overflow bottle ROTAХ overflow bottle	Page 11 Page 12 Page 15
General notes on the cooling system Coolant capacity Cooling air duct General notes on the cooling air ducts Data for optional components of cooling system	Page 17 Page 18 Page 19 Page 20 Page 21

BRP-Powertrain
INSTALLATION MANUAL

Overview

Cooling system

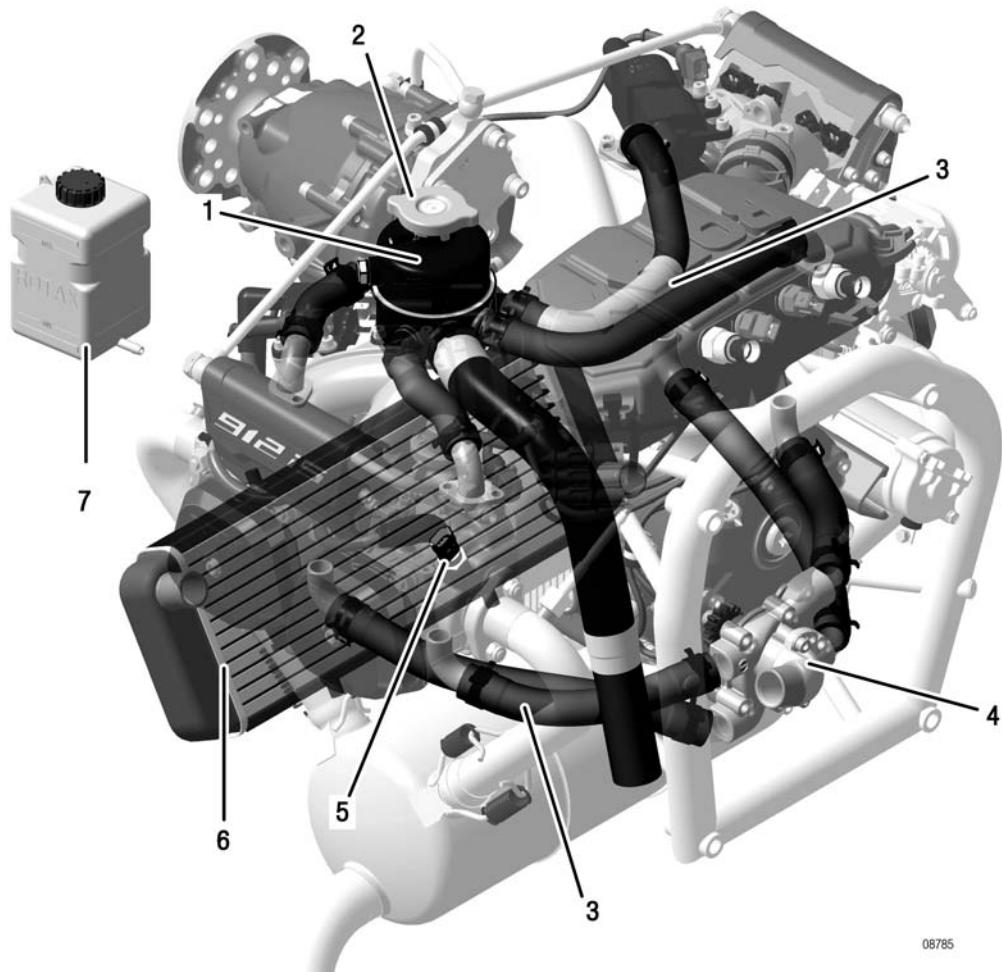

Part	Function
1	Expansion tank
2	Radiator cap
3	Coolant hose
4	Water pump housing
5	Temperature sensor
6	Radiator
7	Overflow bottle

Fig. 1

1) Cooling system

1.1) System description

Cooling

See Fig. 2.

The engine cooling system is designed for liquid cooling of the cylinder heads and ram air cooling of the cylinders.

The cooling system of the cylinder heads is a **closed** circuit with an expansion tank and overflow bottle.

Coolant

The coolant flow is forced by a water pump, driven from the camshaft, from the radiator to the individual cylinder heads. The coolant flows from the top of the cylinder heads to the expansion tank (1). Since the standard location of the radiator (3) is below engine level, the expansion tank located on top of the engine allows for coolant expansion.

Expansion tank

The expansion tank is closed with a pressure cap (2) (with pressure relief valve and return valve). As the coolant heats up and expands, the pressure relief valve opens and the coolant flows via a thin hose at atmospheric pressure to the transparent overflow bottle (4). As it cools down, the coolant is sucked back into the cooling circuit.

Shape, size and position

The shape, size and position of the radiator(s) depends mainly on the space available in the aircraft.

Measuring the coolant temp.

NOTE: The coolant temperature sensor is in cylinder head 4.


Radiator

If a GENUINE-ROTAХ radiator is being used, then an oil-water heat exchanger must not be present. The radiator is dimensioned to cater for the heat of the coolant and cannot cope with the additional heat generated by the oil system.

BRP-Powertrain
INSTALLATION MANUAL

Graphic

Cooling system

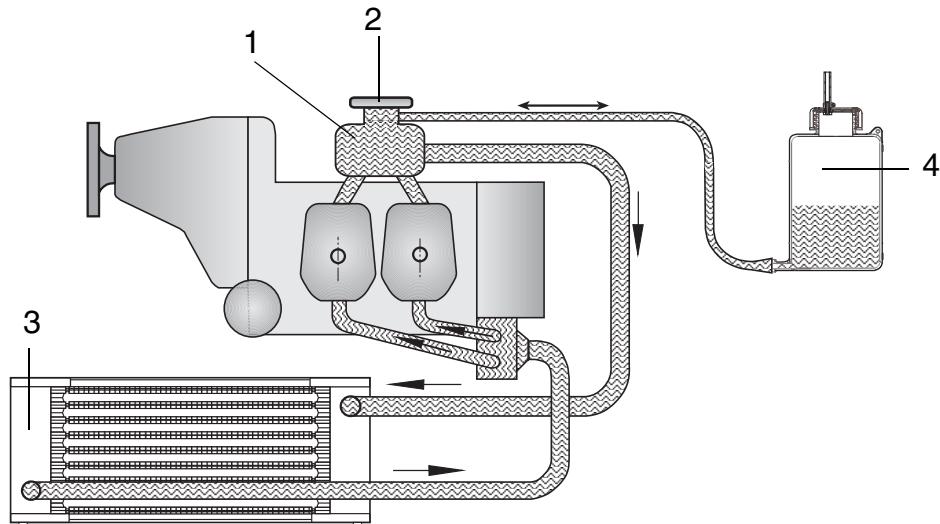

Part	Function
1	Expansion tank
2	Pressure cap
3	Radiator
4	Overflow bottle

Fig. 2

09152

1.2) Operating limits

General note**IN WARNING**

Non-compliance can result in serious injuries or death!
The cooling system must be designed so that operating temperatures will not exceed the maximum values.

Optional radiator

When correctly installed in the aircraft, the optionally available BRP-Powertrain radiator has enough cooling capacity to keep within the standard specified operating limits. The flow resistance of the radiator coolant is correctly adjusted to the cooling system. The tube size must be sufficient.

Boiling point of the coolant

Monitoring the cooling system is important for controlling engine cooling and prevent knocking combustion within the operating limits. It is important that the coolant circuit is designed so that the coolant does not reach boiling point under any conditions. If the temperature exceeds the boiling point, the engine can quickly overheat due to loss of coolant.

The boiling point of the coolant is mainly influenced by:

- the type of coolant
- mixture ratio (percentage water rate)
- the system pressure (opening pressure of radiator cap)

Coolant temperature

Coolant temperature: (coolant exit temperature)	
Max.	120 °C (248 °F)

1.3) Coolant types

General note

NOTICE

Using waterless coolant
is not permitted (e.g. Evans).

Permissible coolant types:

Description	
1	Conventional coolant based on ethylene glycol

NOTICE

When selecting a suitable coolant, the information in Service Instruction SI-912 i-001, latest issue, must be observed.

Conventional coolant

Conventional coolant is recommended as it commonly available and has a greater thermal heat transfer capability. Its limitation is its lower boiling point.

Mixing ratio

NOTICE

The manufacturers instructions regarding the coolant must be observed.

Description	Mixture ratio	
	Concentration	Water
Conventional coolant	50 %	50 %
Some conventional coolants are available pre-mixed by the manufacturer. In this case do not mix with water, instead follow the manufacturers instructions.		

Boiling point

Conventional coolant:

Conventional coolant mixed with 50 % water cannot boil at a temperature below 120 °C (248 °F) at a pressure of 1.2 bar (18 psi). The max. coolant temperature limit is therefore 120°C (248 °F).

Marking

Marking of the coolant to be used

NOTICE

The coolant to be used and its concentration (percentage water rate) must be correctly communicated to the owner.

2) Checking the efficiency of the cooling system

General note The maximum coolant temperature must be determined in order to check the efficiency of the cooling system.

Measurement of coolant temperature See Fig. 3.
The coolant temperature is measured using temperature sensor (1), which is installed on cylinder 4.

Graphic Coolant temperature sensor

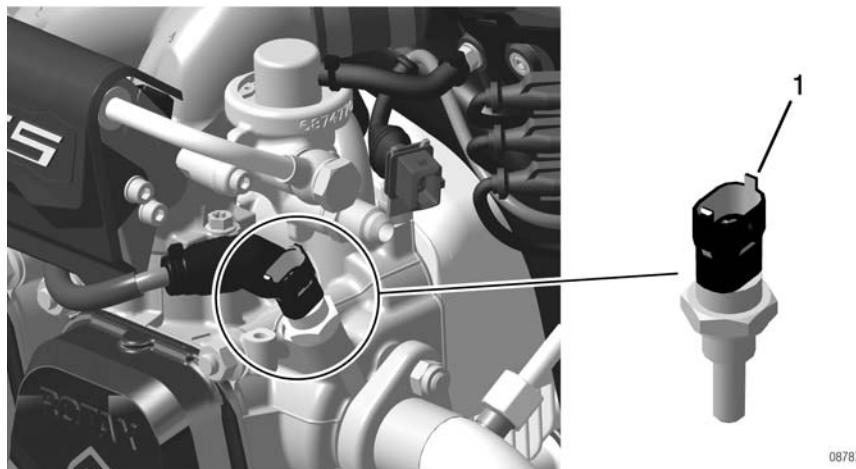


Fig. 3

Coolant exit temperature

See Fig. 4.

m WARNING

Non-compliance can result in serious injuries or death!
Do not restrict the coolant flow with the sensor.

NOTICE

It is possible to record a false measurement when measuring fluid temperatures. If fluid volume is lost and the sensor is not fully submerged in the liquid, the indicating instrument could incorrectly display a lower temperature, by measuring the air temperature instead of the coolant temperature.

2.1) Cooling system requirements

Safety

WARNING

Non-compliance can result in serious injuries or death!

The cooling system must be designed so that the operating limits are not exceeded.

To minimize flow resistance, use radiators that have both a parallel flow and have a low flow resistance. A prime example would be the GENUINE-ROTAХ radiators. Be sure to use short hoses and pipelines.

NOTICE

All components of the cooling system must be suitably secured.

Coolant hoses

See Fig. 4.

NOTICE

Hoses exposed to direct heat radiation from the exhaust system, must be suitably protected with heat-resistant protection tubes, for example.

NOTE:

Aluminium tubes with an inner diameter of 25 mm (0.98 in.) can be used instead of longer hoses. These must have a bulge (1) in order to prevent coolant hoses working loose. Note as well that this will double the number of hose clips required!

- Temperature resistance, min. 125 °C (257 °F)
- Pressure durability: min. 5 bar (72 psi)
- Inner diameter: 25 mm
- Bending radius: min. 175 mm (6.89 in.) (except moulded hoses)
- Material: 100 % resistant to glycol, antifreeze and ozone.

Graphic

Drawing aluminium tube

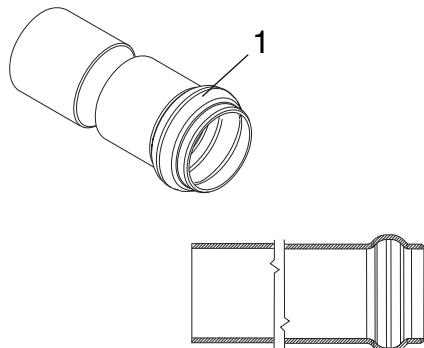


Fig. 4

09158

d05785.fm

Hose connecting expansion tank**Hose from expansion tank to overflow bottle:**

See Fig. 5.


 WARNING

Non-compliance can result in serious injuries or death!
A soft walled hose is not suitable as it can collapse and cause cooling system failure.

- The hose from the expansion tank to the overflow bottle must be rated for vacuum/suction for min. 125 °C (257 °F), e.g. it must be strong enough to withstand high temperatures and vacuum/suction during the cooling down period.

The aircraft manufacturer must give the possibility to the pilots to check the coolant level in the expansion tank. Also it is necessary to inform the pilots about the daily inspection of the coolant level in the aircraft manufacturers operators (pilots) manual or an adequate link to the ROTAX 912 i Series Operators Manual.

It is recommended that adequate measures are taken for carrying out these inspections, e.g. a flap or panel on the cowling or a warning instrument in the cockpit for low coolant level.

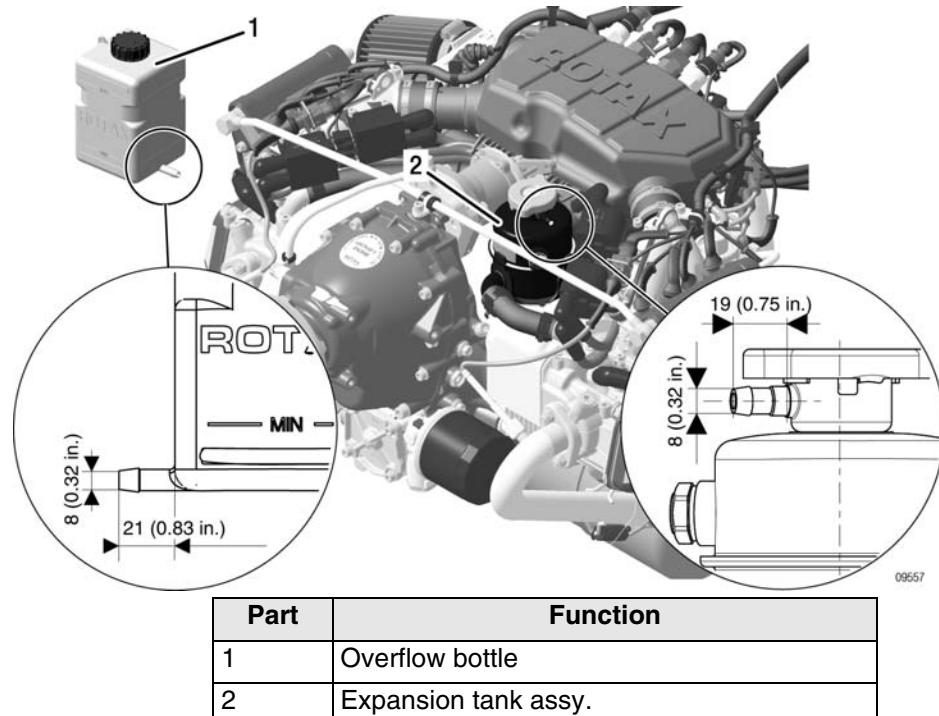Graphic*Fig. 5*

BRP-Powertrain
INSTALLATION MANUAL

NOTES

3) Connecting sizes and position of connections

General note


See Fig. 6.

NOTICE

The hoses must be fixed with appropriate clips to prevent loss, e.g. with spring type hose clips, such as those used for the coolant hoses between the water pump and cylinder. Clips of this type have performed well in the field.

Graphic

Connecting sizes

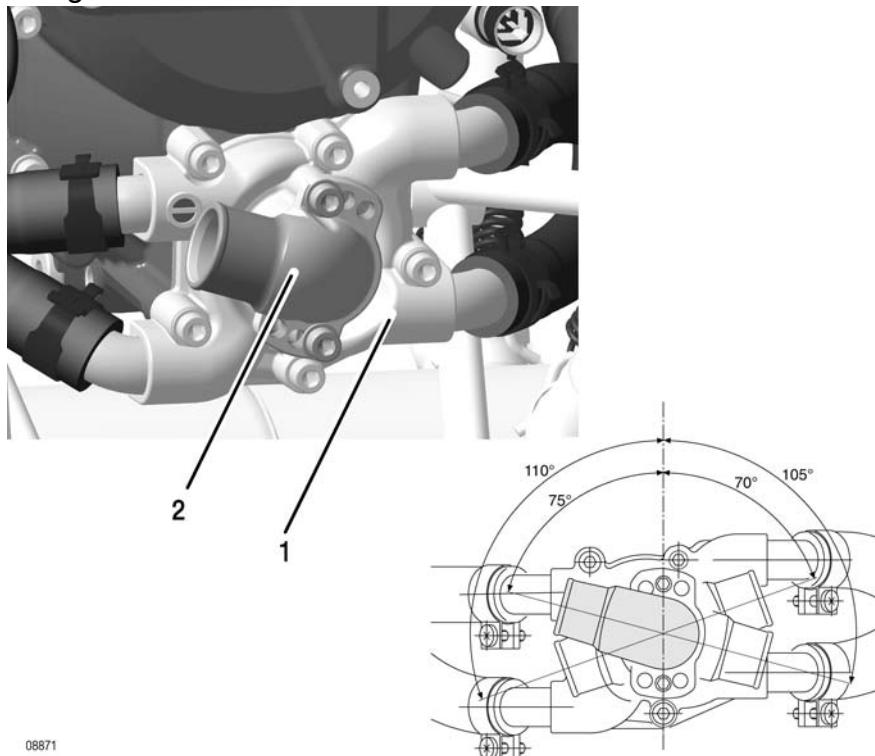

Part	Function
1	Water pump housing
2	Water inlet elbow

Water inlet elbow: Outer diameter 27 mm (1.06 in.)

Slip-on length: max. 19 mm (0.75 in.)

Fig. 6

BRP-Powertrain
INSTALLATION MANUAL

Water inlet elbow

NOTICE

Use the total slip-on length for the water inlet elbow and expansion tank. Secure hoses with suitable spring or screw clamps.

NOTE: Choose between six possible installation positions of water inlet elbow (2) appropriate to specific installation (see illustration).

Use two M6x20 Allen screws and lock washers to attach the water inlet elbow. Tighten screws to 10 Nm (90 in.lb.).

3.1) Requirements, permissible location and installation position of the radiator/expansion tank/overflow bottle

Radiator

See Fig. 7.

m WARNING

Non-compliance can result in serious injuries or death! The radiator must be designed and installed such that the permissible operating temperatures are maintained and the max. values are not exceeded. This must also apply to "Hot day condition".

NOTICE

If required, the radiator outlet (3) may be located max. 1.5 m (4.92 ft.) underneath the inlet elbow (4) of the water pump and no higher than the expansion tank (1).

Expansion tank

To ensure proper operation of the cooling system, the expansion tank (1) with pressure cap (2) in the main operating systems must be installed on the highest point of the cooling circuit.

NOTE: The expansion tank (1) is fitted on top of the engine.

BRP-Powertrain
INSTALLATION MANUAL

Graphic

Permitted installation positions

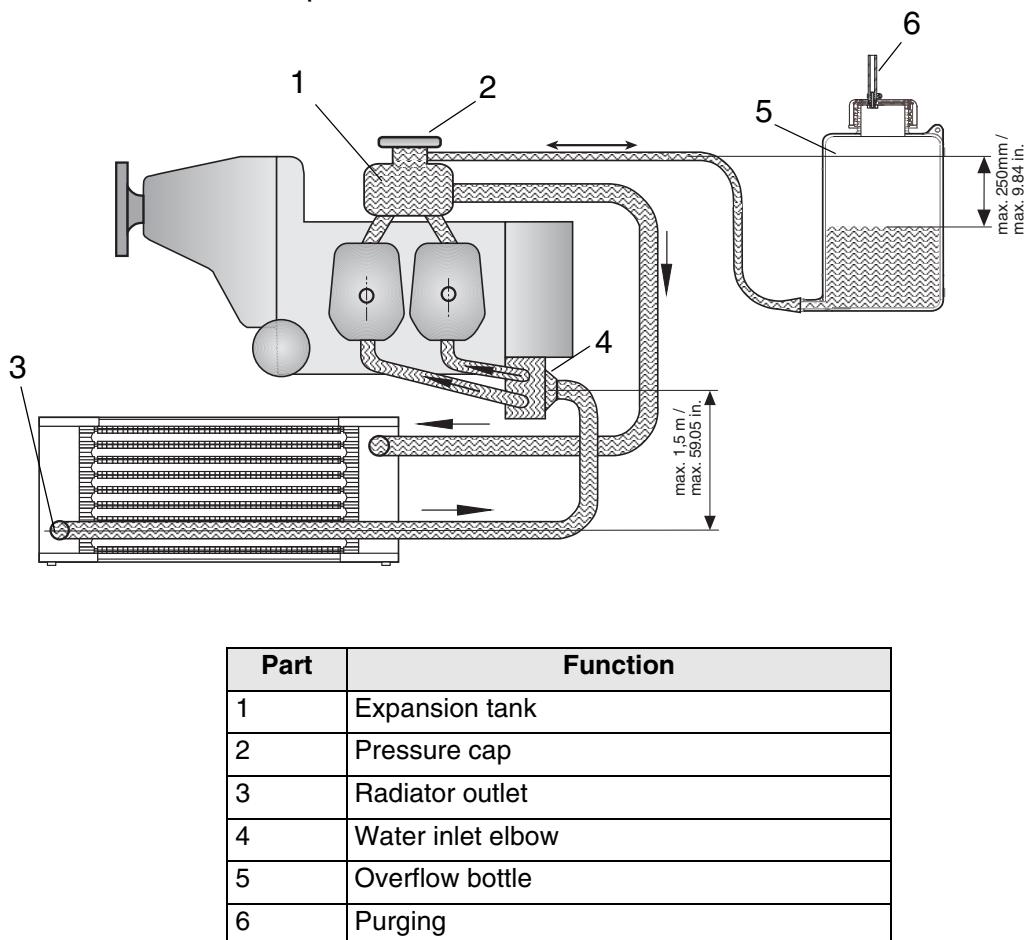


Fig. 7

08319

Overflow bottle

The system also needs an overflow bottle in which surplus coolant is collected and returned to the coolant circuit during the cooling down period.

NOTICE

To ensure proper operation of the cooling system, the suction height between overflow bottle and expansion tank must not exceed 250 mm (10 in.).

NOTE:

For proper operation ensure that the hose to the overflow bottle is as short as possible.

BRP-Powertrain
INSTALLATION MANUAL

- Overflow bottle requirements**
- Transparent material
 - Temperature resistant from -40 °C to +130 °C (-40 °F to 266 °F)
 - 100 % resistant to glycol and suitable for all other antifreeze agents
 - Volume approx. 0.5 l. (0.13 USgal)
 - With vent (6), diameter 2.5 mm (0.1 in.)
- NOTE:** The overflow bottle should be furnished with a label indicating function and content.

Capacity

m WARNING Non-compliance can result in serious injuries or death!
The overflow bottle must never be empty, otherwise air will be sucked into the cooling circuit; this can have a negative effect on the safe operation of the engine.

Installation

NOTICE The overflow bottle and its supply and discharge must not be installed close to the exhaust system, as emerging coolant can be flammable under certain conditions.

3.2) ROTAX overflow bottle (optional extra)

General note	If the optional ROTAX overflow bottle is used, the purging system must be arranged as shown below.
Retrofitting	<p>NOTE: To vent coolant steam from the overflow bottle in case of overheating, the plastic cap can be retrofitted with a hose nipple and hose (see Fig. 8).</p> <p>The purging line (5) must be routed so that coolant cannot come in contact with the hot exhaust system.</p> <p>The vent line must be routed in a continuous decline or furnished with a drain bore at its lowest point to drain any condensation.</p> <p>The line must be protected from any kind of ice formation from condensation, e.g. insulation protection or routing in a hose with hot air flow and furnishing the line with a bypass opening before the cowling outlet.</p>

Work instruction See [Fig. 8](#).

Procedure for attaching the hose nipple:

Step	Procedure
1	Unscrew the plug screw (2) from the overflow bottle.
2	Bore the existing purging hole from dia. 2.5 mm (0.10 in.) to dia. 6 mm (0.236 in.).
3	Apply LOCTITE 603 to the threads of the hose nipple (3).
4	Insert hose nipple (3) with the thread first into the vent hole.
5	Fix M6 hex. nut (1) onto the hose nipple (3). Tightening torque 5 Nm (3.69 lbft).
6	Screw the plug screw onto the overflow bottle.

Steps for attaching the hose.

Step	Procedure
1	Secure the hose with a gear-type hose clip (4) or spring type hose clip.
2	Secure and route the hose (5) without kinks.

BRP-Powertrain
INSTALLATION MANUAL

Graphic

Hose nipple

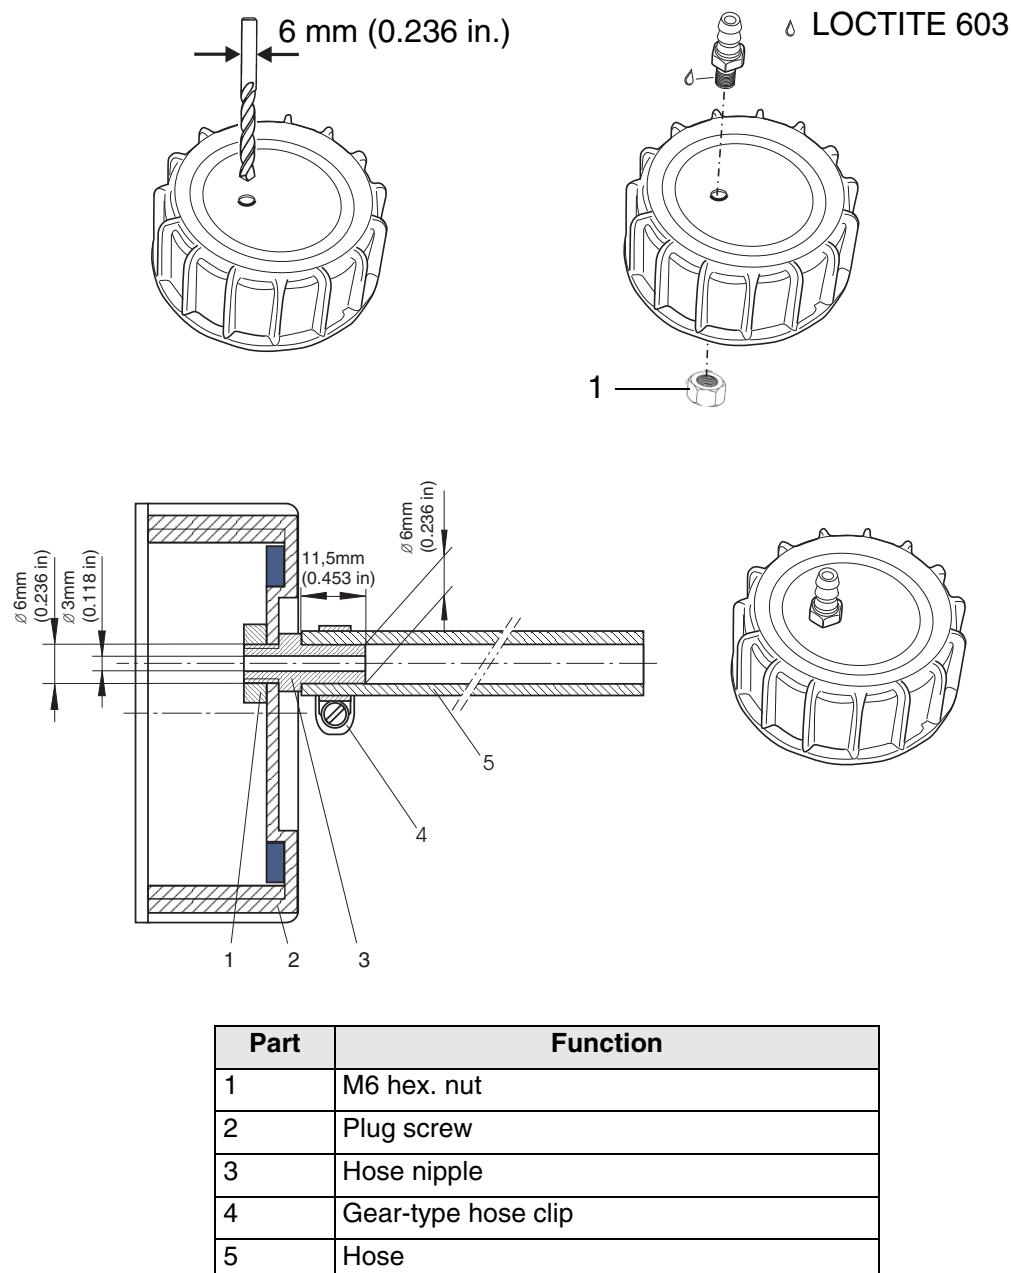


Fig. 8

05033.09126

4) General notes on the cooling system

Certification

! WARNING

Non-compliance can result in serious injuries or death!
Certification according to the latest regulations, such as FAR or EASA, must be conducted by the aircraft or fuselage manufacturer.

Essential parts of the cooling system, such as radiator, etc., are available for this engine from BRP-Powertrain.

! WARNING

Ensure that no contact with hoses or hose clamps of the engine is given (risk of chafing, wear, loss of coolant) at the installation of external components (governor, vacuum pump).

Radiator

NOTICE


The radiator must be designed to dissipate approx. 30 kW (7.58 BTU/s) of thermal energy at take-off performance.

In an installation as depicted with the radiator (1) in a higher position than the standard supplied expansion tank (3), a water accumulator (2) has to be fitted instead of the expansion tank (3). Additionally a suitable expansion tank (3) has to be installed at the highest point of the cooling circuit.

NOTE: Experience has shown that with good airflow, a radiator with an area of 500 cm² (77.5 in²) is required for trouble-free operation.

Graphic

Radiator

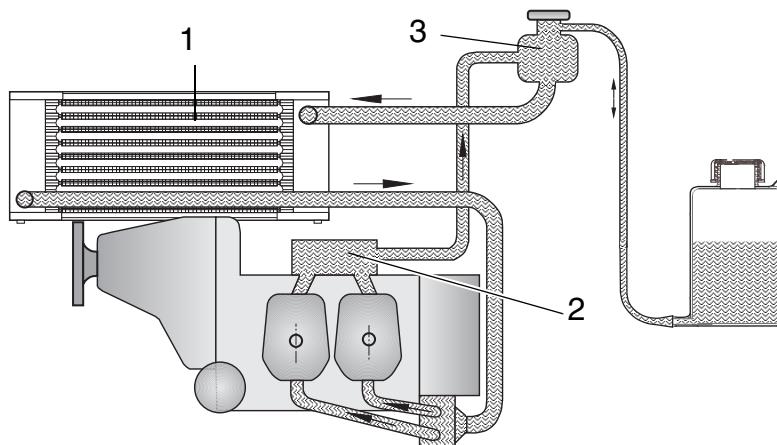

Part	Function
1	Radiator
2	Water accumulator
3	Expansion tank

Fig. 9

08320

d05785.htm

BRP-Powertrain
INSTALLATION MANUAL

Flow rate The flow rate in the coolant circuit is approx. 60 l/min (15.85 USgal/min.) at 5800 rpm. At full throttle, an approximate value of around 0.75 m³/s (28.59 cu.ft/sec) can be assumed for the required cooling air flow.

Flow resistance The flow resistance of the coolant in the optional ROTAX radiator is correctly adjusted for the cooling system.
If using other radiators, check the flow rate and cooling capacity.

Installation of the radiator No provision has been made for attachment of the radiator(s) on the engine (rubber mounts are recommended).

NOTICE

The radiator must be installed without distortion or stress and be free of vibrations. If a GENUINE ROTAX radiator is not being installed, ensure sufficient cooling capacity.

4.1) Coolant capacity

4 cylinder heads	560 cm ³ (0.02 cu.ft)
Coolant pump.....	100 cm ³ (0.004 cu.ft)
Expansion tank	250 cm ³ (0.008 cu.ft)
2 m coolant hose (inner ø 18 mm)	500 cm ³ (0.018 cu.ft)
Total coolant quantity for engine.....	approx. 1.5 l (0.4 USgal)

4.2) Cooling air ducts (optional)

General note Cooling air ducts are not required if the oil and coolant temperatures are within the prescribed operating limits. Otherwise following measurement must be performed for the first installation of an aircraft type (not in serial production).

Hot day condition See [Fig. 10](#).

In contrast to the cylinder heads, the cylinders are ram air cooled. Plan the cooling air ducts according to installation requirement.

m WARNING

Non-compliance can result in serious injuries or death!
The cooling air ducts must be designed and built such that the operating temperatures are within the specified limits and maximum values are not exceeded.
This must also apply to "**Hot day condition**".

Max. permitted cylinder wall temperature on hottest cylinder...200 °C
(392 °F)

NOTE: If this temperature is exceeded, appropriate measures (e.g. cooling air ducts, modifications to cowling, etc.) must be taken to bring it within limits again.

| **Graphic**

Measuring point for Hot day condition

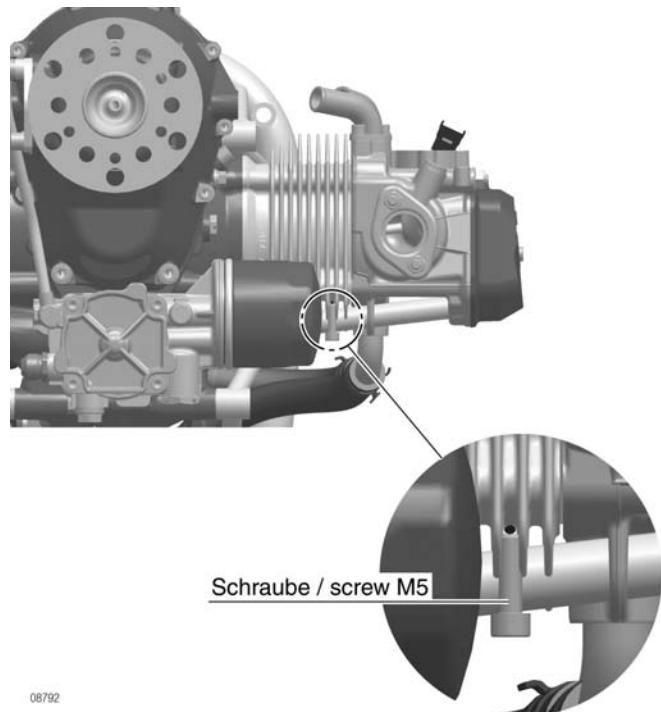


Fig. 10

4.2.1) General notes on the cooling air ducts

Front installa-
tion

! WARNING

Non-compliance can result in serious injuries or death!
Certification according to the latest regulations, such
as FAR or EASA, must be conducted by the aircraft or
fuselage manufacturer.

For front installation in a closed cooling, ducting of cooling air to the cylinders is available. This removes the need for costly horizontal partitioning (baffles).

NOTE: It also means that the engine remains completely on the warm side of the engine compartment and is very easy to access. In special cases a separate cold air supply to the air filters must be provided.

BRP-Powertrain has developed a non-certified cooling air duct especially for this application. Cooling air ducts are not required if the cylinder temperature is within limit, see section [4.2](#).

Selecting cool-
ing air ducts

The following recommendations should assist the aircraft or fuselage manufacturer in selecting suitable cooling air ducts.

Cooling capacity	The cooling air ducts must be designed such that they transfer thermal energy of approx. 6 kW (5.7 BTU/s) at take-off performance.
Cross section of air duct	Cross section of air duct under the airflow baffle min. 100 cm ² (15.50 in ²).
Material	Glass fibre reinforced plastic or heat and fire resistant material.
Attachment options	Formlocking on engine block and mounting above the cylinder and the crankcase. HINWEIS: If formlocking attachment is not sufficient, additional attachment is possible using two M8 threaded lugs on the top of the engine block.

NOTICE

The stated maximum permissible loads (per screw)
are valid only if using the minimum specified thread
length, and must never be exceeded.

Thread height 18 mm (0.71 in.).

BRP-Powertrain
INSTALLATION MANUAL

Permissible loads (per screw)

	x-axis	y-axis	z-axis
Attachment points	-300 mm (-11.81 in.)	-30 mm (-1.18 in.)	-14 mm (-0.55 in.)
	-300 mm (-11.81 in.)	-30 mm (-1.18 in.)	-14 mm (-0.55 in.)

	Attachment points
Max. permissible force (safe load) in (N) on x, y and z axis	2000 N (449.62 lb-force)
Max. permissible bending moment (safe load) in (Nm) in x, y and z axis	50 Nm (36.89 lbft)
Min. length of thread (mm)	15 mm (0.59 in.)

4.3) Data for optional components of cooling system

Overflow bottle

See [Fig. 11](#) to [Fig. 13](#).

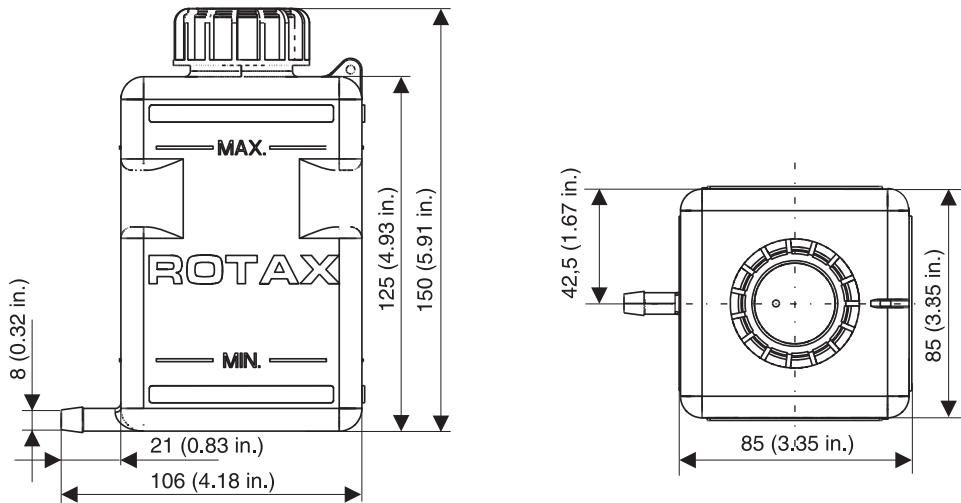


Fig. 11

09148

BRP-Powertrain
INSTALLATION MANUAL

| **Radiator**

Weight: see chap. 72-00-00 section: 2.1)

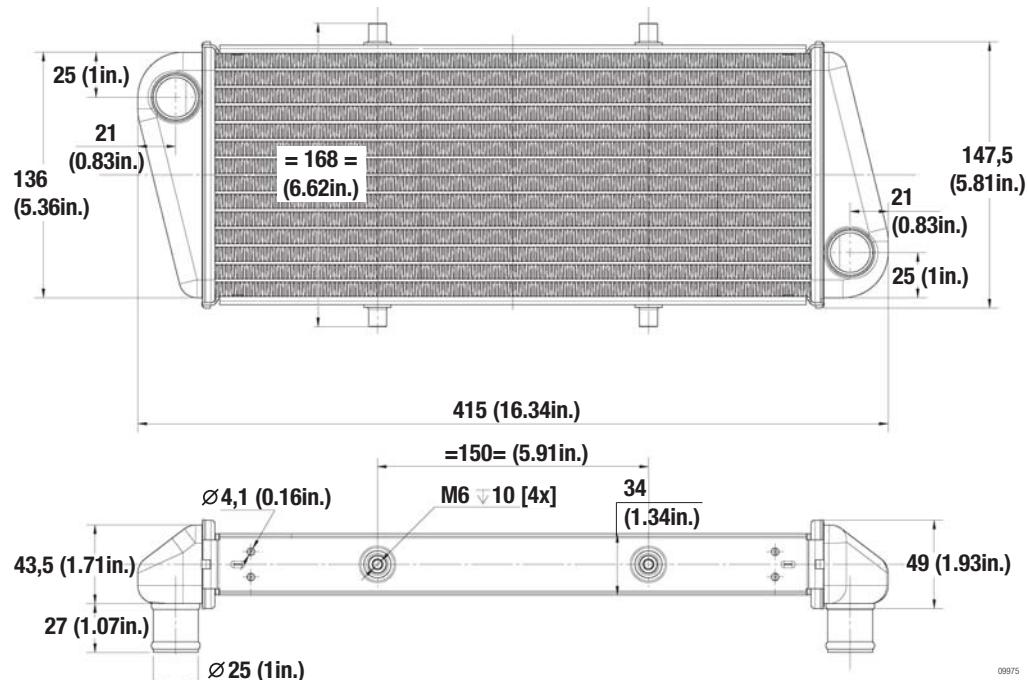


Fig. 12

Cooling air duct

Weight: see chap. 72-00-00 section: 2.1)

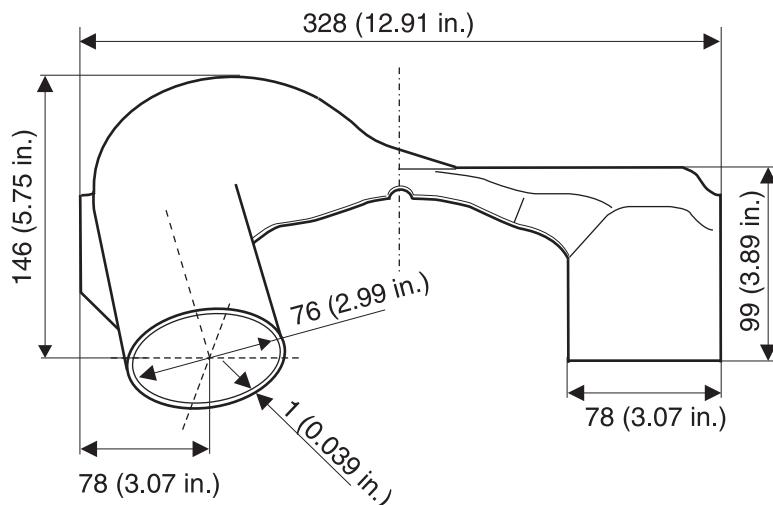


Fig. 13

09165

Chapter: 76-00-00
ENGINE MANAGEMENT

Introduction The main components of the EMS are:

- ECU
- ECU actuators
- ECU sensors
- EMS current supply
- FUSE BOX
- Switches
- Wiring

Table of contents This section of the Installation Manual describes the management of the aircraft engine.

Subject	Page
ECU <ul style="list-style-type: none">Technical dataConnectorConnectionsInstallation of the engine control unit assy.	Page 5 Page 5 Page 6 Page 6 Page 6
FUSE BOX assy. <ul style="list-style-type: none">Technical dataConnectionsFitting the AMP connectorInstallation position of the FUSE BOX assy.	Page 7 Page 7 Page 8 Page 8 Page 9
Ambient air, pressure, temperatur sensor (AAPTS)	Page 11
Maintenance tool <ul style="list-style-type: none">Pin assignment of maintenance and diagnostic interface	Page 11 Page 11
Display <ul style="list-style-type: none">Pin assignment of display interfaces	Page 13 Page 13

The core of the EMS is the engine control unit (ECU), which consists of two modules. These modules will be denoted by LANE A and LANE B, each one capable of taking over control, regulation and monitoring of the engine. In error-free engine operation, both LANES are turned ON.

During engine control by LANE A, LANE B ensures that the engine operation can be maintained even after a failure or reduced functionality of LANE A. Depending on the activity and the failure status of the two LANES, the ECU automatically selects a LANE to take over control of the engine.

BRP-Powertrain
INSTALLATION MANUAL

A huge quantity of sensors (e. g. sensors for measuring the pressure in the airbox) and actuators (e. g. ignition coils) of the engine is designed with redundancy. In this case, each of the sensors or actuators is connected to a LANE, so that the two LANES have the same measurement values and send the same output signals. Non-redundant sensors (e. g. oil pressure sensors) are connected to one LANE only and serve for the expanded monitoring of the engine functionalities. Due to an ECU internal communication, these sensor values will be exchanged between the two LANES (assuming that both LANES are active and free of errors).

Each LANE has a maintenance and a display interface (CAN-bus). While the maintenance interface is required to work with the software B.U.D.S. Aircraft to perform various diagnostic and maintenance activities, the display CAN interface enables the connection of a display for visualization of engine parameters.

In addition to the ECU, the FUSE BOX is another major component of the EMS. The FUSE BOX with its two rectifier regulators and generators (generator A and generator B) is responsible for a constant power supply to all EMS components including fuel pump modul and the aircraft.

After engine start and before the engine has reached a defined speed for a specified time (see latest Operators Manual), the EMS is powered by generator B. After this threshold is exceeded, the generator B can be used to supply the aircraft and to recharge the aircraft battery. In this system state generator A supplies the EMS. In case of an error in the area of the power supply, the EMS is re-switching to generator B for continuation of the engine operation. In this case, the aircraft is no longer supplied with power and the battery will not be recharged. This system state can only be reseted with a full restart of the ECU.


NOTE: The generator (generator A or generator B) always supplies the complete EMS (both LANES A and B). The assumption that generator A supplies LANE A and generator B supplies LANE B is false.

d06207.fm

BRP-Powertrain
INSTALLATION MANUAL

Overview

Engine control

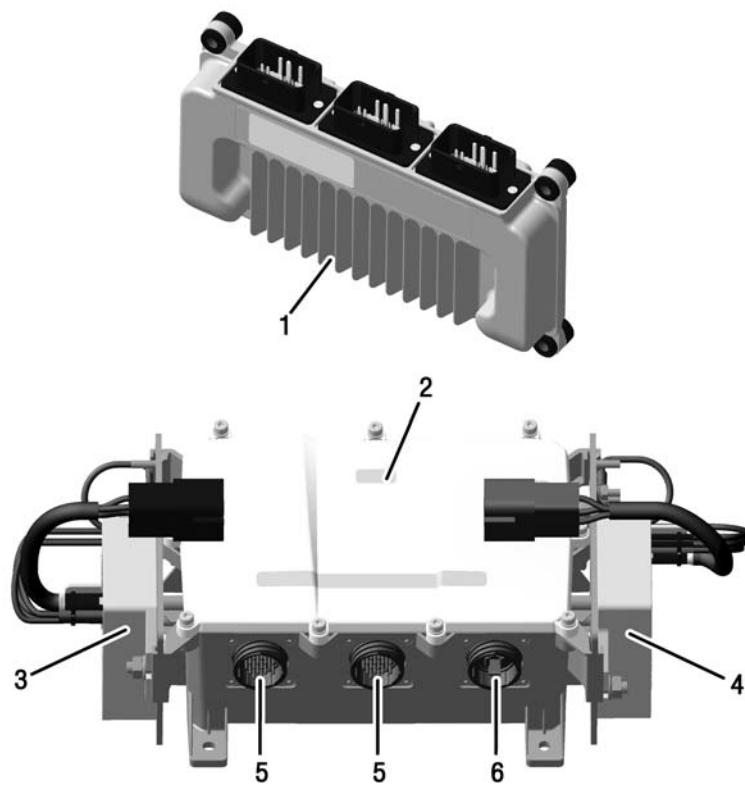

09550

Part	Function
1	Control unit assy. (ECU)
2	FUSE BOX assy.
3	Rectifier regulator A (black connector)
4	Rectifier regulator B (grey connector)
5	LANE A (X1)/ LANE B (X2) plug connection
6	Plug connection (X3)

Fig. 1

08725

d06207.fm

Effectivity: 912 i Series
Edition 1/Rev. 2

76-00-00

Page 3
January 01/2014

BRP-Powertrain
INSTALLATION MANUAL

NOTES


1) ECU

General There are two independent engine management units housed in a single waterproof box.

1.1) Technical data

See [Fig. 2](#).

Graphic Connections and dimensions

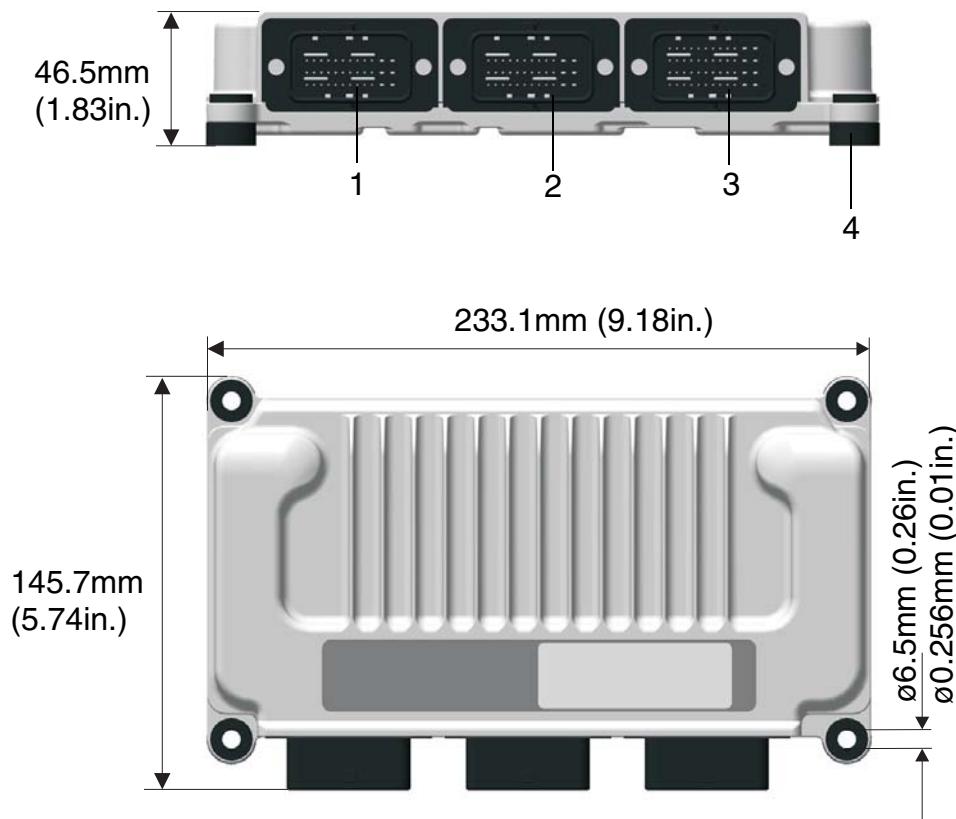

Part	Function
1	Plug connection A1
2	Plug connection A2
3	Plug connection B
4	Rubber vibration damping/insulation material

Fig. 2

06328

1.2) Connector

Connector

NOTICE

The connectors are indexed, i.e. connector A1 can only be connected to A1. Excessive force or incorrect positioning can result in bent pins and the ECU would then need to be replaced.

1.3) Connections

Connection

Insert the wiring harness plug in the correct position on the ECU.

NOTICE

The rubber vibration damping (insulation material) must not be removed. If the rubber dampers were removed, the engine ground and the aircraft ground would be short-circuited.

1.4) Installation of the engine control unit (ECU)

Installation position- The ECU must be housed in the cockpit. It must not be installed in the engine compartment.

NOTICE

To prevent ingress of liquid (moisture), the ECU must be mounted so, that the plug connectors are facing downwards to the wiring harness.

- Installation position of the ECU: vertical/horizontal
- Isolated - No connection to the airframe or engine
- Cables or engine ground must not touch the ECU
- Max. bending radius from the wiring harness 50 mm (1.97 in.)
- Strain relief from wiring harness: ~ 100 mm (3.94 in.) behind the ECU connector

ECU
General note

- Unplug the ECU connector from the wiring harness only if absolutely necessary
- In case of damage on the connector plug from the ECU: Replace wiring harness
- Corrosion of the plug contacts: Replace wiring harness and ECU
- Damaged connector plug locking pins: Replace ECU
- Do not rebend the plug contacts of the ECU: Replace ECU if necessary
- Connector plugs (ECU) are suitable for up to 20 plug-in operations according to the manufacturers information. The number of plugging operations must be entered into the logbook

Temperature

Permissible component temperature: Max. +80 °C (176 °F)

Effectivity: 912 i Series
Edition 1/Rev. 2

76-00-00

d06207.fm


2) FUSE BOX assy.

2.1) Technical data

Graphic

See Fig. 3.

Connections and dimensions

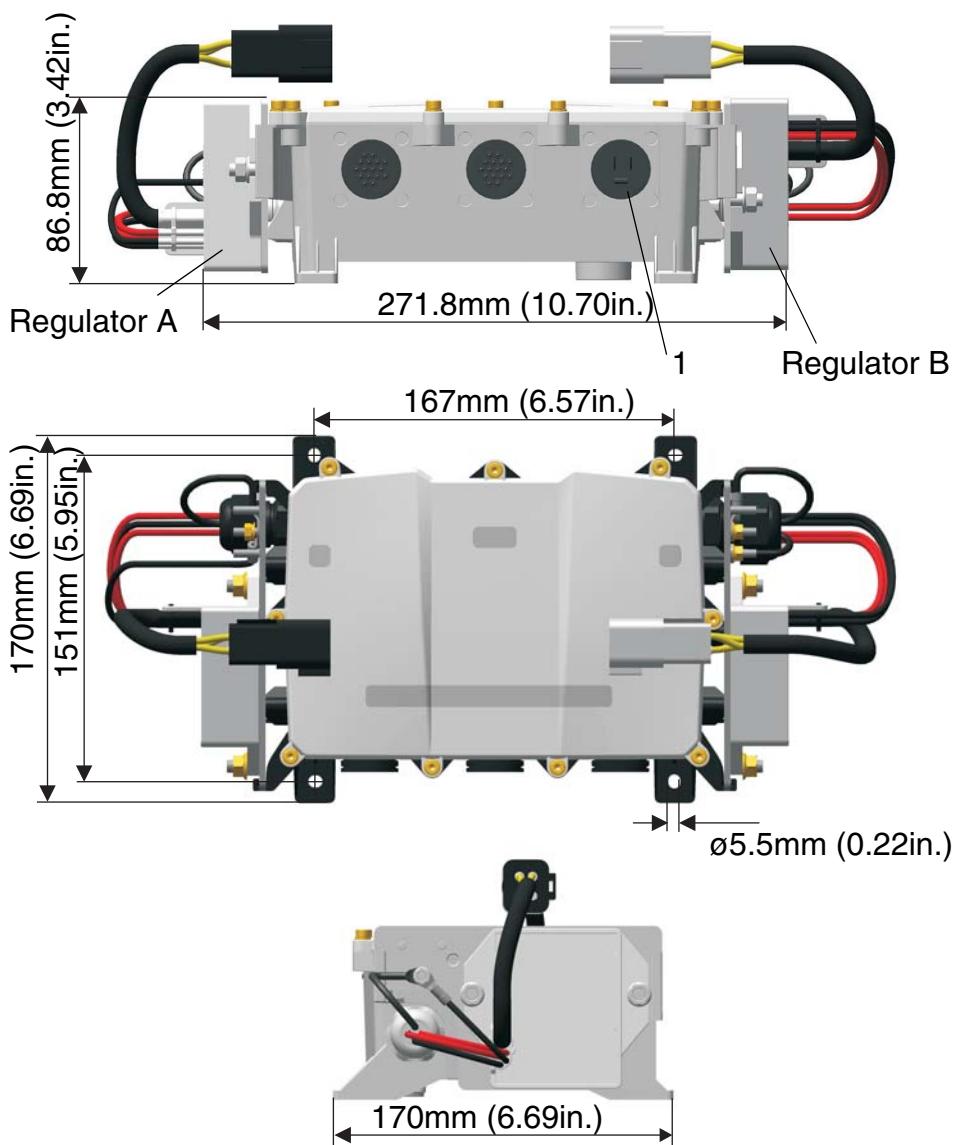

Part	Function
1	Plug connection POWER (X3)

Fig. 3

06330


d06207.fm

BRP-Powertrain
INSTALLATION MANUAL

2.2) Connections

- Connection** See Fig. 4.
Seals supplied with the fuse box assy., must be inserted into the grooves provided for each connector plug.
Insert the wiring harness plug in the correct position on the FUSE BOX assy.
The mating plug for the FUSE BOX is included in the scope of delivery.
NOTE: A set of spare fuses can be found in the FUSE BOX.

| **Graphic** X3 connector



PIN 1 battery backup switch
PIN 2 start power switch
PIN 3 start power switch

Fig. 4

06393

The mating connector (AMP connector) for the FUSE BOX is included in the scope of supply.

2.3) Fitting the AMP connector

- General note** See Fig. 5.
NOTE: The AMP connector is included in the scope of delivery.

Special tools The following special tools and equipment are necessary for fitting the AMP connector.

Part number	Description
n.a.	Crimping pliers TYCO-Connectivity 69710-1
n.a.	Tool TYCO-Connectivity 90145-1
n.a.	Disassembly tool TYCO-Connectivity 91124-1

Procedure Fitting the AMP connector:

Step	Procedure
1	Feed line (1) through the connector receptacle (5), squeeze plate (6) and cable holder (7).
2	Strip insulation from line (1).
3	Install socket contact (2) using suitable crimping pliers.
4	Push the socket contact (2) into the appropriate position in the AMP connector (3) until it engages.


d06207.fm

BRP-Powertrain
INSTALLATION MANUAL

Step	Procedure
5	Check for tight fit.
6	Install strain relief clamp (4).

Graphic

Fitting the AMP connector

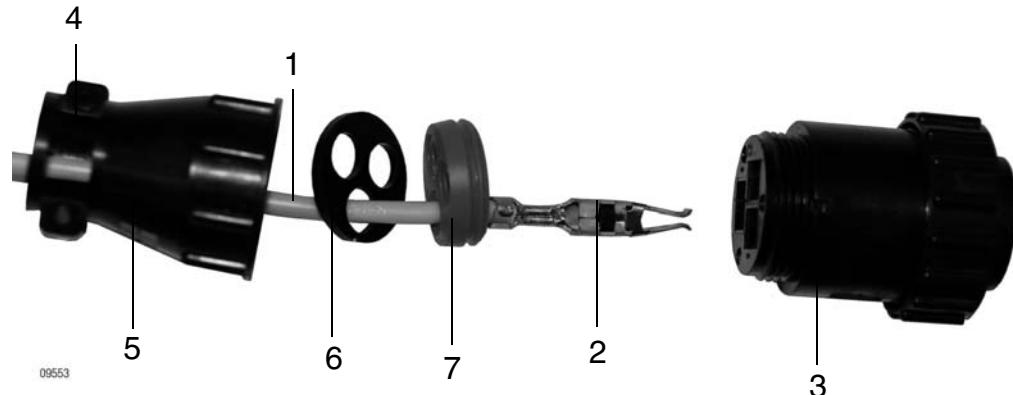

Part	Function
1	Line
2	Socket contact
3	Connector
4	Strain relief clamp
5	Connector receptacle
6	Squeeze plate
7	Cable holder

Fig. 5

2.4) Installation position of the FUSE BOX assy.

The FUSE BOX must be placed that the maximum permissible component temperature must not exceed.



The FUSE BOX must not be installed in the cockpit.
Installation in the engine compartment ONLY!

Temperature

Permissible component temperature: Max. +80 °C (176 °F)

BRP-Powertrain
INSTALLATION MANUAL

NOTES

3) Ambient air, pressure, temperature sensor (AAPTS)

General

The AAPTS sensor is the all-in-one sensor for engine ambient temperature and engine ambient pressure. In cowled engine installations it has to be mounted in the engine compartment in a ram air free area and close to the air inlet. The sensor should measure the correct air inlet temperature and the air pressure right before the air filter.

NOTICE

The AAPTS sensor should not be mounted in the air intake system between the air filter and throttle body.

4) Maintenance tool

General

For engines of the ROTAX 912 i Series, the maintenance and diagnostic software B.U.D.S. Aircraft is available. This provides not only the reading of ECU logs, it also provides a variety of functionalities to support troubleshooting of the engine. To start this software and connect the engine with a computer a B.U.D.S. Aircraft kit is required. This is a USB adapter, that provides different software functionalities depending on its version.

4.1) Pin assignment of maintenance and diagnostic interface

Pin assignment

See Fig. 6.

Pin assignment for Sub-D DE9 (9-pin) of maintenance and diagnostic interface.

Pin	Description	HIC Pin no.	Sub-D DE9 Pin no.
LANE A Sub-D DE9 Maintenance and Diagnostic interface	CAN_LOW_2_A	11 (HIC A)	2
	CAN_GND_2_A	10 (HIC A)	3
	CAN-HIGH_2_A	12 (HIC A)	7
LANE B Sub-D DE9 Maintenance and Diagnostic interface	CAN_LOW_2_B	15 (HIC B)	2
	CAN_GND_2_B	14 (HIC B)	3
	CAN_HIGH_2_B	16 (HIC B)	7

NOTE: The positions of the individual pins on the 9-pin Sub-D DE9 connector are numbered.

NOTE: It is recommended not to connect maintenance and diagnostic interfaces LANE A and LANE B together.

Impedance

If the ECU is connected with the Maintenance and Diagnostic Sub-D DE9 DE9 (9-pin) connector, the impedance between CAN_HIGH_2_A (CAN_HIGH_2_B) and CAN_LOW_2_A (CAN_LOW_2_B) will be ~60 Ohm.

BRP-Powertrain
INSTALLATION MANUAL

NOTES

5) Display

Indicating instruments



Non-compliance can result in serious injuries or death!
Only use display instruments, which have two separate CAN Aerospace interfaces and can work separately.
The CAN Aerospace interfaces of LANE A and B must not be connected, otherwise the redundancy of the display instrument is no longer given.

Only use display devices that have a CAN Aerospace interface. Contact an authorized Distributor or Service Center for ROTAX aircraft engines to get a detailed description of the display CAN interface (Pilot Display Interface Specification Document).

NOTE: Only the defined operating limits by ROTAX (see latest Operators Manual) are valid for engine operation. The responsibility for adapting these operating limits to the display accordingly is up to the display manufacturer .

5.1) Pin assignment of display interfaces

Display pin as-
signment

See Fig. 6.

Pin assignment of display interfaces)

Pin	Description	HIC Pin no.	Pin no. on display
LANE A Sub-D DE9 Display interface	CAN_LOW_1_A CAN_GND_1_A CAN-HIGH_1_A	5 (HIC A) 4 (HIC A) 6 (HIC A)	Refer to the connection specifications of the display manufacturer.
LANE B Sub-D DE9 Display interface	CAN_LOW_1_B CAN_GND_1_B CAN_HIGH_1_B	7 (HIC B) 6 (HIC B) 8 (HIC B)	



In order to ensure a high electromagnetic compatibility in data transmission, twisted cables (3 pins: CAN_H, CAN_L, CAN_GND) must be used for the CAN-connections.

BRP-Powertrain
INSTALLATION MANUAL

NOTE: If both CAN-interfaces are connected and plugged into an indicating instrument with only one input, an error on one of the interfaces or a short circuit on the data line can cause a total loss of data supply to the indicating instrument. Subsequently the pilot is no longer provided with important information such as temperature, oil pressure, boost pressure and speed.

| Graphic

Wiring HIC-Maintenance und Display

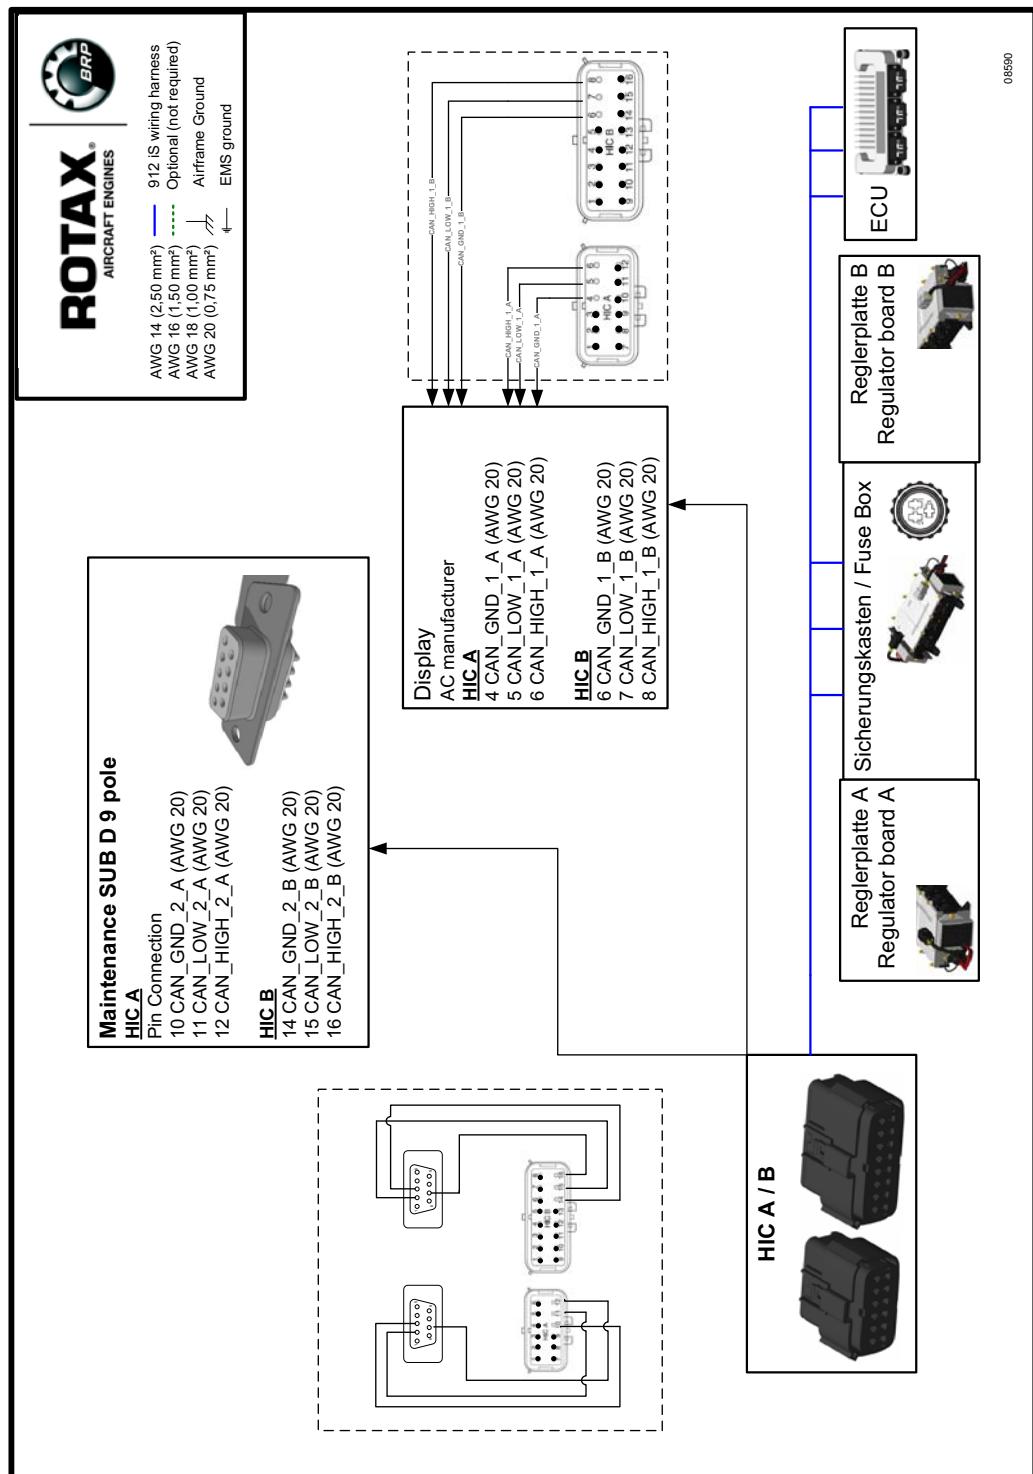


Fig. 6

08590

BRP-Powertrain
INSTALLATION MANUAL

NOTES

BRP-Powertrain
INSTALLATION MANUAL

Chapter: 78-00-00
EXHAUST SYSTEM

General note

See [Fig. 1.](#)

NOTICE

The exhaust system must be designed by the aircraft or fuselage manufacturer such that the permissible loads and bending moments on the points of attachment are not exceeded. The exhaust system may require additional support.

Table of contents


This section of the Installation Manual contains information on the exhaust system of the aircraft engines.

Subject	Page
General notes on the exhaust system	Page 3
Exhaust system requirements	Page 5
Technical data	Page 5
If a GENUINE-ROTAХ exhaust is not in use	Page 5
Attaching the exhaust system	Page 7
Dimensions of the exhaust system	Page 9
Exhaust system assy.	Page 9
Data for optional components of the exhaust system	Page 11

BRP-Powertrain
INSTALLATION MANUAL

| Overview

Exhaust system, typical

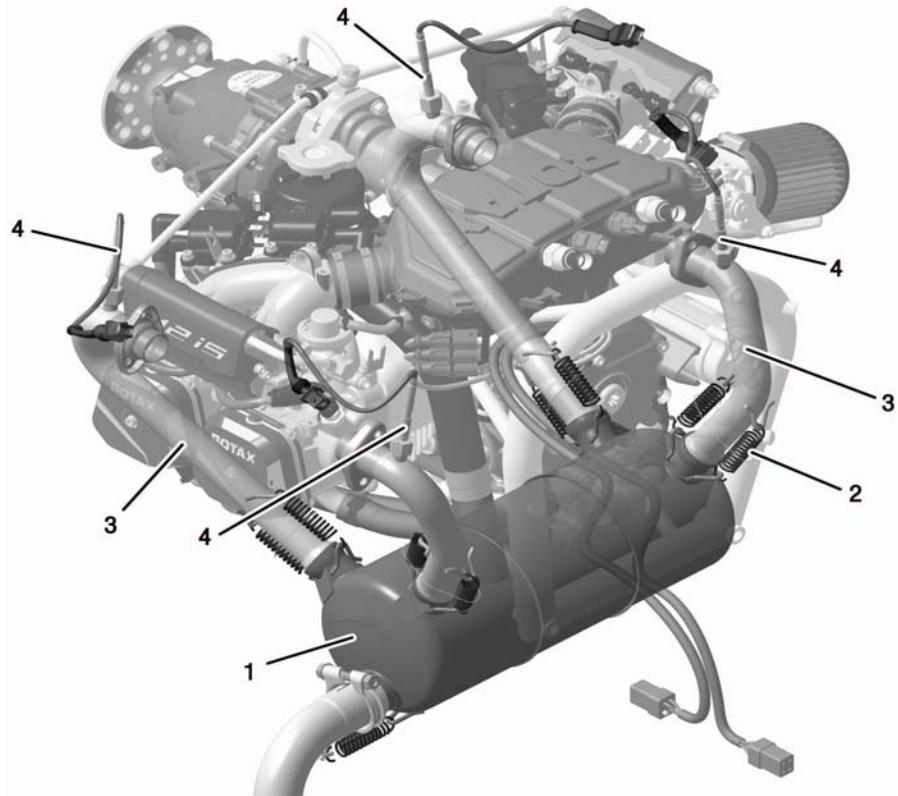

08793

Part	Function
1	Muffler
2	Tension spring
3	Exhaust pipe
4	EGT temperature sensor

Fig. 1

1) General notes on the exhaust system

Certification

An exhaust system especially designed for universal application has been developed by BRP-Powertrain. Certification according to the latest regulations, such as FAR or EASA, must be conducted by the aircraft or fuselage manufacturer.

NOTICE

Vibrations due to improper installation and maintenance is the most common reason for damage of the exhaust system.

1.1) The following recommendations should help the aircraft or fuselage manufacturer to select a suitable exhaust system.

Damping element

The ideal is a common transversal damping element serving all 4 cylinders, positioned under the engine.

NOTE: Equal length of pipes from the cylinder to damping element is recommended for better tuning.

Distribution of the exhaust system

Distribution of the exhaust system into 2 separate systems is not recommended. Individual mufflers on either side cause power loss and increased engine noise.

Exhaust flange

During assembly, ensure that the flange is parallel to the cylinder head flange and is not protruding.

NOTE: Tighten the exhaust flange evenly and in parallel. There must be a gap of the same size all the way round.

Oil filter


There must be a clearance of at least 20 mm (0.79 in.) between the exhaust pipe and the oil filter to allow the oil filter to be fitted and removed without having to slacken off the exhaust system. If a heat shield is fitted, this will also have to be taken into consideration.

NOTICE

The exhaust system must not adversely affect the operation or replacement of the oil filter.

BRP-Powertrain
INSTALLATION MANUAL

Graphic

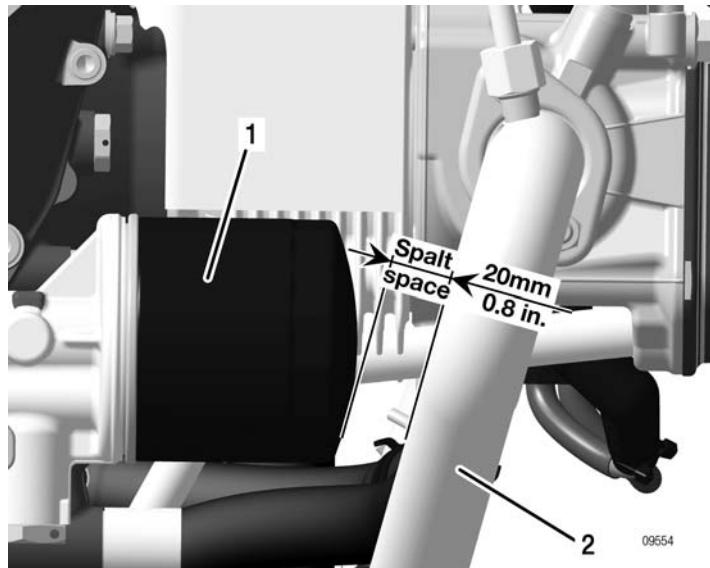

Part	Function
1	Oil filter
2	Exhaust manifold

Fig. 2

2) Exhaust system requirements

General note

See Fig. 4 and Fig. 5.



Non-compliance can result in serious injuries or death!

The exhaust system must be designed and built so that the permissible operating temperatures are maintained and the max. exhaust gas temperatures are not exceeded.

NOTICE

Install heat shields in required areas (fuel, oil, coolant hoses or tubes) and/or on the electronic components. Because of the high temperatures, provide suitable protection against accidental contact.

NOTICE

Secure exhaust system by suitable means according to installation requirements (Lockwire, heat-resistant silicone to dampen the exhaust spring etc.).

NOTICE

The performance specifications relate to ISA (15 °C) (59 °F) conditions and are only achieved if the engine is equipped with an unmodified GENUINE-ROTAX exhaust system and airbox.

2.1) Technical data

- Average radius of exhaust manifold: at least 40 mm (1.57 in.)
- Inner diameter of manifold pipe: at least 28 mm (1.10 in.)
- Damping volume: approx. 5 l (1.32 US gal)
- Back pressure at maximum power: max. 0.2 bar (2.9 psi) measured in each case approx. 100 mm (3.94 in.) beyond the end of the exhaust flange

2.2) If a GENUINE-ROTAX exhaust is not in use

General note

The four supplied exhaust sockets with exhaust flange and lock nuts must be used.

Exhaust sockets material: X6CrNiMoTi 17 12 2 (DIN 1.4571)

Tightening torque of M8 lock nuts: min. 15 Nm (133 in.lb.)

NOTE: The exhaust flange must not touch the cylinder head.

BRP-Powertrain
INSTALLATION MANUAL

Graphic Exhaust sockets

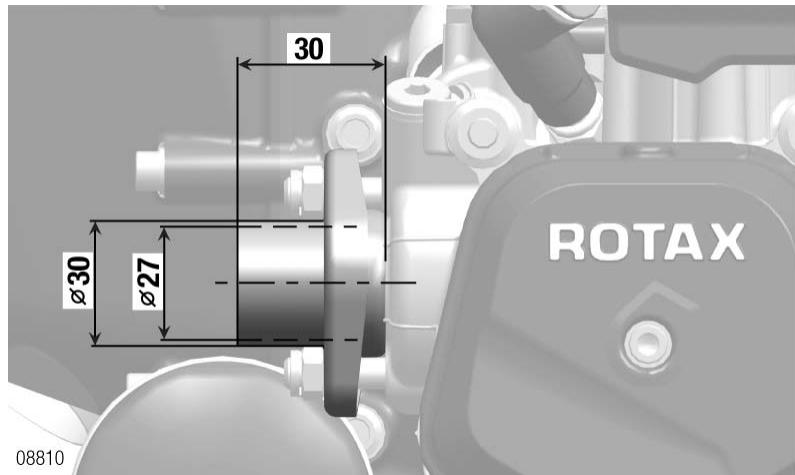


Fig. 3

08810

BRP-Powertrain

INSTALLATION MANUAL

3) Attaching the exhaust system

General note

The shape and configuration of the exhaust system is essentially determined by the free space available in the aircraft.

Two M8x23 studs are provided on each cylinder for attaching the exhaust system.

Location of the studs

NOTE: All dimensions from zero reference point (P).

Location	Coordinates		
	x axis mm/in.	y axis mm/in.	z axis mm/in.
Cylinder 1	-160/-6.3	-196/-7.72	-82/-3.23
	-160/-6.3	-212/-8.35	-113/-4.45
Cylinder 2	-192/-7.56	196/7.72	-82/-3.23
	-192/-7.56	212/8.35	-113/-4.45
Cylinder 3	-408/-16.06	-196/-7.72	-82/-3.23
	-408/-16.06	-212/-8.35	-113/-4.45
Cylinder 4	-438/-17.24	196/7.72	-82/-3.23
	-438/-17.24	212/8.35	-113/-4.45

Attachment points	
Max. permissible forces (safe load) in (N/lb-force) on x, y and z axis	1000/224.81
Max. permissible bending moment (safe load) in (Nm/ft.lb) on x, y and z axis	40/30

BRP-Powertrain
INSTALLATION MANUAL

NOTES

4) Dimensions of the exhaust system

4.1) Exhaust system assy.

See Fig. 4 und Fig. 5.

Location and position of the temperature sensor

NOTICE

If the EGT sensor is fitted on a slope or with the sensor tip pointing upwards, then various fluids can lead to undesired corrosion. The sensor could then fail.

The axis of the temperature sensor may be inclined up to 75 ° from the vertical, so that any residual water will not be collected in the tip of the temperature sensor.

The sensor element itself has no particular orientation, it can be rotated 360° around the axis. The tip of the temperature sensor must be positioned free in the gas flow.

Position

Approx. 50 mm (1.97 in.) from the cylinder head flange i.e. measured from the flat surface on the cylinder head to encoder axis. It is important that all 4 temperature sensors are placed at the same distance!

Graphic

Position


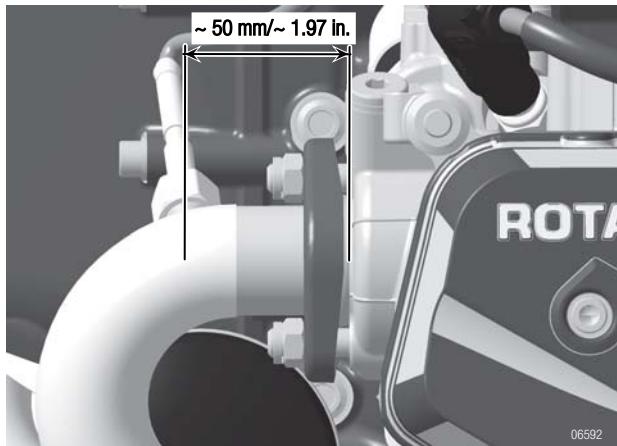


Fig. 4

BRP-Powertrain
INSTALLATION MANUAL

Graphic Exhaust gas measurements

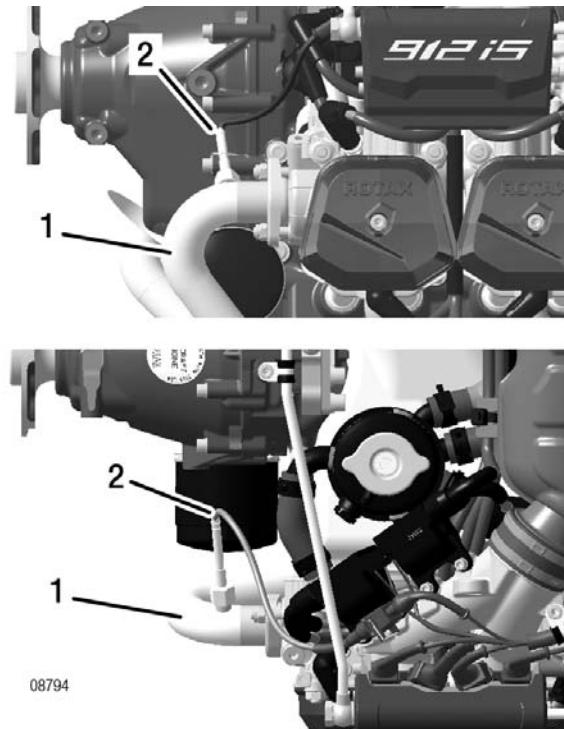


Part	Function
1	Exhaust manifold
2	EGT sensor

Fig. 5

Operating limit See the current 912 i Series Operators Manual.

4.2) Data for optional components of exhaust system

- Weight** See chap. 72-00-00 section: 2.1).
Graphic Exhaust elbow

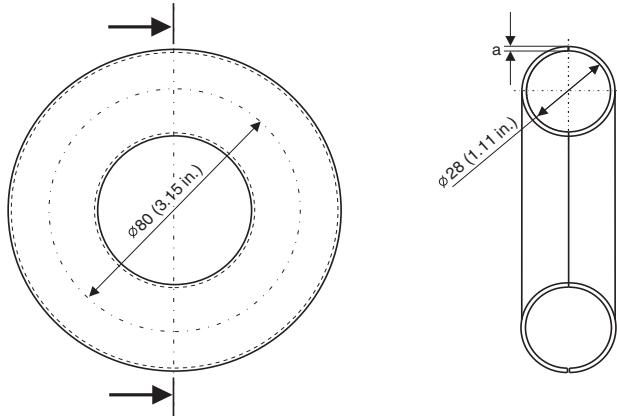


Material/strength: X 15 CrNiSi20-12 (DIN 1.4828) (309 stainless steel) a = 1.5 mm (0.06 in.)

Fig. 6

09164

- Graphic** Muffler

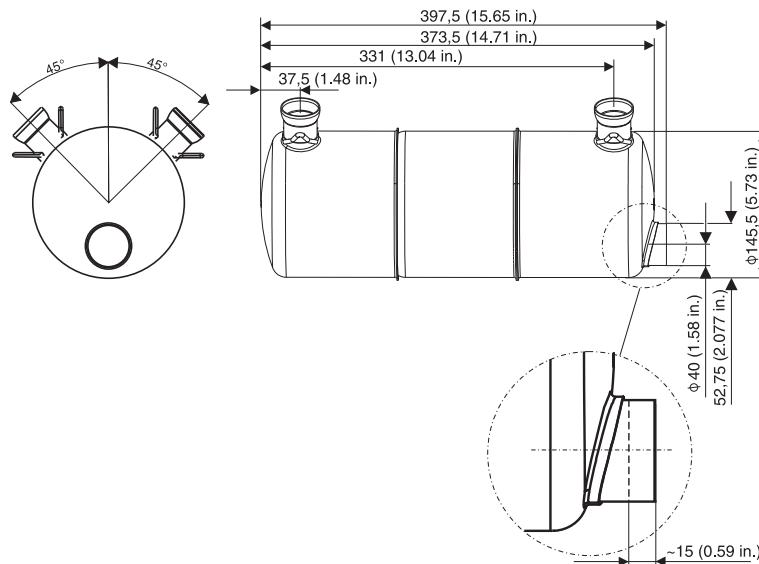

Material/strength: X 6CrNi 189 (DIN 1.4541) (321stainless steel) a = 1 mm (0.04 in.)


Fig. 7

06996

BRP-Powertrain
INSTALLATION MANUAL

Graphic

Tailpipe

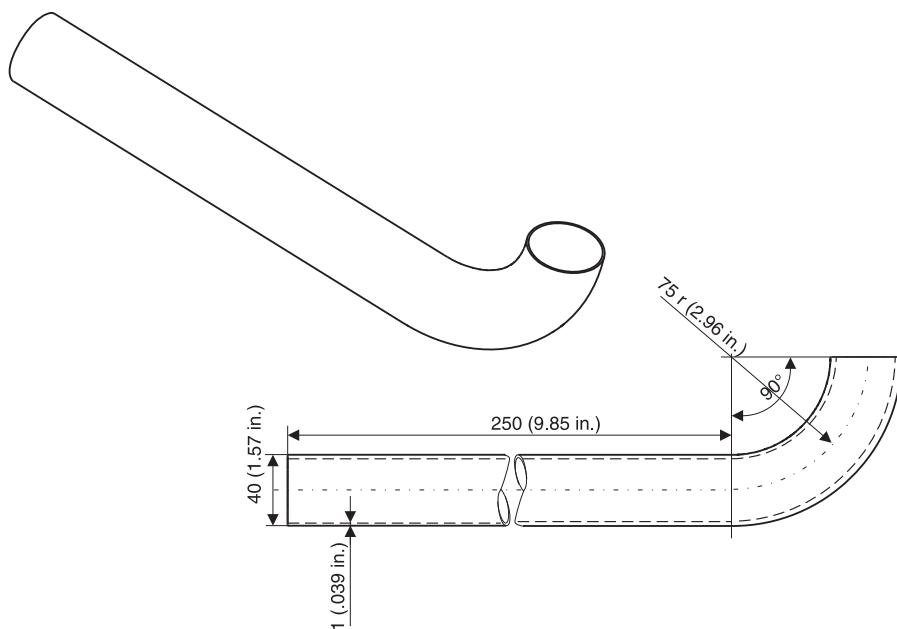


Material/strength: X 5CrNi 189 (DIN 1.4301) (304 stainless steel)
 $a = 1 \text{ mm (0.04 in.)}$

Fig. 8

09153

Graphic

Ball joint (male)

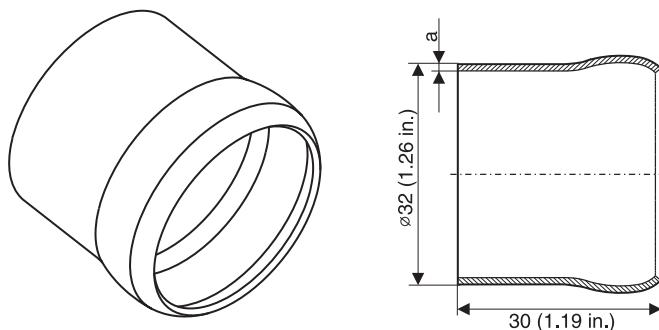

Material/strength: X 15CrNiSi 20, 12 (DIN 1.4301) (304 stainless steel)
 $a = 1 \text{ mm (0.04 in.)}$


Fig. 9

09166

BRP-Powertrain
INSTALLATION MANUAL

Graphic

Exhaust pipe

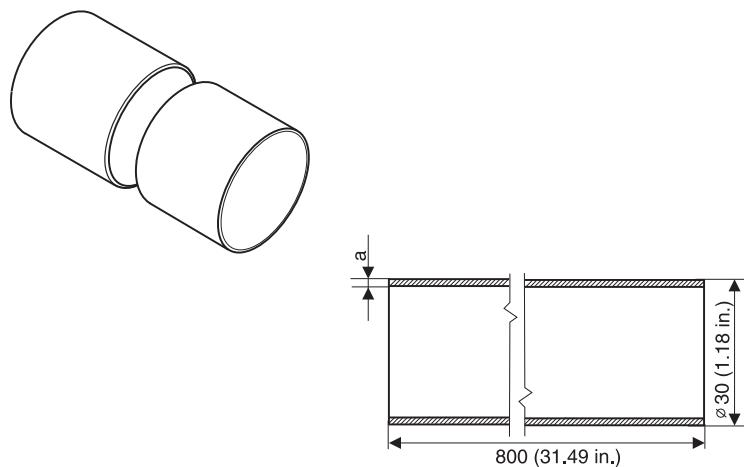

Material/strength: X 15CrNiSi 20, 12 (DIN 1.4301) (304 stainless steel)
 $a = 1 \text{ mm (0.04 in.)}$

Fig. 10

09167

BRP-Powertrain
INSTALLATION MANUAL

Graphic Exhaust system assy., typical

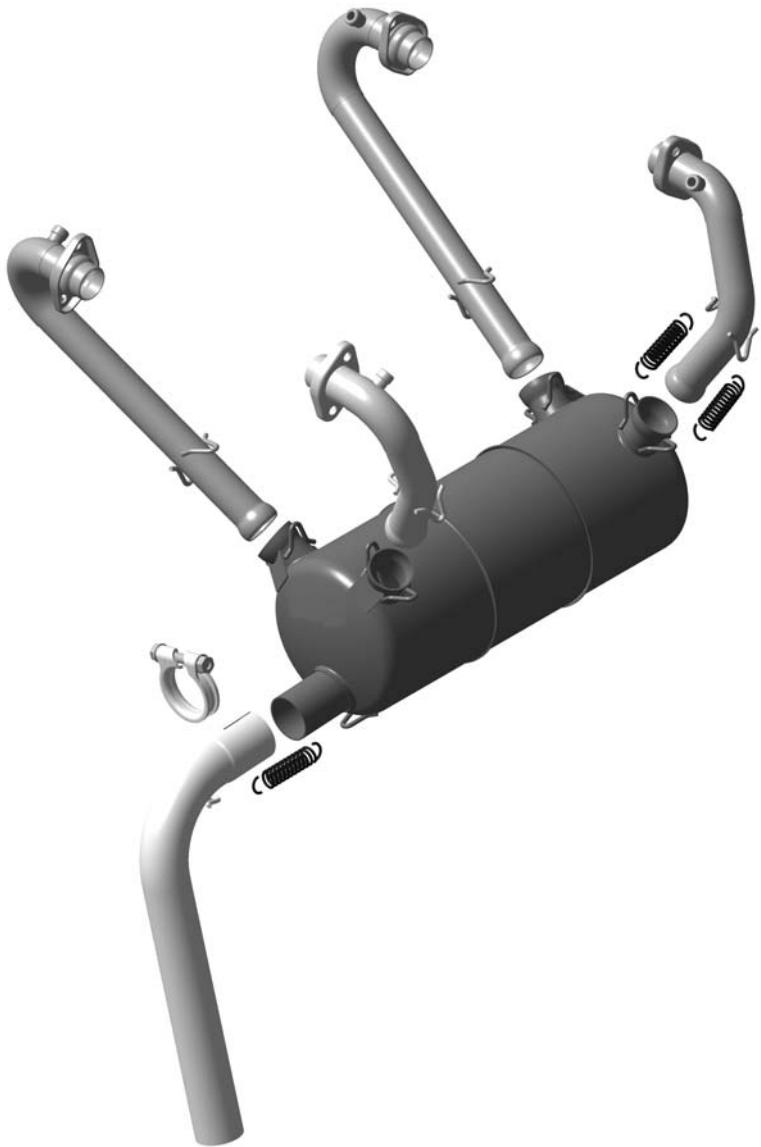


Fig. 11

05913

BRP-Powertrain
INSTALLATION MANUAL

Chapter: 79-00-00
LUBRICATION SYSTEM

General note

The ROTAX 912 i Series is fitted with a dry sump forced lubrication system with an oil pump and integrated pressure regulator.

Table of contents


This section of the Installation Manual describes the system, operating limits and requirements for the lubrication system.

Subject	Page
Lubrication system (oil system) System description Operating limits Checking the oil circuit Measuring of the vacuum Oil and purging line requirements	Page 3 Page 3 Page 4 Page 5 Page 7 Page 9
Connecting sizes and position of connections Oil circuit Oil tank Permissible position and location of the oil tank	Page 11 Page 11 Page 13 Page 16
General notes on the oil cooler Permissible position and location of the oil cooler Capacity Purging the lubrication system Checking the hydraulic valve tappet for correct purging Replacement of components	Page 19 Page 19 Page 20 Page 21 Page 24 Page 25
Data for optional components of lubrication system Oil cooler Variants of connectors	Page 27 Page 27 Page 27

BRP-Powertrain
INSTALLATION MANUAL

Overview

Lubrication system

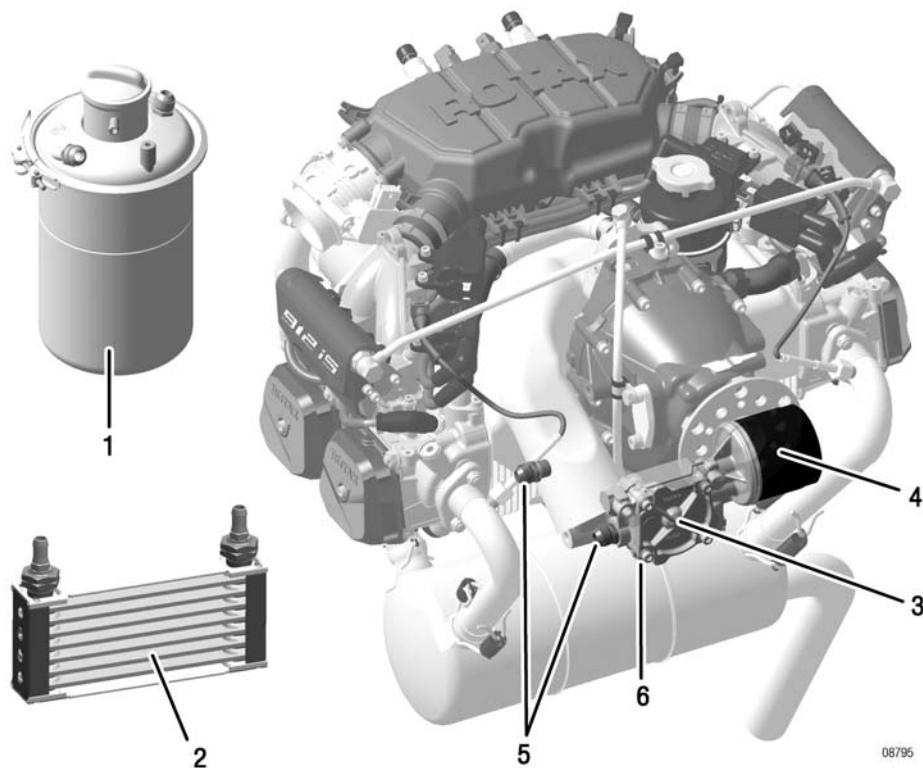

Part	Function
1	Oil tank
2	Oil cooler
3	Oil pump
4	Oil filter
5	Screw socket
6	Plug screw

Fig. 1

NOTE: The suction line can also be connected to the bottom of the oil pump housing. In this case, the plug screw and gasket ring are to be replaced by the screw socket and gasket ring. See the current 912 i Series Heavy Maintenance Manual.

d05398.fm

1) Lubrication system (oil system)

1.1) System description

Drive

See Fig. 2.

NOTE: The oil pump is driven by the camshaft.

The main oil pump sucks the engine oil from oil tank (1) via the oil cooler (3) and forces it through the oil filter to the individual points of lubrication (also lubricates the propeller governor).

The surplus oil emerging from the points of lubrication accumulates on the bottom of the crankcase and is forced back to the oil tank by the crankcase blow-by gases.

Purging

NOTE: The oil circuit is vented via nipple in the oil tank.

Connections



Non-compliance can result in serious injuries or death!

The oil cooler and its connections must be certified according to the latest regulations, such as FAR and EASA, by the aircraft or fuselage manufacturer.

Only the following connections need to be established to complete the lubrication system (oil system).


	Oil circuit, engine (main oil pump)
Connections from	Oil tank (outlet) to oil cooler
	Oil cooler to oil pump (inlet)
	Oil return to oil tank (inlet)
	Oil tank to purging line

NOTE: An oil tank is included with the standard engine version. No provision has been made for attachment of an oil cooler on the engine.

BRP-Powertrain
INSTALLATION MANUAL

Graphic

Oil system

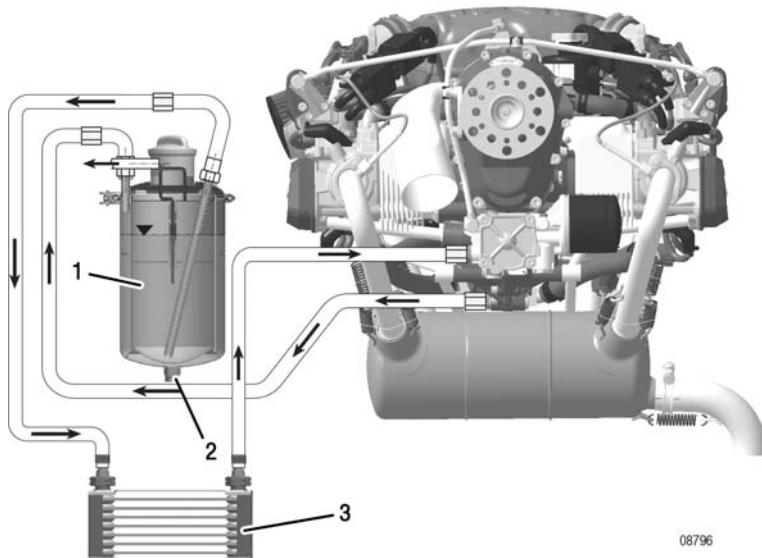

08796

Part	Function
1	Oil tank
2	Oil drain screw
3	Oil cooler
4	Oil filter

Fig. 2

1.2) Operating limits

General note

⚠ WARNING

Non-compliance can result in serious injuries or death!
The lubrication system must be designed such that the permissible operating temperatures and maximum values are not exceeded.

Operating limits	Manual
Oil pressure	See OM 912 i Series, section 2.1
Oil temperature	See OM 912 i Series, section 2.1

⚠ WARNING

Non-compliance can result in serious injuries or death!
At operation below nominal temperature, formation of condensate in the oil system might negatively affect oil quality.

Low temperatures**NOTE:**

When operating at low temperatures, installation of an oil thermostat, parallel to the oil cooler is highly recommended.

**WARNING**

Non-compliance can result in serious injuries or death!

If an oil thermostat is being used and the ambient temperature is low, there is a possibility that the oil may congeal briefly when in a steep descent. Pay extra attention to the oil pressure and oil temperature during these abnormal conditions. If necessary, revert to a cruising or climb situation.

Advantages: safe oil pressure after cold start, prevention of fuel and water accumulation in the oil.

See SL-912-011 "Use of an oil thermostat", latest issue.

1.3) Checking the oil circuit

General note

See Fig. 3.

NOTE: The required pressure gauges and connection parts are not included in the BRP-Powertrain delivery.

To check the oil circuit for correct function, the following readings have to be taken with the engine running.

See Fig. 3.

Measurement of the mean crankcase pressure at full throttle, this ensures correct oil return from crankcase (blow-by gas).

NOTICE


Do not remove the magnetic plug for prolonged periods nor during flight operations.

A pressure sensor (1) (pressure gauge with liquid damping) can be fitted instead of the magnetic plug (2) or the crankshaft locking screw (3). The magnetic plug (2) or the crankshaft locking screw (3) is removed and the pressure sensor (1) is fitted.

BRP-Powertrain
INSTALLATION MANUAL

Graphic

Measurement of crankcase pressure

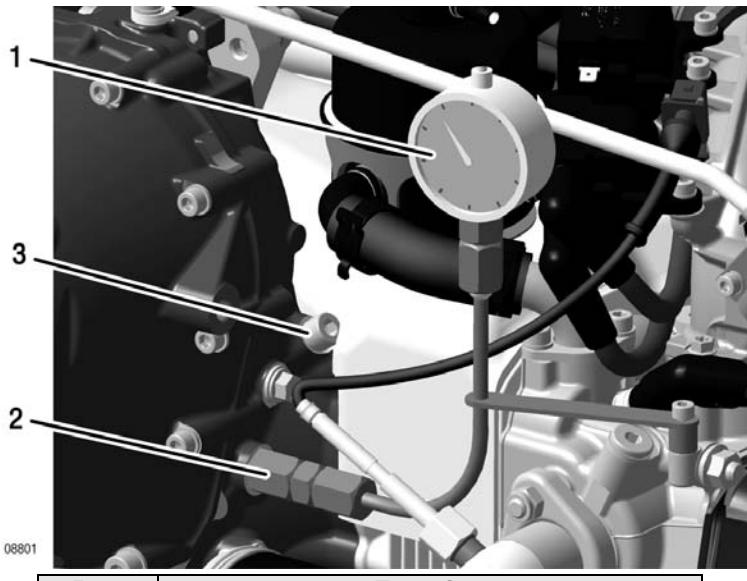

Part	Function
1	Pressure indicator
2	Magnetic plug
3	Crankshaft locking screw

Fig. 3

Magnetic plug

NOTE: The thread for the magnetic plug (2) must be M12x1.5 (metric) and M8 for the crankshaft locking screw (3) (use always new gasket).

Pressure values

The pressure in the crankcase at (full throttle) must not exceed the prevailing ambient pressure by more than 0.45 bar (6.53 psi) at 90 °C (194 °F) oil temperature.

⚠ WARNING

Non-compliance can result in serious injuries or death! If the readings exceed the pressure limits, then the flow resistance in the oil return line from oil sump to oil tank is too high in the current engine installation (contamination, restrictions of cross-section, etc.). This condition is unsafe and must be rectified immediately.

If crankcase pressure and measuring pressure of the vacuum readings and all operational data (flight attitude, temperatures, etc.) are within the specified limits, then it can be assumed that the oil circuit is working correctly.

d05398.fm

1.4) Measuring of the vacuum

Measuring of the vacuum See Fig. 4.

Measure the vacuum in the suction oil line (1) - from the oil tank via the oil cooler to the engine oil pump - at a distance of max. 100 mm (4 in.) from the oil pump suction connector (2).

At full throttle, the indicated vacuum (3) upstream of the oil pump must not be less than 0.3 bar (4.35 psi), otherwise the oil hose (1) could collapse and block the oil supply to the engine.

⚠ WARNING


Non-compliance can result in serious injuries or death!

The vacuum (3) (pressure gauge with liquid damping) must be verified over the complete engine operation range. If the oil is cold, the flow resistance increases, which means that not enough oil will flow on the suction side.

BRP-Powertrain
INSTALLATION MANUAL

Graphic

Measuring of the vacuum

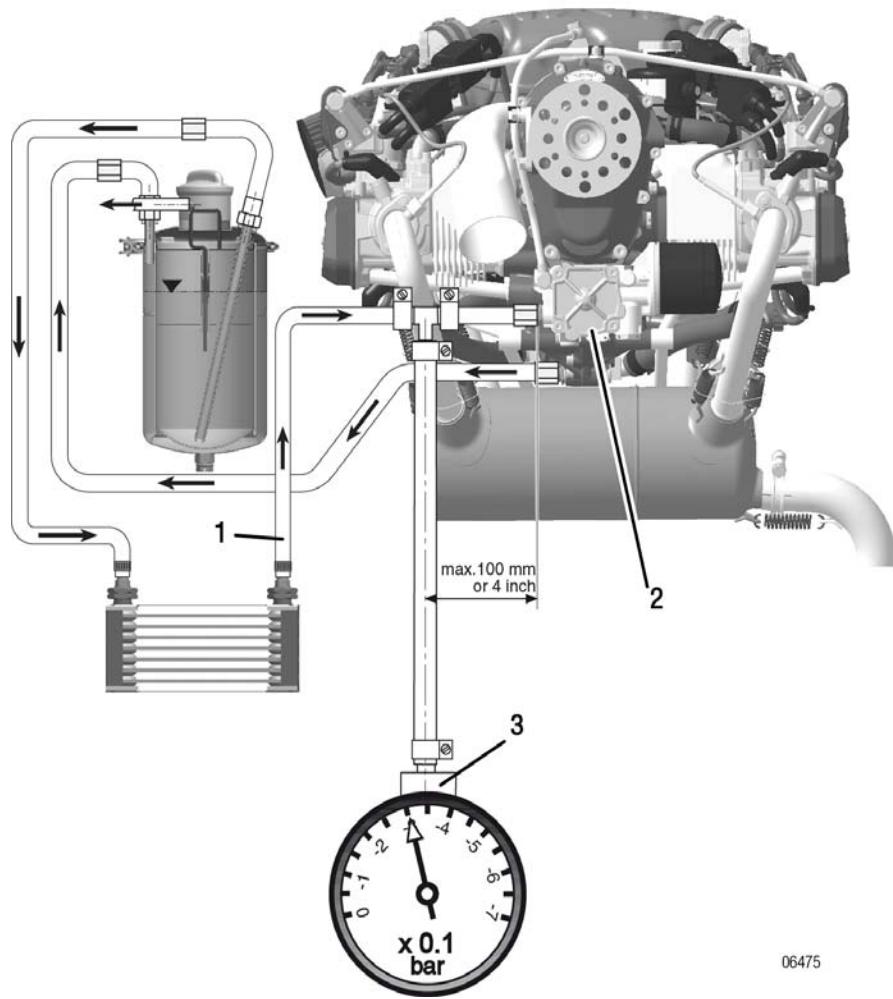

06475

Part	Function
1	Suction oil line
2	Oil pump
3	Pressure gauge

Fig. 4


BRP-Powertrain
INSTALLATION MANUAL

1.5) Oil and purging line requirements

Oil lines	Oil circuit, engine (main oil pump)
	- Temperature durability: min. 140 °C (284 °F)
	- Pressure durability: min. 10 bar (73 psi.)
	- Bending radius: min. 70 mm* (2.76 in.)
	* unless otherwise stated by the hose manufacturer
	- Minimum inner dia. of oil lines in relation to total length
	up to 1 m (39.37 in.) inner diameter minimum 11 mm (0.43 in.)
	up to 2 m (78.74 in.) inner diameter minimum 12 mm (0.47 in.)
	up to 3 m (118.11 in.) inner diameter minimum 13 mm (0.51 in.)
	- Length of individual oil line: max. 3 m (9.84 ft.)
Purging line	Purging line of oil tank
	See Fig. 5.
	- Route the line without kinks and avoid sharp bends.
	NOTE: Water is a by-product of the combustion of fuel. Most of this water will dissipate from the combustion chamber with the exhaust gases. A small amount will reach the crankcase and must be disposed of through the purging line.
	- The purging line must be routed in a continuous decline or furnished with a drain bore at its lowest point to drain any condensate.
	- The purging line must be protected from any kind of ice formation from condensation, e.g. insulation protection or routing in a hose with hot air flow and furnishing the vent line with a bypass opening (1) before the cowling outlet (2).

BRP-Powertrain
INSTALLATION MANUAL

Graphic Purgung line.

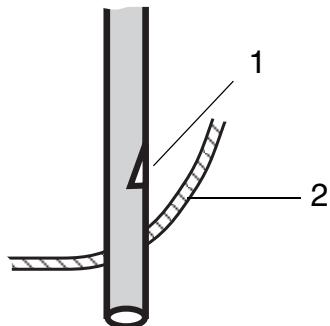

Part	Function
1	Bypass opening
2	Outlet through the cowling

Fig. 5

04874

2) Connecting sizes and position of connections

General note

NOTICE

Utilize the full slip-on length for all connections. Secure hoses with suitable screw clamps or crimp connections.

NOTE: The oil line connections are optionally available as UNF threads.

2.1) Oil circuit (engine)

General note

See Fig. 6.

Depending on engine configuration, the oil feed line connectors may vary:

- 912 iSc/iS thread M18 optional UNF thread


Oil pump (inlet)

Connection:

Oil pump (inlet)	
Screw socket (1)	3/4-16 UNF/M16x1.5
Tightening torque of inlet line	25 Nm (18.44 ft.lb.)

Graphic

Oil pump inlet

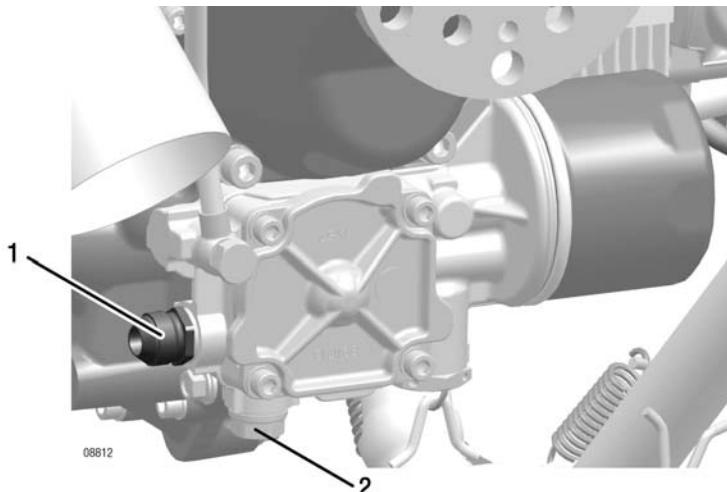

Part	Function
1	3/4-16 UNF/M16x1.5 screw socket
2	Alternative connection

Fig. 6

BRP-Powertrain
INSTALLATION MANUAL

Oil return

See Fig. 7.

NOTICE

The engine design is for a conventional, non-aerobatic, tractor or pusher configuration with the oil return port in the optimum position. Assuming these points are taken into consideration, the engine will be properly lubricated in all flight profiles. Aircraft that are not conventional (e.g. airships, gyrocopters, dive brake equipped aircraft, etc.) that require engine load at steep inclination angles may have special lubrication requirements.

Select the appropriate connection for the oil return line according to the propeller configuration and oil system layout.


- Position **4, 5** for tractor arrangement
- Position **3** for pusher arrangement

NOTICE

Check that the connections for the oil feed and return lines are correct.

Graphic

Connections

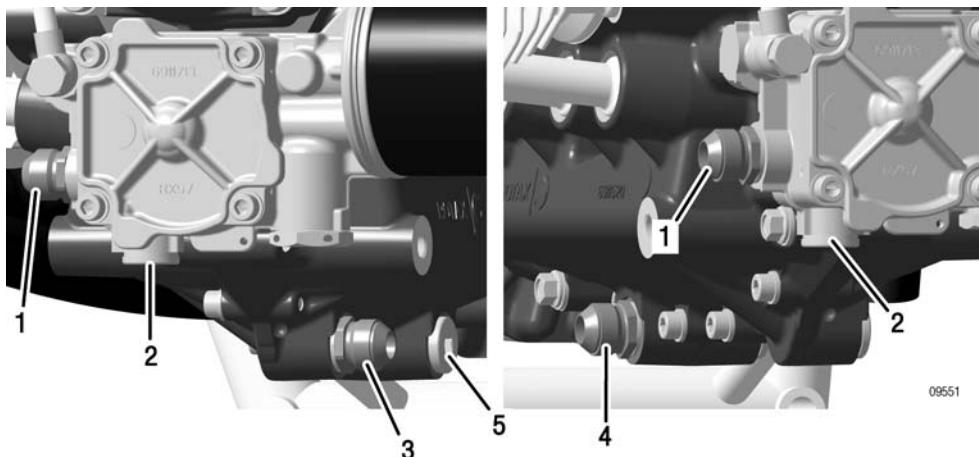

Part	Function
1 or 2	Screw socket (oil feed line) from oil tank or oil cooler
3	Screw socket (oil return line) for pusher arrangement
4 or 5	Screw socket (oil return line) for tractor arrangement

Fig. 7

BRP-Powertrain
INSTALLATION MANUAL

Connections

Screw connection (optional)	
Thread	3/4-16 UNF/M16x1.5
Tightening torque of oil return line	25 Nm (18.44 ft.lb.)

2.2) Oil tank

Connections

See [Fig. 8](#) and [Fig. 9](#).

NOTICE

Only use the oil tank provided in the scope of delivery, as its design has changed compared with older tanks.

NOTE:

Optional extra:


Nipple either straight or with 90° elbow. Metric M18x1.5 or UNF 3/4-16 thread.

NOTICE

Check what type of thread or connection there is on the supplied oil tank.

Connections for oil circuit (engine)

Graphic

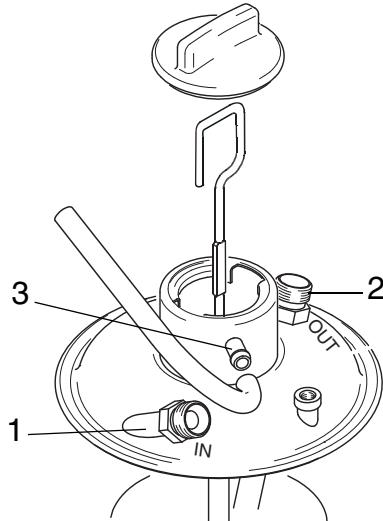

Part	Function
1	Oil feed line
2	Oil outlet
3	Purging nipple

Fig. 8

BRP-Powertrain
INSTALLATION MANUAL

UNF thread
Optional

Oil feed line and outlet have UNF threads

Screw connection	
Thread	3/4-16 UNF
Tightening torque of oil feed line and outlet	25 Nm (18.44 ft.lb.)

NOTICE

The oil tank cover is also marked with the designations

IN- oil return line from crankcase

OUT- outlet to oil cooler/oil pump.

Purging nipple

Purging nipple	
Outer dia.	8 mm (0.31 in.)
Slip-on length	max. 15 mm (0.59 in.)

Bent socket 90°
Optional

part no. 956580

Bent socket 90° / M18x1.5	
Outer dia.	12 mm (0.47 in.)
Slip-on length	max. 24 mm (0.94 in.)
Tightening torque	25 Nm (18.44 ft.lb.)

Nipple optional


part no. 956610

Nipple with cap nut / straight	
Outer dia.	12 mm (0.47 in.)
Slip-on length	max. 24 mm (0.94 in.)
Tightening torque	25 Nm (18.44 ft.lb.)

BRP-Powertrain
INSTALLATION MANUAL

Graphic

Oil tank

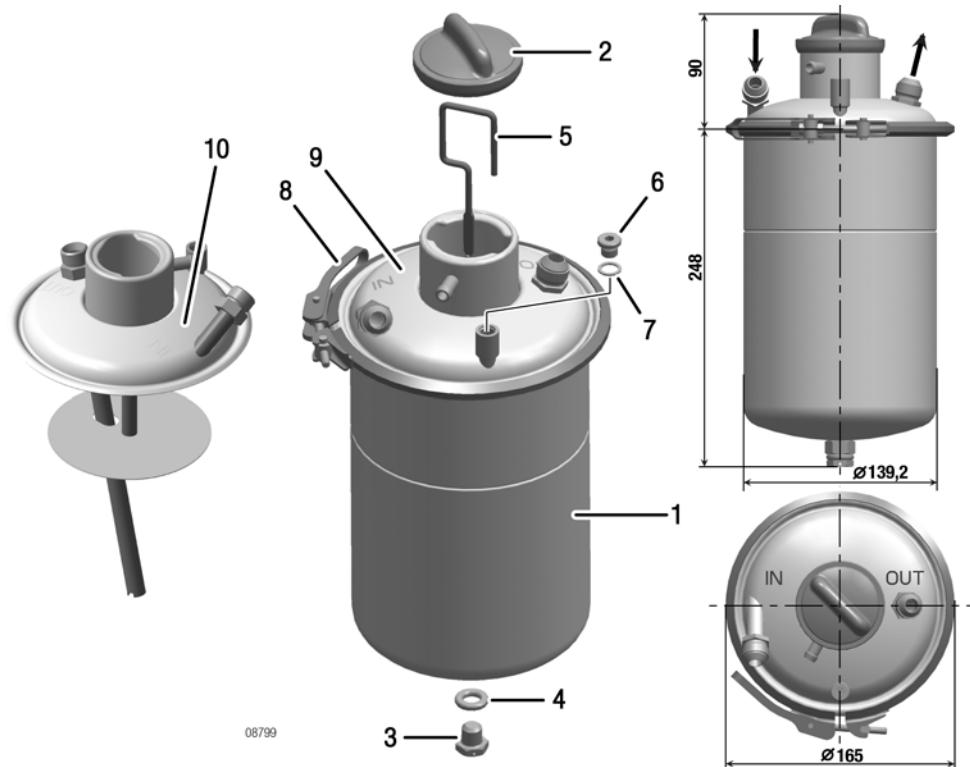

Part	Function
1	Oil tank
2	Bayonet cap
3	M12x12 hex. screw
4	C12x18 gasket ring
5	Oil dipstick
6	M10x1 plug screw
7	A10x14 gasket ring
8	Profile clamp 163
9	Oil tank cover assy. (UNF 3/4-16)
10	Oil tank cover assy. (metric M18x1.5)

Fig. 9

NOTICE

If the lines are connected incorrectly, the engine will not be lubricated and the engine will be damaged very quickly!

2.3) Permissible position and location of the oil tank

**Position and
location**

See Fig. 10.

- The longitudinal axis z3 must be parallel to z-axis of the system of coordinates.

Permissible deviation from parallel: $\pm 10^\circ$

NOTE: This applies to both planes.



WARNING

Non-compliance can result in serious injuries or death!
If the oil tank is located higher, oil might trickle through bearing clearances into the crankcase during longer periods of engine stop. If fitted too low it might damage the oil circuit.

- The oil tank (1) must be positioned on its z-axis such that the normal oil level (2) is always between 0 and -400 mm (-15.75 in.) on the y-axis.


NOTE: If the profile clamp of the oil tank is 360 mm (14.17 in.) below the propeller shaft, then the oil in the oil tank is at the same level as the oil pump. This is the ideal position for the oil tank.

- Install the oil tank free of vibrations and not directly on the engine.
- Oil tank cover (3) and oil drain screw (4) must be easily accessible.

BRP-Powertrain
INSTALLATION MANUAL

Graphic

Position and location of the oil tank

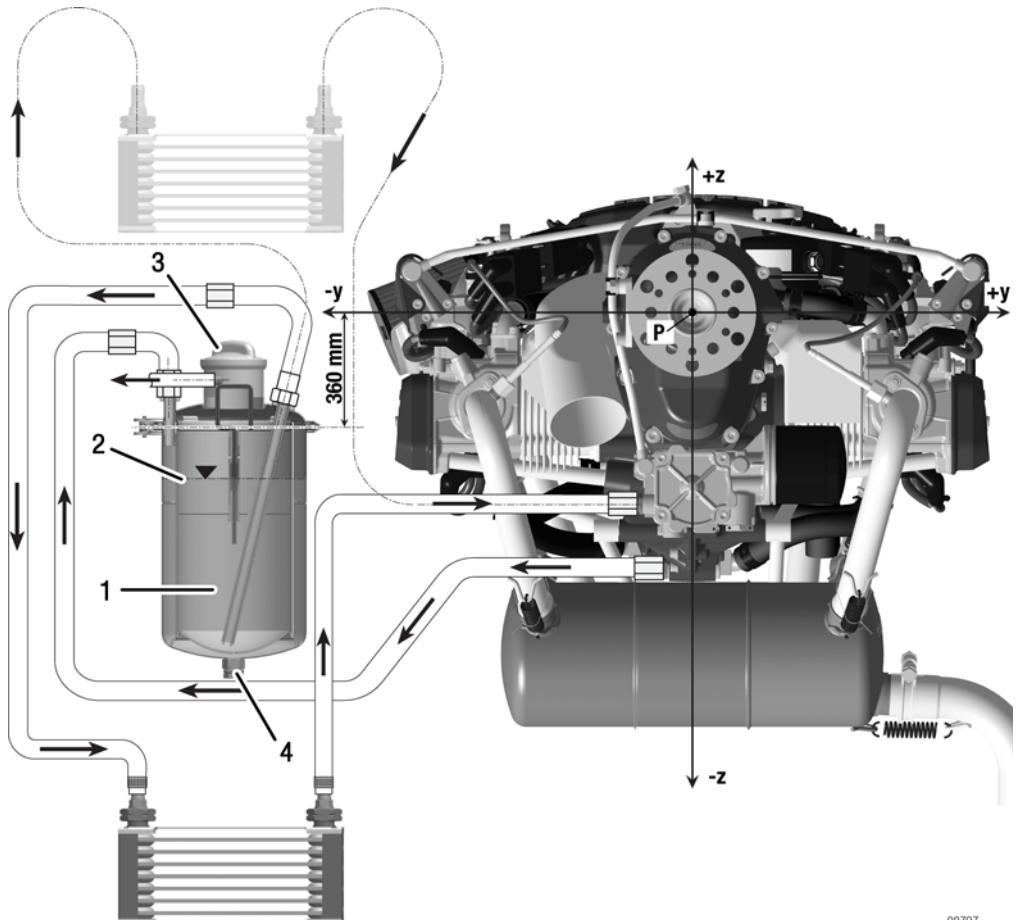

08797

Part	Function
1	Oil tank
2	Oil level
3	Oil tank cover
4	Oil drain screw, hex. screw

Fig. 10

BRP-Powertrain
INSTALLATION MANUAL

NOTES

3) General notes on the oil cooler

General note

An oil cooler is available for this engine from BRP-Powertrain (see Illustrated Parts Catalog).

**WARNING**

Non-compliance can result in serious injuries or death! Certification according to the latest regulations, such as FAR or EASA, must be conducted by the aircraft or fuselage manufacturer.

**NOTICE**

The oil cooler must be designed to dissipate approx. 10 kW (7.58 BTU/s) of thermal energy at take-off performance.

**NOTICE**

The oil cooler must not restrict oil flow. Test system as per chap. 79-00-00 section 1.3.

NOTE:

Experience has shown that an oil cooler of at least 160 cm² (25 in²) is required, provided that air flow is adequate.

3.1) Permissible position and location of the oil cooler

Installation

See [Fig. 11](#).

**WARNING**

Non-compliance can result in serious injuries or death! The oil cooler must be designed and installed such that the permissible operating temperatures are maintained and that these do not exceed or fall below the maximum values.

This must also apply to "hot day conditions". If need be, take appropriate measures such as changing the size of the oil cooler, partially covering the cooler, etc.

- The oil cooler should always be installed below the engine oil pump.

**NOTICE**

The oil cooler must be installed with the radiator caps pointing upwards i.e. in positive direction on the z-axis.

BRP-Powertrain
INSTALLATION MANUAL

- If this position is not practical, also install the oil cooler with the radiator caps pointing upwards, i.e. in positive direction on the z-axis.

NOTICE

This will prevent unintentional draining of the oil cooler during longer periods of engine stop.

3.2) Capacity

Oil tank

- Capacity without oil cooler and connecting lines min. 3 l (0.8 USgal) depending on the respective installation.

Volume of oil tank	
Up to the MIN. mark	2.5 l (0.66 USgal)
Up to the MAX. mark	3.0 l (0.79 USgal)

- Perform oil level check and add oil if necessary.
-

3.3) Purging the lubrication system

Safety

See Fig. 11.



Risk of burns and scalds.

Hot engine parts.

Always allow engine to cool down to ambient temperature before starting work.

Introduction

Ensure that oil lines are connected correctly and secured and that the oil cooler (if fitted) is in the suction line (1) between the oil tank and the oil pump. Verify that the oil tank is filled up to the maximum level (to the top of the flat portion of the dipstick). Additional oil (up to 0.5 litre (0.13 USgal)) may be added to the tank for the purpose of this procedure.

Instruction

The following work procedures must be carried out:



Incorrectly connected oil lines to the oil tank or to the engine will result in severe engine damage.

Step	Procedure
1	Disconnect oil return line (2) from the oil tank.
2	Place the free end (3) of the return line into a suitable container (4) below the engine.
3	Plug open connection (5) on oil tank with suitable air tight cap.
4	Remove the spark plug connectors.
5	For easier rotation of engine remove one spark plug from each cylinder. NOTICE Prevent any foreign objects entering through spark plug hole.
6	Using a compressed air line, pressurise the oil tank through its purging connection (6) (on the neck of the tank). Adjust the compressor outlet regulator so that the air line pressure is between 0.4 bar (5.8 psi) and 1 bar (14.5 psi). Do not exceed 1 bar (14.5 psi).



Non-compliance can result in serious injuries or death!
Do not remove the oil tank cover before ensuring that air pressure has been completely released from the tank.

BRP-Powertrain
INSTALLATION MANUAL

NOTE: The oil tank cover is not pressure-tight, some air can escape.

The pressure in the oil tank has to be maintained during the following steps.

NOTICE

The oil tank may empty and as a result introduce air into the oil system. Pay attention to the oil level and fill tank as required.

NOTICE

Do not use the starter for this purpose. Fit propeller and use it to turn the engine.

7	Turn the engine by hand in direction of normal rotation until the first pressure indication appears on the oil pressure gauge. Normally this will take approx. 20 turns. Depending on installation it may take up to 60 turns.
8	Stop the pressurisation.
9	Open the cap (5) for the oil return line on the oil tank and reconnect the engine oil return line (2) to the tank. NOTICE Ensure that the suction oil line (1) and oil return lines (2) are connected to the proper fittings on the oil tank. If the oil lines from the engine to the oil tank are incorrectly connected, severe engine damage may result.
10	Refit the spark plug. Restore aircraft to original operating condition.
11	Residual oil may have accumulated in the crankcase. Return it to the oil tank by following the oil level check procedure in the relevant Operators Manual (or SI-912 i-005 Oil level check, current issue).
12	Fill the oil in the tank up to the full mark on the dipstick.

NOTICE

Carefully check all lubrication system connections, lines and clamps for leaks and tightness.


ENVIRONMENTAL NOTE

Protect their environment. Observe to bury no oil!
Dispose of oil in an environmentally friendly manner.

BRP-Powertrain
INSTALLATION MANUAL

Graphic

Lubrication system

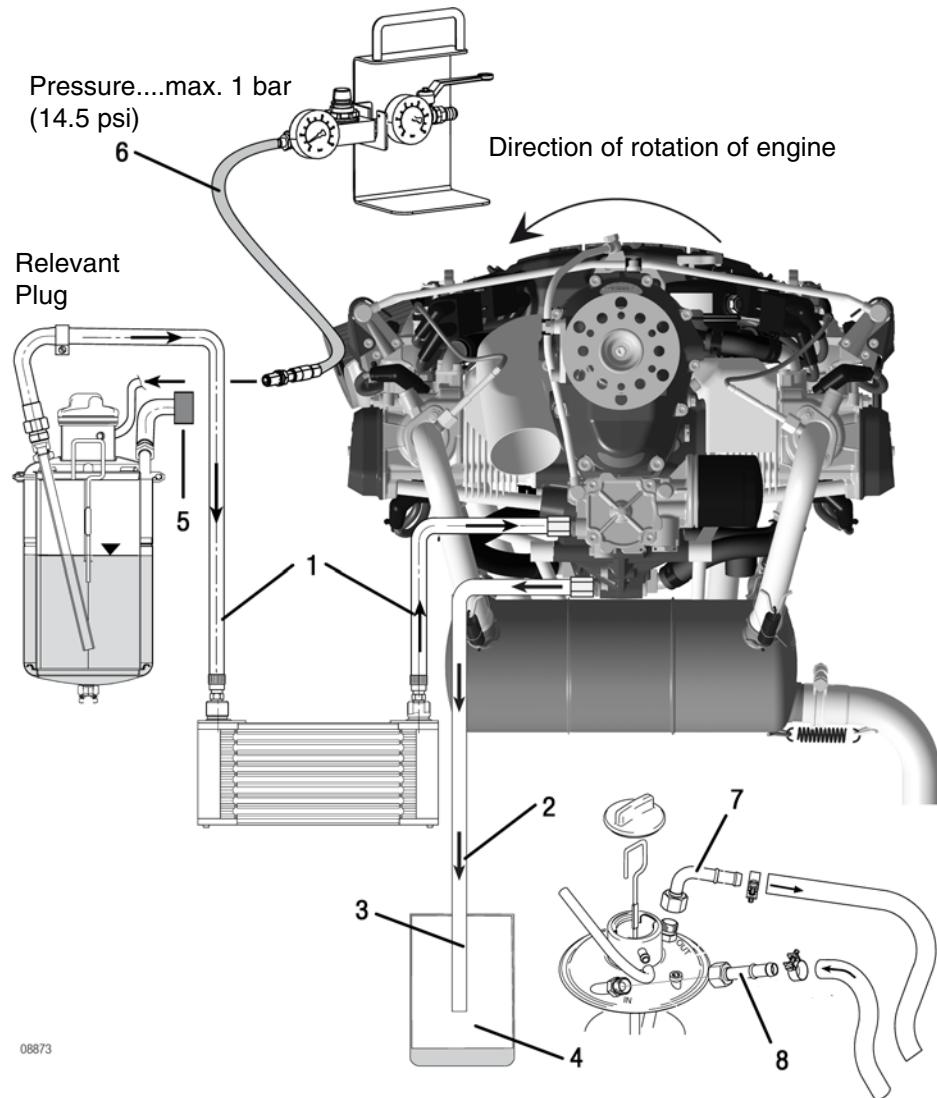

Part	Function
1	Suction line
2	Oil return line
3	Free end
4	Tank
5	Plug
6	Purging connection
7	To oil pump
8	Return from engine

Fig. 11

02233

d05398.fm

Effectivity: 912 i Series
Edition 1/Rev. 0

79-00-00

Page 23
January 01/2012

3.4) Checking the hydraulic valve tappet for correct purging

General note

See Fig. 12.



Risk of burns and scalds.

Hot engine parts.

Always allow engine to cool down to ambient temperature before starting work.

The following check procedure describes the correct method for purging the hydraulic valve tappet.

Instruction

The following work procedures must be carried out:

Step	Procedure
1	Remove valve cover on cylinder 1.
2	Turn crankshaft in direction of normal rotation so that cylinder 1 is set to top dead centre ignition (both valves are closed).
3	Push down the rocker arm on the push-rod side with a force (F) of around 70 N (15.74 lb-force) for about 3 seconds. You can use a belt tester, for example, to check approximately how much force is being exerted. Repeat on other rocker arms.
4	Check the size of the gap between the rocker arm and the valve contact surfaces. Max. permitted gap 0.5 mm (0.02 in.). NOTICE If it is possible to push the hydraulic valve tappet further than this limit, an additional engine run for about 5 min. at 3500 rpm, after refitting the valve covers, is required. In order to vent the hydraulic valve tappet, this process can be repeated another 2 times.
5	Repeat on all other cylinders.

BRP-Powertrain
INSTALLATION MANUAL

Graphic

Hydraulic valve tappet

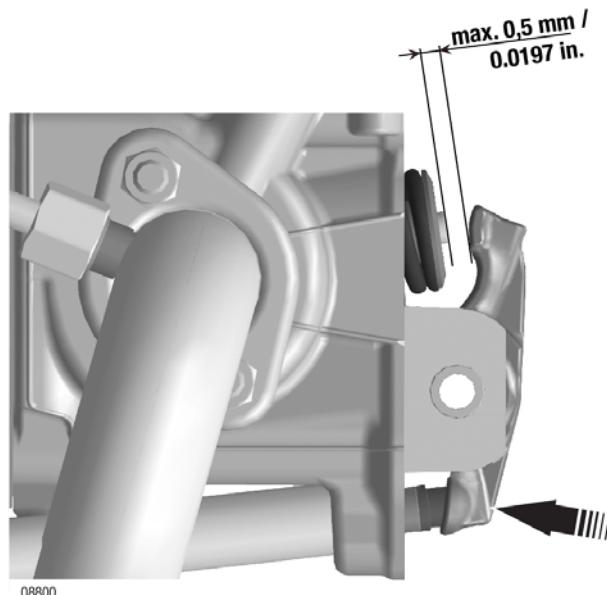


Fig. 12

3.5) Replacement of components

General note

If an hydraulic valve tappet still malfunctions after several engine runs, it must be replaced and the valve spring support must be inspected for wear.

Work procedures

All work must be performed in accordance with the relevant Maintenance Manual.

BRP-Powertrain
INSTALLATION MANUAL

NOTES

BRP-Powertrain
INSTALLATION MANUAL

4) Data for optional components of lubrication system

4.1) Oil cooler

General note	See Fig. 13.
Weight	See chap. 72-00-00 section: 2.1).

4.1.1) Variants of connectors

General note	NOTICE	Counter hold screw sockets when securing the oil lines.
---------------------	---------------	---

UNF screw socket

UNF screw socket	
Thread	3/4-16 UNF
Tightening torque	22 Nm (16.23 ft.lb.) and LOCTITE 648
Tightening torque of oil feed line and outlet	25 Nm (18.44 ft.lb.)

Nipple 13.2/9.5

Nipple	
Outer dia.	13.2 mm (0.52 in.)
Slip-on length	max. 21 mm (0.83 in.)
Tightening torque	22 Nm (16.23 ft.lb.) and LOCTITE 243

Metric screw sockets

NOTICE	Counter hold screw sockets when securing the oil lines.
---------------	---

Metric screw sockets	
Thread	M18x1.5
Tightening torque	22 Nm (16.23 ft.lb.) and LOCTITE 648
Tightening torque of oil feed line and outlet, bent socket or hose nipple	25 Nm (18.44 ft.lb.)

BRP-Powertrain
INSTALLATION MANUAL

Angular tube

Angular tube (90°)	
Outer dia.	13.2 mm (0.52 in.)
Slip-on length	max. 21 mm (0.83 in.)
Tightening torque	22 Nm (16.23 ft.lb.) and LOCTITE 648

Bent socket


Bent socket (90°)	
Outer dia.	12 mm (0.47 in.)
Slip-on length	max. 24 mm (0.94 in.)
Tightening torque	25 Nm (18.44 ft.lb.)

Hose nipple with cap nut (straight nipple)

Hose nipple with cap nut	
Outer dia.	12 mm (0.47 in.)
Slip-on length	max. 24 mm (0.94 in.)
Tightening torque	25 Nm (18.44 ft.lb.)

BRP-Powertrain
INSTALLATION MANUAL

Connection variants

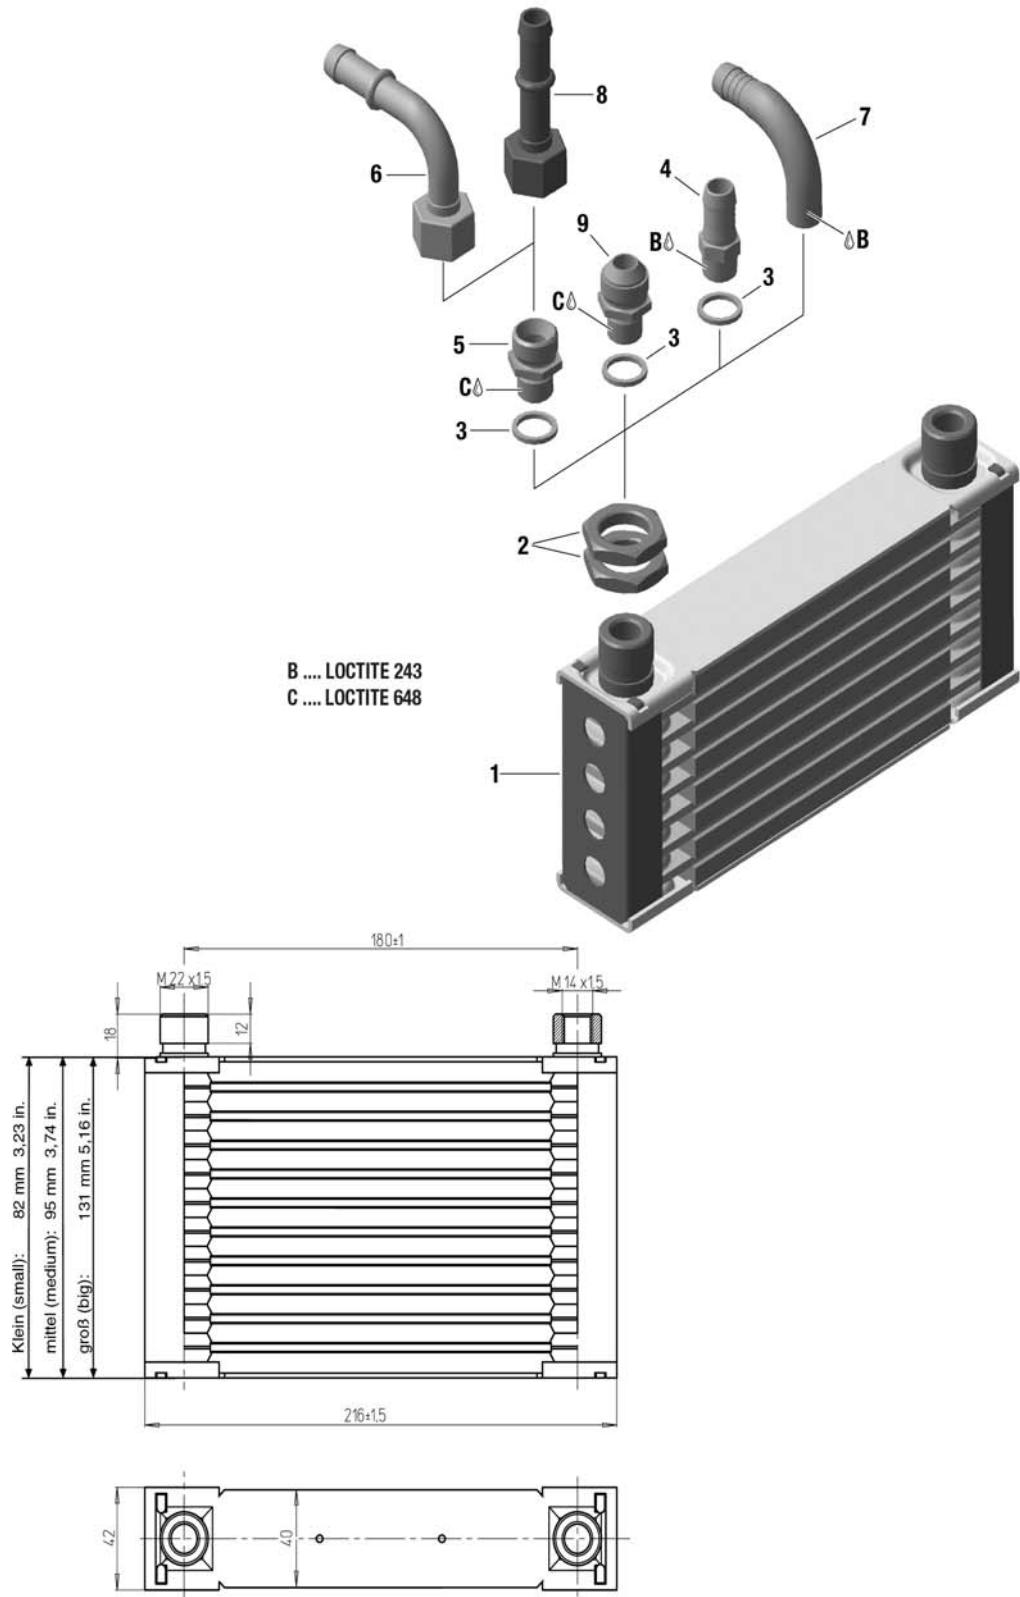

d05398.fm

Effectivity: 912 i Series
Edition 1/Rev. 0

79-00-00

Page 29
January 01/2012

BRP-Powertrain
INSTALLATION MANUAL

Part	Function
1	Oil cooler
2	M22x1.5 hex. nut
3	Gasket ring 14.2/18/2
4	Nipple 13.2/9.5
5	M18x1.5/M14x1.5 screw socket
6	Bent socket assy.
7	M14x1.5 angular tube
8	Hose nipple with cap nut
9	3/4-16 UNF/M14x1.5 screw socket

Fig. 13

08900

d05398.fm

BRP-Powertrain
INSTALLATION MANUAL

Chapter: 80-00-00
ELECTRIC STARTER

General note



Non-compliance can result in serious injuries or death!

When working on the electric starter assy., there is a risk of short circuit and electrical fault.

All installation work on the electric starter assy. must be carried out with engine switched off and the battery (negative terminal) disconnected.

Ignition, main and lane selector switches must be set to OFF.

Table of contents


This section of the Installation Manual contains the electric starter of the aircraft engine.

Subject	Page
Electric starter	Page 3
Power supply wires from starter relay to the electric starter	Page 3
Starter relay assy. technical data	Page 4

BRP-Powertrain
INSTALLATION MANUAL

Overview

Electric starter

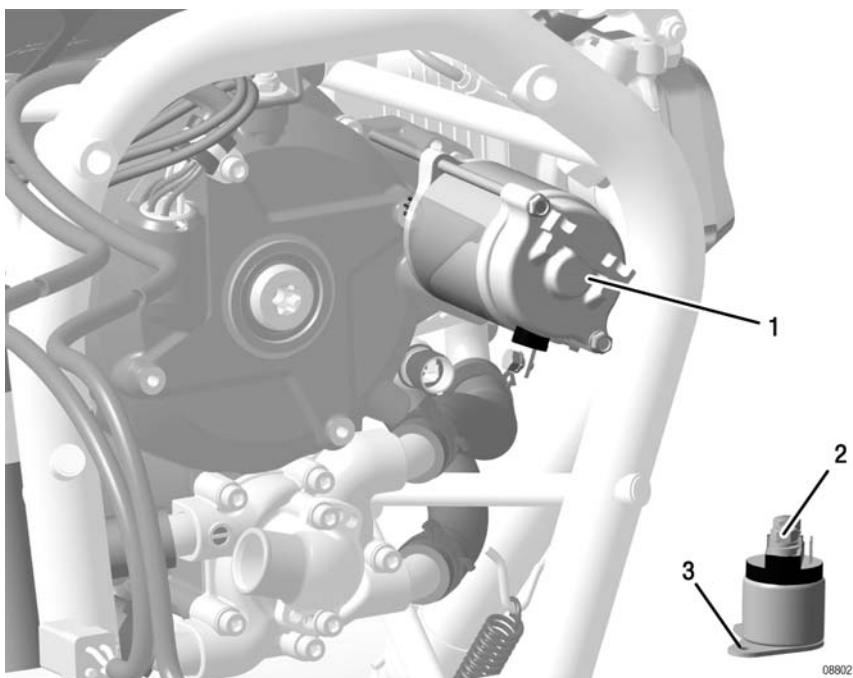

08802

Part	Function
1	Electric starter
2	Starter relay assy.
3	EMS ground

Fig. 1

1) Electric starter

General note

NOTICE

Suitable for short starting periods only.

NOTICE

Max. 80 °C (176 °F) ambient temperature by the electric starter housing. Activate starter for max. 10 sec. (without interruption), followed by a cooling period of 2 minutes.


1.1) Power supply wires from starter relay to the electric starter

Cross section At least 16 mm² (2.48 in²)

Output 0.8 kW (0.9 kW optional)

Connection See [Fig. 2](#).
Positive terminal (2): M6 screw connection (tightening torque 4 Nm (36 in.lb)) suitable for cable terminals according to DIN 46225 (MIL-T7928; PIDG or equivalent).

Graphic Connection

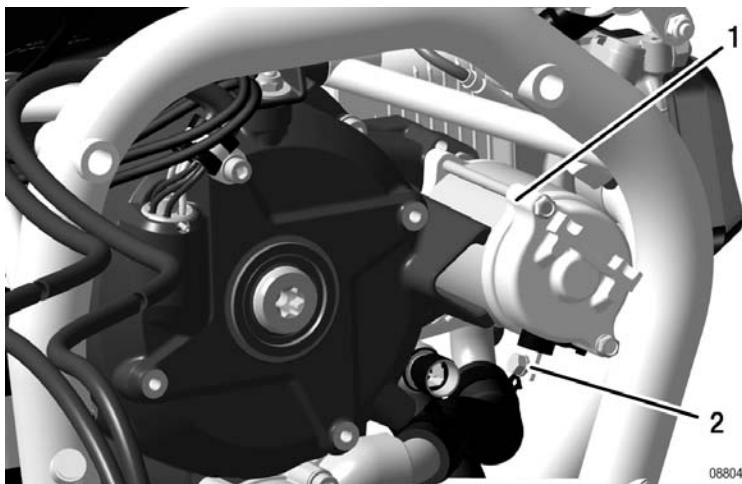

Part	Function
1	Electric starter
2	Positive terminal

Fig. 2

d05175.fm
Grounding cable

Grounding cable via engine block.

BRP-Powertrain
INSTALLATION MANUAL

1.2) Starter relay assy. technical data


General note	See Fig. 3.
	NOTICE Activation of starter relay limited to short duration. The duty cycle over an interval of 4 minutes is 25%.
Nominal voltage	- 12 V/DC
Control voltage	- Min. 6 V - Max. 18 V
Switching current	- Max. 75 A 8 (permanent) - Max. 300 A/1 sec. (short duration)
Temperature	Permissible ambient temperature: - Min. -40 °C (-40 °F) - Max. +100 °C (212 °F)
Weight	See chap. 72-00-00 section: 2.1).
Connections	Main current connections (1): M6 screw connection (tightening torque 4 Nm (36 in.lb.)) suitable for cable terminals according to DIN 46225 (MIL-T-7928; PIDG or equivalent). Control wiring (2): 6.3x0.8 plug connector suitable for Faston connector (female) according to DIN 46247 (MIL-T-7928; (PIDG) or equivalent).
Grounding	NOTICE The starter relay must be isolated from the aircraft ground. See chap. 24-00-00 section: FUSE BOX connections.

BRP-Powertrain
INSTALLATION MANUAL

Graphic

Starter relay

NOTE: Starter relay must be installed isolated from airframe ground.

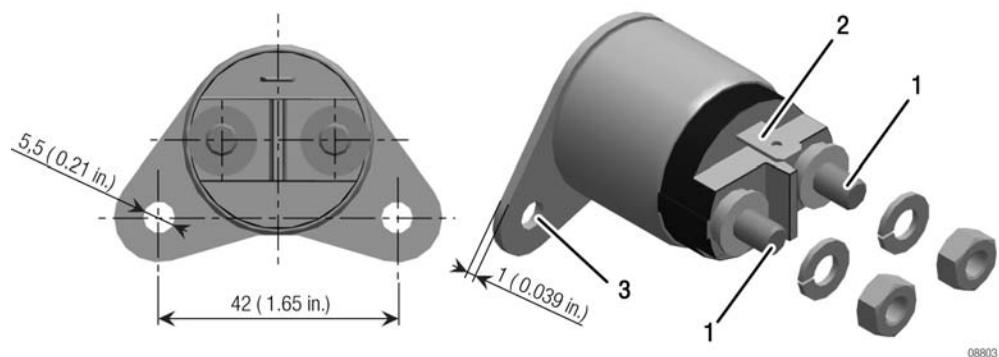

Part	Function
1	Main current connections
2	Control wiring
3	Ground

Fig. 3

BRP-Powertrain
INSTALLATION MANUAL

NOTES



Motornummer / Engine serial no.

Flugzeugtype / Type of aircraft

Flugzeugkennzeichen / Aircraft registration no.

ROTAX® Vertriebspartner

ROTAX® authorized distributor