NATIONAL BATTERY SUPPLY

844-539-2555 (Toll Free)

Sales@NationalBatterySupply.com

5416 W Sligh Ave. Suite 106
Tampa FL. 33634

OEM private label high energy density
and deep cycle battery manufacture.

NBSC-3 Series Charger (220)


This series of chargers adopts dual-transistor forward topology and pulse width modulation (PWM) technology.The aluminum profile shell and internal glue filling are sturdy and durable; the two-color LED indicator shows the charging status; the automatic fan instantly dissipates heat.



- Technical parameters

- Input voltage range: 85-145/185-265Vac
- Input frequency: 40-70Hz
- Maximum input current: 4.5A@110Vac, 2.5A@220Vac
- Maximum efficiency: ≥89%
- Noise: ≤40dBProtection
- level: IPX4Operating
- temperature: -20°C~65°C
- Storage temperature: -40°C~85°C
- Humidity: 5%~95%
- Altitude: ≤3000 meters

Dimension

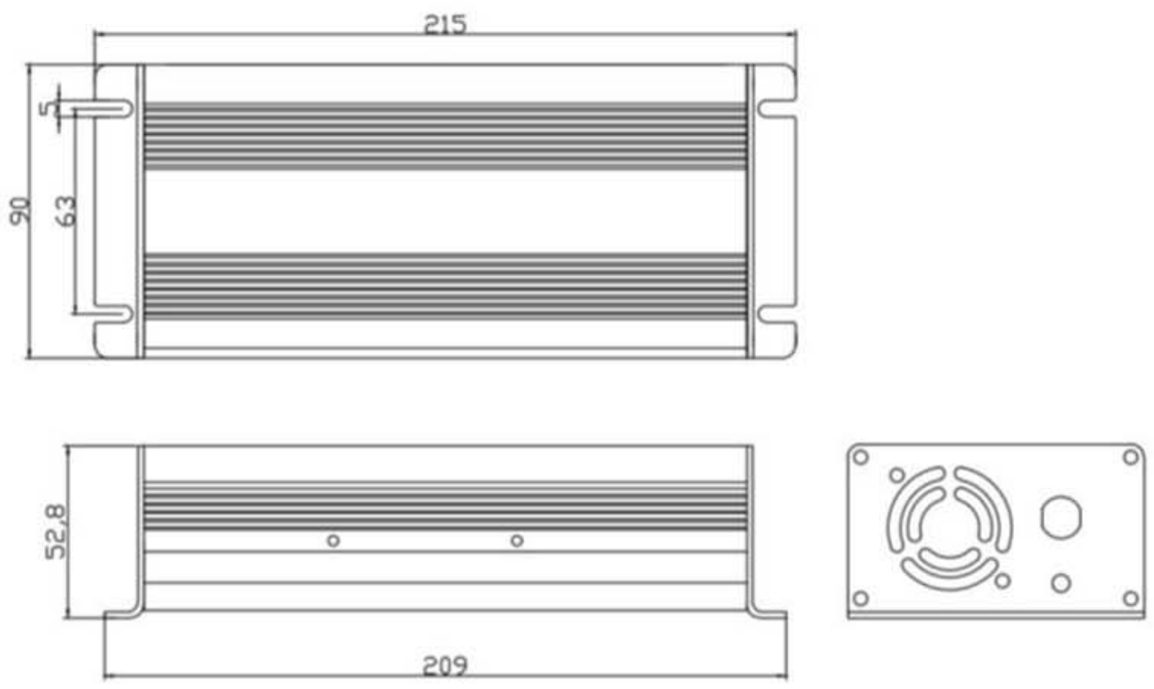

Common Output

Nominal volt	LEAD	LIFEPO4	NMC	Charge current @110Vac	Charge current @220Vac	Protect
12V	14.7V	14.6V	16.8V	15A	15A	1. Input undervoltage/overvoltage protection 2. 2. Overheat protection 3. 3. Output no-load protection 4. 4. Output short circuit/reverse connection protection 5. 5. Output overcurrent/overvoltage protection
24V	29.4V	29.2V	29.4V	10A	10A	
36V	44.1V	43.8V	42V	6A	6A	
48V	58.8V	58.4V	58.8V	5A	5A	
60V	73.5V	73V	67.2V	4A	4A	
72V	88.2V	87.6V	84V	3A	3A	


NBSC-3 Series Charger (300)

This series of chargers adopts dual-transistor forward topology and pulse width modulation (PWM) technology.The aluminum profile shell and internal glue filling are sturdy and durable; the two-color LED indicator shows the charging status; the automatic fan instantly dissipates heat.



- Technical parameters
- Input voltage range: 85-145/185-265Vac
- Input frequency: 40-70Hz
- Maximum input current: 4.5A@110Vac, 2.5A@220Vac
- Maximum efficiency: ≥89%
- Noise: ≤40dBProtection
- level: IPX4Operating
- temperature: -20°C~65°C
- Storage temperature: -40°C~85°C
- Humidity: 5%~95%
- Altitude: ≤3000 meters

Dimension

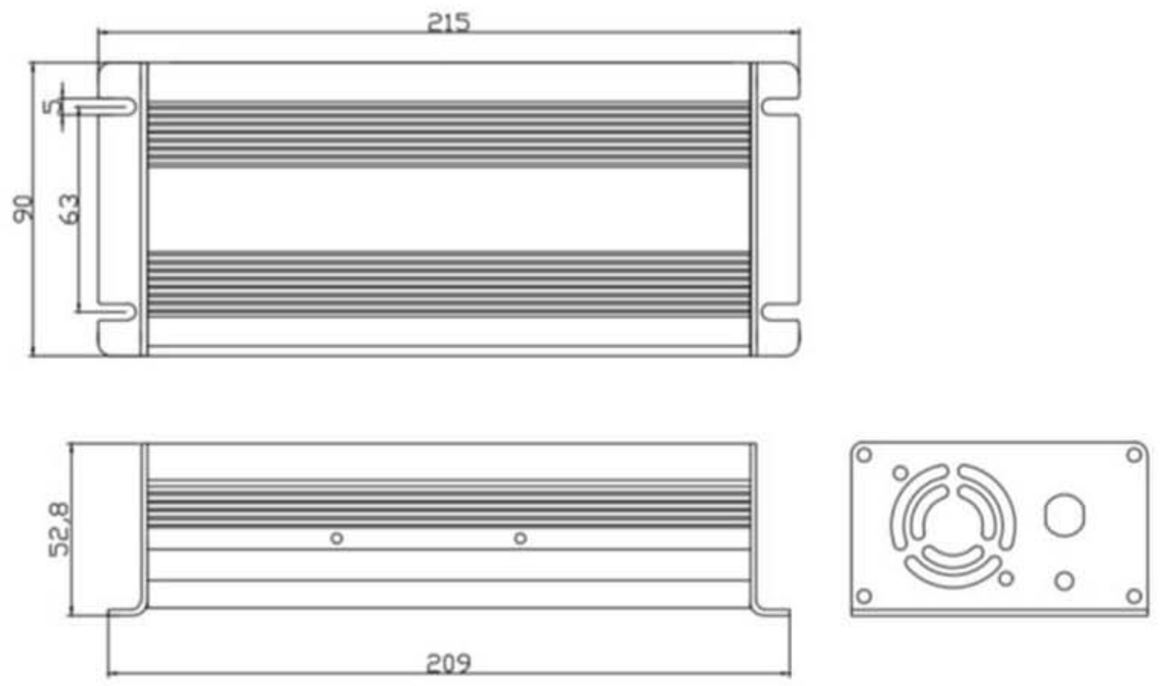

Common Output

Nominal volt	LEAD	LIFEPO4	NMC	Charge current @110Vac	Charge current @220Vac	Protect
12V	14.7V	14.6V	16.8V	15A	20A	1. Input undervoltage/overvoltage protection 2. 2. Overheat protection 3. 3. Output no-load protection 4. 4. Output short circuit/reverse connection protection 5. 5. Output overcurrent/overvoltage protection
24V	29.4V	29.2V	29.4V	10A	10A	
36V	44.1V	43.8V	42V	6A	6A	
48V	58.8V	58.4V	58.8V	5A	5A	
60V	73.5V	73V	67.2V	4A	4A	
72V	88.2V	87.6V	84V	3A	3A	

NBSC-6 Series Charger (600W)


This series of chargers adopts dual-transistor forward topology and pulse width modulation (PWM) technology.The aluminum profile shell and internal glue filling are sturdy and durable; the two-color LED indicator shows the charging status; the automatic fan instantly dissipates heat.



- Technical parameters

- Input voltage range: 85-145/185-265Vac
- Input frequency: 40-70Hz
- Maximum input current: 4.5A@110Vac, 2.5A@220Vac
- Maximum efficiency: ≥89%
- Noise: ≤40dBProtection
- level: IPX4Operating
- temperature: -20°C~65°C
- Storage temperature: -40°C~85°C
- Humidity: 5%~95%
- Altitude: ≤3000 meters

Dimensions

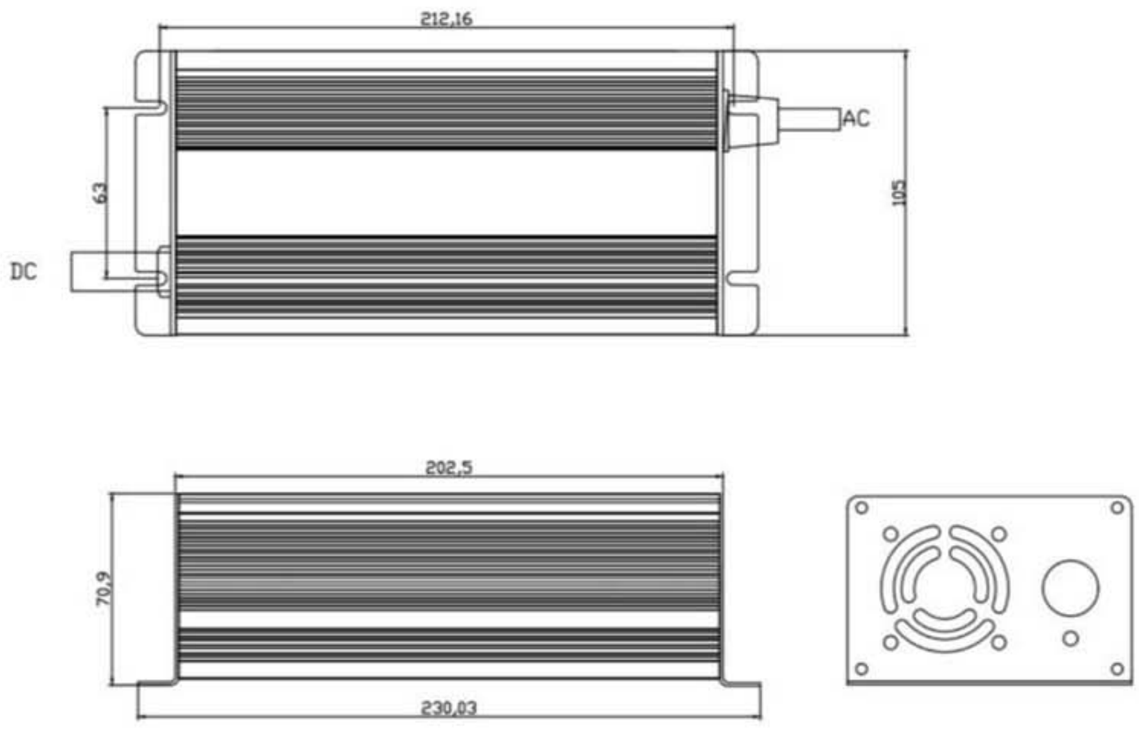

Common Output

Nominal Volt	Lead	LiFePO4	NMC	Charge current @110Vac	Charge current @220Vac	保护
12V	14.7V	14.6V	16.8V	20A	20A	1. Input undervoltage/overvoltage protection 2. 2. Overheat protection 3. 3. Output no-load protection 4. 4. Output short circuit/reverse connection protection 5. 5. Output overcurrent/overvoltage protection
24V	29.4V	29.2V	29.4V	20A	20A	
36V	44.1V	43.8V	42V	12A	12A	
48V	58.8V	58.4V	58.8V	10A	10A	
60V	73.5V	73V	67.2V	8A	8A	
72V	88.2V	87.6V	84V	6A	6A	

NBSC-8 Series Smart Charger (800W)

This series uses MCU intelligent control and pulse width modulation (PWM) technology to set the best charging curve according to battery information; active PFC and LLC half-bridge circuits, high charging efficiency, good stability and strong safety. Fully enclosed aluminum die-casting shell and internal glue filling, waterproof, dustproof and shockproof; three-color LED indicator can edit different charging states, and automatic variable speed fan reasonably cools down.

- Technical parameters
- nput voltage range: 85-265Vac
- Input frequency: 40-70Hz
- Maximum input current: 8A@110Vac,4A@220Vac
- Maximum efficiency: ≥93%
- Noise: ≤40dB
- Protection level: IP66
- Operating temperature: -20°C~65°C
- Storage temperature: -40°C~85°C
- Humidity: 5%~95%
- Altitude: ≤3000 meters





Portable



On board

Dimension

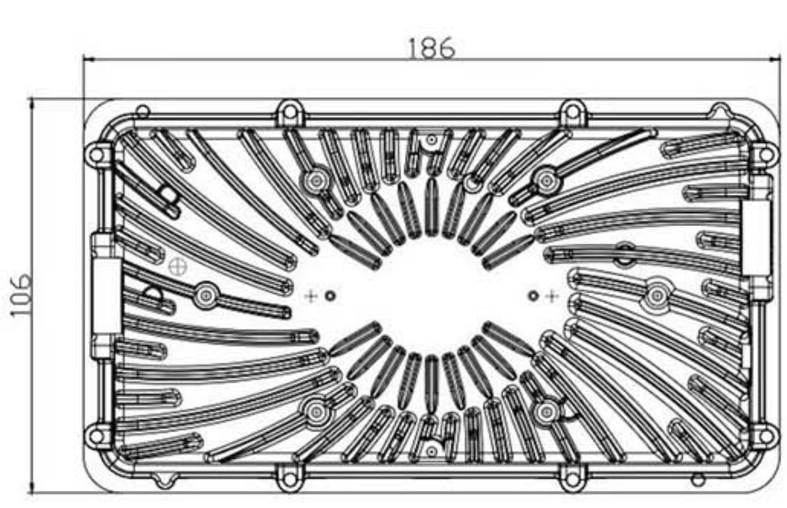

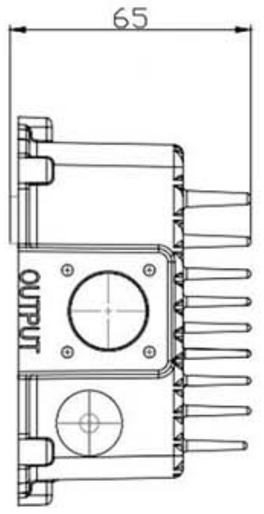

Optional feature

☐ CAN/RS485 communication☐ Anti-walking☐ External indicator light☐ Burning☐ Shutdown/restart

☐12V auxiliary power supply☐Enable circuit☐Temperature probe☐Analog line☐Other

Volt	Lead	LiFePO4	NMC	Charge current @110Vac	Charge current @220Vac	Protection
12V	14.7V	14.6V	16.8V	30A	30A	1. Input undervoltage/overvoltage protection 2. 2. Overheat protection 3. 3. Output no-load protection 4. 4. Output short circuit/reverse connection protection 5. 5. Output overcurrent/overvoltage protection
24V	29.4V	29.2V	29.4V	25A	25A	
36V	44.1V	43.8V	42V	15A	18A	
48V	58.8V	58.4V	58.8V	12A	12A	
60V	73.5V	73V	67.2V	9A	10A	
72V	88.2V	87.6V	84V	8A	9A	
84V	102.9V	102.2V	100.8V	6A	7A	
96V	117.6V	116.8V	117.6V	5A	6A	

NBSC-9 Series Smart Charger (900W)

This series uses MCU intelligent control and pulse width modulation (PWM) technology to set the best charging curve according to battery information; active PFC and LLC half-bridge circuits, high charging efficiency, good stability and strong safety. Aluminum profile shell and internal glue filling, sturdy and durable; three-color LED indicator can edit different charging states, automatic vari




- Technical parameters
- Input voltage range: 85-265Vac
- nput frequency: 40-70Hz
- nput maximum current: 9A@110Vac, 4.5A@220Vac
- Maximum efficiency: ≥93%
- Noise: ≤40dB
- Protection level: IPX4
- Operating temperature: -20°C~65°C
- Storage temperature: -40°C~85°C
- Humidity: 5%~95%
- Altitude: ≤3000 meters


Optional feature

☐ CAN/RS485 communication☐ Anti-walking☐ External indicator light☐ Burning☐ Shutdown/restart

☐12V auxiliary power supply☐Enable circuit☐Temperature probe☐Analog line☐Other

Dimensions

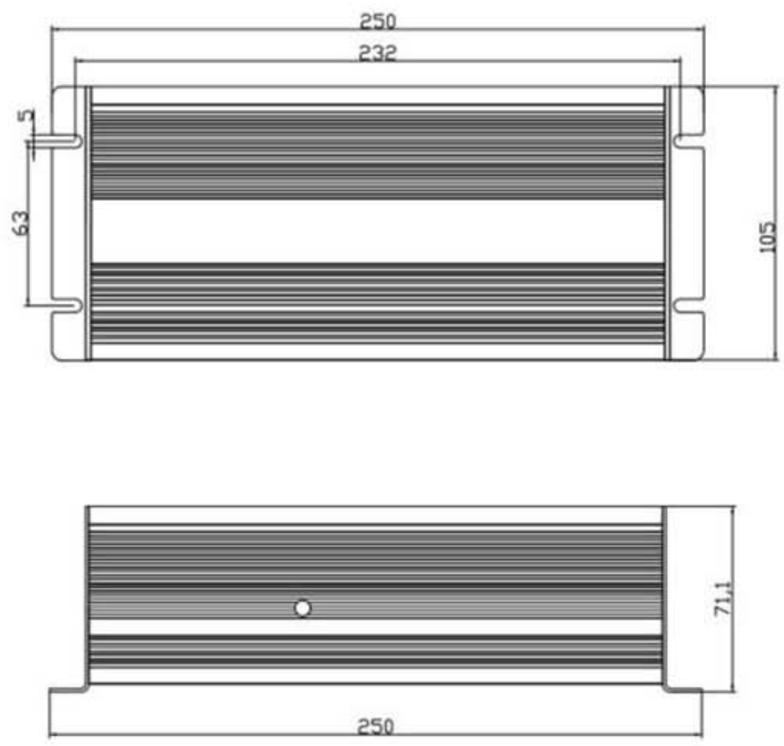



Volt	Lead	LiFePO4	NMC	Charge current @110Vac	Charge current @220Vac	protection
12V	14.7V	14.6V	16.8V	30A	30A	1. Input undervoltage/overvoltage protection 2. 2. Overheat protection 3. 3. Output no-load protection 4. 4. Output short circuit/reverse connection protection 5. 5. Output overcurrent/overvoltage protection
24V	29.4V	29.2V	29.4V	30A	30A	
36V	44.1V	43.8V	42V	20A	20A	
48V	58.8V	58.4V	58.8V	15A	15A	
60V	73.5V	73V	67.2V	12A	12A	
72V	88.2V	87.6V	84V	10A	10A	
84V	102.9V	102.2V	100.8V	8A	8A	
96V	117.6V	116.8V	117.6V	7A	7A	

NBSC-15 Series Smart Charger (1500W)

This series uses MCU intelligent control and pulse width modulation (PWM) technology to set the best charging curve according to battery information; active PFC and LLC half-bridge circuits, high charging efficiency, good stability and strong safety. Fully enclosed aluminum die-casting shell and internal glue filling, waterproof, dustproof and shockproof; three-color LED indicator can edit different charging states, and automatic variable speed fan reasonably cools down.




便携式



车载式

- Technical parameters
- Input voltage range: 85-265Vac
- Input frequency: 40-70Hz
- Maximum input current: 11A@110Vac, 7A@220Vac
- Maximum efficiency: ≥93%Noise: ≤40dBProtection level: IP66
- Operating temperature: -20°C~65°C
- Storage temperature: -40°C~85°C
- Humidity: 5%~95%
- Altitude: ≤3000 meters


Dimension

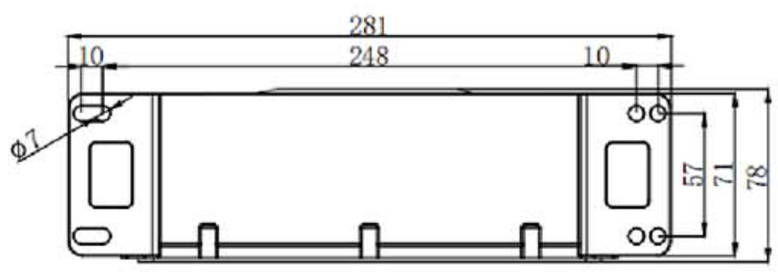

Optional feature

☐ CAN/RS485 communication☐ Anti-walking☐ External indicator light☐ Burning☐ Shutdown/restart

☐12V auxiliary power supply☐Enable circuit☐Temperature probe☐Analog line☐Other

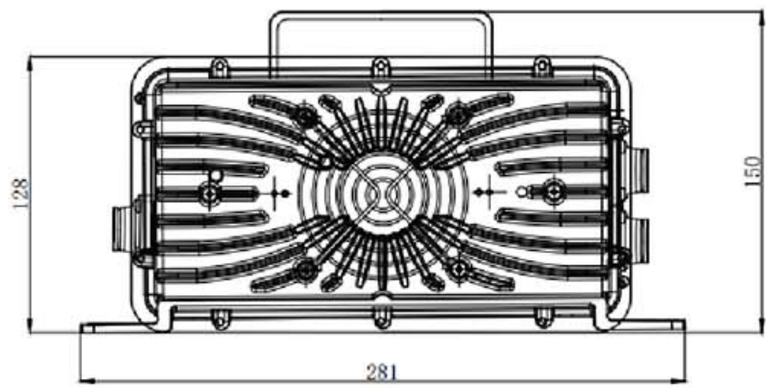

Volt	Lead	LiFePO4	NMC	Charge current @110Vac	Charge current @220Vac	protection
12V	14.7V	14.6V	16.8V	30A	30A	1. Input undervoltage/overvoltage protection 2. 2. Overheat protection 3. 3. Output no-load protection 4. 4. Output short circuit/reverse connection protection 5. 5. Output overcurrent/overvoltage protection
24V	29.4V	29.2V	29.4V	30A	30A	
36V	44.1V	43.8V	42V	25A	30A	
48V	58.8V	58.4V	58.8V	18A	25A	
60V	73.5V	73V	67.2V	15A	20A	
72V	88.2V	87.6V	84V	12A	15A	
84V	102.9V	102.2V	100.8V	10A	13A	
96V	117.6V	116.8V	117.6V	9A	12A	

NBSC-22 Series Smart Charger (2200W)

This series uses MCU intelligent control and pulse width modulation (PWM) technology to set the best charging curve according to battery information; active PFC and LLC half-bridge circuits, high charging efficiency, good stability and strong safety. Fully enclosed aluminum die-casting shell and internal glue filling, waterproof, dustproof and shockproof; three-color LED indicator can speed fan reasonably cools down.

- Technical parameters
- Input voltage range: 85-265Vac
- nput frequency: 40-70Hz
- Maximum input current: 13A@110Vac, 10A@220Vac
- Maximum efficiency: ≥93%Noise: ≤40dB
- Protection level: IP66
- Operating temperature: -20°C~65°C
- Storage temperature: -40°C~85°C
- Humidity: 5%~95%Altitude: ≤3000 meters



Portable


On board

Optional feature

☐ CAN/RS485 communication☐ Anti-walking☐ External indicator light☐ Burning☐ Shutdown/restart

☐12V auxiliary power supply☐Enable circuit☐Temperature probe☐Analog line☐Other

Dimension

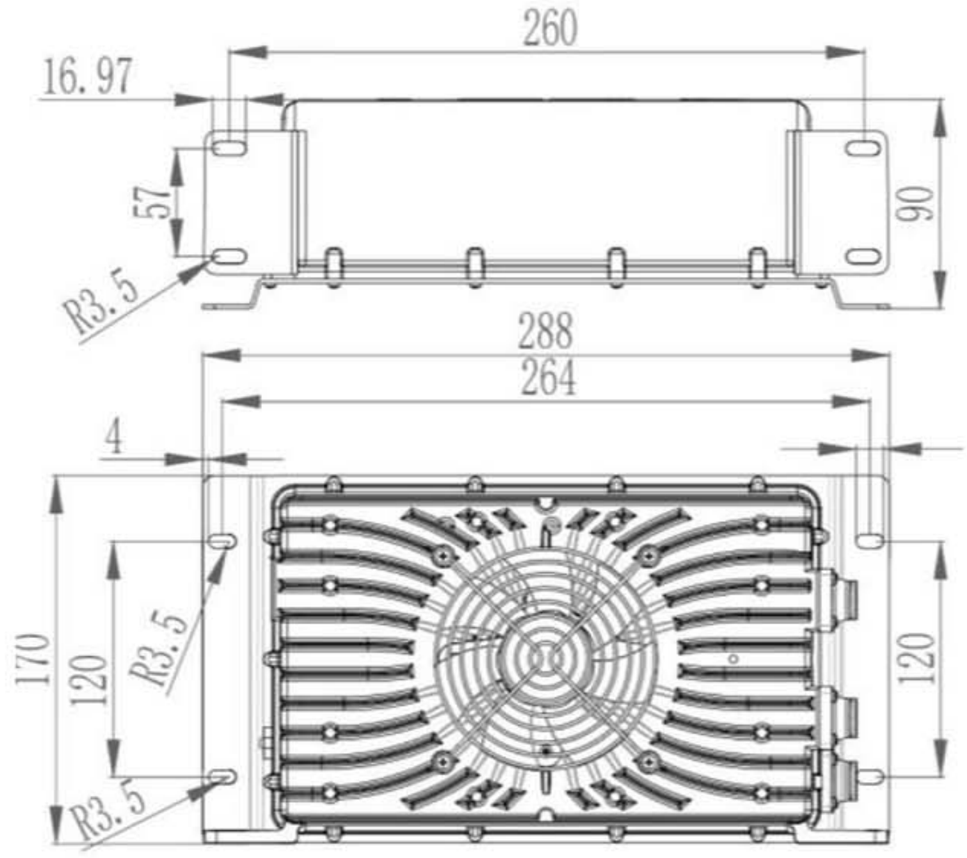

Volt	Lead	LiFePO4	NMC	Charge current @110Vac	Charge current @220Vac	protection
12V	14.7V	14.6V	16.8V	50A	50A	1. 1Input undervoltage/overvoltage protection 2. 2. Overheat protection 3. 3. Output no-load protection 4. 4. Output short circuit/reverse connection protection 5. 5. Output overcurrent/overvoltage protection
24V	29.4V	29.2V	29.4V	40A	50A	
36V	44.1V	43.8V	42V	30A	45A	
48V	58.8V	58.4V	58.8V	22A	35A	
60V	73.5V	73V	67.2V	18A	30A	
72V	88.2V	87.6V	84V	15A	25A	
84V	102.9V	102.2V	100.8V	12A	20A	
96V	117.6V	116.8V	117.6V	11A	18A	


NBSC-25 Series Smart Charger (2500W)

This series uses MCU intelligent control and pulse width modulation (PWM) technology to set the best charging curve according to battery information; LLC half-bridge circuit, good stability and strong safety. The red iron shell and internal glue filling are sturdy and durable; the LED digital tube displays voltage and current intuitively, the handle design is easy to carry, and the automatic variable

- Technical parameters
- Input voltage range: 85-265Vac
- Input frequency: 40-70Hz
- Maximum input current: 16A@220Vac
- Maximum efficiency: ≥93%Noise: ≤40dBProtection level: IPX4
- Operating temperature: -20°C~65°C
- Storage temperature: -40°C~85°C
- Humidity: 5%~95%
- Altitude: ≤3000 meters



Dimensions

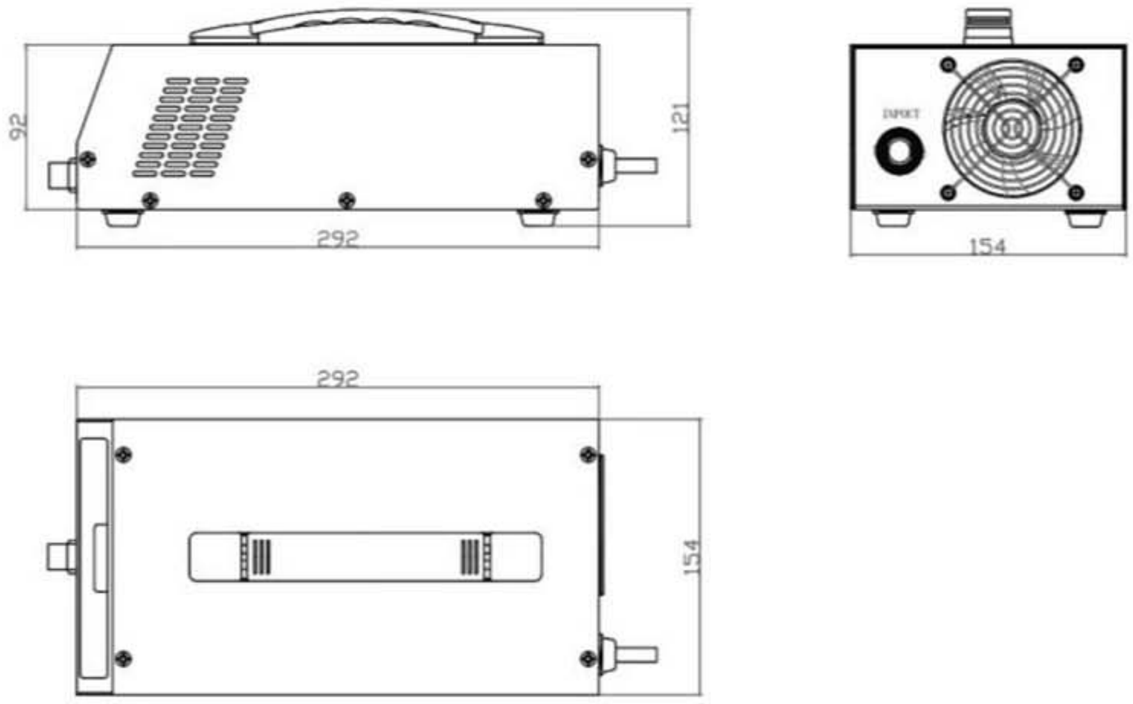

Optional feature

☐ CAN/RS485 communication☐ Anti-walking☐ External indicator light☐ Burning☐ Shutdown/restart

☐12V auxiliary power supply☐Enable circuit☐Temperature probe☐Analog line☐Other

Volt	Lead	LiFePO4	NMC	Charge current @110Vac	Charge current @220Vac	protection
12V	14.7V	14.6V	16.8V	/	50A	1. Input undervoltage/overvoltage protection 2. 2. Overheat protection 3. 3. Output no-load protection 4. 4. Output short circuit/reverse connection protection 5. 5. Output overcurrent/overvoltage protection
24V	29.4V	29.2V	29.4V	/	50A	
36V	44.1V	43.8V	42V	/	50A	
48V	58.8V	58.4V	58.8V	/	40A	
60V	73.5V	73V	67.2V	/	30A	
72V	88.2V	87.6V	84V	/	25A	
84V	102.9V	102.2V	100.8V	/	20A	
96V	117.6V	116.8V	117.6V	/	20A	


NBSC-33 Series Smart Charger (3300W)


This series uses MCU intelligent control and pulse width modulation (PWM) technology to set the best charging curve according to battery information; active PFC and full-bridge circuit, high charging efficiency, good stability and strong safety. Fully enclosed aluminum die-casting shell and internal glue filling, waterproof, dustproof and shockproof; three-color LED indicator can edit different charging states, and automatic variable speed fan reasonably cools down.



- Technical parameters
- Input voltage range: 85-265Vac
- Input frequency: 40-70Hz
- Maximum input current: 18A@110Vac, 15A@220Vac
- Maximum efficiency: ≥93%Noise: ≤40dBProtection level: IP66
- Operating temperature: -20°C~65°C
- Storage temperature: -40°C~85°C
- Humidity: 5%~95%Altitude: ≤3000 meters

Dimensions

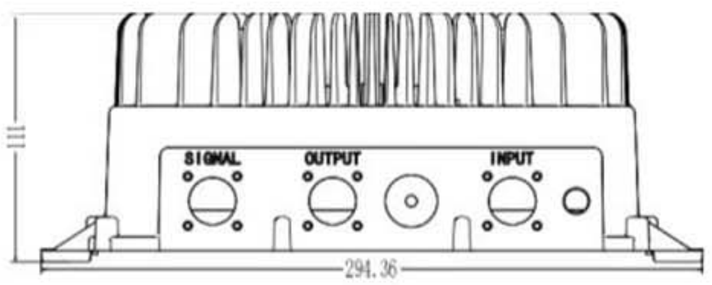

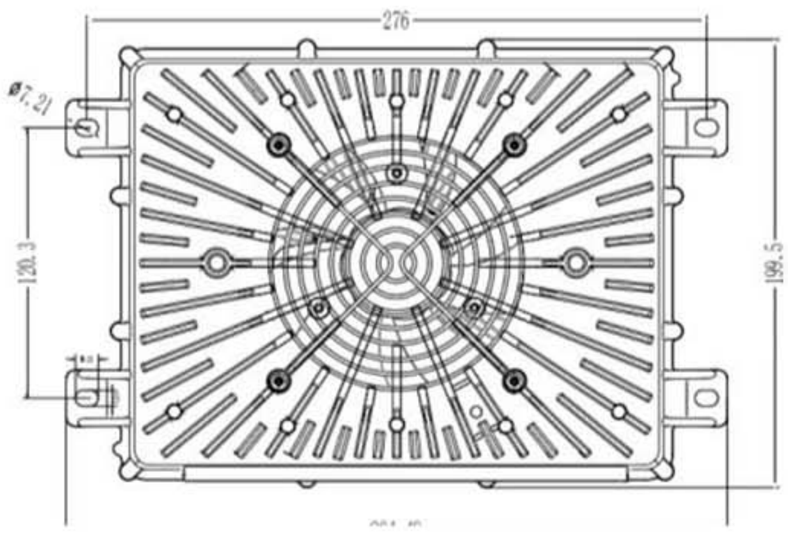

☐ CAN/RS485 communication☐ Anti-walking☐ External indicator light☐ Burning☐ Shutdown/restart

☐12V auxiliary power supply☐Enable circuit☐Temperature probe☐Analog line☐Other

Volt	Lead	LiFePO4	NMC	Charge current @110Vac	Charge current @220Vac	protection
12V	14.7V	14.6V	16.8V	90A	100A	1. Input undervoltage/overvoltage protection 2. 2. Overheat protection 3. 3. Output no-load protection 4. 4. Output short circuit/reverse connection protection 5. 5. Output overcurrent/overvoltage protection
24V	29.4V	29.2V	29.4V	50A	100A	
36V	44.1V	43.8V	42V	35A	70A	
48V	58.8V	58.4V	58.8V	25A	50A	
60V	73.5V	73V	67.2V	20A	45A	
72V	88.2V	87.6V	84V	18A	35A	
84V	102.9V	102.2V	100.8V	15A	30A	
96V	117.6V	116.8V	117.6V	13A	25A	


NBSC-36 Series Smart Charger (3600W)

This series uses MCU intelligent control and pulse width modulation (PWM) technology to set the best charging curve according to battery information; active PFC and full-bridge circuit, high charging efficiency, good stability and strong safety. Fully enclosed aluminum die-casting shell and internal glue filling, waterproof, dustproof and shockproof; three-color LED indicator can edit different charging states, and automatic variable speed fan reasonably cools down.



- Technical parametersAC
- input voltage range: 85-265Vac; 380VacAC input frequency: 40-70HzAC
- input maximum current: 25A@220Vac, 10A@380Vac
- Maximum efficiency: ≥93%Noise: ≤40dBProtection level: IPX4
- Operating temperature: -20°C~65°C
- Storage temperature: -40°C~85°C
- Storage temperature: -40°C~85°C
- Humidity: 5%~95%Altitude: ≤3000 meters

Dimension

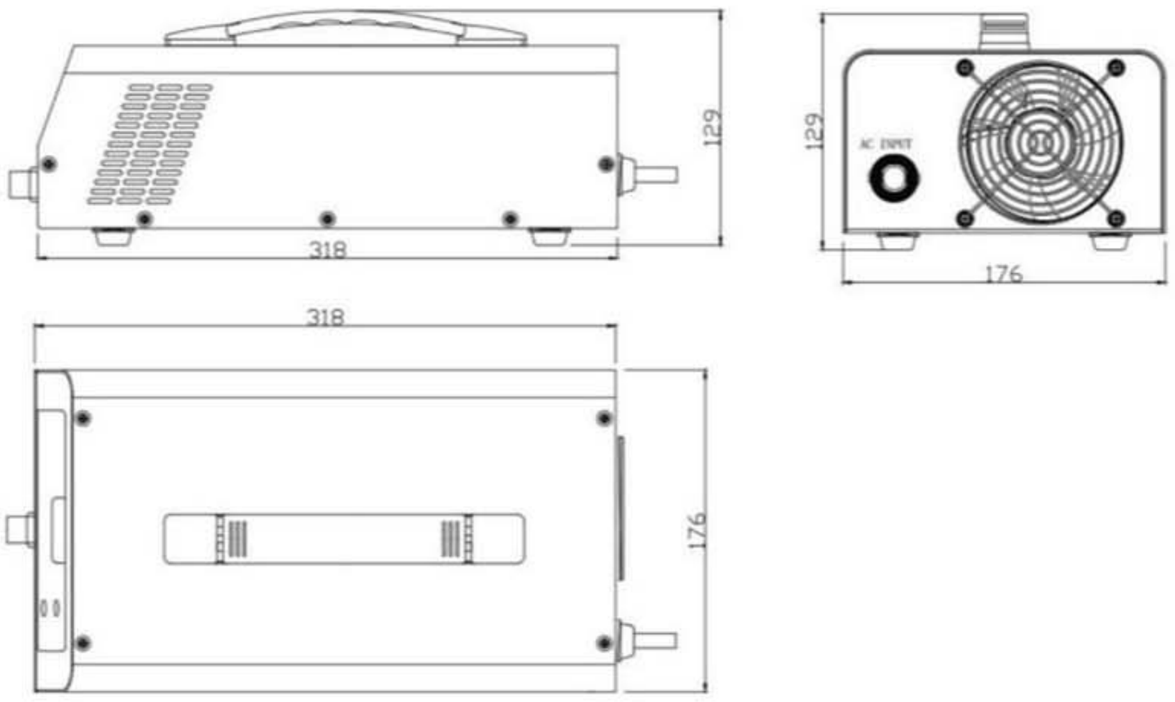

Optional feature

☐ CAN/RS485 communication☐ Anti-walking☐ External indicator light☐ Burning☐ Shutdown/restart

☐12V auxiliary power supply☐Enable circuit☐Temperature probe☐Analog line☐Other


Volt	Lead	LiFePO4	NMC	Charge current @110Vac	Charge current @220Vac	protection
12V	14.7V	14.6V	16.8V	100A	100A	1. Input undervoltage/overvoltage protection 2. 2. Overheat protection 3. 3. Output no-load protection 4. 4. Output short circuit/reverse connection protection 5. 5. Output overcurrent/overvoltage protection
24V	29.4V	29.2V	29.4V	100A	100A	
36V	44.1V	43.8V	42V	80A	80A	
48V	58.8V	58.4V	58.8V	60A	60A	
60V	73.5V	73V	67.2V	45A	45A	
72V	88.2V	87.6V	84V	40A	40A	
84V	102.9V	102.2V	100.8V	30A	30A	
96V	117.6V	116.8V	117.6V	30A	30A	

4 Output Series (1000W)

This series uses MCU intelligent control and pulse width modulation (PWM) technology to set the best charging curve according to battery information; active PFC and full-bridge circuit, high charging efficiency, good stability and strong safety. Fully enclosed aluminum die-casting shell and internal glue filling, waterproof, dustproof and shockproof; three-color LED indicator can edit different charging states, and automatic variable speed fan reasonably cools down.

- Technical parameters
- AC input voltage range: 100-240Vac; 380Vac
- AC input frequency: 50-76HzAC
- input maximum current: 25A@220Vac, 10A@380Vac
- Maximum efficiency: ≥93%Noise: ≤40dBProtection level: IPX4
- Operating temperature: -20°C~65°C
- Storage temperature: -40°C~85°C
- Humidity: 5%~95%Altitude: ≤3000 meters



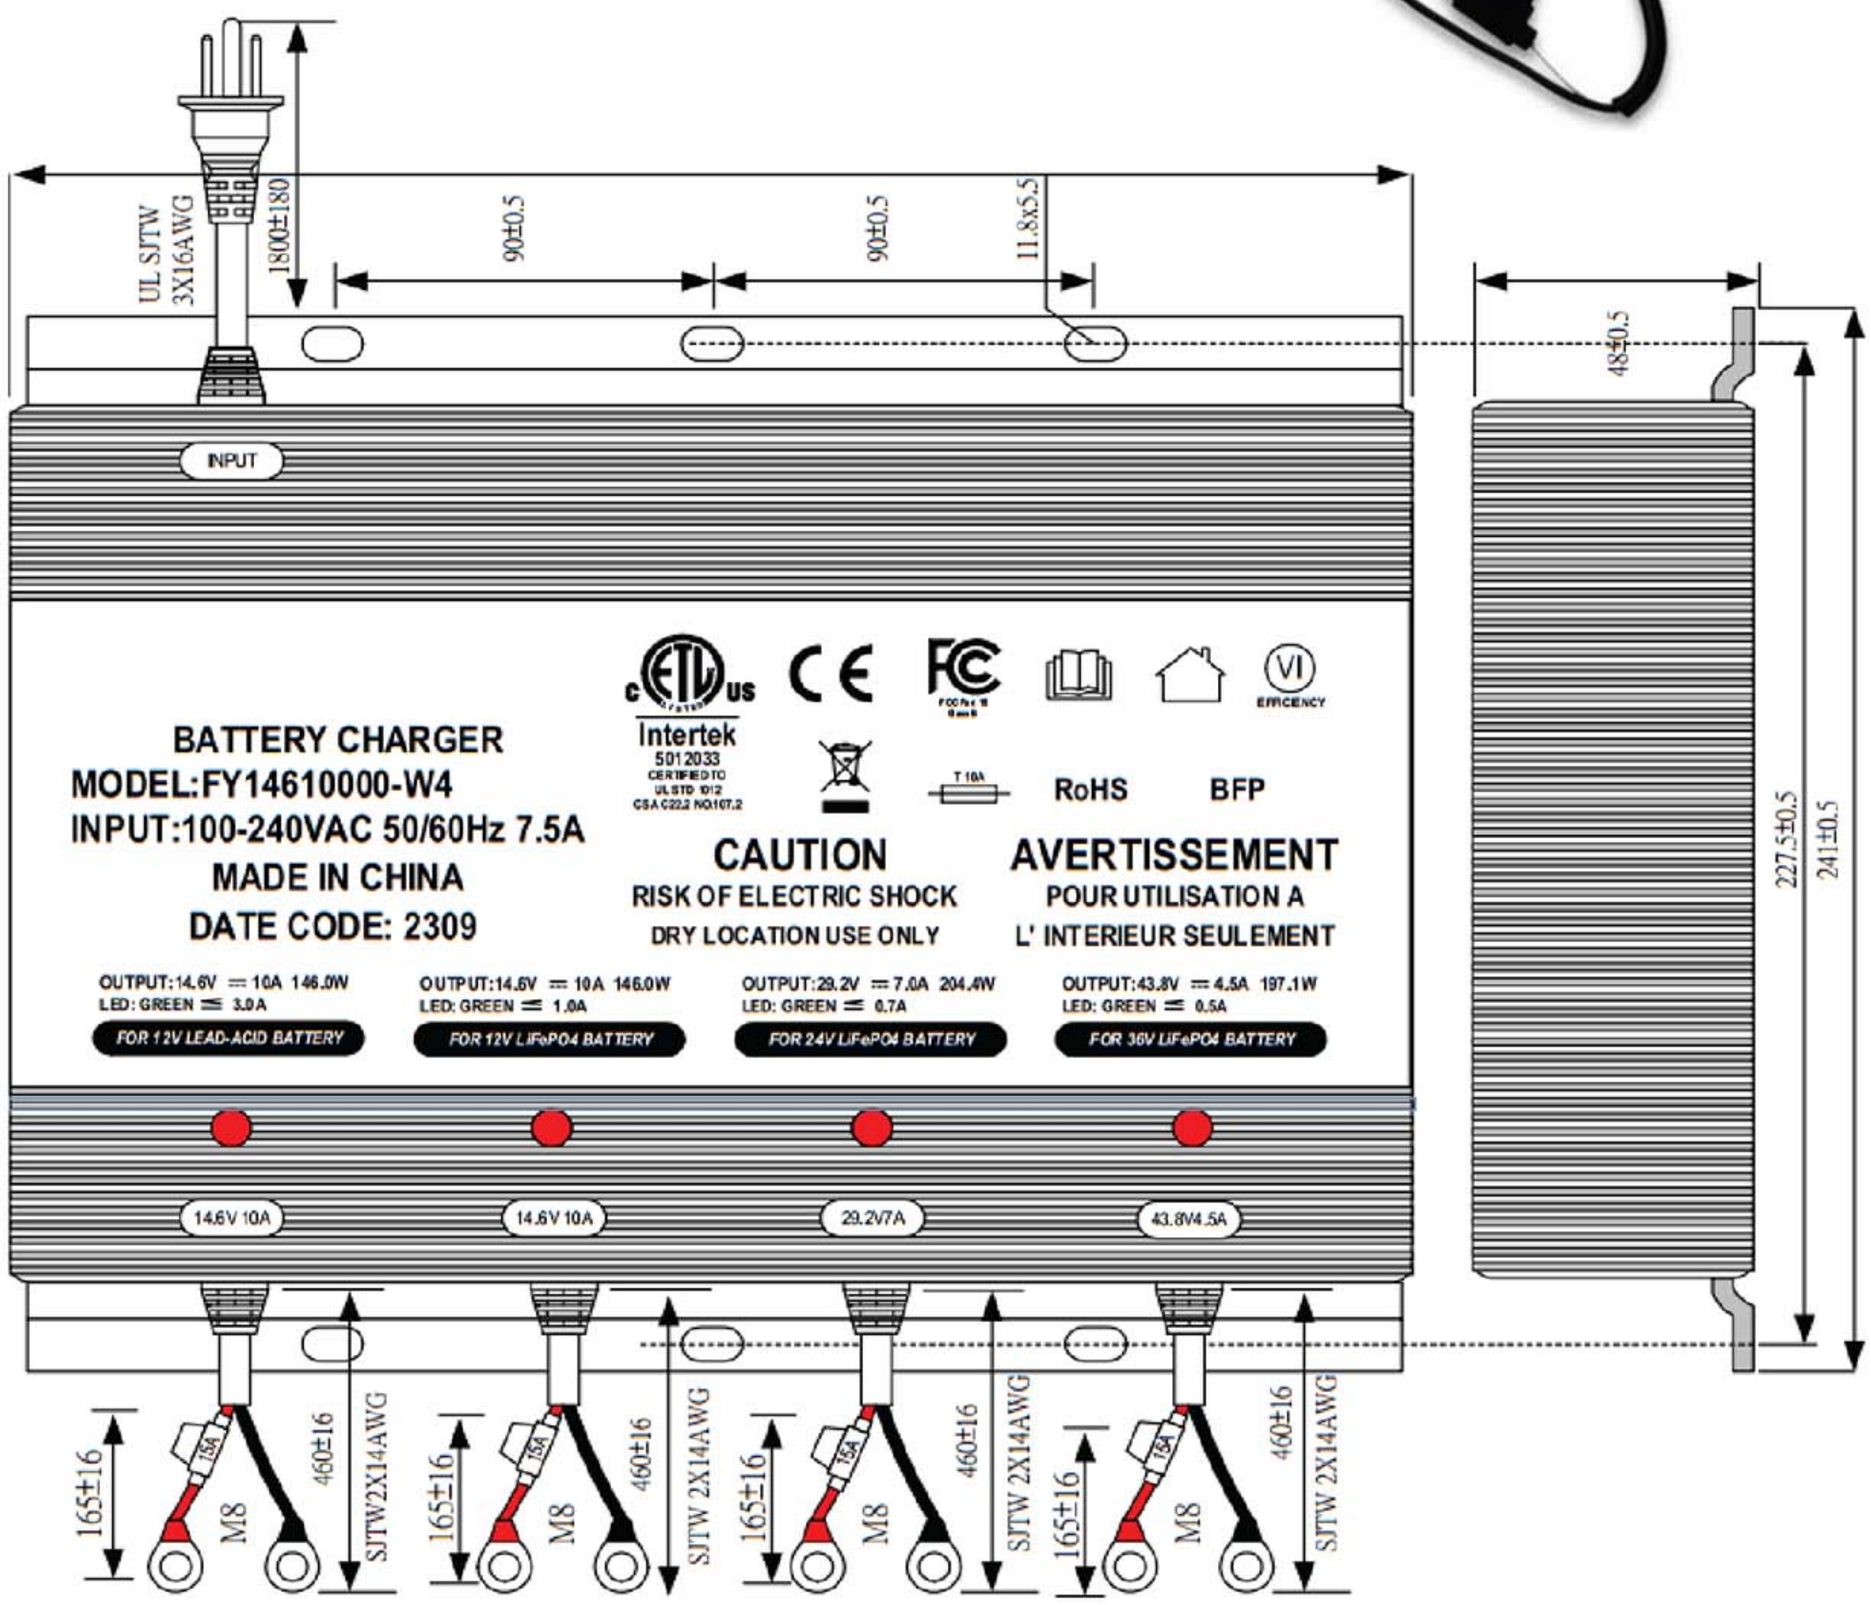

NATIONAL BATTERY SUPPLY

WE LOOK FORWARD TO HEARING FROM *YOU!*

844-539-2555 (Toll Free)

Sales@NationalBatterySupply.com

5416 W Sligh Ave. Suite 106
Tampa FL. 33634

OEM private label high energy density
and deep cycle battery manufacture.

NATIONAL BATTERY SUPPLY