Assignment 3

Use [Week2_sample1] as template to build a working network according to the topology, all PCs can ping every PC.

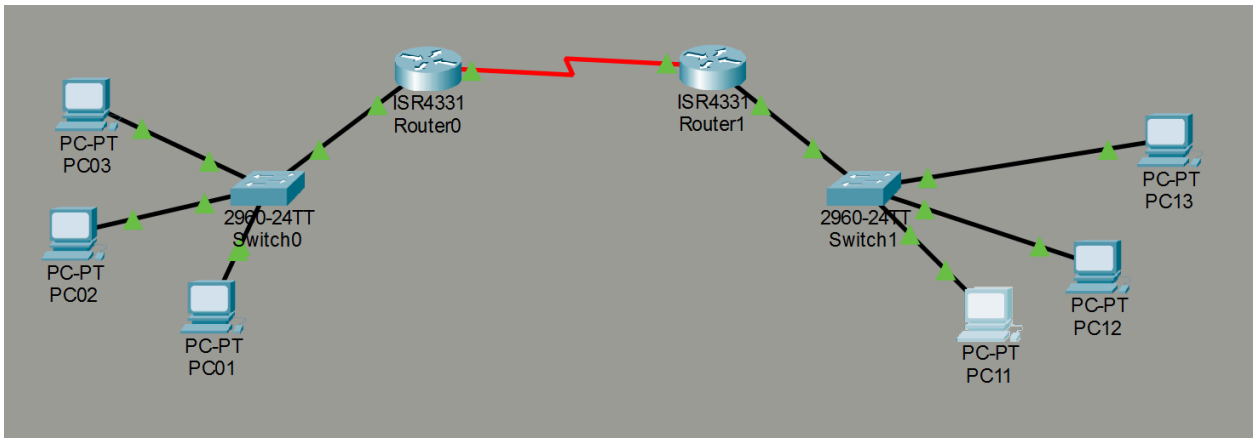

ตรวจสอบการตั้งค่าของ Router

Router 0

```
Router>show ip interface brief
Interface              IP-Address      OK? Method Status                Protocol
GigabitEthernet0/0/0   192.168.0.1     YES manual up                    up
GigabitEthernet0/0/1   202.28.94.1     YES manual down                  down
GigabitEthernet0/0/2   unassigned      YES unset  administratively down down
Serial0/1/0            10.0.0.2        YES manual up                    up
Serial0/1/1            unassigned      YES unset  administratively down down
Vlan1                  unassigned      YES unset  administratively down down
```

Router 1

```
Router>show ip interface brief
Interface              IP-Address      OK? Method Status                Protocol
GigabitEthernet0/0/0   192.168.1.1     YES manual up                    up
GigabitEthernet0/0/1   202.28.94.2     YES manual down                  down
GigabitEthernet0/0/2   unassigned      YES unset  administratively down down
Serial0/1/0            10.0.0.1        YES manual up                    up
Serial0/1/1            unassigned      YES unset  administratively down down
Vlan1                  unassigned      YES unset  administratively down down
```

ตรวจสอบการตั้งค่าของ switch

Switch0

Physical Config CLI Attributes

IOS Command Line Interface

```
Press RETURN to get started!


%LINK-5-CHANGED: Interface FastEthernet0/1, changed state to up

%LINEPROTO-5-UPDOWN: Line protocol on Interface FastEthernet0/1, changed state to up

%LINK-5-CHANGED: Interface FastEthernet0/2, changed state to up

%LINEPROTO-5-UPDOWN: Line protocol on Interface FastEthernet0/2, changed state to up

%LINK-5-CHANGED: Interface FastEthernet0/3, changed state to up

%LINEPROTO-5-UPDOWN: Line protocol on Interface FastEthernet0/3, changed state to up

%LINK-5-CHANGED: Interface FastEthernet0/4, changed state to up

%LINEPROTO-5-UPDOWN: Line protocol on Interface FastEthernet0/4, changed state to up


Switch>show ip interface brief
Interface              IP-Address      OK? Method Status                Protocol
FastEthernet0/1        unassigned      YES manual up                    up
FastEthernet0/2        unassigned      YES manual up                    up
FastEthernet0/3        unassigned      YES manual up                    up
FastEthernet0/4        unassigned      YES manual up                    up
FastEthernet0/5        unassigned      YES manual down                  down
FastEthernet0/6        unassigned      YES manual down                  down
FastEthernet0/7        unassigned      YES manual down                  down
FastEthernet0/8        unassigned      YES manual down                  down
FastEthernet0/9        unassigned      YES manual down                  down
FastEthernet0/10       unassigned      YES manual down                  down
FastEthernet0/11       unassigned      YES manual down                  down
FastEthernet0/12       unassigned      YES manual down                  down
FastEthernet0/13       unassigned      YES manual down                  down
FastEthernet0/14       unassigned      YES manual down                  down
FastEthernet0/15       unassigned      YES manual down                  down
FastEthernet0/16       unassigned      YES manual down                  down
FastEthernet0/17       unassigned      YES manual down                  down
FastEthernet0/18       unassigned      YES manual down                  down
FastEthernet0/19       unassigned      YES manual down                  down
FastEthernet0/20       unassigned      YES manual down                  down
FastEthernet0/21       unassigned      YES manual down                  down
 --More--
```

Switch1

Physical Config CLI Attributes

IOS Command Line Interface

```
Press RETURN to get started!


%LINK-5-CHANGED: Interface FastEthernet0/1, changed state to up

%LINEPROTO-5-UPDOWN: Line protocol on Interface FastEthernet0/1, changed state to up

%LINK-5-CHANGED: Interface FastEthernet0/2, changed state to up

%LINEPROTO-5-UPDOWN: Line protocol on Interface FastEthernet0/2, changed state to up

%LINK-5-CHANGED: Interface FastEthernet0/3, changed state to up

%LINEPROTO-5-UPDOWN: Line protocol on Interface FastEthernet0/3, changed state to up

%LINK-5-CHANGED: Interface FastEthernet0/4, changed state to up

%LINEPROTO-5-UPDOWN: Line protocol on Interface FastEthernet0/4, changed state to up


Switch>show ip interface brief
Interface              IP-Address      OK? Method Status                Protocol
FastEthernet0/1        unassigned      YES manual up                    up
FastEthernet0/2        unassigned      YES manual up                    up
FastEthernet0/3        unassigned      YES manual up                    up
FastEthernet0/4        unassigned      YES manual up                    up
FastEthernet0/5        unassigned      YES manual down                  down
FastEthernet0/6        unassigned      YES manual down                  down
FastEthernet0/7        unassigned      YES manual down                  down
FastEthernet0/8        unassigned      YES manual down                  down
FastEthernet0/9        unassigned      YES manual down                  down
FastEthernet0/10       unassigned      YES manual down                  down
FastEthernet0/11       unassigned      YES manual down                  down
FastEthernet0/12       unassigned      YES manual down                  down
FastEthernet0/13       unassigned      YES manual down                  down
FastEthernet0/14       unassigned      YES manual down                  down
FastEthernet0/15       unassigned      YES manual down                  down
FastEthernet0/16       unassigned      YES manual down                  down
FastEthernet0/17       unassigned      YES manual down                  down
FastEthernet0/18       unassigned      YES manual down                  down
FastEthernet0/19       unassigned      YES manual down                  down
FastEthernet0/20       unassigned      YES manual down                  down
FastEthernet0/21       unassigned      YES manual down                  down
 --More--
```

ตั้งค่า IPV4 , Subnet Mask และ Default Gateway ของ PC ที่เชื่อมกับ switch0

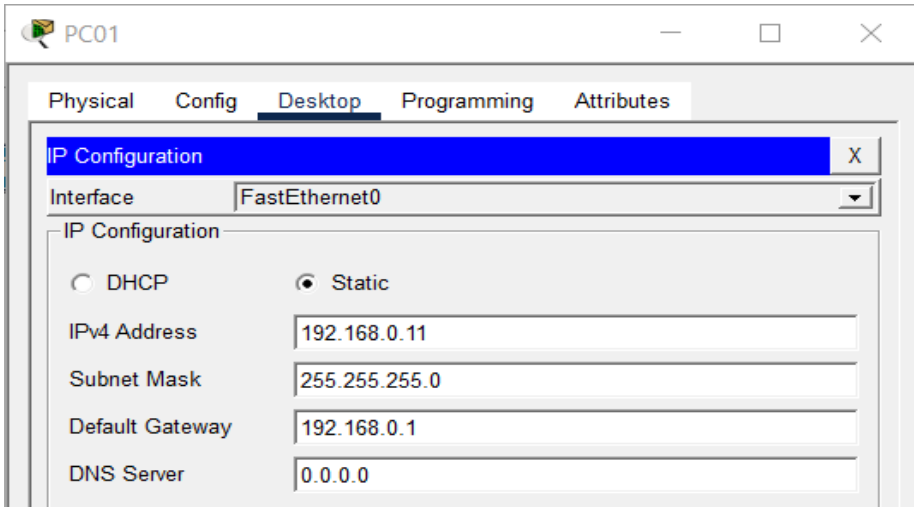

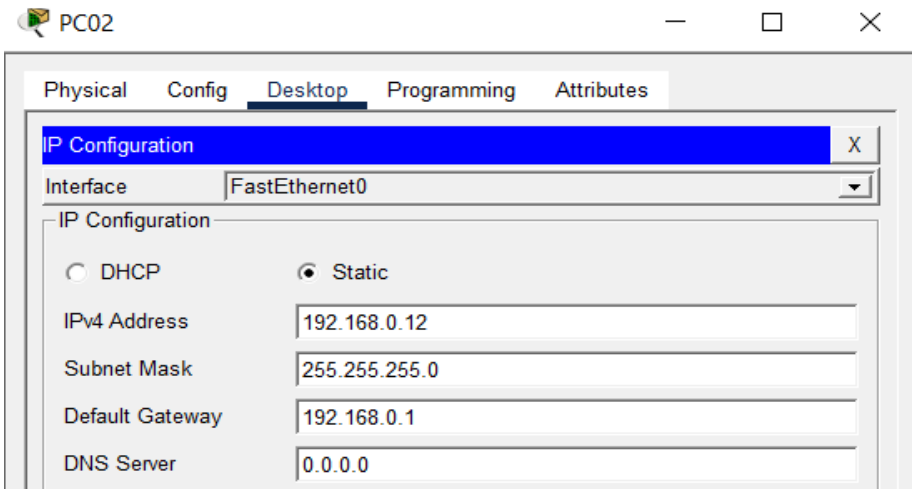

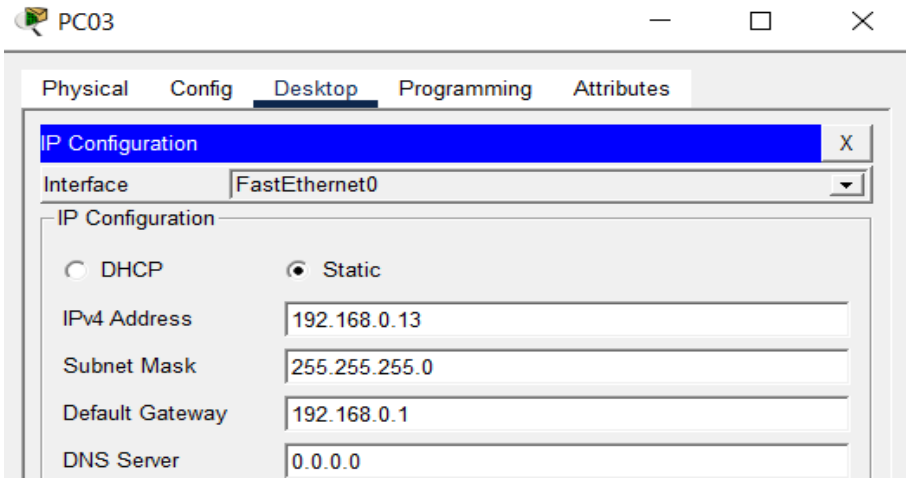

ตั้งค่า IPV4 , Subnet Mask และ Default Gateway ของ PC ที่เชื่อมกับ switch1

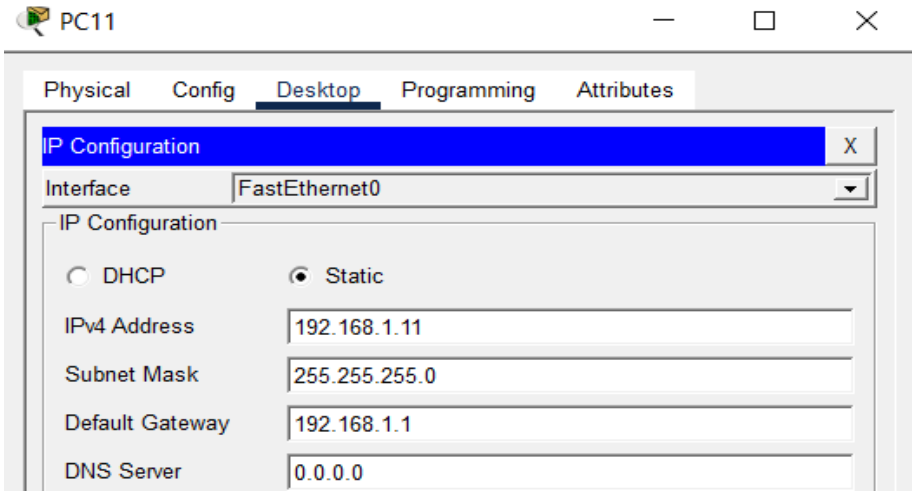

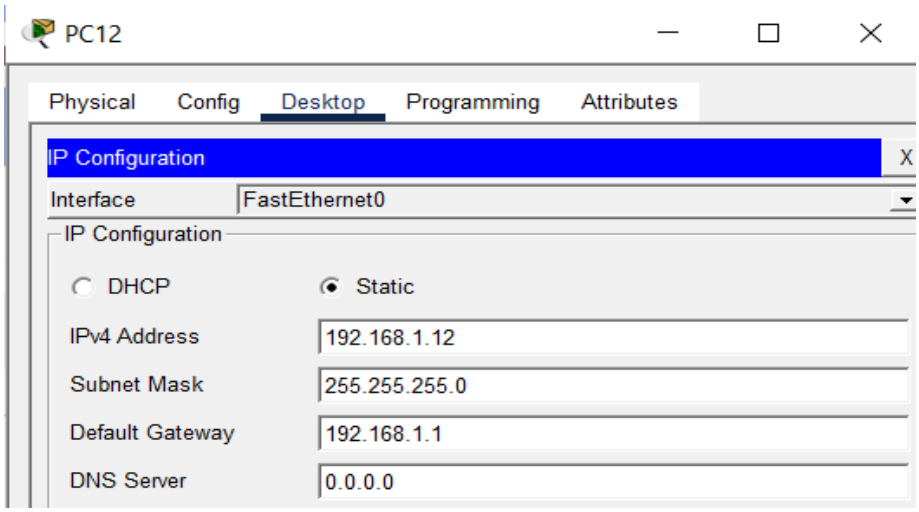

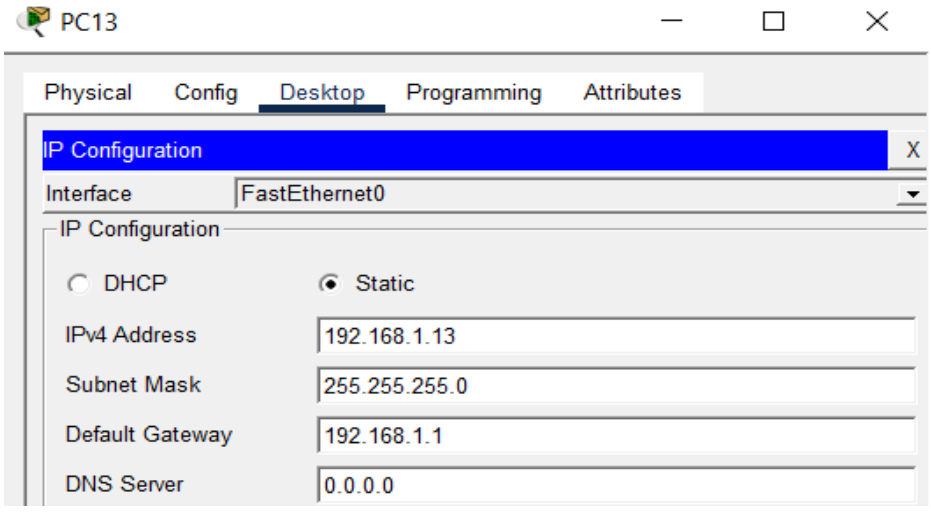

ตรวจสอบ Ping Gateway , Ping PC ฝั่งดียวกัน และ Ping ข้าม subnet

PC ที่เชื่อมต่อกับฝั่ง Router 0 (switch0)

PC01

Physical Config Desktop Programming Attributes

Command Prompt

```
Cisco Packet Tracer PC Command Line 1.0
C:\>ping 192.168.0.1

Pinging 192.168.0.1 with 32 bytes of data:

Reply from 192.168.0.1: bytes=32 time<1ms TTL=255
Reply from 192.168.0.1: bytes=32 time<1ms TTL=255
Reply from 192.168.0.1: bytes=32 time<1ms TTL=255
Reply from 192.168.0.1: bytes=32 time=1ms TTL=255

Ping statistics for 192.168.0.1:
    Packets: Sent = 4, Received = 4, Lost = 0 (0% loss),
Approximate round trip times in milli-seconds:
    Minimum = 0ms, Maximum = 1ms, Average = 0ms

C:\>ping 192.168.0.12

Pinging 192.168.0.12 with 32 bytes of data:

Reply from 192.168.0.12: bytes=32 time<1ms TTL=128
Reply from 192.168.0.12: bytes=32 time=5ms TTL=128
Reply from 192.168.0.12: bytes=32 time<1ms TTL=128
Reply from 192.168.0.12: bytes=32 time<1ms TTL=128

Ping statistics for 192.168.0.12:
    Packets: Sent = 4, Received = 4, Lost = 0 (0% loss),
Approximate round trip times in milli-seconds:
    Minimum = 0ms, Maximum = 5ms, Average = 1ms

C:\>ping 192.168.1.12

Pinging 192.168.1.12 with 32 bytes of data:

Request timed out.
Reply from 192.168.1.12: bytes=32 time=1ms TTL=126
Reply from 192.168.1.12: bytes=32 time=2ms TTL=126
Reply from 192.168.1.12: bytes=32 time=5ms TTL=126

Ping statistics for 192.168.1.12:
    Packets: Sent = 4, Received = 3, Lost = 1 (25% loss),
Approximate round trip times in milli-seconds:
    Minimum = 1ms, Maximum = 5ms, Average = 2ms

C:\>
```

PC ที่เชื่อมต่อกับฝั่ง Router 1 (switch1)

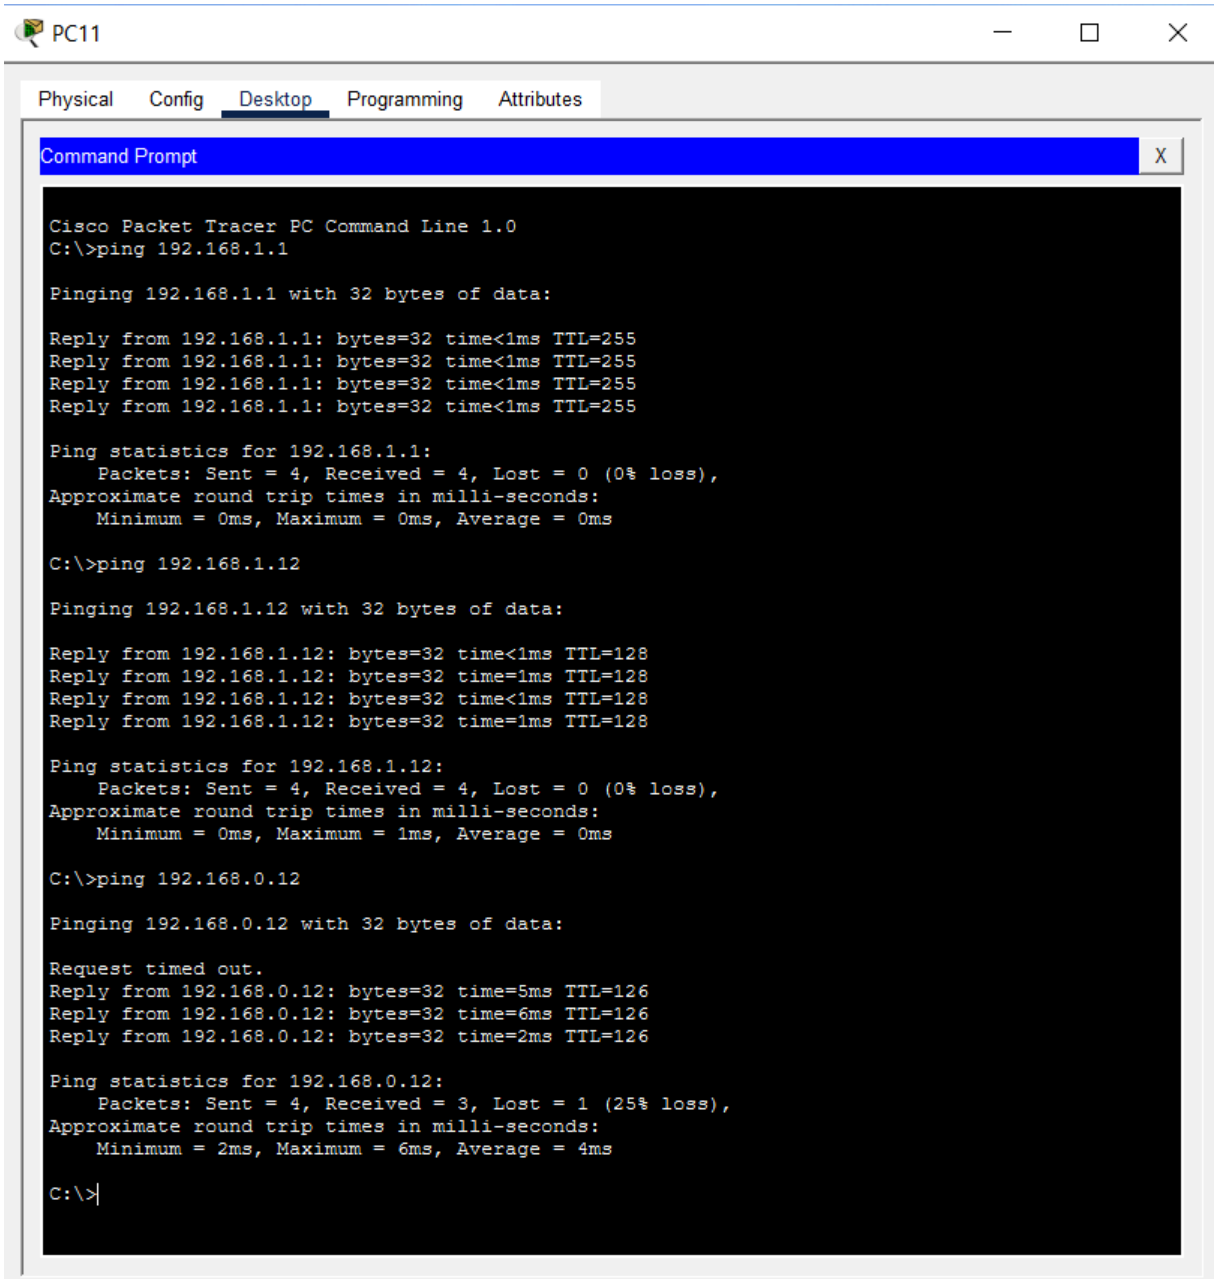


```
Cisco Packet Tracer PC Command Line 1.0
C:\>ping 192.168.1.1

Pinging 192.168.1.1 with 32 bytes of data:

Reply from 192.168.1.1: bytes=32 time<1ms TTL=255
Reply from 192.168.1.1: bytes=32 time<1ms TTL=255
Reply from 192.168.1.1: bytes=32 time<1ms TTL=255
Reply from 192.168.1.1: bytes=32 time<1ms TTL=255

Ping statistics for 192.168.1.1:
    Packets: Sent = 4, Received = 4, Lost = 0 (0% loss),
Approximate round trip times in milli-seconds:
    Minimum = 0ms, Maximum = 0ms, Average = 0ms

C:\>ping 192.168.1.12

Pinging 192.168.1.12 with 32 bytes of data:

Reply from 192.168.1.12: bytes=32 time<1ms TTL=128
Reply from 192.168.1.12: bytes=32 time=1ms TTL=128
Reply from 192.168.1.12: bytes=32 time<1ms TTL=128
Reply from 192.168.1.12: bytes=32 time=1ms TTL=128

Ping statistics for 192.168.1.12:
    Packets: Sent = 4, Received = 4, Lost = 0 (0% loss),
Approximate round trip times in milli-seconds:
    Minimum = 0ms, Maximum = 1ms, Average = 0ms

C:\>ping 192.168.0.12

Pinging 192.168.0.12 with 32 bytes of data:

Request timed out.
Reply from 192.168.0.12: bytes=32 time=5ms TTL=126
Reply from 192.168.0.12: bytes=32 time=6ms TTL=126
Reply from 192.168.0.12: bytes=32 time=2ms TTL=126

Ping statistics for 192.168.0.12:
    Packets: Sent = 4, Received = 3, Lost = 1 (25% loss),
Approximate round trip times in milli-seconds:
    Minimum = 2ms, Maximum = 6ms, Average = 4ms

C:\>
```

ไฟล์ที่สำเร็จแล้ว :
https://drive.google.com/file/d/1r3vs90LPAEbYdbnAsOoFlzyCXWDv7glC/view?usp=sharing

นางสาวณัฐนันทน์ บุษดี 673380037-1 section 1