SINCE
1931

IEC
The Imperial Electric Company (Pvt) Ltd.

CHINT

PRICE LIST 2025



VISIT NOW

www.iec.com.pk

Index

Serial No.	Description	Page No.
1	Miniature Circuit Breakers (MCB) 6kA	04
2	Miniature Circuit Breakers (MCB) 10kA	04
3	DC Miniature Circuit Breakers (DC-MCB)	05
4	Change Over Switches (Din rail Type)	05
5	Residual Current Breaker with Over-Current (RCBO)	06
6	Residual Current Circuit Breakers (RCCB/ELCB)	06
7	Surge Arrestors (AC & DC)	07
8	Molded Case Circuit Breakers Fixed Type (MCCB) 3 Pole	08
9	Molded Case Circuit Breakers Fixed Type (MCCB) 4 Pole	09
10	Molded Case Circuit Breakers Adjustable (MCCB)	10
11	High Voltage Molded Case Circuit Breakers Adjustable (MCCB) 3 Pole up to 1150VAC	11
12	Air Circuit Breakers	12
13	Air Circuit Breakers (High Voltage)	13
14	Magnetic Contactors 3-Pole	14
15	Magnetic Contactors 4-Pole	15
16	Accessories of Magnetic Contactors	15-16
17	Thermal Overload Relays	17
18	Manual Motor Starters	18
19	Direct Online Starters & Protection Relays	19
20	Protection Relays	19
21	Motor Protection Relay & Pulse Relay & Counting Relay	20
22	Modular AC Contactor & Industrial Power Relay	21
23	Time Delay Relays	22
24	Current Transformers	23
25	Capacitors	24
26	Power Factor Controller	25
27	Load Break Switch & Change Over Switches (Manual)	26
28	Motorize Change Over Switches (ATS)	27
29	HRC Fuses	28
30	Panel Meters	29
31	Panel Accessories	30
32	Inverters/VFDs	31

History of IEC

The Imperial Electric Co. (Pvt.) Ltd (IEC) was established in 1931. Since its inception, IEC has always provided its clients with world-class products & services, and our clients have relied on us for innovative and economical solutions to their problems. Over the years, the company has earned a reputation for excellence and professionalism for continuously striving to meet and even exceed standards which set the climate for a sustainable business relationship with its clients.

IEC is a Leading OEM of Diesel Generating Sets. It manufactures diesel Generating Sets under the brand name of IMPAC, ranging from 09 kVA to 1250 kVA coupled with world renowned engines & alternators. IEC is also Pakistan's premier EPC Contractor for Power Generation Projects and Airport Specialized Systems with extensive experience of more than 50 years. IEC officially represent some of the globally best OEMs in Pakistan which includes Schneider Electric, Chint Electric, Tungsram Lighting, Thorn Lighting, ADB Safegate, ITW GSE, JBT Aerotech, Thales, Hitzinger GmbH and Leoni Studer.

History of CHINT

Founded in 1984, CHINT is a leading global provider of smart energy solutions. It is actively deploying industrial sectors including smart electrics, green energy, industrial control and automation, smart home forming an integrated whole industry chain of "power generation, storage, transmission, substation, distribution, sales and consumption".

CHINT boasts an extensive business network across over 140 countries and regions as well as more than 40,000 employees and this has ranked CHINT among China's Top 50 companies for more than 20 consecutive years. CHINT has core businesses of clean energy, energy distribution, big data, and energy value-added services.

Dear Valued Customer:

IEC feels privilege in launching CHINT Low Voltage switchgear as an official partner in Pakistan. With regional offices in all major cities of Pakistan for the customer's ease and support, we (IEC) will commit to provide the genuine CHINT Products at the most competitive prices to retain the trust of our customers.

Terms and Conditions:

This price list shall be governed by following terms & conditions given below:

Date of implementation:

This price list is in PAK RUPEES (PKR) and is effective from 06.10.2025. This is the verified version of price list from The Imperial Electric Company (Pvt.) Ltd. Please disregard if u get any other version of this price list.

Warranty:

All CHINT Products supplied are BRAND NEW which are warranted against defects in design, workmanship, and materials. The warranties shall be for a period of 12 months calculated from the date of delivery.

The following conditions will VOID the warranty:

- Misuse or mishandling components.
- Modification or repair of the component.
- Faulty/Wrong installation of component.

Sales Return Policy:

Sales Returns would be entertained if components were returned in the same good condition and packing, they were sold. No returns will be accepted 30 days after the invoice date.

General Sales Tax:

GST will only be refunded if return is processed before the 5th of next month from sale date. For example, if any invoice is generated on any date in January, the deadline to send return along with GST would be February 5th. In case of returns afterwards, deducted GST amount will not be refunded at any cost, however, customers may request GST payment prof from IEC.

Packing and Forwarding Costs:

Prices are without packing and ex-our stores Lahore / Karachi. Packing and forwarding expenses will be charged extra at present.

Insurance:

All dispatches will be made at the customer's risk, unless they are insured at customer's cost.

Changes in Price List:

This Price list is subject to change without prior notice.

The major product range has been conveyed to our customers through this price list; however, if you require any other CHINT product which is not listed in this price list, please feel free to contact us.

We hope this new price list with details of CHINT LV components will prove to be more convenient for our customers.

Thank you

Miniature Circuit Breakers (MCB) 6kA

- Compliant standards: IEC60898-1
- Compliant certification: CE
- Protection: Overload & Short Circuit

Rated current: 1A ~ 63A
Frequency: 50/60Hz

Electromagnetic release type: B, C, D

Number of poles: 1P, 2P, 3P, 4P

Rated impulse withstand voltage (Uimp): 4KV



Model	Poles	Ampere Ratings	Price-PKR
NXB-63C	1-Pole	1, 2, 3, 4,6 Amps	950
NXB-63C	1-Pole	10, 16, 20, 25, 32, 40, 50, 63 Amps	900
NXB-63C	2-Pole	1, 2, 3, 4,6 Amps	2,200
NXB-63C	2-Pole	10, 16, 20, 25, 32, 40, 50, 63 Amps	1,900
NXB-63C	3-Pole	1, 2, 3, 4,6 Amps	2,950
NXB-63C	3-Pole	10, 16, 20, 25, 32, 40 Amps	2,650
NXB-63C	3-Pole	50, 63 Amps	2,850
NXB-63C	4-Pole	1, 2, 3, 4, 6, 10, 16, 20, 25, 32 Amps	4,400
NXB-63C	4-Pole	40, 50, 63 Amps	4,800
NXB-125C	4-Pole	100, 125 Amps	6,500

Miniature Circuit Breakers (MCB) 10kA

Model	Poles	Ampere Ratings	Price-PKR
NXB-63H	1-Pole	1, 2, 3, 4,6 Amps	1,500
NXB-63H	1-Pole	10, 16, 20, 25, 32, 40, 50, 63 Amps	1,450
NXB-63H	2-Pole	1, 2, 3, 4,6, 10 Amps	2,400
NXB-63H	2-Pole	16, 20, 25 Amps	2,200
NXB-63H	2-Pole	32, 40, 50, 63 Amps	2,500
NXB-63H	3-Pole	1, 2, 3, 4,6, 10, 16, 20, 25, 32 Amps	3,500
NXB-63H	3-Pole	40, 50, 63 Amps	3,800
NXB-63H	4-Pole	1, 2, 3, 4 Amps	5,000
NXB-63H	4-Pole	6, 10, 16, 20, 25, 32, 40 Amps	4,600
NXB-63H	4-Pole	50, 63 Amps	5,000

Accessories

Model	Specifications	Price-PKR
AX-X1	Auxiliary Contact	1,000
AL-X1	Alarm Auxiliary Contact	1,200
UVR	UVT -220VAC	1,400



DC Miniature Circuit Breakers (DC-MCB)

Certificates: CCC, CE, CB, TUV
Standard: IEC/EN 60947-2
Rated voltage up to 1000V
Protection of circuits against overload currents
Protection of circuits against short-circuit currents

Model	Poles	Ampere Ratings	Price-PKR
NB1-63DC	2-Pole	1, 2, 3, 4, 6, 10, 16, 20, 25, 32, 40, 50, 63 Amps	4,800
DZ158-125	2-Pole	125 Amps	7,000
NB1-63DC	4-Pole	1, 2, 3, 4, 6, 10, 16, 20, 25, 32, 40, 50, 63 Amps	9,000



Changeover Switch

Certificates: KEMA
Electric ratings: AC 50/60Hz
Rated current: up to 63A
Standard: IEC60669-1

Model	Poles	Ampere Ratings	Price-PKR
NZK1-32	1-Pole	32, 63 Amps	On Request
NZK1-32	2-Pole	32, 63 Amps	On Request

Residual Current Circuit Breakers (RCCB/RCBO/ELCB)



- Compliant Standards: IEC61009-1
- Compliant certification: CE
- Major function: Overload, short circuit, isolation, residual current operation
- Technical parameters
  Rated current: 6A, 10A, 16A, 20A, 25A, 32A, 40A, 50A, 63A
  Rated residual operating current: 0.03A, 0.05A, 0.075A, 0.1A, 0.3A
  Rated short-circuit breaking capacity (Icu): 6000A
  Short-circuit breaking capacity (Ics): 6000A
  Rated impulse withstand voltage (Uimp): 4kV

Model	Poles	Ampere Ratings	Sensitivity	Price-PKR
NXBLE-63	2-Pole	6, 10, 16, 20, 25, 32, 40 Amps	30 / 300mA	4,500
NXBLE-63	2-Pole	50, 63 Amps	30 / 300mA	4,800
NXBLE-63	4-Pole	6, 10, 16, 20, 25, 32, 40 Amps	30 / 300mA	7,500
NXBLE-63	4-Pole	50, 63 Amps	30 / 300mA	8,000
NXBLE-63	4-Pole	100 Amps	30 / 300mA	11,000

Residual Current Operated Circuit Breakers (RCCB)/ELCB



- Compliant Standards: IEC61008-1
- Control electric circuits
- Protect people against indirect contacts and additional
- protection against direct contacts

Model	Poles	Ampere Ratings	Sensitivity	Price-PKR
NL1-63	2-Pole	25, 40, 63 Amps	30mA	7,500
NL1-63	2-Pole	25, 40, 63 Amps	300mA	8,500
NL1-63	4-Pole	25, 40, 63 Amps	30mA	12,000
NL1-63	4-Pole	25, 40, 63 Amps	300mA	13,000

AC - Surge Arrestors



- Number of poles: 1, 2 ,3, 4
- Electric ratings: 230/460V,
- Application: Protect electric system and on-loading electrical apparatus from thunder and instantaneous over-voltage
- Standard: IEC 61643-1, EN 61643-11

Model	Type	Specifications	Price-PKR
NU6-II	2- Pole	Max operated Volt:380V/460V Nominal Discharge Current :40kA	13,200
NU6-II	4-Pole	Max operated Volt: 415V/460V Nominal Discharge Current :40kA	20,000
NU6-II	4-Pole	Max operated Volt: 415V/460V Nominal Discharge Current :65kA	40,000
NU6-II	4-Pole	Max operated Volt: 415V/460V Nominal Discharge Current :100kA	65,000

DC - Surge Arrestors (NOARK)

DC Surge protection devices Ex9UEP are suitable for photovoltaic applications.
These SPDs are designed and tested according to PV T1+T2 class from EN 61643-31 standard

Model	Type	Specifications	Price-PKR
EX9UEP	2- Pole	Max output voltage: 750V Nominal discharge current: 40kA For undergrounded PV system	18,000
EX9UEP	2- Pole	Max output voltage: 1200V/1500V Nominal discharge current: 40kA For grounded PV system	25,000
EX9UEP	4-Pole	Max output voltage: 1200V/1500V Nominal discharge current: 40kA For undergrounded PV system	35,000

Molded Case Circuit Breakers (MCCB)



The molded case circuit breaker will provide protection for the circuit and equipment in case of overload, short circuit and under-voltage condition occurred in the power distribution circuit. Besides, it can also provide protection of overload, short circuit and under voltage for the non-frequent start of the motor.

- Certificates: KEMA, ESC, UKrSEPRO, PCT, RCC, KC
- Electric Ratings: AC 690V, 50/60Hz
- Standard: IEC/EN 60947-2
- Frame Size:63A, 125A, 160A, 250A, 400A, 630A, 800A, 1000A, 1250A, 1600A
- Installation Method: Fixed Type; Plug-in Type

Standard Breaking Capacity (Thermal-Magnetic Trip)

Model	Pole	Type	Current Rating (A)	Icu 380~415 VAC	Price -PKR
NXM-125 S	3 Pole	Fixed	16, 20, 25	25 kA	12,500
NXM-125 S	3 Pole	Fixed	32, 40, 50,	25 kA	12,500
NXM-125 S	3 Pole	Fixed	63, 80, 100	25 kA	12,500
NXM-125 S	3 Pole	Fixed	125	25 kA	16,000
NXM-160 S	3 Pole	Fixed	160	35 kA	16,000
NXM-250 S	3 Pole	Fixed	200, 225, 250	35 kA	20,000
NXM-400 S	3 Pole	Fixed	320, 400	50 kA	42,000
NXM-630 S	3 Pole	Fixed	500, 630	50 kA	65,000
NXM-800 S	3 Pole	Fixed	800	50 kA	90,000
NXM-1000 S	3 Pole	Fixed	1000	50 kA	135,000
NXM-1600 S	3 Pole	Fixed	1250	50 kA	250,000
NXM-1600 S	3 Pole	Fixed	1600	50 kA	On Request

High Breaking Capacity MCCB Models (Thermal Magnetic Trip)

Model	Pole	Type	Current Rating(A)	Icu 380~415 VAC	Price-PKR
NXM-125 H	3 Pole	Fixed	15, 20, 25, 32, 40, 50, 63, 80, 100	50 kA	14,500
NXM-125 H	3 Pole	Fixed	125	50 kA	18,000
NXM-250 H	3 Pole	Fixed	160	50 kA	18,000
NXM-250 H	3 Pole	Fixed	200, 225, 250	50 kA	22,000
NXM-400 H	3 Pole	Fixed	320, 400	70 kA	45,000
NXM-630 H	3 Pole	Fixed	500, 630	70 kA	70,000
NXM-800 H	3 Pole	Fixed	800	70 kA	110,000
NXM-1000 H	3 Pole	Fixed	1000	70 kA	145,000
NXM-1600 H	3 Pole	Fixed	1250	70 kA	270,000
NXM-1600 H	3 Pole	Fixed	1600	70 kA	On Request

Molded Case Circuit Breakers (MCCB)

Standard Fixed MCCB (Thermal Magnetic Trips)

Model	Pole	Type	Rated Current (A)	Icu 380~415 VAC	Price-PKR
NXM-125 S	4 Pole	Fixed	16, 20, 25, 32, 40, 50, 63, 80, 100	25 kA	16,000
NXM-125 S	4 Pole	Fixed	125, 160	25 kA	20,000
NXM-250 S	4 Pole	Fixed	200, 225, 250	36 kA	25,000
NXM-400 S	4 Pole	Fixed	320, 400	50 kA	55,000
NXM-630 S	4 Pole	Fixed	500, 630	50 kA	75,000
NXM-800 S	4 Pole	Fixed	800	50 kA	120,000
NXM-1000 S	4 Pole	Fixed	1000	50 kA	155,000
NXM-1600 S	4 Pole	Fixed	1250	50 kA	On Request
NXM-1600 S	4 Pole	Fixed	1600	50 kA	On Request

High Breaking Capacity MCCB Models (Thermal Magnetic Trip)

Model	Pole	Type	Rated Current (A)	Icu 380~415 VAC	Price-PKR
NXM-125 H	4 Pole	Fixed	16, 20, 25, 32, 40, 50, 63, 80, 100	50 kA	18,000
NXM-125 H	4 Pole	Fixed	125, 160	50 kA	21,000
NXM-250 H	4 Pole	Fixed	200, 225, 250	50 kA	26,000
NXM-400 H	4 Pole	Fixed	320, 400	70 kA	62,000
NXM-630 H	4 Pole	Fixed	500, 630	70 kA	80,000
NXM-800 H	4 Pole	Fixed	800	70 kA	130,000
NXM-1000 H	4 Pole	Fixed	1000	70 kA	165,000
NXM-1600 H	4 Pole	Fixed	1250	70 kA	On Request
NXM-1600 H	4 Pole	Fixed	1600	70 kA	On Request

Accessories Of MCCBs

Accessory Type	125 (M1)	160 (M2)	250 (M3)	400/630 (M4)	800/1000 (M5/M6)	1250/1600 (M7)
Aux. Switch	On Req	On Req	On Req	On Req	On Req	On Req
UVT-230VAC	On Req	On Req	On Req	On Req	On Req	On Req
SHUNT-230VAC	On Req	On Req	On Req	On Req	On Req	On Req
Motor -230VAC	On Req	On Req	On Req	On Req	On Req	On Req

Standard Adjustable MCCB (Thermal Magnetic Trips)



Model	Pole	Type	Rated Current (A)	Icu 380~415 VAC	Price -PKR
NXMS-160F	3 Pole	Adjustable	32, 40, 63, 100	36 kA	36,000
NXMS-160F	3 Pole	Adjustable	125	36 kA	37,000
NXMS-160F	3 Pole	Adjustable	160	36 kA	38,000
NXMS-250F	3 Pole	Adjustable	200	36 kA	40,000
NXMS-250F	3 Pole	Adjustable	250	36 kA	46,000
NXMS-400F	3 Pole	Adjustable	400	50 KA	75,000
NXMS-630F	3 Pole	Adjustable	630	50 KA	82,000
NXMS-1000S	3 Pole	Adjustable	800	50 KA	155,000
NXMS-1000S	3 Pole	Adjustable	1000	50 KA	195,000
NXMS-1600S	3 Pole	Adjustable	1250	50 KA	300,000
NXMS-1600S	3 Pole	Adjustable	1600	50 KA	On Request

Standard Adjustable MCCB (Thermal Magnetic Trips)

Model	Pole	Type	Rated Current (A)	Icu 380~415 VAC	Price -PKR
NXMS-160F	4 Pole	Adjustable	32, 40, 63, 100	36 kA	42,000
NXMS-160F	4 Pole	Adjustable	125	36 kA	42,000
NXMS-160F	4 Pole	Adjustable	160	36 kA	46,000
NXMS-250F	4 Pole	Adjustable	200	36 kA	52,000
NXMS-250F	4 Pole	Adjustable	250	36 kA	52,000
NXMS-400F	4 Pole	Adjustable	400	50 KA	95,000
NXMS-630F	4 Pole	Adjustable	630	50 KA	110,000
NXMS-1000S	4 Pole	Adjustable	800	50 KA	200,000
NXMS-1000S	4 Pole	Adjustable	1000	50 KA	230,000
NXMS-1600S	4 Pole	Adjustable	1250	50 KA	450,000
NXMS-1600S	4 Pole	Adjustable	1600	50 KA	On Request

MCCB - High Voltage (up to 1150V AC)



This NM8N High-voltage (HV) Series Molded Case Circuit Breaker is specially designed for handling high-voltage electrical system, capable to break heavy loaded electrical circuit systems under wide range of operating temperature of - 40 ℃ ~ + 70 ℃ . The characteristics of this Circuit Breaker is its capability to break circuit with zero arcing, which is an ideal component for meeting the requirements of many systems such as the solar (PV) power generation system. This Circuit Breaker works perfectly up to the maximum working voltage of AC 1150V, which can effectively protects electrical systems like the output loading of the string Inverters, and others such as the loading capacity of the AC combiner box in the photovoltaic systems.

Rated Voltage Ue(V) : AC 690/800/1000/1150 ;
Frame Size current: 250, 400, 630;
Rated insulation voltage: 1250V
Rated impulse withstand voltage: 8kV (frame size: 250A) 12kV (frame size: 400A, 630A)
Rated ultimate short-circuit breaking current(kA) @AC800v : 36, 50
Rated service breaking current(kA)@AC800v : 36, 50
Ambient temperature: -40℃ ~+70℃
Standard complied: IEC/EN 60947-2

Model	Pole	Specification	ICU 800V	Price
NM8N-250HVS TM	3 Pole	250A	50KA	On Request
NM8N-400HVS TM	3 Pole	400A	50KA	On Request
NM8N-630HVS TM	3 Pole	630A	50KA	On Request

Air Circuit Breakers



- Frame size (A): 1600, 2000, 3200, 4000, 6300
- Certificates: KEMA, UKrSEPRO, GOST, RCC
- Rated Operational Voltage (Ue): 400/690 VAC, 50Hz
- Rated Insulation Voltage (Ui): 1000V
- Rated Impulse withstand Voltage (Uimp): 12kV
- Number of poles: 3P, 4P
- Breaking capacity: N, S, H
- Overload time delay & Short circuit protection
- Earthing fault protection
- Standard: IEC/EN 60947-2
- Installation method: Draw-out type, Fixed type
- NXA can operate in the ambient temperature of -45°C to 70°C

Model	Pole	Ratings	Icu.380 415 VAC	Price-PKR
NXA-16	3 Pole	1000 Amps	50 kA	480,000
NXA-16	3 Pole	1250 Amps	50 kA	495,000
NXA-16	3 Pole	1600 Amps	50 kA	560,000
NXA-20	3 Pole	2000 Amps	80 kA	650,000
NXA-32	3 Pole	2500 Amps	80 kA	875,000
NXA-32	3 Pole	3200 Amps	80 kA	1,150,00
NXA-40	3 Pole	4000 Amps	80 kA	1,475,000
NXA-63	3 Pole	5000 Amps	120 kA	On Request
NXA-63	3 Pole	6300 Amps	120 kA	On Request

Model	Poles	Ratings	Icu.380-415 VAC	Price-PKR
NXA-16 4P	4 Pole	1000 Amps	50 kA	650,000
NXA-16 4P	4 Pole	1250 Amps	50 kA	680,000
NXA-16 4P	4 Pole	1600 Amps	50 kA	710,000
NXA-20 4P	4 Pole	2000 Amps	80kA	890,000
NXA-32 4P	4 Pole	2500 Amps	80kA	1,050,000
NXA-32 4P	4 Pole	3200 Amps	80kA	1,530,000
NXA-40	4 Pole	4000 Amps	80kA	1,970,000

ACB Accessories

Accessories Type	Voltage	Price -PKR
U.V.T.	230/400 VAC	50,000
Shunt Release for NXA-16	230/400 VAC	25,000
Shunt Release for NXA-20/63	230/400 VAC	30,000
Closing Release for NXA-16	230/400 VAC	25,000
Closing Release for NXA-20/63	230/400 VAC	30,000
Motor Mechanism	230/400 VAC	82,000

Air Circuit Breakers (ACB - High Voltage)



- Certificates: KEMA, UKrSEPRO, GOST, RCC, CE
- Electric Ratings: 800~1150VAC, AC50/60Hz
- Overload long-time delay protection
- Short circuit time delay protection
- Short circuit instantaneous protection
- Earthing fault protection
- Standard: IEC/EN 60947-2

Model	Pole	Rating	Icu (800~1150VAC)	Price
NA8-2500HV	3 Pole	1200 Amps	65 kA	On Request
NA8-2500HV	3 Pole	1600 Amps	65 kA	On Request
NA8-2500HV	3 Pole	2500 Amps	65 kA	On Request
NA8-4000HV	3 Pole	4000 Amps	65 kA	On Request
NA8-7500HV	3 Pole	7500 Amps	65 kA	On Request

Magnetic Contactors

The new NXC AC Contactors feature a novel appearance and a complete structure. They are mainly used for the frequent start and control of AC motors as well as remote circuit making/breaking.

They can also be combined with appropriate thermal overload relays to form electromagnetic starters

- Rated Current: 9A to 630A
- Rated Operational Voltage: 220~690V
- Rated Insulation Voltage: 690V
- Reversible Version
- Certificate: KEMA, CE, UL, VDE, PCT
- Standard: IEC/EN60947-4-1





3-Pole

Model	Motor Rating 380/400 VAC KW / HP	Operational Current 380 / 400 VAC AC-3	AC-1	Auxiliary Contacts	Price - PKR
NXC-09	4 / 5	9	20	1NO+1NC	3,000
NXC-12	5.5 / 7.5	12	25	1NO+1NC	3,500
NXC-18	7.5 / 10	18	32	1NO+1NC	4,000
NXC-25	11 / 15	25	40	1NO+1NC	5,000
NXC-32	15 / 20	32	50	1NO+1NC	7,000
NXC-38	18.5 / 25	38	50	1NO+1NC	7,800
NXC-40	18.5 / 25	40	60	1NO+1NC	12,000
NXC-50	22 / 30	50	80	1NO+1NC	13,500
NXC-65	30 / 40	65	80	1NO+1NC	15,500
NXC-75	37 / 50	75	95	1NO+1NC	21,000
NXC-85	37 / 50	85	100	1NO+1NC	22,000
NXC-100	45 / 60	100	110	1NO+1NC	24,000
NXC-120	55 / 75	120	200	-	55,000
NXC-160	75 / 100	160	200	-	60,000
NXC-185	90 / 110	185	275	-	65,000
NXC-225	110 / 150	225	275	-	70,000
NXC-265	132 / 180	265	315	-	100,000
NXC-330	160 / 210	330	380	-	145,000
NXC-400	200 / 265	400	450	-	155,000
NXC-630	335 / 450	630	700	-	270,000

4-Pole

Model	AC-3 Ratings Amps	AC-1 Ratings Amps	Rated Power (KW) 400V	HP	Price - PKR
NXC-09	09	20	4	5	4,500
NXC-12	12	25	5.5	7.5	5,500
NXC-25	25	40	11	15	8,000
NXC-40	40	60	18.5	25	21,500
NXC-50	50	80	22	30	23,000
NXC-65	65	80	30	40	30,000
NXC-80	80	125	37	50	45,000
NXC-95	95	125	45	60	48,000
NC2-115	115	200	55	75	70,000
NC2-150	150	250	75	100	90,000
NC2-185	185	275	90	125	100,000
NC2-225	225	275	110	150	120,000
NC2-265	265	315	132	160	165,000
NC2-330	330	400	160	215	195,000
NC2-400	400	450	200	270	250,000
NC2-630	630	630	335	455	450,000

Accessories of Contactors



Auxiliary Contact Blocks

Model	Specifications	Contact Arrangement	Price - PKR
AX-3X/11	Top Aux Contact	1NO+1NC	770
AX-3X/20	Top Aux Contact	2NO	770
AX-3X/02	Top Aux Contact	2NC	770
AX-3X/22	Top Aux Contact	2NO+2NC	1,200
AX-3X/13	Top Aux Contact	1NO+3NC	1,100
AX-3X/31	Side Aux Contact	1NO+1NC	1,100

Mechanical Interlock

Model	Specifications	Price - PKR
CJX2-09-32	NXC-09 – NXC-38	1,100
CJX2-40-65	NXC-40 – NXC-65	1,650
CJX2-80-95	NXC-75 – NXC-100	1,650
NCL7	NXC-120 – NXC-225	On Request
NCL8-C	NXC-265 – NXC-630	On Request

Operating Coils

Model	Description	Price - PKR
NXC-06-22	24, 48, 110, 220, 415 VAC	On Request
NXC-25-32	110, 220, 415 VAC	On Request
NXC-40-65	110, 220, 415 VAC	On Request
NXC-75-100	110, 220, 415 VAC	On Request
NXC-120-160	110, 220, 415 VAC	On Request
NXC-185-225	110, 220, 415 VAC	On Request
NXC-265-330	110, 220, 415 VAC	On Request
NXC-400	110, 220, 415 VAC	On Request
NXC-630	110, 220, 415 VAC	On Request

Pneumatic Timer

Model	Time Delay Range	Contacts	Price - PKR
F5-T2	0.1 - 30sec	NO+NC	On Request
F5-T4	10 - 180sec	NO+NC	On Request

Thermal Overload Relays

NXR-Thermal overload relays are suitable for Overload and Phase Loss Protection for uninterrupted or intermittent AC motors. The thermal relays also provide temperature compensation, action indication, automatic and manual reset, stop, and testing functions. These thermal relays can be plugged into contactors or installed independently.

Features

- Current Ranges from 0.1A to 630A
- Phase Loss protection
- With Testing mechanism and Stop button
- Operational Voltage: 690V
- Frequency: 50/60Hz
- Tripping Class: 10A
- Certificates: KEMA, CE, UL, RCC
- Standard: IEC60947-4-1, IEC/EN 60947-5-1





Model	Current Range (A)	Compatible Contactor Model	Price - PKR
NXR-25	0.63-1.0	NXC-09- 32	3,400
NXR-25	1.0-1.6		3,400
NXR-25	1.6-2.5		3,400
NXR-25	2.5-4		3,400
NXR-25	4-6		3,400
NXR-25	5.5-8		3,400
NXR-25	7-10		3,400
NXR-25	9-13		3,400
NXR-25	12-18		3,400
NXR-25	17-25		3,400
NXR-38	23-32	NXC-25- 38	4,500
NXR-38	30-38		4,500
NXR-100	37-50	NXC-40- 100	6,500
NXR-100	48-65		6,500
NXR-100	63-80		7,500
NXR-100	80-100		9,500
NXR-200	80-160	NXC-120- 225	On Request
NXR-200	125-250		On Request
NXR-630	200-400	NXC-265– 630	On Request
NXR-630	315-630		On Request

Accessories for NXR

Accessory Type	Price - PKR
Mounting Base for NXR-25	On Request
Mounting Base for NXR-38	On Request
Mounting Base for NXR-100	On Request

Manual Motor Starters



- Up to 80A
- With Overload protection
- With Short Circuit protection
- With Phase Failure protection
- Electrical Rating: 690V
- Temperature: -5°C to 40°C
- Standard: IEC/EN 60947-2, IEC/EN 60947-4-1
- Certificates: SEMKO, CE, UkrSEPRO, RCC, UL

Model	Icu (kA) 415 VAC	Current Range (A)	Price - PKR
NS2-25	100 kA	0.4- 0.63	10,000
NS2-25	100 kA	0.63 - 1	10,000
NS2-25	100 kA	1 - 1.6	10,000
NS2-25	100 kA	1.6 - 2.5	10,000
NS2-25	100 kA	2.5 - 4	10,000
NS2-25	100 kA	4 - 6.3	10,000
NS2-25	100 kA	6 - 10	10,000
NS2-25	15 kA	9 - 14	10,000
NS2-25	15 kA	13 - 18	10,000
NS2-25	15 kA	20 - 25	10,000
NS2-80B	15 kA	25 - 40	28,000
NS2-80B	15 kA	40 - 63	28,000
NS2-80B	15kA	56 - 80	28,000

Accessories of NS2

Model	Specifications	Price - PKR
NS2-AU11	Auxiliary 1NO + 1NC (Side Mount)	1,800
NS2-F2	Fault Signal Contact	On Request
NS2-UV220	Under Voltage Release	On Request
NS2-25X	Extended Rotary Handle	On Request
NS2-EH8	Extended Rotary Handle	On Request

Direct Online Starters



- Overload Protection
- Phase failure protection
- Available up to 11kW / 22A
- Rated Operational Voltage: 690VAC
- Frequency: 50/60z
- Temperature: -5℃ to 40℃
- IP class: IP55
- Standard: IEC/EN60947-4-1

Model	Motor Capacity 380/400VAC	Current Range (A)	Price - PKR
NQ3-5.5P	0.5HP / 0.37kW	0.63- 1	14,000
NQ3-5.5P	0.75HP / 0.55kW	1- 1.6	14,000
NQ3-5.5P	1HP / 0.75kW	1.6-2.5	14,000
NQ3-5.5P	2HP / 1.5kW	2.5- 4	14,000
NQ3-5.5P	3HP / 2.2kW	4- 6.0	14,000
NQ3-5.5P	4HP / 3kW	5.5 - 8.0	14,000
NQ3-5.5P	7.5HP / 5.5kW	9- 13	14,000
NQ3-11P	10HP / 7.5kW	12 – 18	20,000
NQ3-11P	15HP / 11kW	17 - 25	20,000

Protection Relays



NJYB3 Relay is used to provide overvoltage, Undervoltage, phase failure, phase sequence, three-phase unbalance temperature and load protection control in three-phase three-wire up to 415V circuits and three-phase four-wire up to 240V circuits with a frequency of AC50Hz.

Model	Specifications	Price - PKR
NJYB3-4	Under & Over Voltage with phase failure, 3Phase, 3 Wire	7,500
NJYB3-5	Under & Over Voltage with phase failure & sequence, 3Phase, 3 Wire	7,500
NJYB3-11	Under & Over Voltage with phase failure, 1/3Phase, 3 Wire	7,500
NJYB3-12	Under & Over Voltage with phase failure & sequence, 3Phase, 4 Wire	7,500

Motor Protection Relay



NJBK7 series motor protection relay is applicable for overload protection, locked rotor protection, phase failure protection, three-phase imbalance protection, undercurrent protection, grounding protection, PTC temperature protection and communication failure protection for AC electromotors of a frequency of 50Hz with a rated insulation voltage of up to 690V and a rated operating current of 1A ~ 800A.
This protector is usually used to combine with AC contactor and conforms to IEC60947-4-1.

Model	Current Range (A)	Motor Power (kW)	Price - PKR
NJBK7-800T/400	80 - 400	40 - 200	40,000
NJBK7-800T/800	200 - 800	100 - 400	50,000

Pulse Relay



NJMC1 pulse relay is a mechanical bistable relay that changes the contact state by inputting pulse signals. Contact switching current of up to 16A and 32A
A complete range of AC/DC specifications

Model	Contact Load (Resistive)	Coil Rated Voltage	Price - PKR
NJMC1	16A, 1 Pole	230 VAC	3,000
NJMC1	32A, 1 Pole	230 VAC	4,000

Counting Relay



Model	Voltage Rays	Type	Price - PKR
NJJ3 AC/DC	100V - 240V	Digital	20,000
JDM 15G AC/DC	100V - 240V	Analog	18,000

Modular AC Contactor



NCH8-Manual Modular AC contactor is mainly used in power systems with AC 50Hz/60Hz, rated operating voltage up to 400V and rated operating current up to 63A.
It is used as remote or manual switch for circuit control under AC-7a and AC-7b (non-inductive load or low-inductive load/resistance furnace, domestic appliance and low-inductive load of similar applications) application category.

Model	Current (AC-1, AC-7a)	Number of Contact	Price - PKR
NCH8-20	20A	1 NO + 1 NC	4,000
NCH8-20	20A	2 NO + 2 NC	6,000
NCH8-25	25A	2 NO + 2 NC	6,000
NCH8-40	40A	1 NO + 1 NC	7,000

Industrial Power Relay



These power relays are available in different coil voltages 12VDC, 24VDC, 220VAC etc. These relays have contact switching capability of 10A. A complete range of AC/DC specifications and are enclosed in transparent dust cover. Certifications are CE UL

Model	Type	Contacts	Price - PKR
JQX-10F 2Z	8Pin, Round	2CO / 10 Amps	1,250
JQX-10F 3Z	11Pin, Round	3CO / 10 Amps	1,550
JQX- 13F (D) 2Z	8Pin, Flat	2CO / 10 Amps	1,550
JQX-22F 4Z	14Pin, Flat	4CO / 5 Amps	1,100

Power Relay Socket

Model	Type	Applicable for	Price - PKR
CZF08A-E	8Pin, Round	JQX-10F 2Z	650
CZF11A-E	11Pin, Round	JQX-10F 3Z	650
CZF08A-E	8Pin, Flat	JQX- 13F (D) 2Z	650
CZF14A-E	14Pin, Flat	JQX-22F	650

Time Delay Relays

JSZ3 Time Delay Relay is applicable for automatic control system, such as machine automatic control and complete equipment automatic control, etc.



Model	Specifications	Price - PKR
JSZ3C-B	Power on delay with instantaneous operation Contact 8Pin Plugin Type Delay Range 0.1-1sec/10sec/60sec/6min Operation Voltage :220VAC, 50/60Hz	3,300
JSZ3Y	Star Delta Delay Delay Range 30sec Operation Voltage :220VAC, 50/60Hz	3,900
JSZ3A-A	Power on delay / Multi Range Timer Delay Range 0.05-0.5/-5sec/30sec/3min Operation Voltage :220VAC, 50/60Hz	2,750
JSZ3 A-G	Power on delay Delay Range 0.05-4min /40 min/4hr / 24hr Operation Voltage :220VAC, 50/60Hz	2,750
CZS08X-E	Timer Socket	

Current Transformers

- Secondary current Isn: 5A
- Rated voltage Ue: 660V
- Frequency: 50/60Hz
- Operating temperature: -5°C to + 40°C
- Standards: IEC/EN 60044-1
- Installation type: busbar or plate fixing





Model No	Transformation Ratio	Accuracy Class	Price - PKR
BH-0.66 40 I B	30/5A	3	4,500
BH-0.66 40 I B	75/5A	3	4,500
BH-0.66 40 I B	50/5A	3	4,500
BH-0.66 40 I	100/5A	0.5	4,500
BH-0.66 40 I	150/5A	0.5	4,500
BH-0.66 40 I	200/5A	0.5	4,500
BH-0.66 40 I	250/5A	0.5	4,500
BH-0.66 40 I	300/5A	0.5	4,500
BH-0.66 40 I	400/5A	0.5	4,500
BH-0.66 60 I	500/5A	0.5	6,500
BH-0.66 60 I	600/5A	0.5	6,500
BH-0.66 60 I	800/5A	0.5	7,200
BH-0.66 60 I	1000/5A	0.5	7,800
BH(SDH)-0.66 60 II	500/5A	0.5	6,600
BH(SDH)-0.66 60 II	600/5A	0.5	6,600
BH(SDH)-0.66 60 II	800/5A	0.5	7,200
BH(SDH)-0.66 60 II	1000/5A	0.5	7,700
BH(SDH)-0.66 60 II	1200/5A	0.5	8,000
BH(SDH)-0.66 100 II	1500/5A	0.5	10,000
BH(SDH)-0.66 100 II	2000/5A	0.5	11,500
BH(SDH)-0.66 120 II	2500/5A	0.5	12,500
BH(SDH)-0.66 120 II	4000/5A	0.5	18,000

Capacitors



Used for the Improvement of Power factor and Power Quality

- Ambient Temp: -25 to +50 deg C
- Self-Healing
- Rated Voltage: 230/525VAC
- Metal enclosure
- Convenient for mounting
- Standard: IEC/EN 60831-1:2014

Model No	Ratings	Voltage	Price - PKR
NWC6-0.45-5-3	5kVAR	415/440VAC	14,500
NWC6-0.45-12-3	12kVAR	415/440VAC	22,000
NWC6-0.45-25-3	25kVAR	415/440VAC	35,500
NWC6-0.45-40-3	40kVAR	415/440VAC	55,000



Model No	Ratings	Voltage	Price - PKR
BZMJ-0.4-5-3	7.5kVAR	415/440VAC	12,500
BZMJ-0.4-12-3	12kVAR	415/440VAC	18,000
BZMJ-0.4-25-3	25kVAR	415/440VAC	37,500
BZMJ-0.4-50-3	50kVAR	415/440VAC	66,500

Power Factor Controller



Reactive Power Compensation Controller is a dedicated controller which can make compensations for the reactive power of low voltage distribution system. Rated Voltage is 220/440VAC, 50/60Hz and available in 6 and 12 steps

Features:

- With combined control on reactive power and power factor, a reliable input can be ensured under low load and surge switching can be prevented.
- Real-time display of the network status, including parameters such as power factor, voltage, current, active power, and reactive power, etc.
- The polarity of the sampling signal can be automatically identified. Therefore, no worry about wrong connections with reversed polarity.
- In case the voltage of the electrical power network is lower than 300 V, or exceeds the preset over-voltage protection value, the connected capacitor banks will be automatically and rapidly (5 sec.) disconnected in steps, and the voltage value will be displayed.
- The controller is a cyclic automated-self-test function,

Model No.	Specifications	Price - PKR
JKF8-6	6-Steps	50,000
JKF8-12	12-Steps	60,000

Load Break Switch



- For Manually making & breaking of circuit
- Standard: IEC 60947-3 : 2001 (AC22/AC23)
- Certified: CE, KEMA


Model No.	Rated Current	Poles	Price - PKR
NH40-125/3C	125A	3	35,000
NH40-160/3C	160A	3	40,000
NH40-250/3C	250A	3	55,000
NH40-400/3C	400A	3	80,000
NH40-630/3C	630A	3	110,000
NH40-800/3C	800A	3	On Request
NH40-1000/3C	1000A	3	On Request
NH40-1250/3C	1250A	3	On Request
NH40-1600/3C	1600A	3	On Request
NH40-2000/3C	2000A	3	On Request
NH40-2500/3C	2500A	3	On Request

Change Over Switches (Manual)



Model No.	Rated Current	Poles	Price - PKR
NH40-125/4CS	125A	4	75,000
NH40-162/4CS	160A	4	80,000
NH40-250/4CS	250A	4	100,000
NH40-400/4CS	400A	4	200,000
NH40-630/4CS	630A	4	250,000
NH40-1000/4CS	1000A	4	On Request
NH40-1252	1250A	4	On Request
NH40-1600	1600A	4	On Request

Motorize Change Over Switches (ATS)

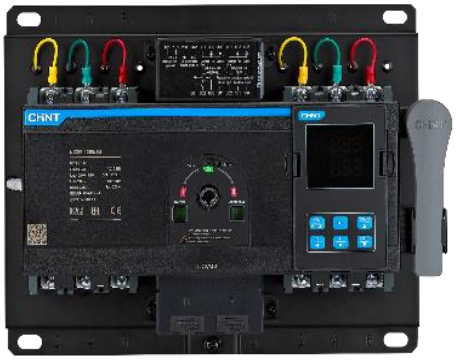

NXZ(H)B/NXZ(H)M Series Automatic Transfer Switching Equipment is applicable to three-phase four-wire duplicate supply grid of AC 50/60Hz, rated voltage 400V/415V and below, rated current 800A, and can switch one or several load circuits from one power source to the other to ensure the normal power supply of the load circuit. This product is applicable to industrial and commercial power use places, high-rise buildings, and residential houses.

Certification: KEMA, CE etc.

Model	Rated Current	Poles	Price-PKR
NXZM-125S/4B	63 / 100 Amps	4	155,000
NXZM-160S/4B	125 / 160 Amps	4	175,000
NXZM-250S/4B	250 Amps	4	185,000
NXZM-400S/4B	400 Amps	4	350,000
NXZM-630S/4B	630 Amps	4	375,000
NXZM-800S/4B	800 Amps	4	475,000

RT 36-00



RT36 Kinfe Contact Fuse Protector

- Electric ratings: AC 690V, up to 1000A
- Application: For protection of electric apparatus against over-load and short circuit
- Features: Compact design, light weight, low power consumption and high breaking capacity
- Standard: IEC 60269.

HRC Fuses

Model No.	Ratings	Price - PKR
HRT 36	10,16, 25, 32	1,500
HRT 36	63	1,600
HRT 36	100, 125	1,700
HRT 36	160	1,800
HRT 36	250	3,000
HRT 36	315	4,000
HRT 36	400	4,000
HRT 36	500	5,000
HRT 36	630	5,000
HRT 36	800	On Request
HRT 36	1000	On Request
HRT 36	1250	On Request

HRT-36 Base

Model No.	Specifications	Price - PKR
HRT 36	Base up to 160A	2,000
HRT 36	Base up to 250A	4,000
HRT 36	Base up to 400A	6,000
HRT 36	Base up to 630A	8,000
HRT 36	Base up to 1250A	On Request

RT 28 Cylindrical Contact Caps Fuse Protector



Model No.	Specifications	Price - PKR
RT-28	Fuse Holder 1P-32A	On Request

RT 28 Cylindrical Fuse

Model No.	Specifications	Price - PKR
RT-28	Cylindrical Fuse 2-32A	On Request

Panel Meters









Model No.	Specifications	Price - PKR
DM96U	Digital AC Voltmeter LED Display, 0 to 600VAC Supply Voltage: AC220 ±10% Regular Sizes Available	4,500
DM961	Digital AC AMMETER LED Display, 0 to 999/5A Supply Voltage: AC220±10% Regular Sizes Available	5,000
NP96-V	Analogue AC Voltmeter scale 0 to 500VAC Regular Sizes Available	On Request
NP96-A	Analog AC AMMETER scale 10A to 2000A with 5A CT operated Regular Sizes Available	On Request
PD6663S4	Digital Electrical Analyzer 3 Phase, 4 Digit LED Display Electrical Parameters: Voltage, Current, Frequency, Active Power, Power Factor, Reactive Power, Active Energy etc. RS485 Data interface, Auxiliary Power Supply 85 to 264 VAC Size: 96x96 mm	On Request
PD7777-8H	Digital Harmonic Multi-Function Meter 3 Phase, 4.3"Digit Color Display Touch Screen in Place of Mechanical Keys Electrical Parameters: Voltage, Current, Frequency Active Power, Power Factor, Reactive Power, Active Energy etc. Measure 2nd -31st Harmonic Ratio of the Voltage, Current & Harmonic bar Chart RS-485 Data Interface, USB Data Port	On Request

Control Signals

Indication Lights

Model No.	Specifications	Price - PKR
ND16-22D/4	Red Color, 220VAC	500
ND16-22D/4	Green Color, 220VAC	500
ND16-22D/4	Yellow Color, 220VAC	500
ND16-22D/4	Blue Color, 220VAC	500



Indication Lights

Model No.	Specifications	Price - PKR
ND9-22D/4	Red Color, 220VAC	1,000
ND9-22D/4	Green Color, 220VAC	1,000
ND9-22D/4	Yellow Color, 220VAC	1,000
ND9-22D/4	Blue Color, 220VAC	1,000



Push Button

Model No.	Specifications	Price - PKR
NP2-BA31	Green - 22mm - 1NO (non-Illuminated)	750
NP2-BA41	Red - 22mm - 1NC (non-Illuminated)	750
NP2-BW3361	Green -22mm - 1NO (Illuminated)	1,400
NP2-BW3462	Red - 22mm - 1NC (Illuminated)	1,400
NP2-BS542	Mushroom Head 40mm -1NC	1,100
NP2-BE101	NO Contact	200
NP2-BE102	NC Contact	200



Selector Switches

Model No.	Specifications	Price - PKR
NP2-BJ21	2Position – 1NO, Metal (non-illuminated)	900
NP2-BJ33	3Position – 2NO, Metal (non-illuminated)	1,100
NP8-11XD/21	2Position – 1NO+1NC, Metal (illuminated)	On Request
NP8-11XD/21	3Position – 2NO+1NC, Metal (illuminated)	On Request



CAM Switches

Model No.	Specifications	Price - PKR
LW32-20LH3	4 Position Ammeter Selector	4,500
LW32-20YH5	7 Position Voltmeter Selector	5,000
LW32-20-1	Auto-Off-Manual, 20A	On Request
LW32-63-4	Change Over Switch (Manual) I-O-II, 32A,	On Request
LW32-63-2	Phase Selector Switch 4-Position , 63A	On Request



Inverters/VFD's





Model No.	Specifications	Motor Rating	Price - PKR
NVF3-0.75/D2	Single Phase Input 220VAC, Three Phase Output 220VAC	1HP/0.75kW	On Request
NVF3-1.5/D2	Single Phase Input 220VAC, Three Phase Output 220VAC	2HP/1.5kW	On Request
NVF3-0.75/S2	Three Phase Input 220VAC, Three Phase Output 220VAC	1HP /0.75kW	On Request
NVF3-1.5/S2	Three Phase Input 220VAC, Three Phase Output 220VAC	2HP/1.5kW	On Request
NVF7-0.75/S4	Three Phase Input 380VAC, Three Phase Output 380VAC	1HP/0.75kW	On Request
NVF7-1.5/S4	Three Phase Input 380VAC, Three Phase Output 380VAC	2HP/1.5kW	On Request
NVF7-2.2/S4	Three Phase Input 380VAC, Three Phase Output 380VAC	3HP/2.2kW	On Request
NVF7-3.7/S4	Three Phase Input 380VAC, Three Phase Output 380VAC	5HP/3.7kW	On Request
NVF7-5.5/S4	Three Phase Input 380VAC, Three Phase Output 380VAC	7.5HP/5.5kW	On Request
NVF7-7.5/S4	Three Phase Input 380VAC, Three Phase Output 380VAC	10HP/7.5kW	On Request
NVF7-11/S4	Three Phase Input 380VAC, Three Phase Output 380VAC	15HP/11kW	On Request
NVF7-15/S4	Three Phase Input 380VAC, Three Phase Output 380VAC	20HP/15kW	On Request
NVF7-18/S4	Three Phase Input 380VAC, Three Phase Output 380VAC	25HP/18.5kW	On Request
NVF7-22/S4	Three Phase Input 380VAC, Three Phase Output 380VAC	30HP/22kW	On Request
NVF7-30/S4	Three Phase Input 380VAC, Three Phase Output 380VAC	40HP/30kW	On Request
NVF7-37/S4	Three Phase Input 380VAC, Three Phase Output 380VAC	50HP/37kW	On Request
NVF7-45/S4	Three Phase Input 380VAC, Three Phase Output 380VAC	60HP/45kW	On Request
NVF7-55/S4	Three Phase Input 380VAC, Three Phase Output 380VAC	74HP/55kW	On Request
NVF7-75/S4	Three Phase Input 380VAC, Three Phase Output 380VAC	100HP/75kW	On Request
NVF7-90/S4	Three Phase Input 380VAC, Three Phase Output 380VAC	120HP/90kW	On Request
NVF7-110/S4	Three Phase Input 380VAC, Three Phase Output 380VAC	147HP/110kW	On Request
NVF7-132/S4	Three Phase Input 380VAC, Three Phase Output 380VAC	177HP/132kW	On Request
NVF7-160/S4	Three Phase Input 380VAC, Three Phase Output 380VAC	215HP/160kW	On Request
NVF7-185/S4	Three Phase Input 380VAC, Three Phase Output 380VAC	248HP/185kW	On Request
NVF7-200/S4	Three Phase Input 380VAC, Three Phase Output 380VAC	268HP/200kW	On Request

SINCE
1931

IEC

The Imperial Electric Company (Pvt) Ltd.



HEAD OFFICE	National Tower, 28 Egerton Road Lahore 54000 Tel:042-36304861-65 Fax:042-36304866
ISLAMABAD OFFICE	13-R Block, Elahi Plaza, 2nd Floor,F-7 Markaz, Islamabad 44000 Tel:042-36304861-65 Fax:042-36304866
KARACHI OFFICE	Mehdi Tower, 6th Floor, 115-A, S.M.C.H.Society, Shahrah-e-Faisal, Karachi. Tel:042-36304861-65 Fax:042-36304866
SALES OFFICE	Mohammadia Market, Nishtar (Brandreth) Road, Lahore Tel:042-36304861-65 Fax:042-36304866