
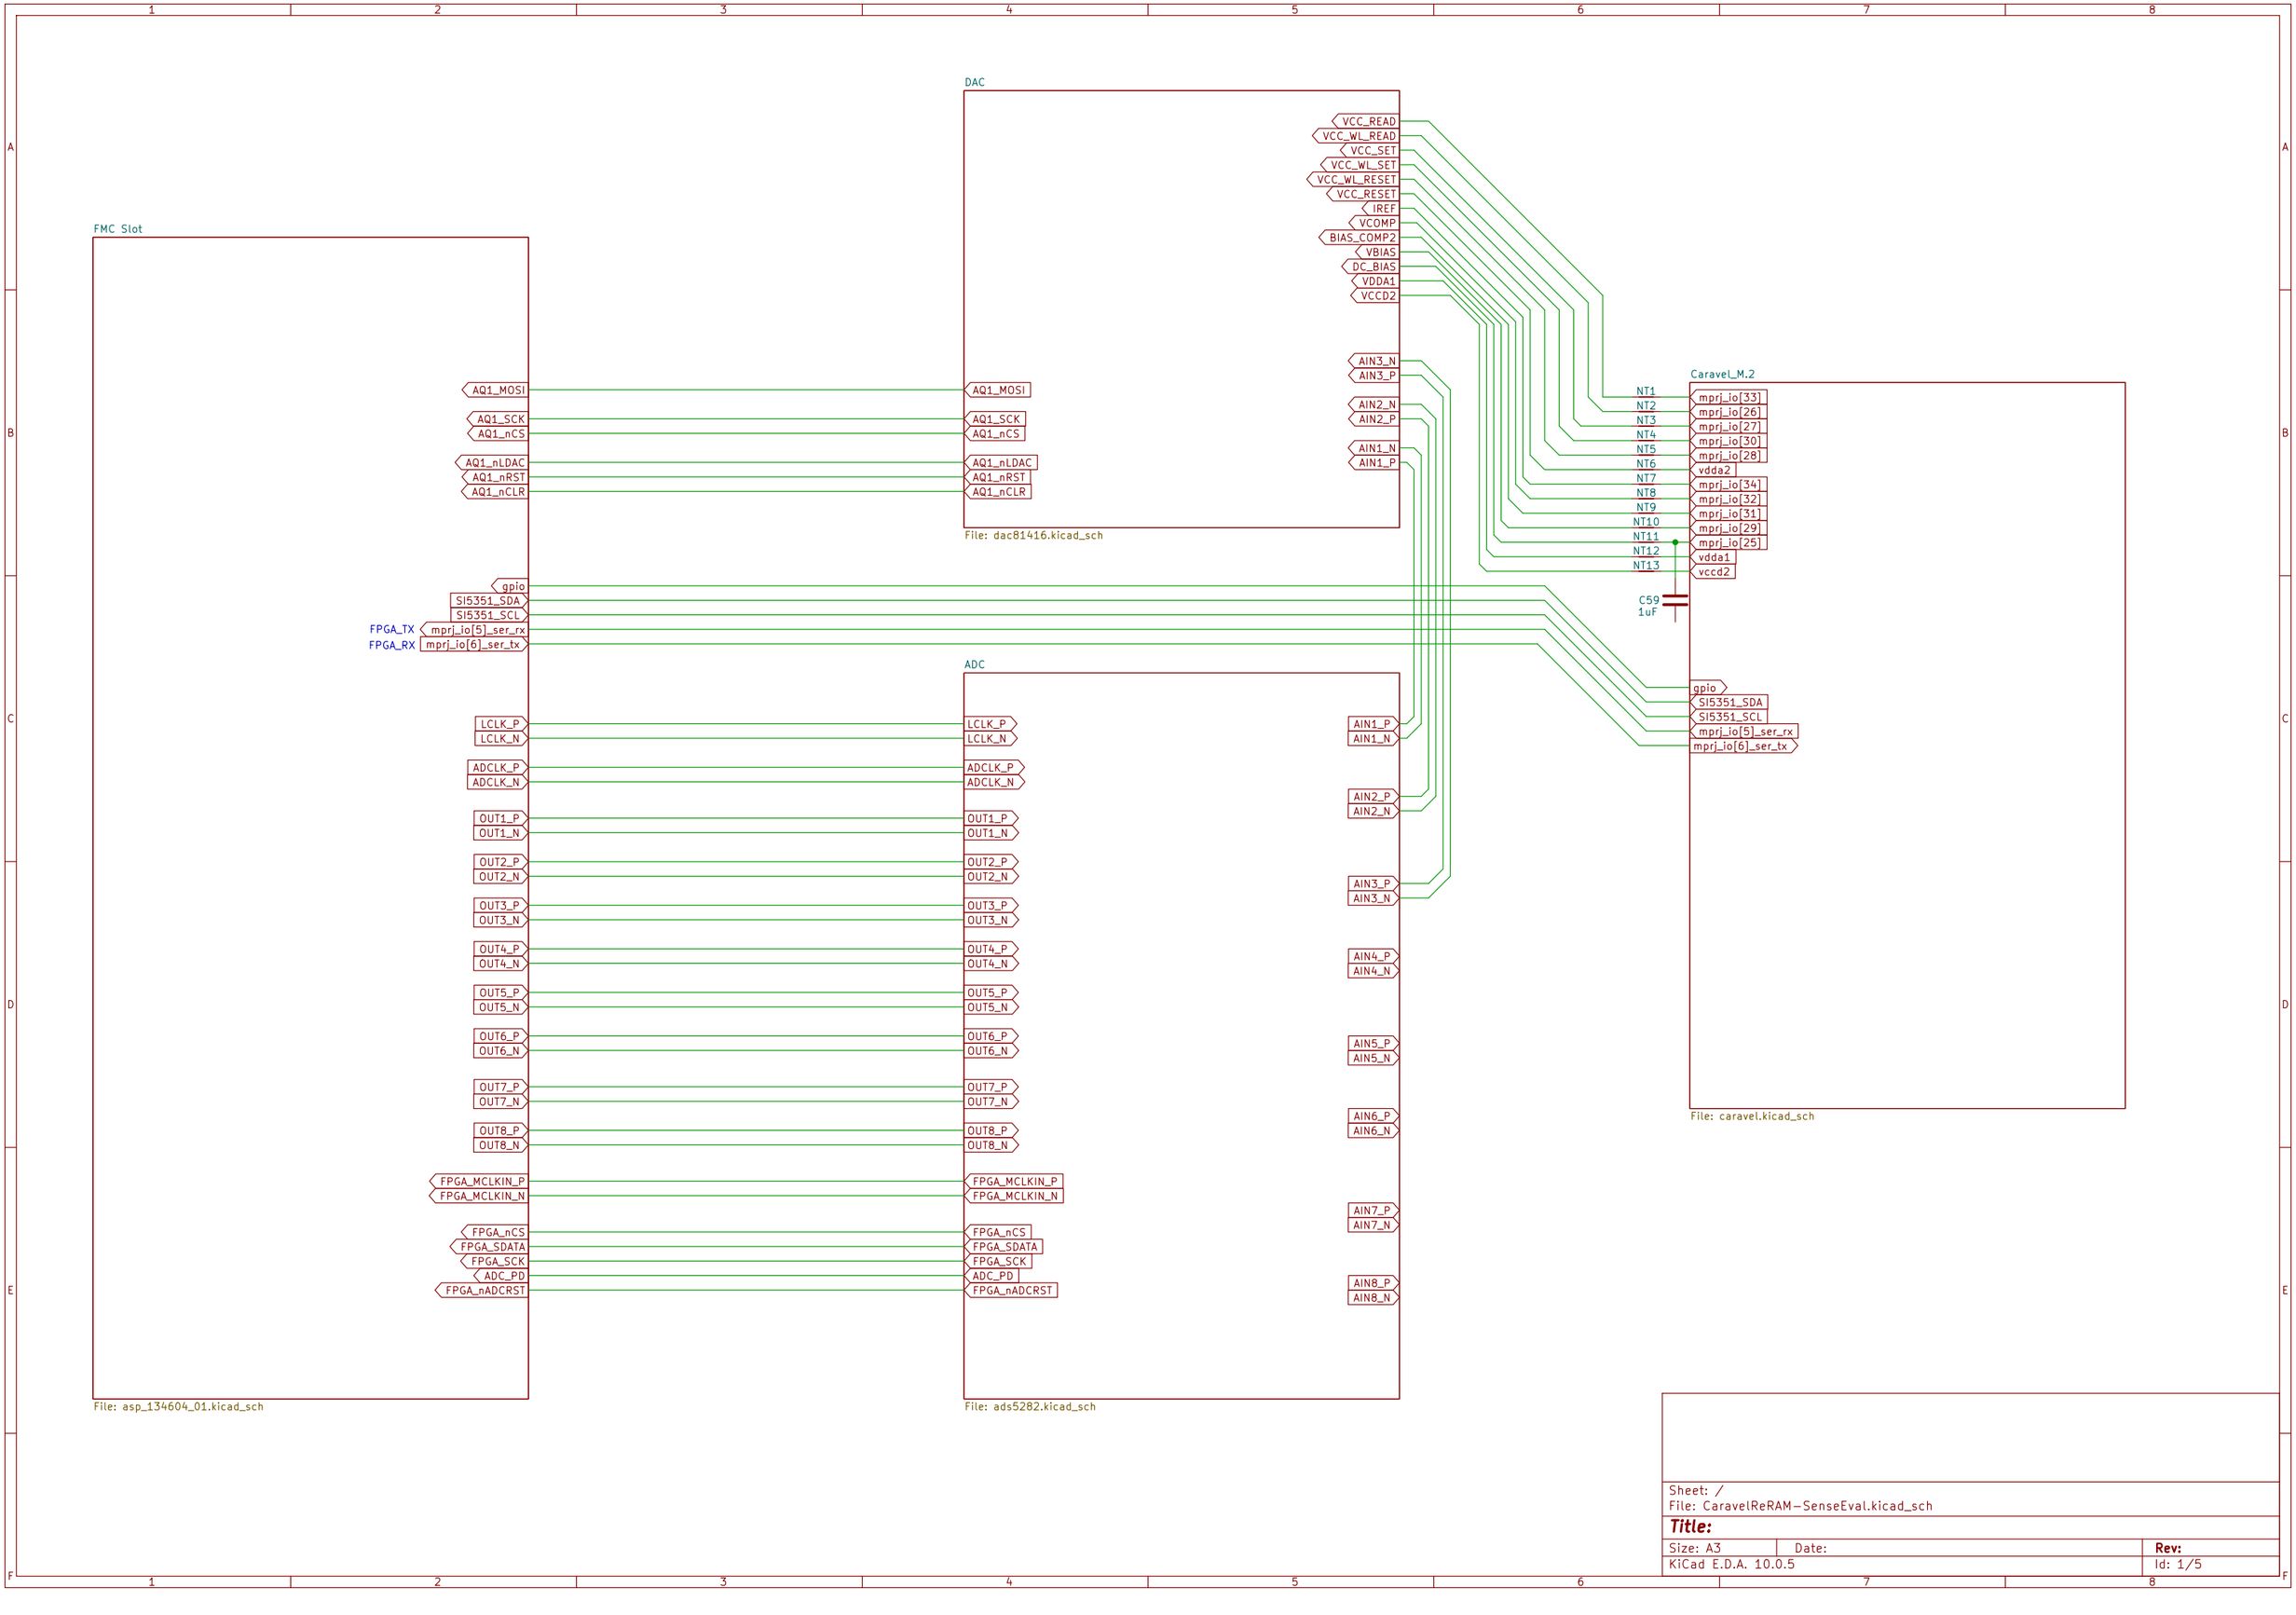


Sheet: /
File: CaravelReRAM-SenseEval.kicad_sch


Title:


Size: A3	Date:	**Rev:**
KiCad E.D.A. 10.0.5		Id: 1/5

DAC

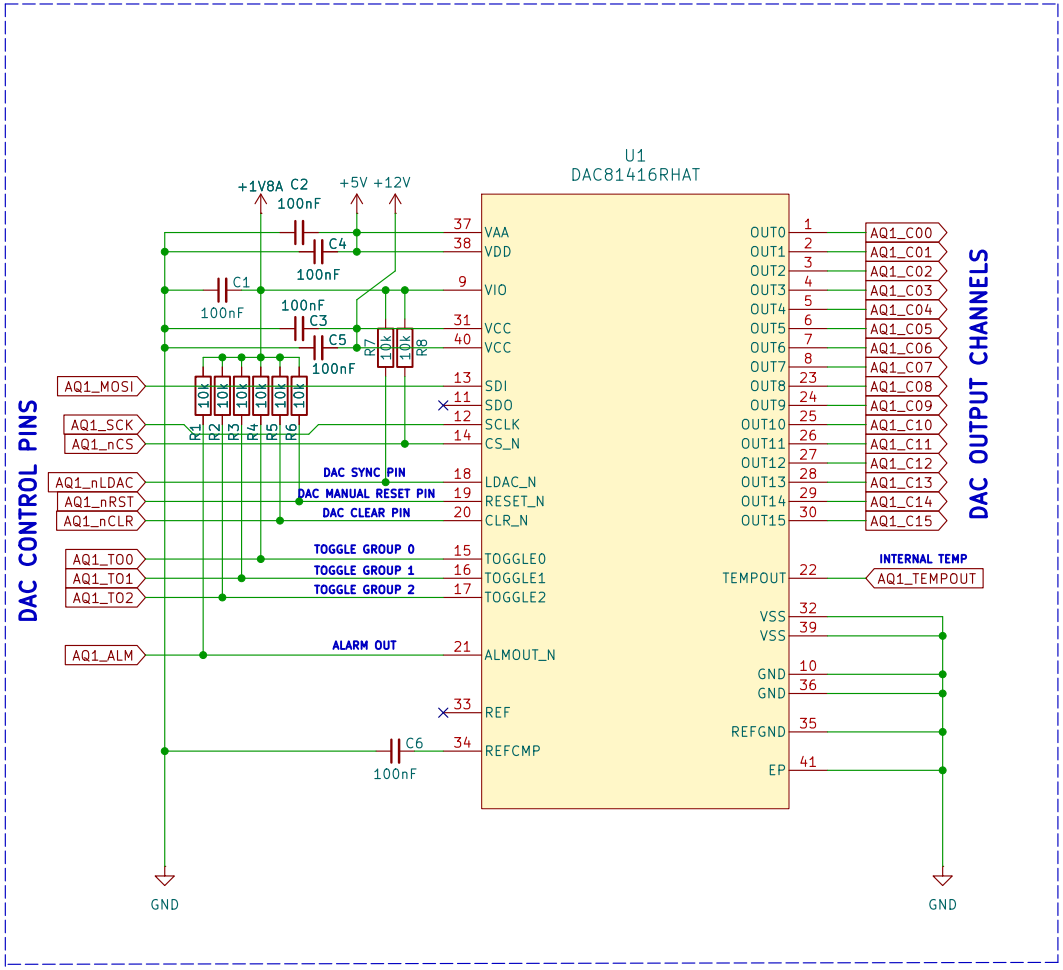


Current Shunts & Net Ties

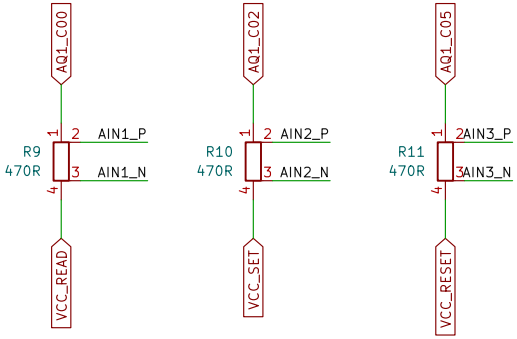



DAC Boost Converter

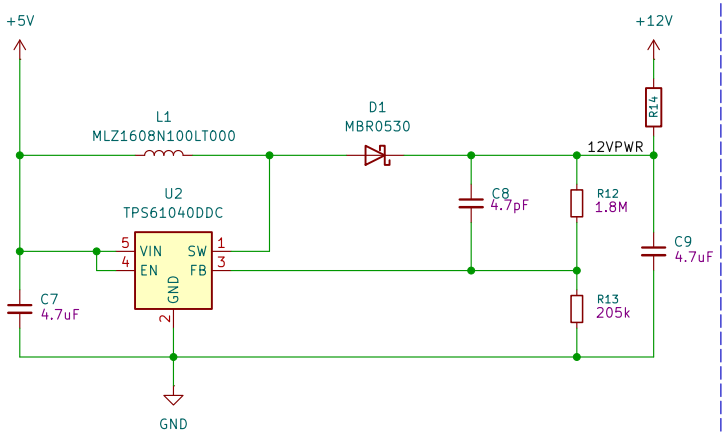


Sheet: /DAC/
File: dac81416.kicad_sch

Title:


Size: A4	Date:	**Rev:**
KiCad E.D.A. 10.0.5		Id: 2/5

Interfaces

*enabled by default and should be disabled in SPI mode







ACBUS0 ____ UART_EN

Buffers to enable FTDI UART interface with Caravel

*required since the FTDI UART ports are shared with the SPI


MEM_SI ____ Caravel_D0
MEM_SO ____ Caravel_D1
MEM_SCK ____ Caravel_SCK
MEM_CS ____ Caravel_CSB

Flash memory interface with Caravel

USB_SI ____ mprj_io[1]_SDO
USB_SO_RXD ____ mprj_io[2]_SDI
USB_CS1 ____ mprj_io[3]_CSB
USB_SCK_TXD ____ mprj_io[4]_SCK


FTDI SPI interface with HKSPI

Reset




Reset Switch

ClockGen

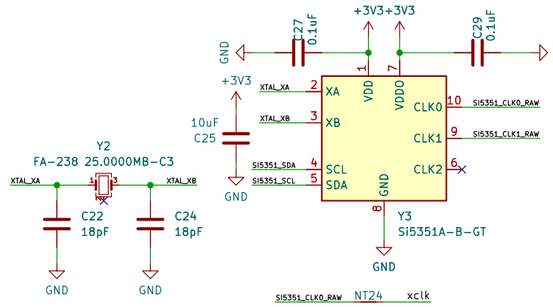


M.2 Connector + Peripherals

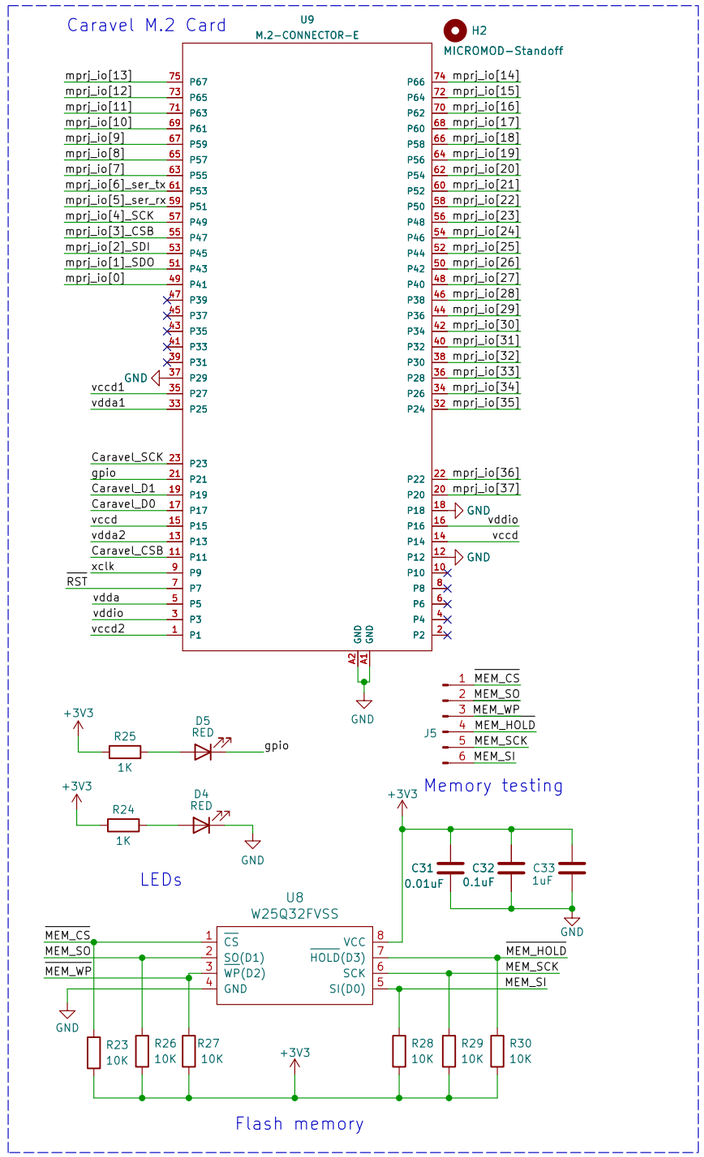



Flash memory

USB to Serial

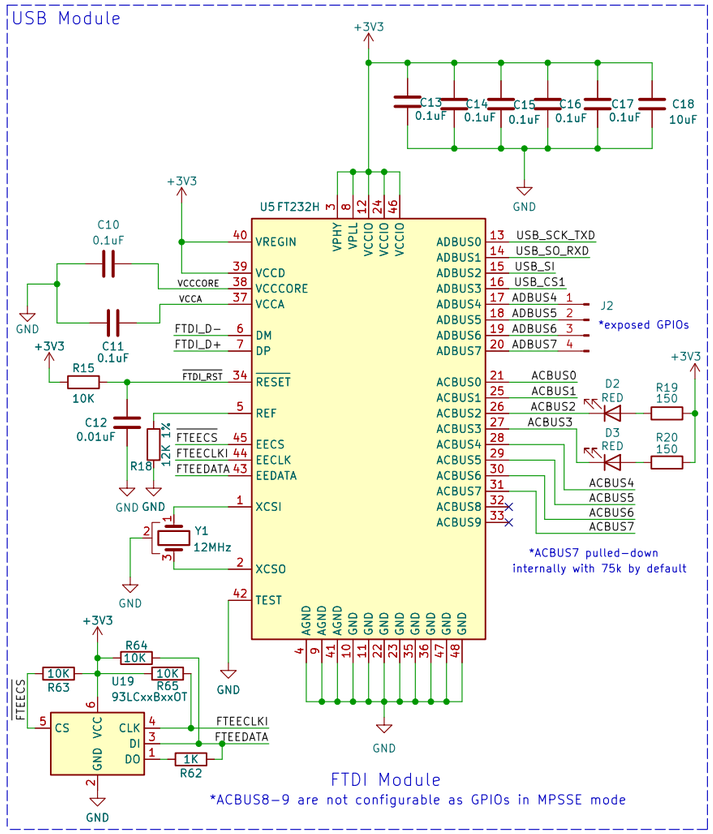


USB

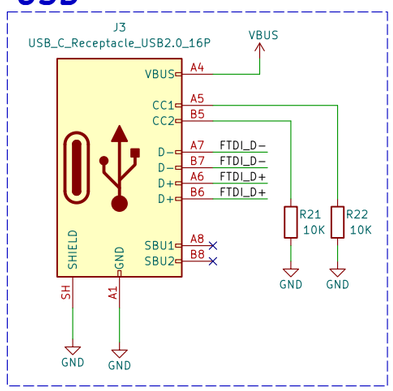



Power

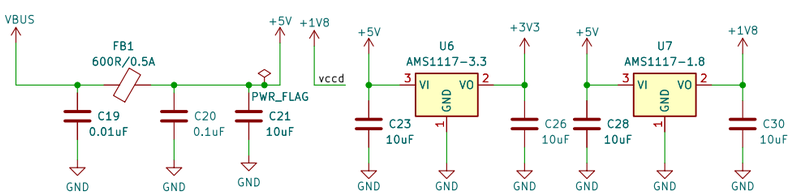


VBUS Filter to 5V

*Place close to the USB connector


Caravel Power Pin Headers

Sheet: /Caravel_M.2/	
File: caravel.kicad_sch	
Title:	
Size: A3	Date:
KiCad E.D.A. 10.0.5	Id: 3/5


Conditioning Amp

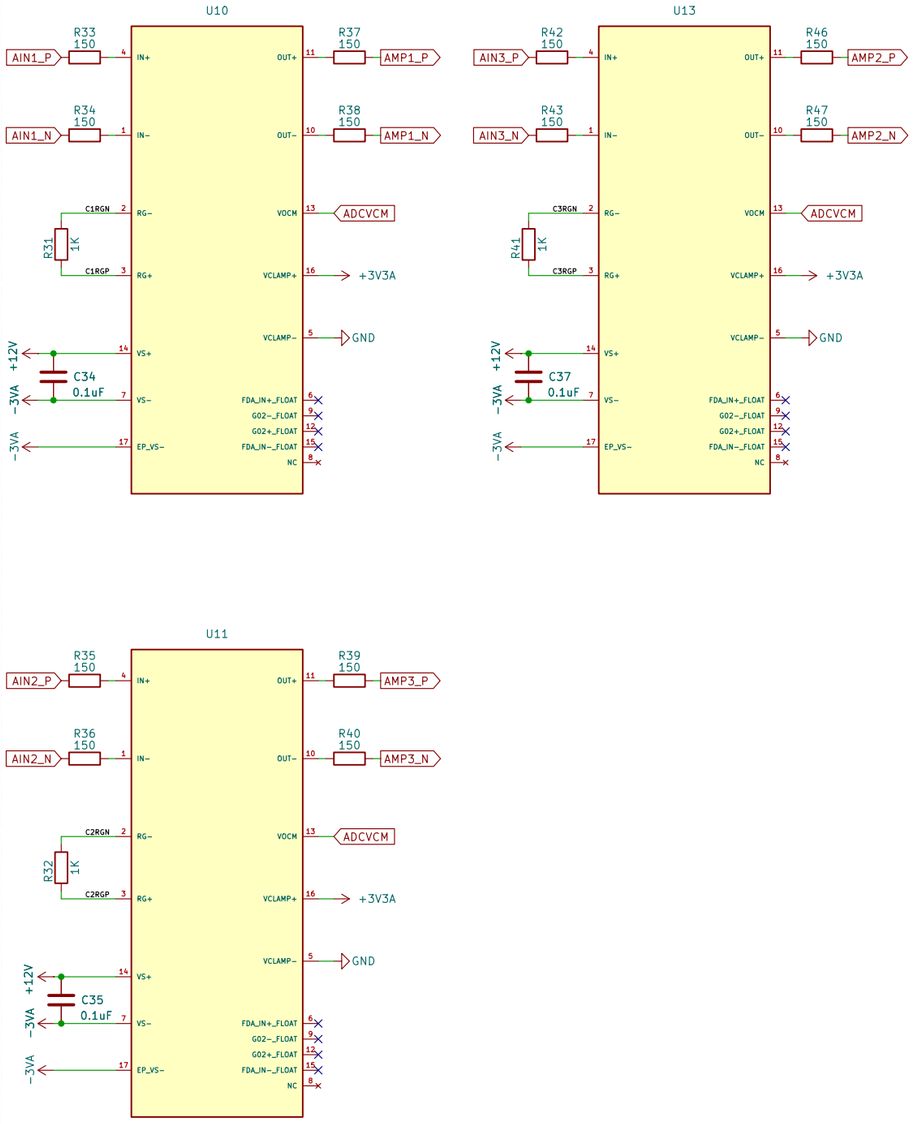



ADC

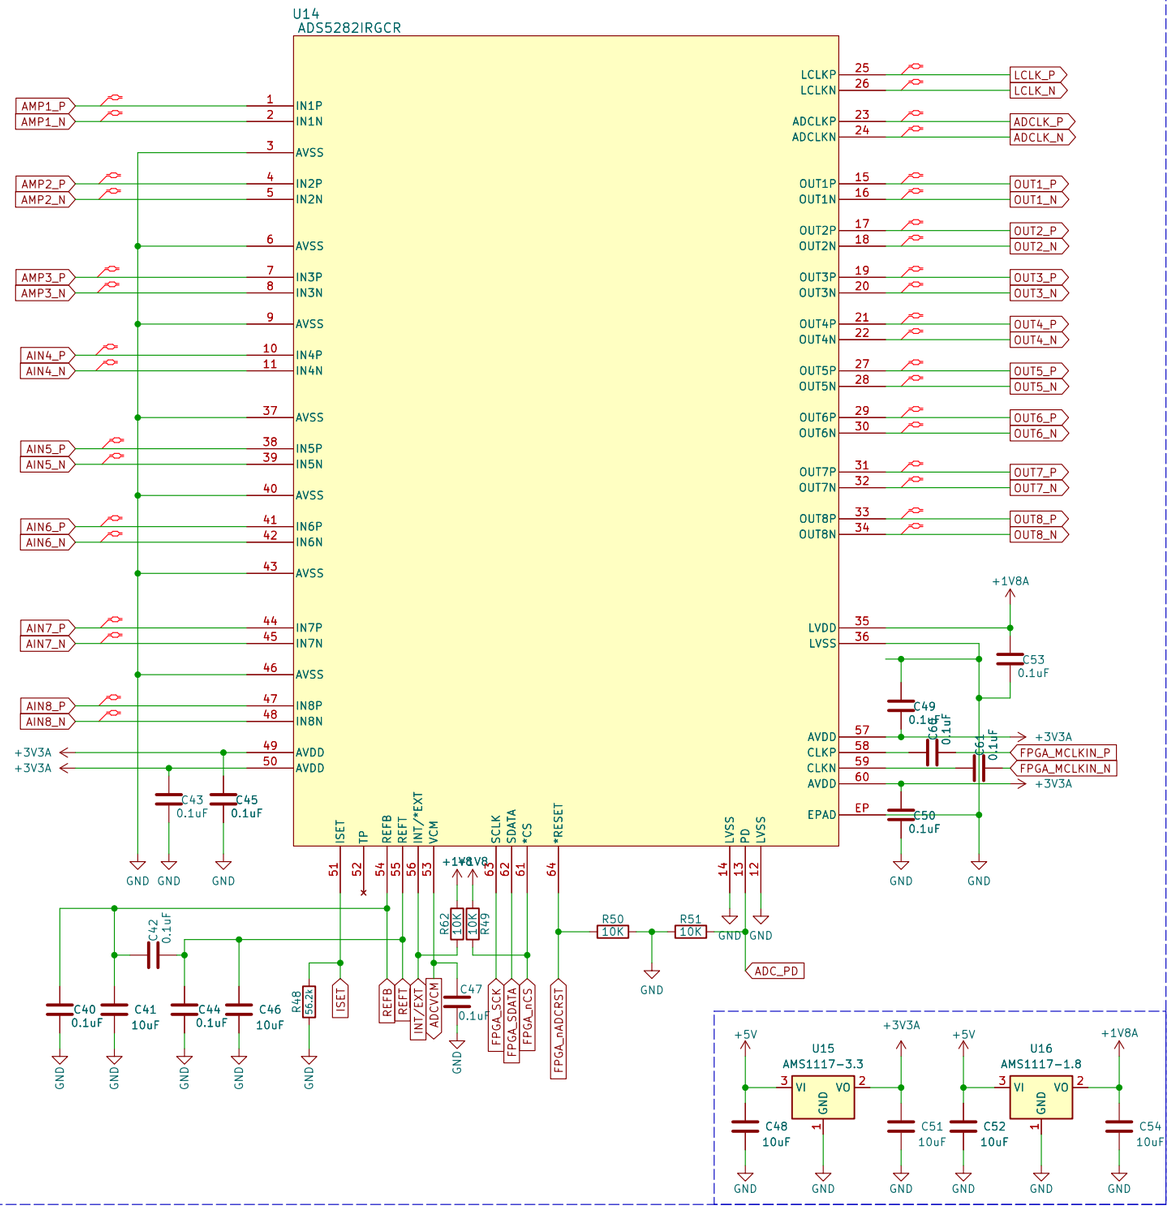


Switched Cap Inverter

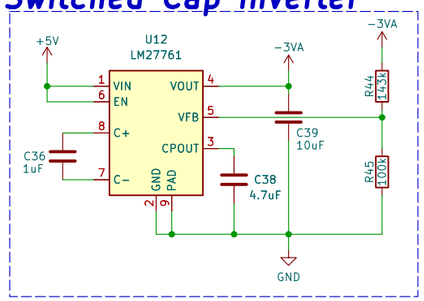








Sheet: /ADC/
File: ads5282.kicad_sch

Title:

Size: A3	Date:	**Rev:**
KiCad E.D.A. 10.0.5		Id: 4/5

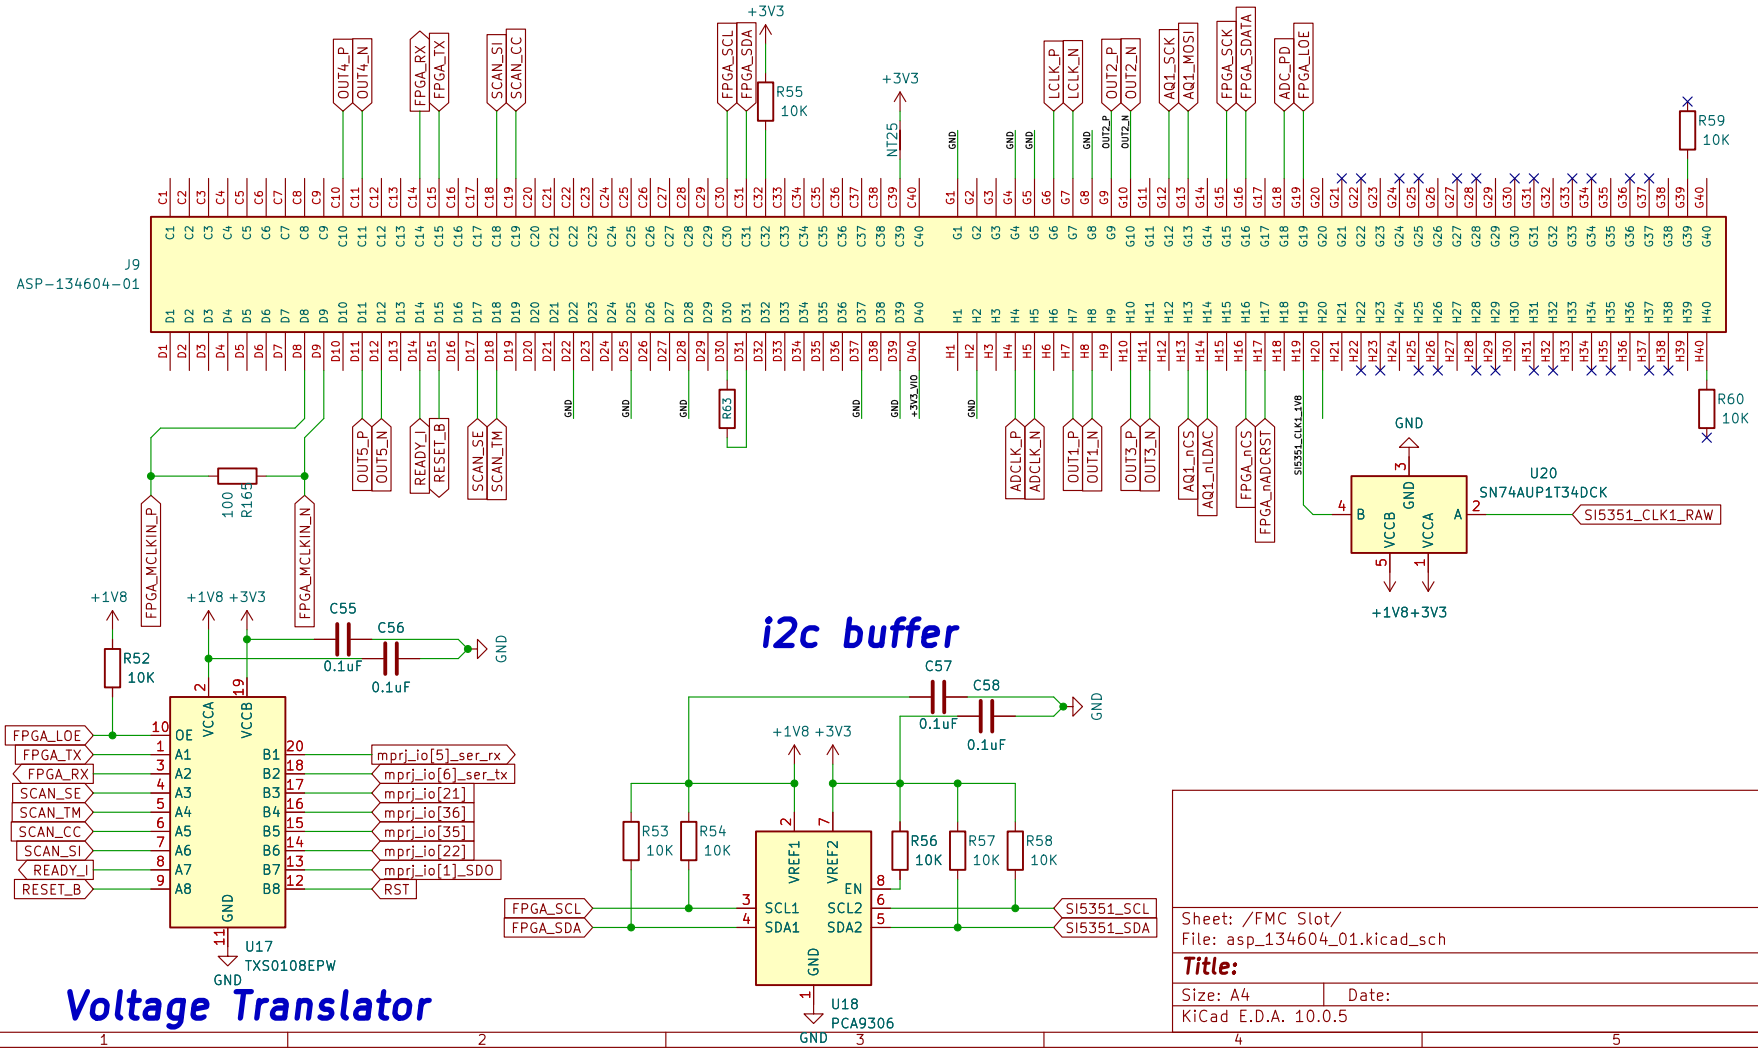

Sheet: /FMC Slot/
File: asp_134604_01.kicad_sch

Title:

Size: A4	Date:	**Rev:**
KiCad E.D.A. 10.0.5		Id: 5/5