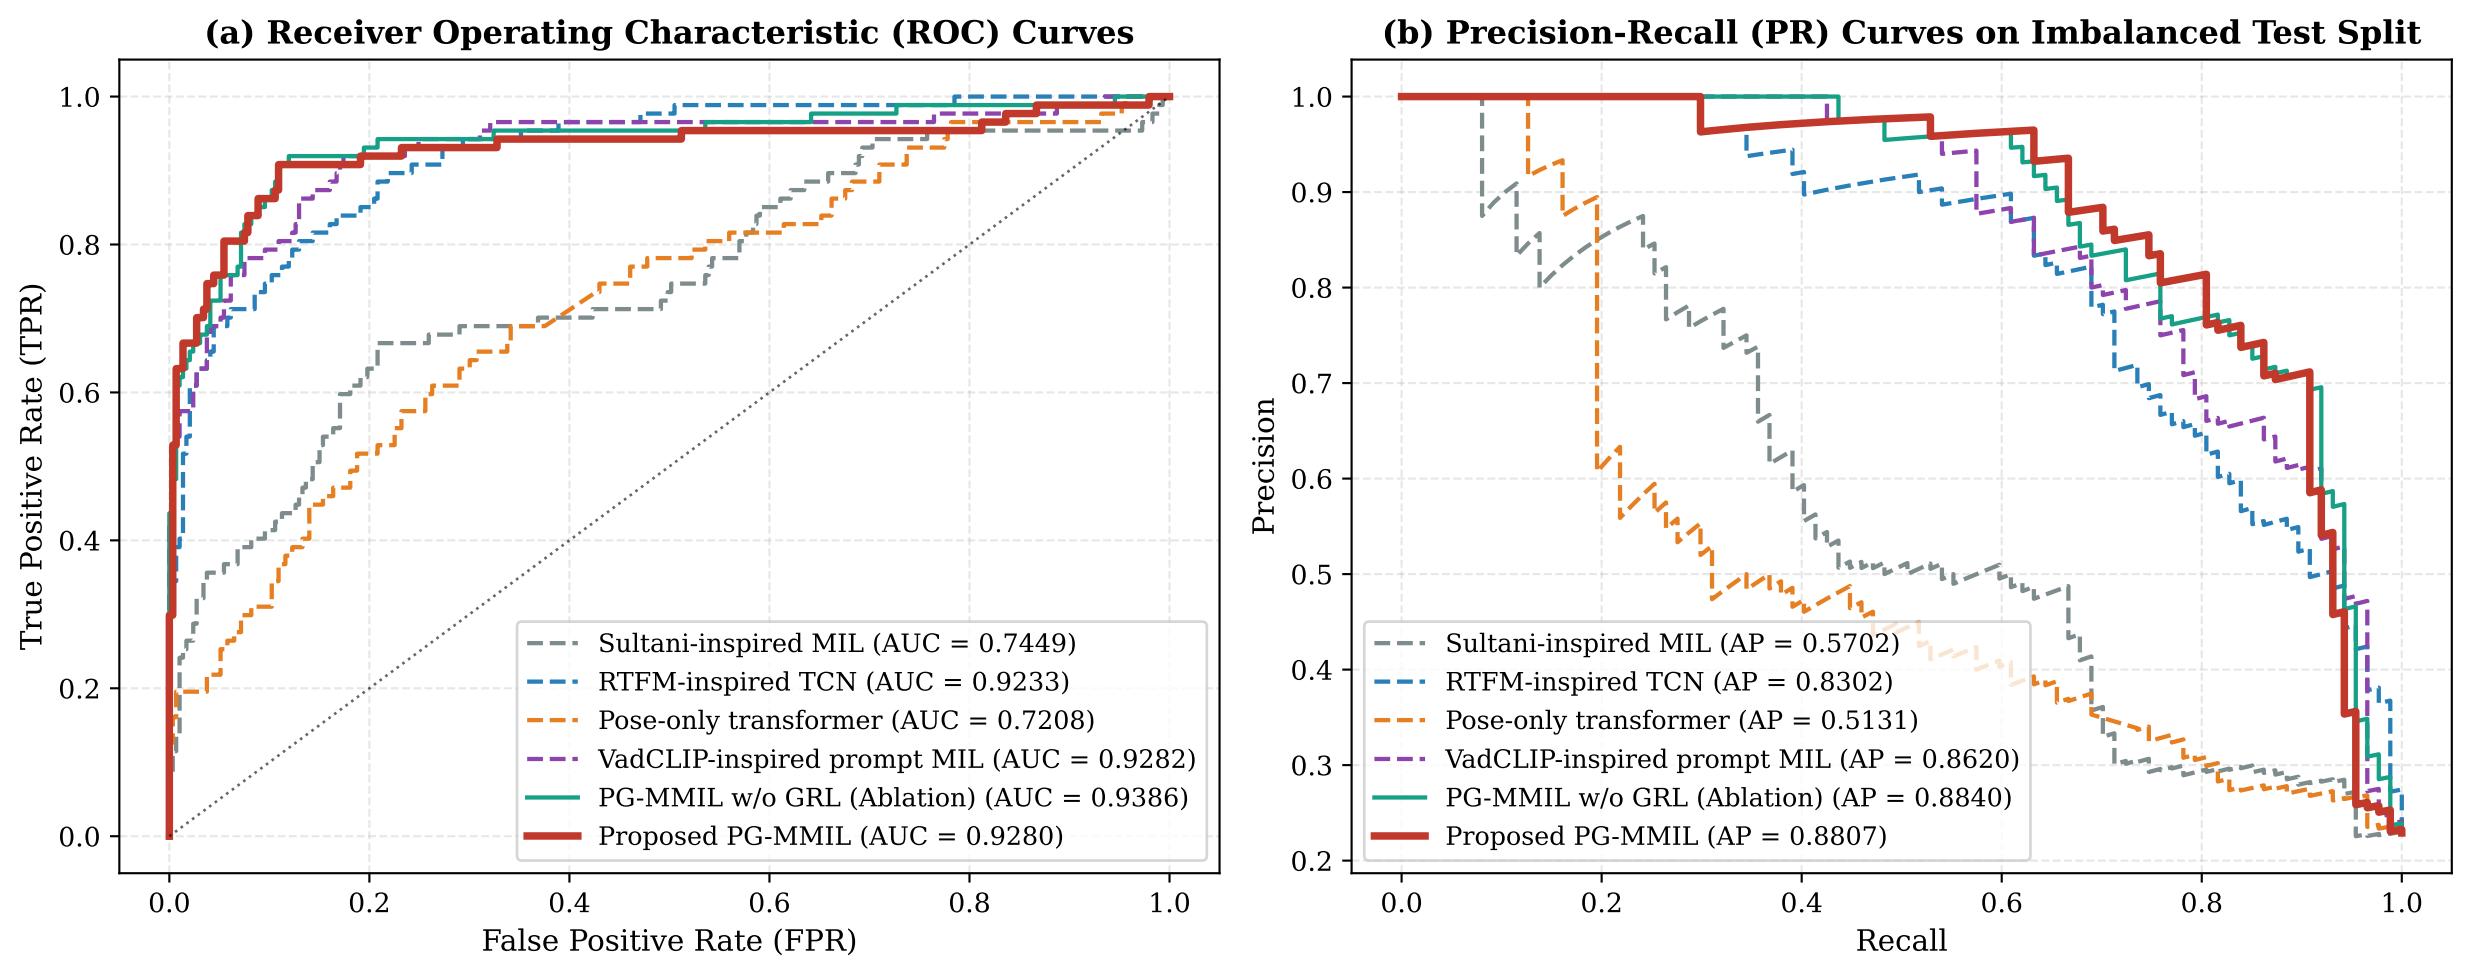
(a) Receiver Operating Characteristic (ROC) Curves
True Positive Rate (TPR)
False Positive Rate (FPR)
Sultani-inspired MIL (AUC = 0.7449)
RTFM-inspired TCN (AUC = 0.9233)
Pose-only transformer (AUC = 0.7208)
VadCLIP-inspired prompt MIL (AUC = 0.9282)
PG-MMIL w/o GRL (Ablation) (AUC = 0.9386)
Proposed PG-MMIL (AUC = 0.9280)
(b) Precision-Recall (PR) Curves on Imbalanced Test Split
Precision
Recall
Sultani-inspired MIL (AP = 0.5702)
RTFM-inspired TCN (AP = 0.8302)
Pose-only transformer (AP = 0.5131)
VadCLIP-inspired prompt MIL (AP = 0.8620)
PG-MMIL w/o GRL (Ablation) (AP = 0.8840)
Proposed PG-MMIL (AP = 0.8807)