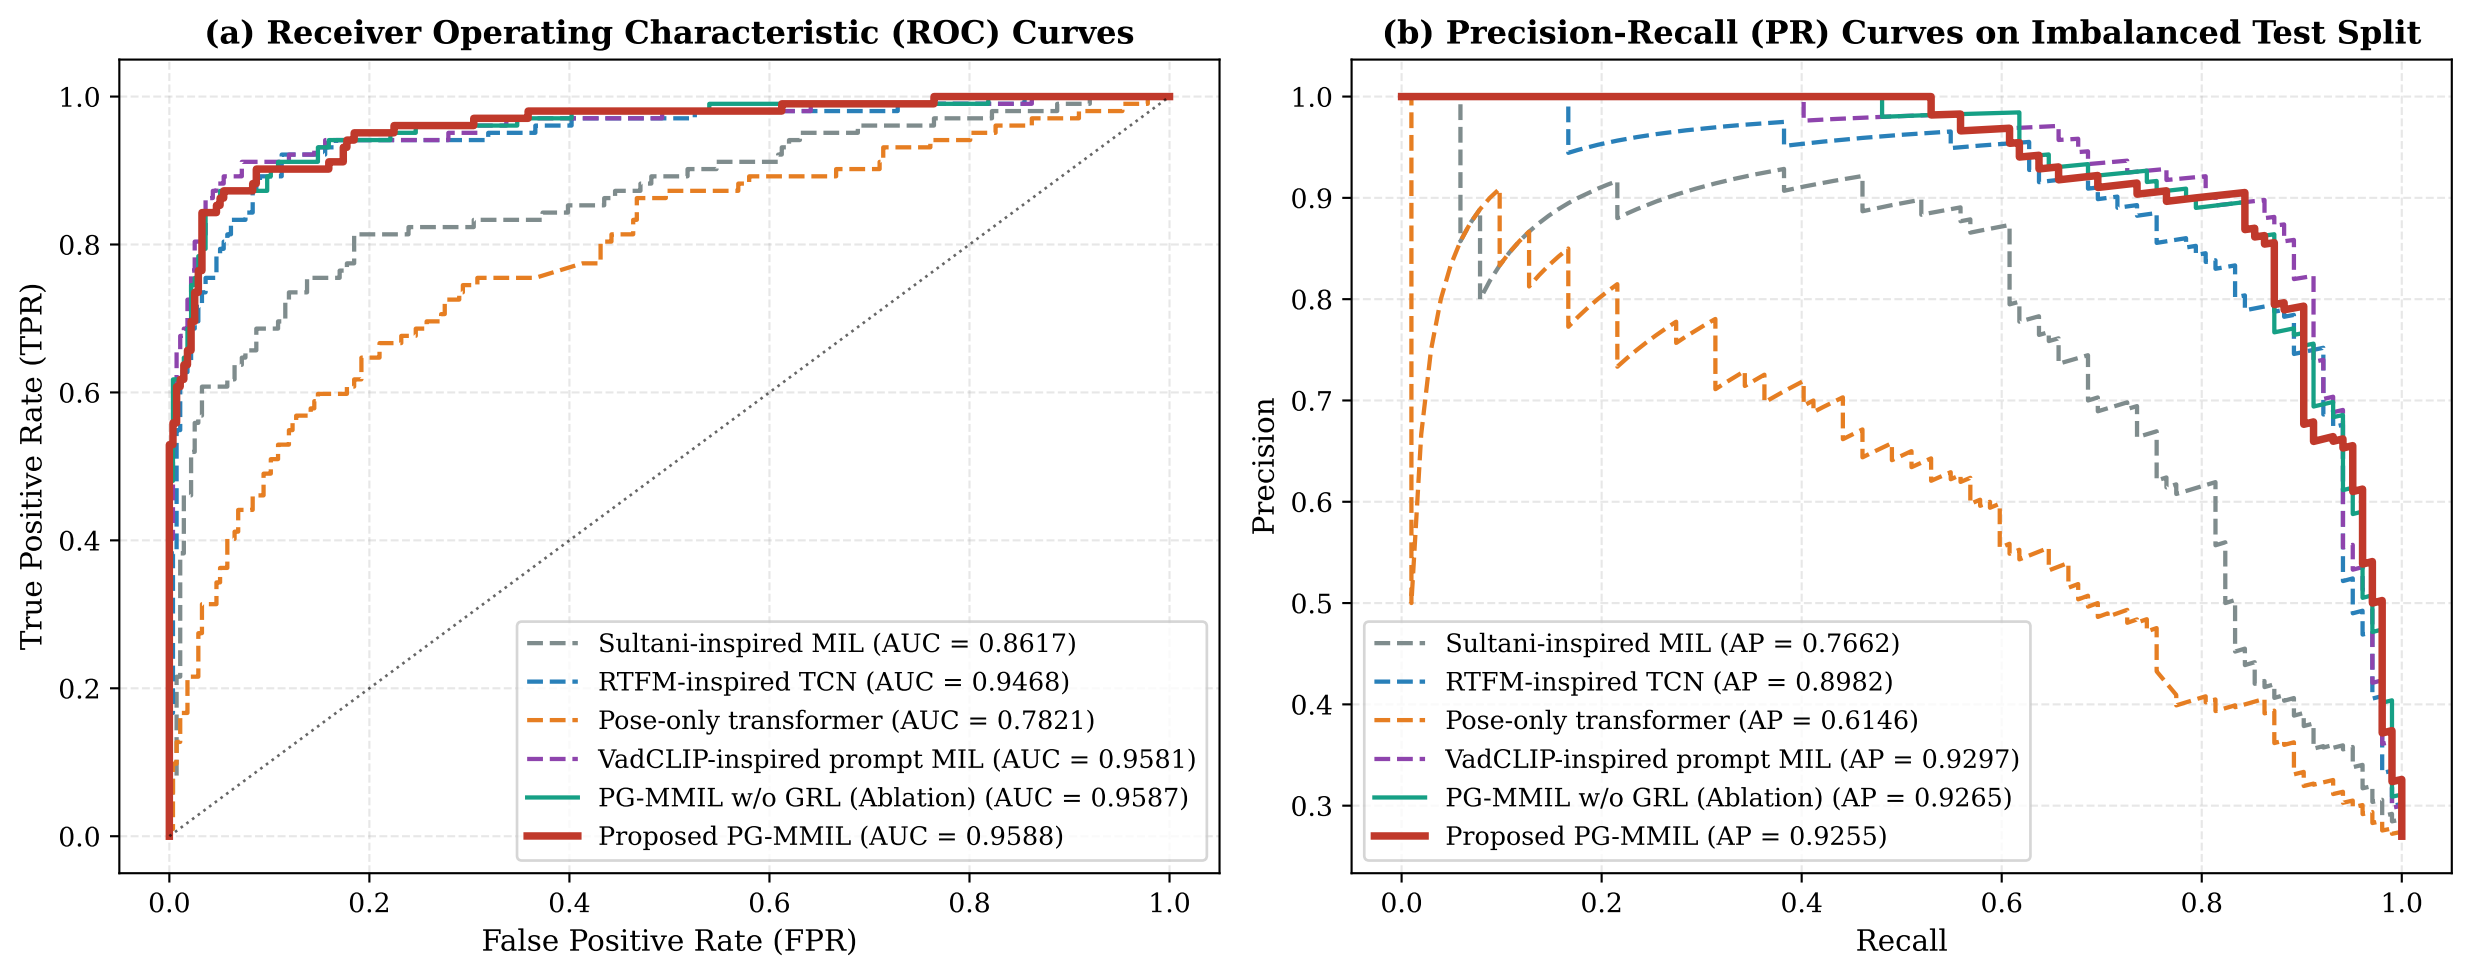
(a) Receiver Operating Characteristic (ROC) Curves
True Positive Rate (TPR)
False Positive Rate (FPR)
0.0
0.2
0.4
0.6
0.8
1.0
Sultani-inspired MIL (AUC = 0.8617)
RTFM-inspired TCN (AUC = 0.9468)
Pose-only transformer (AUC = 0.7821)
VadCLIP-inspired prompt MIL (AUC = 0.9581)
PG-MMIL w/o GRL (Ablation) (AUC = 0.9587)
Proposed PG-MMIL (AUC = 0.9588)
(b) Precision-Recall (PR) Curves on Imbalanced Test Split
Precision
Recall
0.3
0.4
0.5
0.6
0.7
0.8
0.9
1.0
Sultani-inspired MIL (AP = 0.7662)
RTFM-inspired TCN (AP = 0.8982)
Pose-only transformer (AP = 0.6146)
VadCLIP-inspired prompt MIL (AP = 0.9297)
PG-MMIL w/o GRL (Ablation) (AP = 0.9265)
Proposed PG-MMIL (AP = 0.9255)