NOVELIO CLASSIC



Paintable wall coverings

Stronger ideas for a sustainable world

ADFORS SAINT-GOBAIN

NOVELIO CLASSIC

Novelio® Classic, the authentic fiberglass wall covering: decorative, soft and resistant

This range provides maximum protection to walls and ceilings whilst bringing time savings for the applicator thanks to a wide range of finishes: pre-painted, pre-glued or self-adhesive.

Durable protection of walls and ceilings

- Reinforces delicate surfaces
- Resists abrasion
- Provides impact resistance
- Covers all cracks

A wide range of product finishes…



Pre-painted fiberglass wall coverings. This product saves one layer of paint during application.

EASY PAINT



Fiberglass wall coverings with a homogeneous film of glue activated by water. No need for glue.

EASY GLUE



Fiberglass wall coverings with a self-adhesive layer. No need for glue nor water activation machine.

EASY FIX

NOVELIO CLASSIC

Find the best product to match your needs:

		Standard	Pre-painted	Pre-glued	Pre-painted and pre-glued	Self-adhesive
WORKING TIME	Glue application	✔	✔	✘	✘	✘
	Wall covering application	✔	✔	✔	✔	✔
	Painting - 1st layer	✔	✔	✔	✔	✔
	Painting - 2nd layer	✔	✘	✔	✘	✔
	Working time savings	**0 %**	**20 %**	**30 %**	**50 %**	**20 %**
DRYING TIME	Glue drying	24 h	24 h	24 h	24 h	0 h
	Painting 1st layer drying	24 h	24 h	24 h	24 h	24 h
	Painting 2nd layer drying	24 h	0 h	24 h	0 h	24 h
	Drying time saving	**0 %**	**30 %**	**0 %**	**30 %**	**30 %**
MATERIAL	Glue	7 kg	7 kg	0 kg	0 kg	0 kg
	Painting - 1st layer	7 l	7 l	7 l	7 l	7 l
	Painting - 2nd layer	4 l	0	4 l	0	4 l
	Material savings	**0 %**	**4 l of paint**	**7 kg of glue**	**4 l of paint and 7 kg of glue**	**7 kg of glue**
RECOMMENDATION	Professional big projects	●	●●	●●	●●●	●
	Professional small projects	●●	●●	●	●	●●●
	DIY	●	●●	●	●	●●●

Calculations are based on typical application for standard 15 m² room with walls' area about 35 m² (informative value)

NOVELIO CLASSIC

Fiberglass wall coverings

Maximum protection of the walls and ceilings

Highly resistant to cracks and abrasion, this Novelio® range must be applied in a traditional way: application of vinyl glue on the wall, application of fi berglass wall covering, 2 layers of acrylic paint.

We offer a large choice of patterns from very flat to fashionable ones

- Crack prevention & abrasion resistance
- Crack covering for wall renovation
- Decorative product



Benefits

- Durable protection of the wall (with 2 layers of acrylic paint)
- Fast wall renovation
- Easily washable & re-paintable

NOVELIO CLASSIC

Application Steps

Wall preparation

- The wall must be clean (no dust, dirt or grease), dry, even and primed
- Temperature should not be below 8 °C

Wall covering application

1. Cut the individual strips of wall covering according to the room height (+10 cm; respect the pattern repeat)
2. Apply the vinyl glue on the wall homogeneously by means of roller (~200 g / m^2, ±10%)
3. Place the wall covering strip on the wall vertically (or respect the horizontal layout of pattern) and smooth it with plastic spatula or clean roller
4. Place the adjacent strip edge to edge
5. Repeat the points 1, 2, 3 and 4 with other strips until you finish the room
6. Cut the excessive parts with a knife
7. Apply the first layer of acrylic paint (250 g / m^2, ±10%) when the product is dry (~1 day)
8. Apply the second layer of acrylic paint (150 g / m^2, ±10%) when the product is dry (~1 day)













NOVELIO
CLASSIC

Product range

Standard	Finish	Code	g / m²	roll size [m × m]	rolls / pallet	qty / pallet [m²]
Decoveil	Standard	GV45	45	50 × 1	40	2000
Weaving	Standard	T1012	120	50 × 1	28	1400
	Standard	T1010	145	50 × 1	24	1200
	Standard	T1013	160	50 × 1	24	1200
	Standard	T1017	210	50 × 1	20	1000
Ceiling	Standard	T1003	135	50 × 1	40	2000
	Standard	T1006	155	50 × 1	40	2000
Braid	Standard	T1011	160	50 × 1	24	1200
	Standard	T1009	200	50 × 1	18	900
Fishbone	Standard	T2009	160	50 × 1	24	1200
	Standard	T2004	195	50 × 1	18	900
Strip	Standard	T1005	175	50 × 1	24	1200
Mosaic	Standard	T1023	200	50 × 1	24	1200
Small weaving	Standard	T1024	145	50 × 1	30	1500
Small Caro	Standard	T1030	185	50 × 1	24	1200
Domino	Standard	T2002	195	50 × 1	18	900
Diagonal	Standard	T2005	175	50 × 1	18	900
Lozenge	Standard	T2007	190	50 × 1	18	900
Small Lozenge	Standard	T2011	195	50 × 1	18	900
Interlacing	Standard	T2014	195	50 × 1	18	900
Small Fishbone	Standard	T2101	180	50 × 1	30	1500
Crepi	Standard	T3011	160	50 × 1	36	1800



Decoveil - GV45

Weaving - T1012 - T1010 - T1013 - T1017

Ceiling - T1003 - T1006

Braid - T1011 - T1009

Fishbone - T2009 - T2004

Strip - T1005

Mosaic - T1023

Small weaving - T1024

Small Caro - T1030

Domino - T2002

Diagonal - T2005

Lozenge - T2007

Small Lozenge - T2011

Interlacing - T2014



Small Fishbone - T2101


Crepi - T3011

NOVELIO CLASSIC

EASYPAINT

Pre-painted Fiberglass wall coverings

Up to 20% saving of working time

Pre-painted wall coverings only need 1 layer of quality paint to ensure durable protection of the surfaces.

- Pre-painted for an easier application
- Crack prevention & Abrasion resistance
- Crack covering for wall renovation
- Decorative product



Benefits

- Time saving: 1 day of drying time (paint), 20% of working time
- Material saving: 4 l of paint for a 15 m^2 room
- Durable protection of the wall (with 1 layer of acrylic paint)
- Fast wall renovation
- Easily washable & re-paintable

NOVELIO CLASSIC

Application Steps

Wall preparation

- The wall must be clean (no dust, dirt or grease), dry, even and primed
- Temperature should not be below 8° C

Wall covering application

1. Cut the individual strips of wall covering according to the room height (+10 cm; respect the pattern repeat)
2. Apply the vinyl glue on the wall homogeneously by means of roller (~200 g / m^2, ±10%)
3. Place the wall covering strip on the wall vertically (or respect the horizontal layout of pattern) and smooth it with plastic spatula or clean roller
4. Place the adjacent strip edge to edge
5. Repeat the points 1, 2, 3 and 4 with other strips until you finish the room
6. Cut the excessive parts with a knife
7. Apply only one layer of white acrylic matt paint (250 g / m^2, ±10%). (For shiny finish or dark colors, a second layer might be necessary)













NOVELIO CLASSIC

EASYPAINT

Product range

Pattern	Finish	Code	g / m²	roll size [m × m]	rolls / pallet	qty / pallet [m²]
Decoveil	Pre-Painted	GV75C	100	50 × 1	32	1600
	Pre-Painted	GV130C	130	50 × 1	24	1200
	Pre-Painted	GV190C	190	50 × 1	24	1200
Weaving	Pre-Painted	T1112C	128	50 × 1	24	1200
	Pre-Painted	T1007C	140	50 × 1	24	1200
	Pre-Painted	T1010C	145	50 × 1	24	1200
	Pre-Painted	T1013C	160	50 × 1	24	1200
Metis	Pre-Painted	T1050C	125	50 × 1	54 (18 x 3)	2700 (900 x 3)
Ceiling	Pre-Painted	T1006C	155	50 × 1	40	2000
Braid	Pre-Painted	T1009C	200	50 × 1	18	900
Small Fishbone	Pre-Painted	T2001C	170	50 × 1	30	1500
Fishbone	Pre-Painted	T2004C	195	50 × 1	18	900
Crepi	Pre-Painted	T3011C	160	50 × 1	36	1800

Decoveil - GV75C - GV130C - GV190C

Weaving - T1112C - T1007C - T1010C - T1013C

Metis - T1050C

Ceiling - T1006C

Braid - T1009C



Small Fishbone - T2001C



Fishbone - T2004C



Crepi - T3011C

NOVELIO CLASSIC

Pre-glued wall covering

EASYGLUE

CleanAIR

Guaranteed competitivity for Professionals and improved air quality for end-user

Saving time on construction work, the key for competitivity

Interior finishings of large construction work represent thousands of square meters and mobilise different **building trades simultaneoulsy**.

Each craftman must adapt and optimize his work **to respect the time-frames**.

Respecting the timeframe for applying wall coverings means not only **decreasing the working time** but also **operating in a clean environment**.

How can we support the craftman in this step?



Novelio® EasyGlue provides the solution with a high-performance product

Significant time savings thanks to its pre-glued formulation

- **30% saving** on wall covering application time and more than **50%** if the product is **pre-painted**
- **Clean and comfortable** working conditions
- An **homogeneous** pre-glued surface

A decorative, soft and resistant wall covering as are all products in the Novelio® range

- Reinforces delicate surfaces
- Resists abrasion and impact
- Covers all cracks

Improve indoor air quality

- immediate and permanent absorption of formaldehyde
- long-lasting effect (>10 yrs)

NOVELIO CLASSIC

EasyGlue principle

EasyGlue wall covering is made with an **homogeneous film** of glue on one side. This pre-glued wall covering needs a **wetting system** to reactivate the glue.

The chemical formulation of the glue and special coating of the wall covering **meets all needs of the applicator**:


- To apply the wallcovering immediately after wetting
- To get an optimal adhesive performance even for technnical sections (ceilings, external angles, stairwells)
- To move the strip and to adjust the joints so the joins are not visible
- To remove and to reposition and a reposition the strip without any loss of its adhesiveness or its movability

EasyGlue efficiency

Application time savings of between 30% to 50%*

As soon as the wall preparation is finalized, the pre-glued wallcovering is activated and can be glued onto the wall with a time saving around 30%. **No need to glue the wall any more**.

To increase this productivity, we offer a **pre-painted finish** for which **only one layer** of paint is needed. This product can provide a time saving of around 50%.

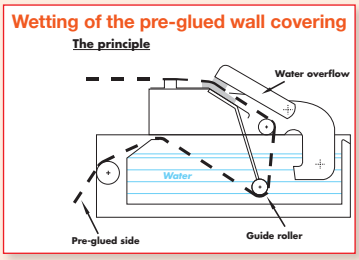

Thanks to the wetting system, the pre-glued wall covering improves the working conditions of the painters

The wall covering does not touch the ground and is applied directly on the wall.

* Calculations are based on typical application for a standard 15 m² room

Application advice:

1 - Wet the pre-glued wall covering.
The wall covering glues immediately.



Practical advice

- Keep the water in the bath at the maximum level to ensure sufficient time for the pre-glued wall covering to wet
- Use a clean and temperate water to guarantee a good activation of the glue
- Do not leave the wall covering in the water (cut all strips that stayed in the water before preparing a new strip)

2 - Apply the strip quickly with a plastic spatula.



Practical advice

- Apply the wall covering immediately or latest after 10 minutes (wall must be clean, dry and primed)
- Smooth all the strip to get away of the air bubbles
- Apply carefully the wall covering in the angles and prepare the cuts of excessive parts
- Check the adhesivenss before starting the 2nd strip

3 - After drying is complete, apply one or two layers of acrylic paint.



Practical advice

- Check ceiling angles before painting
- For a standard finish, the 1st layer of paint must be applied generously to pass through the wall covering, the second layer guarantees a thick and durable film
- For a pre-painted version, use a quality paint and apply the layer generously

NOVELIO CLASSIC

EASYGLUE

CleanAIR

Product range

Pattern	Finish	Code	g / m²	roll size [m × m]	rolls / pallet	qty / pallet [m²]
Weaving	Pre-glued	T1010EF	180	50 × 1	20	1000
Decoveil	Pre-glued & pre-painted	GV190CEF	210	50 × 1	18	900
Weaving	Pre-glued & pre-painted	T1013CEF	200	50 × 1	18	900
Ceiling	Pre-glued & pre-painted	T1006CEF	185	50 × 1	30	1500
Braid	Pre-glued & pre-painted	T1009CEF	250	50 × 1	15	750
Small Fishbone	Pre-glued & pre-painted	T2101CEF	215	50 × 1	24	1200
Fishbone	Pre-glued & pre-painted	T2004CEF	250	50 × 1	15	750
Crepi	Pre-glued & pre-painted	T3111CEF	270	50 × 1	20	1000

Weaving - T1010EF - T1013CEF

Decoveil - GV190CEF

Ceiling - T1006CEF

Braid - T1009CEF



Small Fishbone - T2101CEF

Fishbone - T2004CEF


Crepi - T3111CEF

NOVELIO CLASSIC

EASY FIX

Self-adhesive fiberglass wall covering

Ideal solution for fast renovation

Saving time on construction work, a challenge for all

- How to prepare a wall or ceiling after a water damage **in only 2 steps?**
- How to renovate a room in **only one weekend?**



Novelio® EasyFix provides the solution with a high-performance product

Significant time savings thanks to its self-adhesive formulation

- **20% saving** in wall covering application time
- **30% saving** in total renovation work

A decorative, soft and resistant wall covering as are all products in the Novelio® range

- Reinforces delicate surfaces
- Resists abrasion and impact
- Covers all cracks

NOVELIO CLASSIC

EasyFix principle

EasyFix paintable wall covering is produced with a **self-adhesive coating** on one side.

The chemical formulation of this adhesive **meets all needs of the applicator:**

- To keep the wall covering glued to the wall until ready for the painting
- To remove the strip several times without losing adhesiveness
- To work in all external conditions

EasyFix efficiency

20% saving in wall covering application time*.

Thanks to its adhesive system, the wall covering can be applied directly to the wall or ceiling.

No need to glue the wall beforehand.

30% saving in a room renovation time*.

Once applied, the wall covering can be painted immediately. No need to wait 24 hours for the glue to dry.

A room can be renovated in less than 2 days.

* Calculations are based on a typical application for a standard 15 m² room

Application advice:

1 - Apply the wall covering, smooth it and cut off the excess



Practical advice:

- Make sure that the surface is clean, dry and primed
- Check if the wall is vertical and apply the first strip
- Within 50 cm of the top, place the second strip adjacent to the first one to get a perfect joint. Then apply the whole length
- For technical sections, make a double cut to get a perfect joint
- Smooth the strip to remove air bubbles and check adhesiveness before starting the 2nd strip
- Apply the wall covering carefully in angles and cut off the excess

2 - Apply a second layer of acrylic paint immediately. Once fully dry, apply a second layer of acrylic paint



Practical advice:

- Respect the applications conditions of the paint producer
- The 1st layer must go through the wall covering to ensure firm adhesion to the wall
- If necessary, adjust the viscosity of the acrylic paint to ensure it spreads evently
- Apply generously on the wall covering
- Do not use a dilluted paint for the second layer to ensure a thick and durable film of paint

NOVELIO CLASSIC

EASY FIX

Product range

Pattern	Finish	Code	g / m²	roll size [m × m]	rolls / pallet	qty / pallet [m²]
Weaving	Self-adhesive	T1038X	125	50 × 1	24	1200
Weaving	Self-adhesive	T1038X	125	25 x 1	35	875

Weaving - T1038X

NOVELIO
CLASSIC



The solution to all your requirements

Decorative, soft and resistant fi berglass wall coverings with several finishes

- **Standard**, a wide range of patterns to be applied in a traditional way
- **EasyPaint**, pre-painted wall coverings that save one layer of paint during application
- **EasyFix**, a self-adhesive product to be applied directly to the support and immediately painted
- **EasyGlue**, pre-glued products for an efficient application (glue must be reactivated with water)

Durable protection of walls and ceilings

- reinforces delicate surfaces
- abrasion resistant
- impact resistant
- covers small cracks and irregularities cracks

A range of certified products

CONFIDENCE IN TEXTILES
Tested for harmful substances
according to Oeko-Tex® Standard 100
25.3.0033 INNOVATEXT Budapest

Certificate Oeko-Tex Standard 100
no harmful substances

EXCELLENT FIRE RESISTANCE

Fire reaction according to the standard
EN 13501-1: **Euroclass B-s1-d0**
on support A1 or A2

EMISSIONS IN INDOOR AIR*
A+
A+ A B C

Emission of volatile organic components: Class A +
(very low emission of harmful pollutants)

The commitments of Saint-Gobain ADFORS

Novelio® range respects the European requirements in safety, health and environmental protection.

- All our fiberglass wall coverings meet the conformity criteria applied to decorative wall coverings
- Saint-Gobain ADFORS ensures a quality control throughout the production process according to the standard procedures of EN 15102
- Saint-Gobain ADFORS adds the CE 1020 mark to all the labels according to the standard EN 15102
- Saint-Gobain ADFORS production sites are certified ISO9001 and ISO 14001
- Saint-Gobain ADFORS has perfomed a life cycle analysis of its fiberglass wall coverings NOVELIO®
- On request, Saint-Gobain ADFORS can provide extracts of the ESDS

CE

Saint-Gobain ADFORS CPE
Phone: +420 461 651 111

For more information, visit our website www.novelio.com

SAINT-GOBAIN