SAINT-GOBAIN

Saint-Gobain India Private Limited - Glass Business

Level 7,
Sigapi Aachi Building,
18/3 Rukmani
Lakshmipathy Road,
Egmore, Chennai - 600 008,
Tamil Nadu.
Ph: + 91-44-4593 6000
Fax: +91-44-4593 6008
feedback@sgghardware.com
http://in.saint-gobain-glass.com
Toll Free No: 1800 1021 215

TÜV SÜD

1 MIO CYCLE TESTED

SAINT-GOBAIN | HARDWARE SOLUTIONS



ENTER A WORLD OF ELEGANCE.

PRESENTING

ENTRANCE

AUTOMATIC DOOR SOLUTIONS



STATE-OF-THE-ART ACCESS SYSTEMS—SMART, EFFICIENT & POWERFUL.

At the cutting edge of access systems SAINT-GOBAIN today ushers in an exceptional range of solutions for ease and an effortless experience. Adding to our world-renowned bouquet of customized glazing and glass hardware is our advanced Automatic Sliding Door. Innovating constantly, we now introduce unmatched convenience through our automated access systems for modern living commercial spaces.

ACCESS **LITE**

THE SMART CHOICE FOR, WORK AND COMMERCIAL SPACES




1 MIO CYCLE TESTED

DOOR PARAMETERS

Single Leaf Sliding width	750 - 1400mm
Single Leaf Sliding Weight	1 x 150Kgs
Double Leaf Sliding width	750 - 1250mm
Double Leaf Sliding Weight	2 x 120Kgs
Clear Passage Height	2100 - 3000mm

TECHNICAL DETAILS

Mains voltage, frequency	230 V, 50/60 Hz
Power Consumption	65W - BLDC Motor
Opening Speed	15 - 45 cm/s
Closing Speed	15 - 45 cm/s
Hold Open Range	0 - 8 S
Manual Force	<50N
Operating Temperature Range	-20 to +50 °C

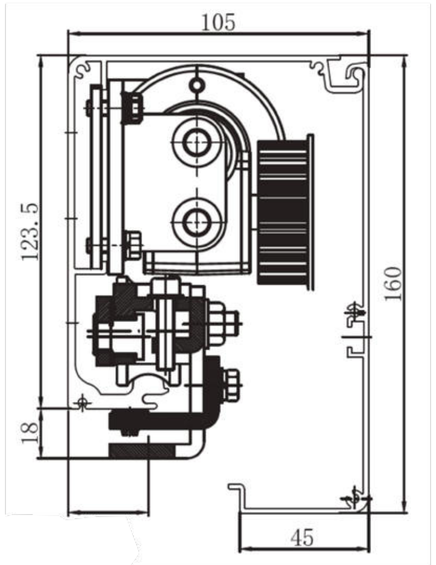

ACCESS **PRO**


A NOTCH ABOVE IN AUTOMATIC SLIDING SYSTEMS



1 MIO CYCLE TESTED

DOOR PARAMETERS


Single Leaf Sliding Weight	1 x 180Kgs
Double Leaf Sliding Weight	2 x 160Kgs
Max Clear Opening Width	4000mm
Clear Passage Height	2100 - 3200mm

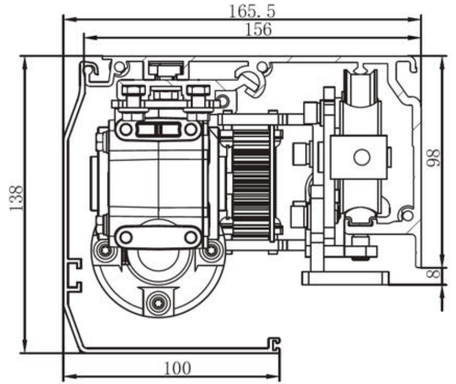

TECHNICAL DETAILS

Mains voltage, frequency	230 V, 50/60 Hz
Power Consumption	DC 24V 100W - BLDC Motor
Opening Speed	15 - 50 cm/s
Closing Speed	15 - 50 cm/s
Hold Open Range	0 - 10 S
Manual Force	<120N
Degree of Protection	IP 20
Operating Temperature Range	-20 to +50 °C
Compliant with EU Low Voltage Directive and EMC Directive	YES
Tested According to EN 16005	YES
Durability	1 Mio Cycles


SMART SENSORS
FOR SAFER SPACES.

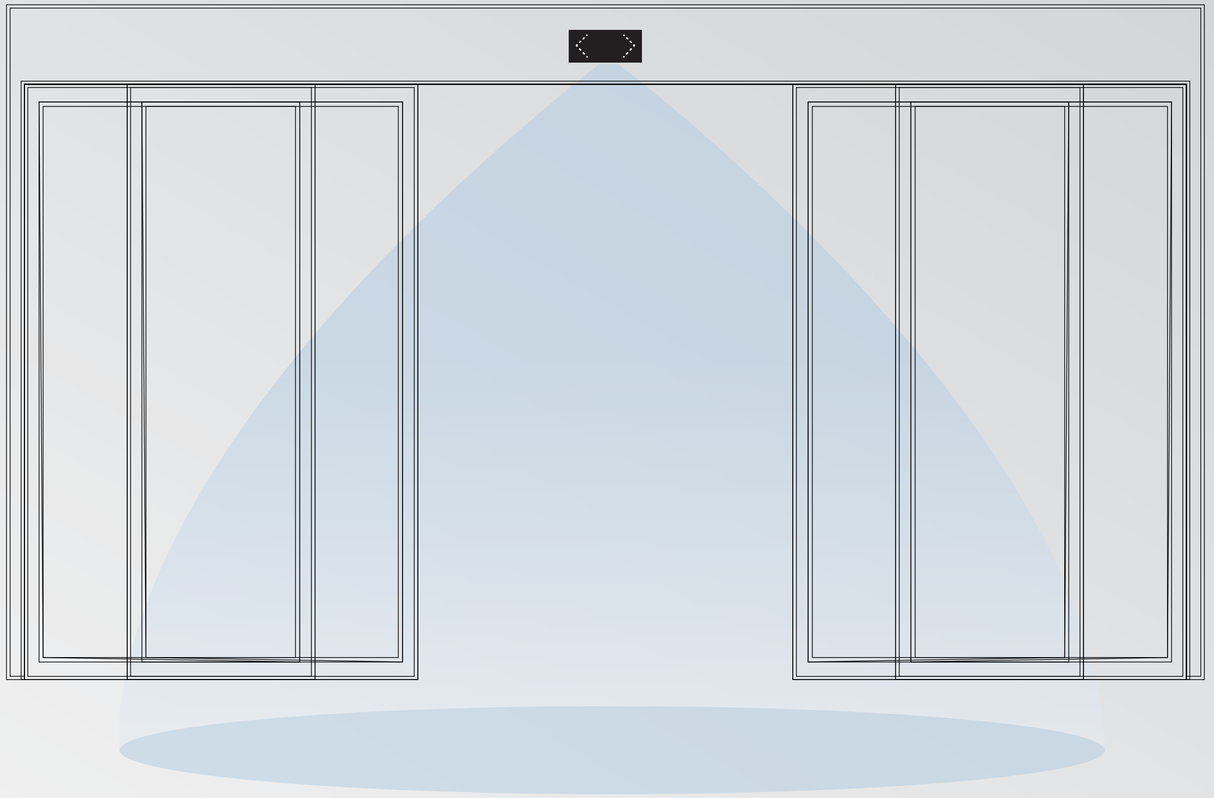

SGF **953**

ACE PLUS
MOTION + SAFETY
SENSOR

ACTIVE INFRARED SAFETY FIELD

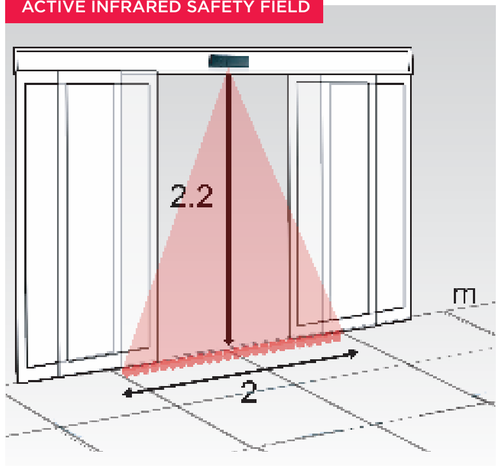

2 m @ 2.2 m mounting height

Technology	: Microwave and Active Infrared
Transmitter frequency	: 24.150 GHz
Transmitter radiated power	: < 20 dBm EIRP
Transmitter power density	: <5 mW / cm²

Detection mode	: Motion and Presence
Min. detection speed	: 5 cm/s (measured in optimal conditions)
Supply voltage	: 12V - 24V AC +/-10%; 12V - 30V DC - 5%+10%
Mains frequency	: 50 to 60 Hz
Max. Power consumption	: <3W (VA)
Output relay	: relay (free of potential change-over contact)
Max. contact voltage	: 42V AC / DC
Max. contact current	: 1A (resistive)
Max. switching power	: 30W (DC) / 60 VA (AC)
Maximum mounting height	: 3m
Protection degree	: IP54
Temperature range	: from -20°C to +55°C
Material	: ABS
Weight	: 215 g
Cable lenght	: 2.5 m




SGF 953

SGF **952**

ACE PLUS
MOTION SENSOR

AUTOMATIC SLIDING DOORS

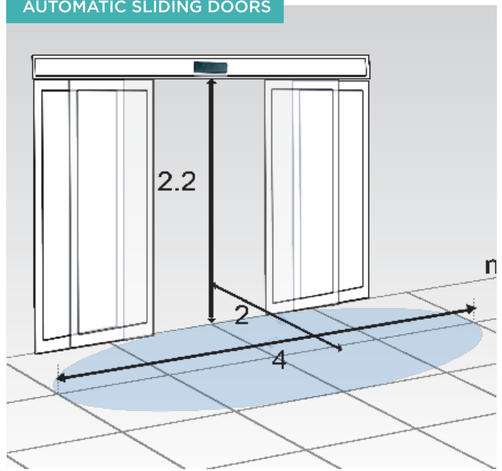

4 m × 2 m @ 2.2 m mounting height

Technology	: Microwave and microprocessor
Transmitter frequency	: 24.125 GHz
Transmitter radiated power	: < 20 dBm EIRP
Transmitter power density	: <5 mW / cm²

Detection mode	: Motion
Min. detection speed	: 5 cm/s (measured in the sensor axis)
Supply voltage	: 12V - 24V AC +/-10%; 12V - 30V DC
Mains frequency	: 50 to 60 Hz
Max. Power consumption	: <2W (VA)
Output relay	: relay (free of potential change-over contact)
Max. contact voltage	: 42V AC - 60V DC
Max. contact current	: 1A (resistive)
Max. switching power	: 30W (DC) / 60 VA (AC)
Maximum mounting height	: 3m
Protection degree	: IP54
Operating Temperature	: from -20°C to +55°C



SGF 952

SGF **951**

ACE MOTION SENSOR

Technology	:	Microwave and microprocessor
Transmitter frequency	:	24.125GHz
Transmitter radiated power	:	<20dBm EIRP
Transmitter power density	:	<5m W/cm2
Maximum mounting height	:	3M
Instatllation Angle	:	0-90 degree (lengthways)
Detection Mode	:	Motion
Min detection speed	:	5cm/s
Power	:	<2W(VA)
Detection range	:	4m*2m (Installation Height 2.2M)

Relay output (No initial potential)	:	COM NO
Maximum current	:	1A
Maximum voltage	:	42V AC/60V DC
Maximum switching power	:	42W(AC)/60W(DC)
Hold Open time	:	2 Second
Cable length	:	2.5 meters
Operating Temperature	:	-20°C to +55°C
Sheating Material	:	ABS plastic
Power supply	:	AC/DC 12-24V ±10% (50Hz to 60Hz)
Size	:	150(L) x 50(W)X38(H)mm



SGF 951

Accessories



SGF 943 REMOTE CONTROL KIT



SGF 944 PROGRAM SWITCH



SGF 945 HAND WAVE SENSOR



SGF 946 WIRELESS PRESS BUTTON



SGF 948 ELECTRIC LOCK



SGF 949 SINGLE SAFETY BEAM SENSOR


Departures