

Emergency Exit Lights

Pictogram Customization

Please mention the code numbers of the Pictogram required along with the model number of the EXIT light at the time of placing order



EXIT	<EXIT>	<EXIT	EXIT >
SF 01 	SF 02 	SF 03 	SF 04
SF 05 	SF 06 	SF 07 	SF 08
SF 09 	SF 10 	SF 11 	SF 12
SF 13 	SF 14 	SF 15 	SF 16
SF 17 	SF 18 	SF 19 	SF 20
SF 21 	SF 22 	SF 23 	NON AN EXIT
SF 25 	SF 26 	SF 27 	SF 24
SF 29 	SF 30 	SF 31 	SF 28
SF 33 	SF 34 	SF 35 	SF 36
SF 37 	SF 38 	SF 39 	SF 40
SF 41 	SF 42 	SF 43 	FIRE EXIT
SF 45 	FIRE EXIT 	SF 47 	SF 44
FIRE EXIT 	FIRE EXIT 	SF 51 	SF 48
REFUGE FLOOR			Way out
SF 53	SF 50	SF 51	SF 52

Emergency Exit Lights

Pictogram Customization



Please mention the code numbers of the Pictogram required along with the model number of the EXIT light at the time of placing order

EXIT	<EXIT>	<EXIT	EXIT >
SF 101	SF 102	SF 103	SF 104
SF 105	SF 106	SF 107	SF 108
SF 109	SF 110	SF 111	SF 112
SF 113	SF 114	SF 115	SF 116
SF 117	SF 118	SF 119	SF 120
			NON AN EXIT
SF 121	SF 122	SF 123	SF 124
SF 125	SF 126	SF 127	SF 128
SF 129	SF 130	SF 131	SF 132
SF 133	SF 134	SF 135	SF 136
SF 137	SF 138	SF 139	SF 140
SF 141	SF 142	SF 143	SF 144
SF 147	SF 148	SF 151	SF 152
SF 149	SF 150	SF 155	SF 156
SF 153	SF 154	SF 155	SF 156



SELF CONTAINED

BEAM LIGHTS & MULTI LIGHTS

RECHARGEABLE EMERGENCY LIGHTS



- * LED Emergency Lights
- * Robust Housing for Industrial applications
- * Works on Nominal Voltage
- * IP 20 protection
- * Battery Back-up <3 hrs.
- * Surface Mounting
- * Also available in higher Back-up POR

Now Available in
Sturdy & Slight
Models

LED TWIN BEAM MULTI LIGHTS

Features and Application

Multi Lights are built, with swivel facility that allows for shifting the focus whenever required. These Twin beam Multi lights could be embedded or mounted on pillars or poles. They are mostly used in large and sprawling premises, mostly industrial ones such as warehouses, godowns, railway yards and similar areas.



LED ML 2

Non-Maintained

3 hrs backup

2 x 18 Watt LED

IP 20

EXIT

Maintained


3 hrs backup

Wall Mount

IP 20



SURFACE

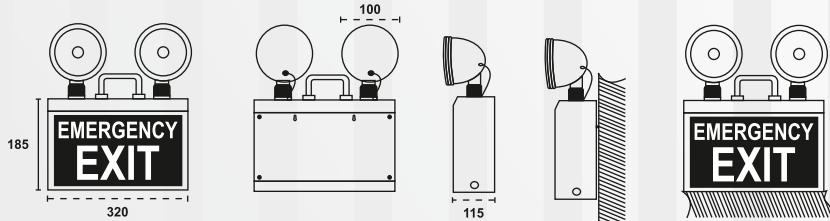

SPECIFICATION

Battery Duration \pm 10%

Aluminum Housing Body

22 SWG CRCA Powder Coated Housing

SLA Rechargeable Battery

4 to 5 hrs. Recharging Period

Input ~ 130 V to 270 V, 50-60Hz (Other Available)

Also Available with Higher Backup - POR

SELF CONTAINED RECHARGEABLE EMERGENCY LIGHTS

Call : +91 92264 40571 / 91757 67352



LED TWIN BEAM MULTI LIGHTS

Features and Application

Multi Lights are built, with swivel facility that allows for shifting the focus whenever required. These Twin beam Multi lights could be embedded or mounted on pillars or poles. They are mostly used in large and sprawling premises, mostly industrial ones such as warehouses, godowns, railway yards and similar areas.





LED ML
Non-Maintained
3 hrs backup
2 x 18 Watt LED
IP 20

EXIT
Maintained
3 hrs backup
Wall Mount
IP 20



SURFACE



SPECIFICATION

Battery Duration \pm 10%

Aluminum Housing Body

22 SWG CRCA Powder Coated Housing

SLA Rechargeable Battery

4 to 5 hrs. Recharging Period

Input ~ 130 V to 270 V, 50-60Hz (Other Available)

Also Available with Higher Backup - POR

SELF CONTAINED RECHARGEABLE EMERGENCY LIGHTS

Call : +91 92264 40571 / 91757 67352

LED TWIN BEAM LIGHTS

Features and Application

Multi Lights are built, with swivel facility that allows for shifting the focus whenever required. These Twin beam Multi lights could be embedded or mounted on pillars or poles. They are mostly used in large and sprawling premises, mostly industrial ones such as warehouses, godowns, railway yards and similar areas.



LED TBL

Non-Maintained



3hrs backup

2 x 18 W LED

IP 20



SURFACE



SPECIFICATION

Battery Duration \pm 10%

Aluminum Housing Body

22 SWG CRCA Powder Coated Housing

SLA Rechargeable Battery

4 to 5 hrs. Recharging Period

Input ~ 130 V to 270 V, 50-60Hz (Other Available)

Also Available with Higher Backup - POR

SELF CONTAINED RECHARGEABLE EMERGENCY LIGHTS

Call : +91 92264 40571 / 91757 67352

DECORATIVE EXIT/EGRESS LIGHTS.

Features and Application

The Exit signage light ensures an orderly and peaceful dispersal of crowd from public places ensuring that exit and escape paths are illuminated in the event of mains power failure.



SPECIFICATION

Battery Duration \pm 10%

Aluminum Housing Body

22 SWG CRCA Powder Coated Housing

SLA Rechargeable Battery

4 to 5 hrs. Recharging Period

Input ~ 130 V to 270 V, 50-60Hz (Other Available)

Also Available with Higher Backup - POR

SELF CONTAINED RECHARGEABLE EMERGENCY LIGHTS

Call : +91 92264 40571 / 91757 67352

RECESSED

LED SLEEK EXIT/EGRESS LIGHTS

Features and Application

The Exit signage light ensures an orderly and peaceful dispersal of crowd from public places ensuring that exit and escape paths are illuminated in the event of mains power failure.



LED EL/M/RM (S) TRANSPARENT LED EL/NE/RM (S) TRANSPARENT

Maintained

3 hrs. Backup

IP 20



Non-Emergency

Ceiling Mount

IP 20



SURFACE



SPECIFICATION

Battery Duration \pm 10%

Aluminum Housing Body

Clear Acrylic Diffuser Cum Massage Panel

22 SWG CRCA Powder Coated Housing

Li-on Rechargeable Battery

4 to 5 hrs. Recharging Period

Input ~ 130 V to 270 V, 50-60Hz (Other Available)

Also Available with Higher Backup - POR

SELF CONTAINED RECHARGEABLE EMERGENCY LIGHTS

Call : +91 92264 40571 / 91757 67352

WEATHER PROOF EXIT / EGRESS LIGHTS (IP65)

Features and Application

An attractive range of special Emergency lighting with ABS white plastic body reeded ABS diffuser and Self Contained Ni-Mh/Ni-Cd Batteries in Maintained/Non-Maintained modes



LED EL M/WP 1

Maintained

2 hrs. Backup





LED

IP 65

Also Available Non-Emergency Model



SURFACE



SPECIFICATION

Battery Duration \pm 10%

ABS White Plastic Body

Constant Current Charger

Li-on Rechargeable Battery

4 to 5 hrs. Recharging Period

ABS Reeded Diffuser

Input ~ 130 V to 270 V, 50-60Hz (Other Available)

Also Available with Higher Backup - POR

SELF CONTAINED RECHARGEABLE EMERGENCY LIGHTS

Call : +91 92264 40571 / 91757 67352

EMERGENCY FIRE EQUIPMENT LIGHTS

Features and Application

One of the most essential mode for Escape lighting recommended by National Building Code of India (NBC, to used near each fire alarm Call point, fire fighting equipment, etc.



LED FE/WL/M 2 (LARGE)

Maintained

2 hrs. backup

10 W LED


IP 20



SURFACE




FRONT SIDE




BACK SIDE



SIDE VIEW



TOP VIEW



BOTTOM VIEW

FASCIA OPTIONS:



FIRE EQUIPMENT LIGHTS

Fire Equipment Lights

Manufactured AS per NBC 2016 volume 1
Chapter 3. Section 3.4.7.1 (h)

SELF CONTAINED

RECHARGEABLE EMERGENCY LIGHTS

Call : +91 92264 40571 / 91757 67352

SPECIFICATION

Battery Duration \pm 10%

Aluminum Housing Body

22 SWG CRCA Powder Coated Housing

Li-on Rechargeable Battery

Constant Current Charger

4 to 5 hrs. Recharging Period

Input ~ 130 V to 270 V, 50-60Hz (Other Available)

Also Available with Higher Backup - POR

EMERGENCY FIRE EQUIPMENT LIGHTS

Features and Application

One of the most essential mode for Escape lighting recommended by National Building Code of India (NBC, to used near each fire alarm Call point, fire fighting equipment, etc.



LED FE/WL/M 2 (LARGE)

Maintained


2 hrs. backup

10 W LED

IP 20




FRONT SIDE




BACK SIDE



SIDE VIEW



TOP VIEW



BOTTOM VIEW

FASCIA OPTIONS:



FIRE EQUIPMENT LIGHTS

Fire Equipment Lights

Manufactured AS per NBC 2016 volume 1
Chapter 3. Section 3.4.7.1 (h)

SELF CONTAINED

RECHARGEABLE EMERGENCY LIGHTS

Call : +91 92264 40571 / 91757 67352

SPECIFICATION

Battery Duration \pm 10%

Aluminum Housing Body

22 SWG CRCA Powder Coated Housing

Li-on Rechargeable Battery

Constant Current Charger

4 to 5 hrs. Recharging Period

Input ~ 130 V to 270 V, 50-60Hz (Other Available)

Also Available with Higher Backup - POR



WE ARE MANUFACTURED BY

SELF CONTAINED RECHARGEABLE EMERGENCY
EXIT LIGHTS & PHOTOLUMINESCENT
SAFETY SIGNAGES



Call : +91 92264 40571 / 91757 67352

Gmail : anjaneya1010@gmail.com