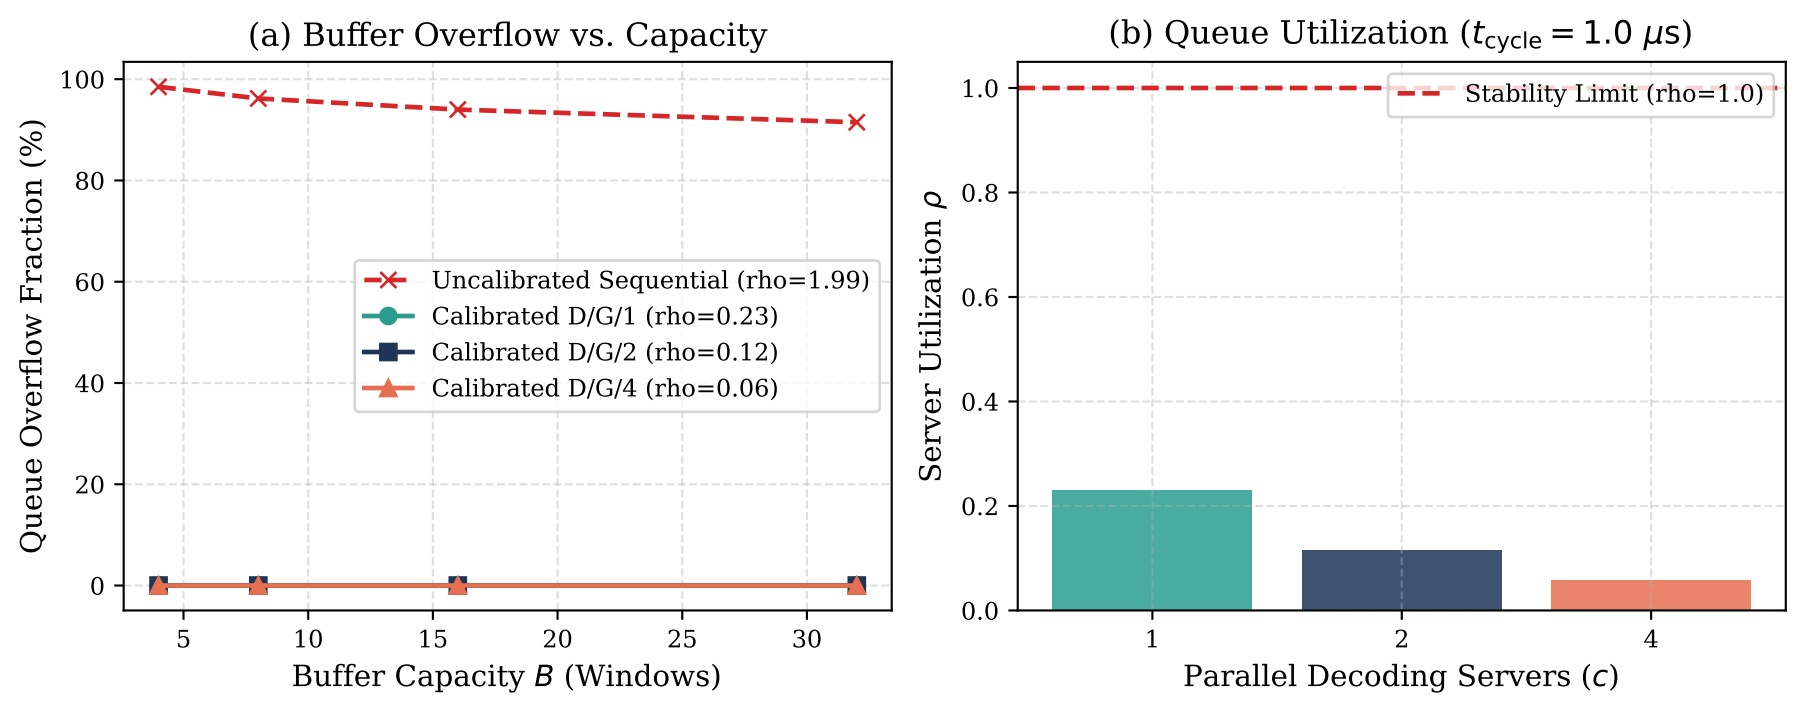
(a) Buffer Overflow vs. Capacity
Queue Overflow Fraction (%)
Buffer Capacity $B$ (Windows)
Uncalibrated Sequential (rho=1.99)
Calibrated D/G/1 (rho=0.23)
Calibrated D/G/2 (rho=0.12)
Calibrated D/G/4 (rho=0.06)
(b) Queue Utilization ($t_{\text{cycle}} = 1.0$ $\mu$s)
Server Utilization $\rho$
Parallel Decoding Servers ($c$)
Stability Limit (rho=1.0)