

275/M30 1200SA



SEMI-AUTOMATIC BOLLARD

The 275/M30 1200SA semiautomatic bollards have been designed to ensure the anti-terrorist protection. Current models are the result of our 40 years' experience in the security field and in excess of 20 years in the specific design and manufacture of automatic bollards.

The installation of the 275/M30 1200SA bollard is recommended for use in any security sensitive site like company driveways, industrial driveways, research centres, embassies, police facilities, military bases.

CERTIFIED ASTM F2656-07 M30 (K4)



PILOMAT

100% MADE IN ITALY



PAG. 1/3

PILOMAT s.r.l.
www.pilomat.com / pilomat@pilomat.com
Via Zanica 17/p, 24050, Grassobbio (BG) Italy
Tel. +39.035.29.72.20
Copyright 2019© Pilomat S.r.l. All rights reserved

275/M30 1200SA_DATASHEET.20 REVIEW 16/10/2020

AVAILABLE ITEMS

PILOMAT BOLLARD 275/M30 1200SAFEV - NORMAL STEEL PAINTED
PILOMAT BOLLARD 275/M30 1200SAIXV - STAINLESS STEEL PAINTED
PILOMAT BOLLARD 275/M30 1200SAIXS - STAINLESS STEEL BRUSHED
PIT IN ALUZINC FOR PILOMAT 275/M30 1200SA - COUNTERFRAME AND REBARS ONE PIT FOR EACH BOLLARD
MULTILED FLASHING LIGHT- 25 LED POINTS
REFLECTING ADHESIVE STRIP - WHITE (NO-LOGO)
HEAD WITHOUT LOGO FOR PILOMAT 275/M30 1200SA
PAINTING WITH RAL COLOUR ON REQUEST
AISI 316 STAINLESS STEEL CYLINDER
SECURITY LOCK FOR MECHANICAL LOCKING OPERATING POINT
ROD FOR LIFTING/LOWERING THE BOLLARD MANUALLY
BATTERY DRILL FOR LIFTING/LOWERING THE BOLLARD

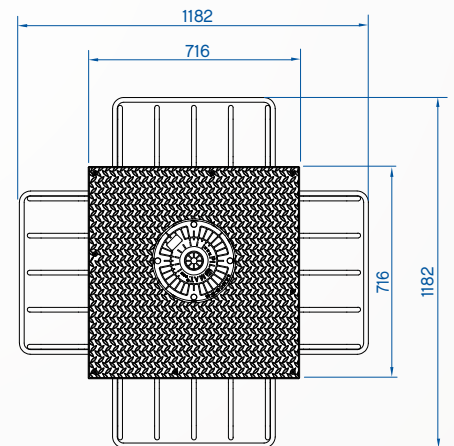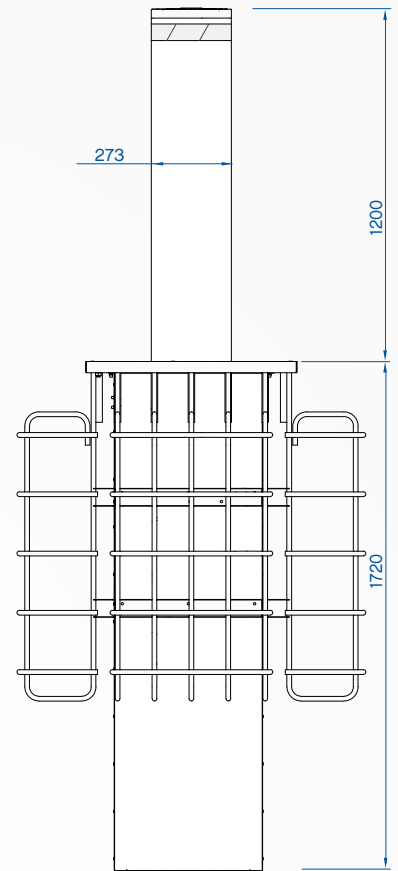

100% MADE IN ITALY

PAG.2/3


PILOMAT s.r.l.
www.pilomat.com / pilomat@pilomat.com
Via Zanica 17/p, 24050, Grassobbio (BG) Italy
Tel. +39.035.29.72.20
Copyright 2019© Pilomat S.r.l. All rights reserved

275/M30 1200SA_DATASHEET.20 REVIEW 16/10/2020

275/M30 1200SA



CYLINDER MATERIAL	S355JR NORMAL STEEL X5CrNi 18-10 (AISI 304) / X5CrNiMo 17-12-12 (AISI 316) STAINLESS STEEL
CYLINDER DIAMETER	273mm
CYLINDER HEIGHT	1200mm
CYLINDER NORMAL STEEL THICKNESS	16mm
OPERATING PRINCIPLE	MANUAL - WITH BATTERY DRILL OR MANUAL ROD RISING: CLOCKWISE ROTATION - LOWERING: COUNTERCLOCKWISE ROTATION
CYLINDER NORMAL STEEL FINISH	ANTI-CORROSION TREATMENT - GREY ANTHRACITE STANDARD PAINTING
CYLINDER STAINLESS STEEL FINISH	GREY ANTHRACITE STANDARD PAINTING OR BRUSHING
OTHER CYLINDER FINISH	RIBS ON CYLINDER'S SURFACE
REFLECTING ADHESIVE STRIP	STANDARD - HEIGHT 55mm
RISING SPEED (WITH BATTERY DRILL)	8cm/s
LOWERING SPEED (WITH DRILL)	20cm/s
MANUAL YDRAULIC PUMP	BUILT-IN INTO THE BOLLARD
PROTECTION CLASS	IP67
IMPACT RESISTANCE (WITHOUT DEFORMATION)	700.000 J
BREAKOUT RESISTANCE	1.200.000 J
NOMINAL OPERATING TEMPERATURE	-20 °C +60 °C
ANTI-CORROSION TREATMENT "M"	OPTIONAL ORDER IN CASE OF INSTALLATION AT LESS THAN 2KM FROM THE SEA ORDER IN CASE OF INSTALLATION WHERE SALT IS USED ON THE ROAD TO AVOID ICE FOR A PERIOD UP TO 3 MONTHS
DRILL INSERT FOR LIFTING/LOWERING	STANDARD - 1 PIECE INCLUDED
LOAD CLASS (EN124)	D400

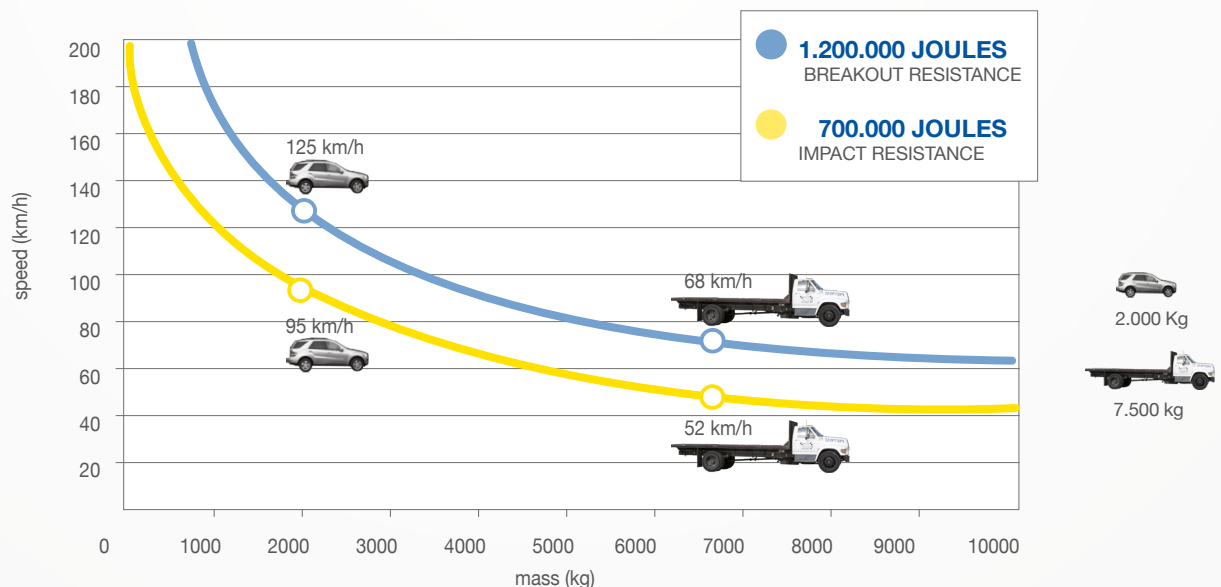

PAG.3/3



100% MADE IN ITALY

PILOMAT s.r.l.
www.pilomat.com / pilomat@pilomat.com
Via Zanica 17/p, 24050, Grassobbio (BG) Italy
Tel. +39.035.29.72.20
Copyright 2019© Pilomat S.r.l. All rights reserved

275/M30 1200SA_DATASHEET.20 REVIEW 16/10/2020