

EL-EC1

Uses capacitive touch technology. Device is activated with finger touch to the sensor.

Specification:

Dimension: 86mm(L) x 50mm(W) x 20mm(H)

■ Input: 12VDC

Contact Rating: 12 ~ 28V, 3A
Output Contact: NO, NC, COM
Mechanical Life: 100,000 tested


Operating Temp : -20°C ~ 55°C (14~131F)
Suitable Humidity : 0 ~ 95% (Relative Humidity)

Detection Range : 0.1cm ~ 10cm

Weight: 0.15kg

Blue LED indicator : Power ON (standby)Green LED indicator : Power ON (sensation)

Technical Information:

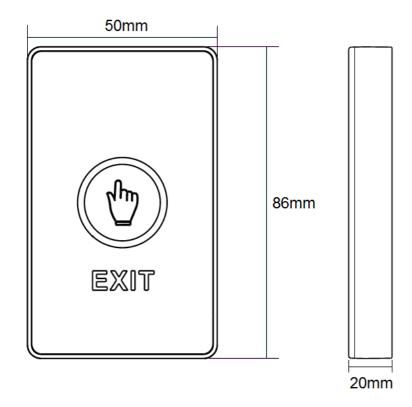



Kyodensha Technologies (M) Sdn Bhd (2057536-M) Digit Innovation Technologies (M) Sdn Bhd (646972-U)

No. 12A Jalan PPU3A, Pusat Teknologi Sinar Puchong 47150 Puchong Selangor, Malaysia TEL +603-8066 4636 +603-8051 5788 FAX +603-8051 4919

WEB www.elock2u.net EMAIL enquiry@elock2u.net