


TP4056 BATTERY CHARGER

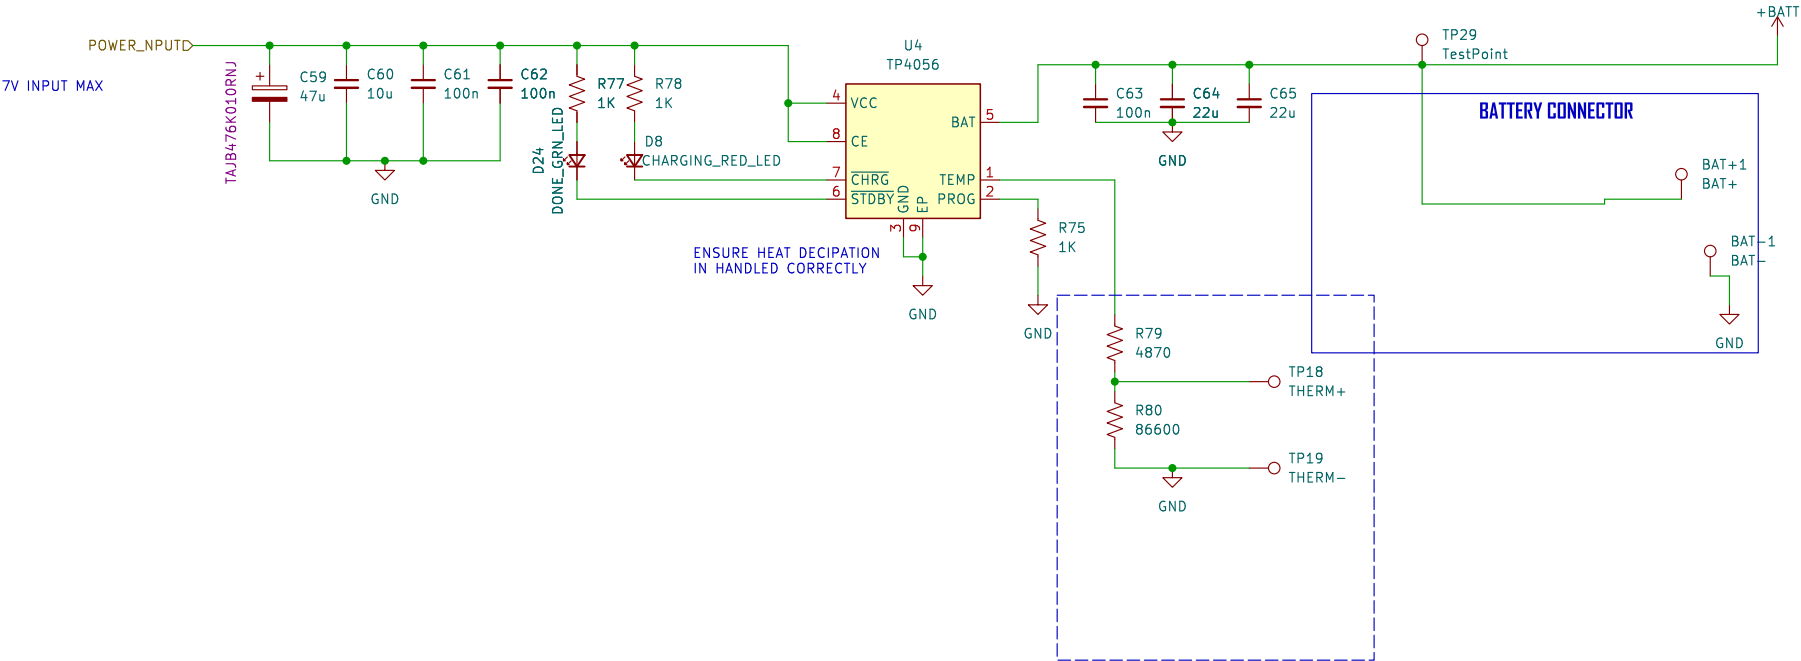

ENSURE HEAT DECIPATION
IN HANDLED CORRECTLY

<https://www.best-microcontroller-projects.com/tp4056-page2.html>
For 45°C the thermistor resistance is about 4k2.
For 5°C the thermistor resistance is about 26k.
WORKING TEMEPERATURE RANGE

Sheet: /LIPO_BAT_CHARGER_TP4056/ File: LIPO_BAT_CHARGER_TP4056.kicad_sch		
Title:		
Size: A4	Date:	Rev:
KiCad E.D.A. 9.0.0-rc2	Id: 3/7	