



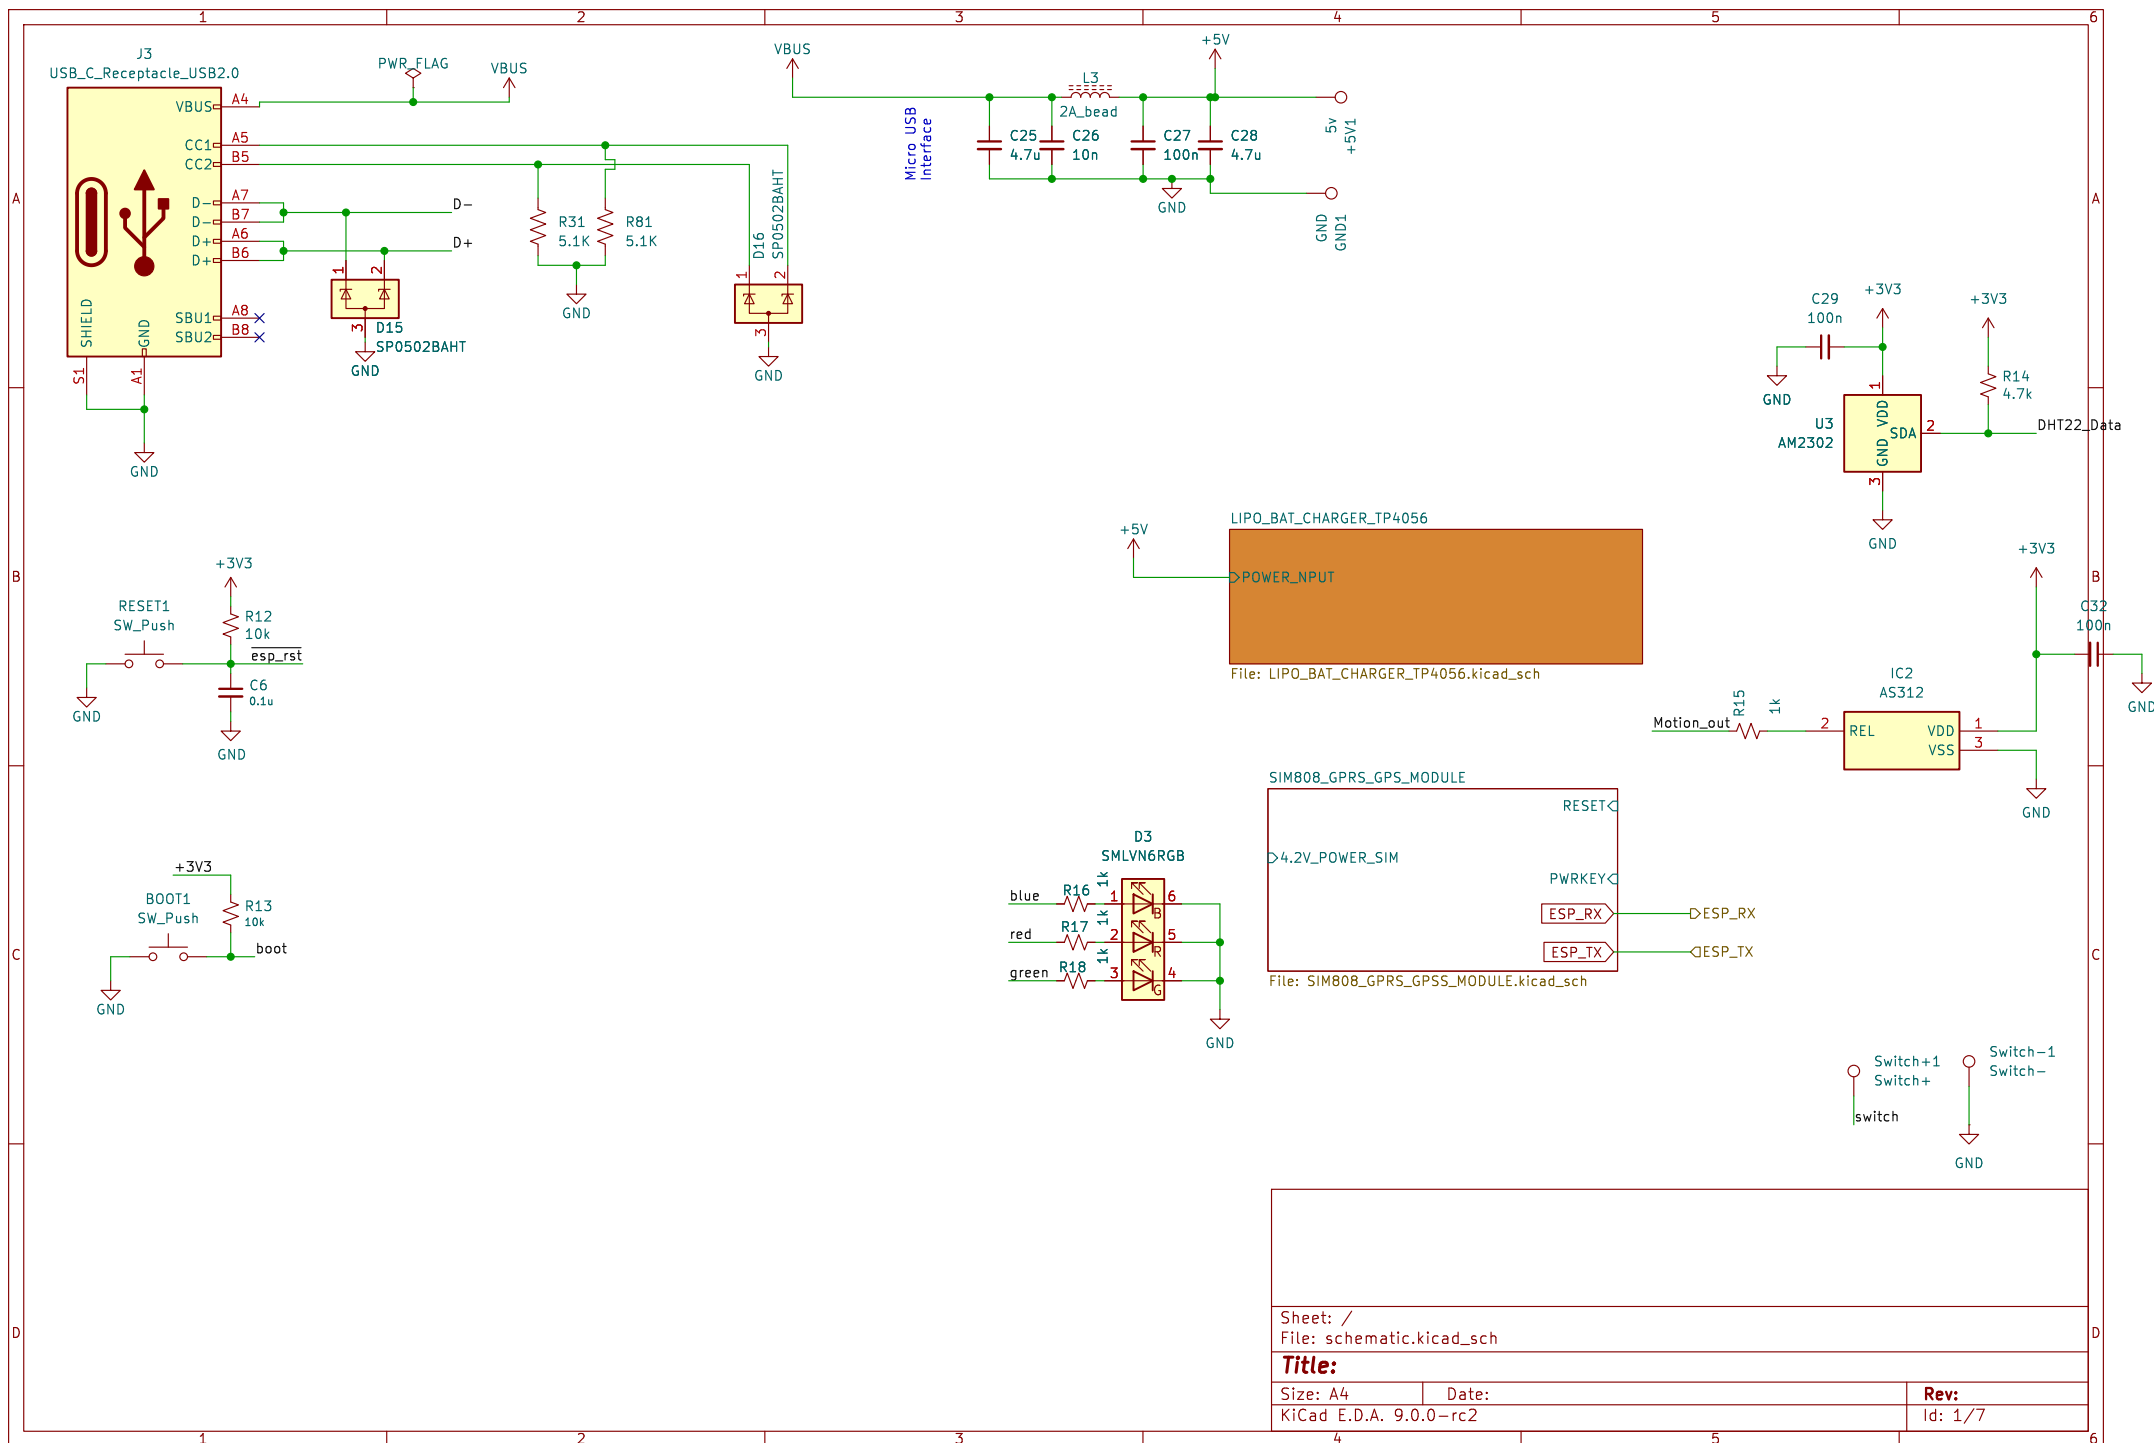

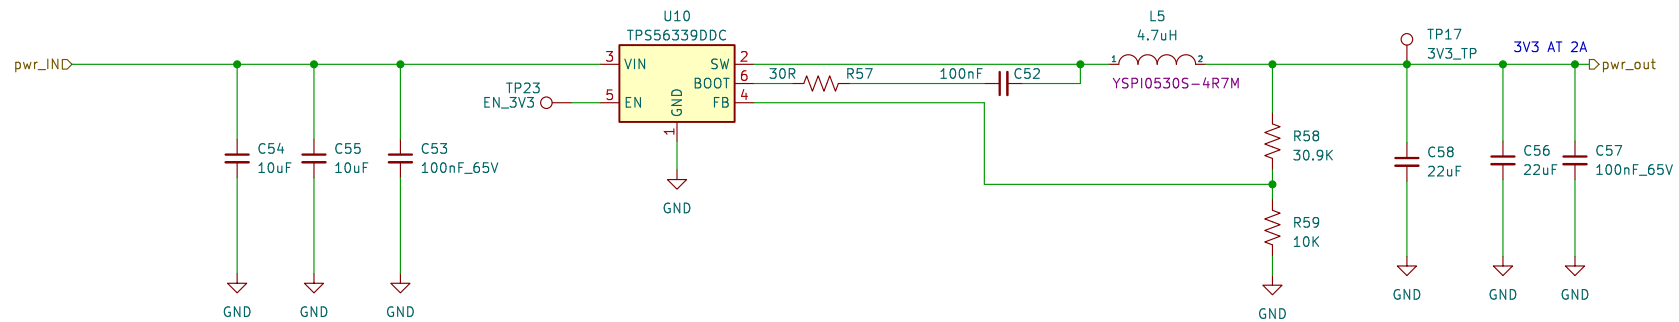

Sheet: /BUCK_CONVERTER_3V3_2A_TPS56339DDCR/
File: BUCK_CONVERTER_3V3_2A_TPS56339DDCR.kicad_sch

Title:

Size: A4


Date:

Rev:

KiCad E.D.A. 9.0.0-rc2

Id: 2/7

TP4056 BATTERY CHARGER

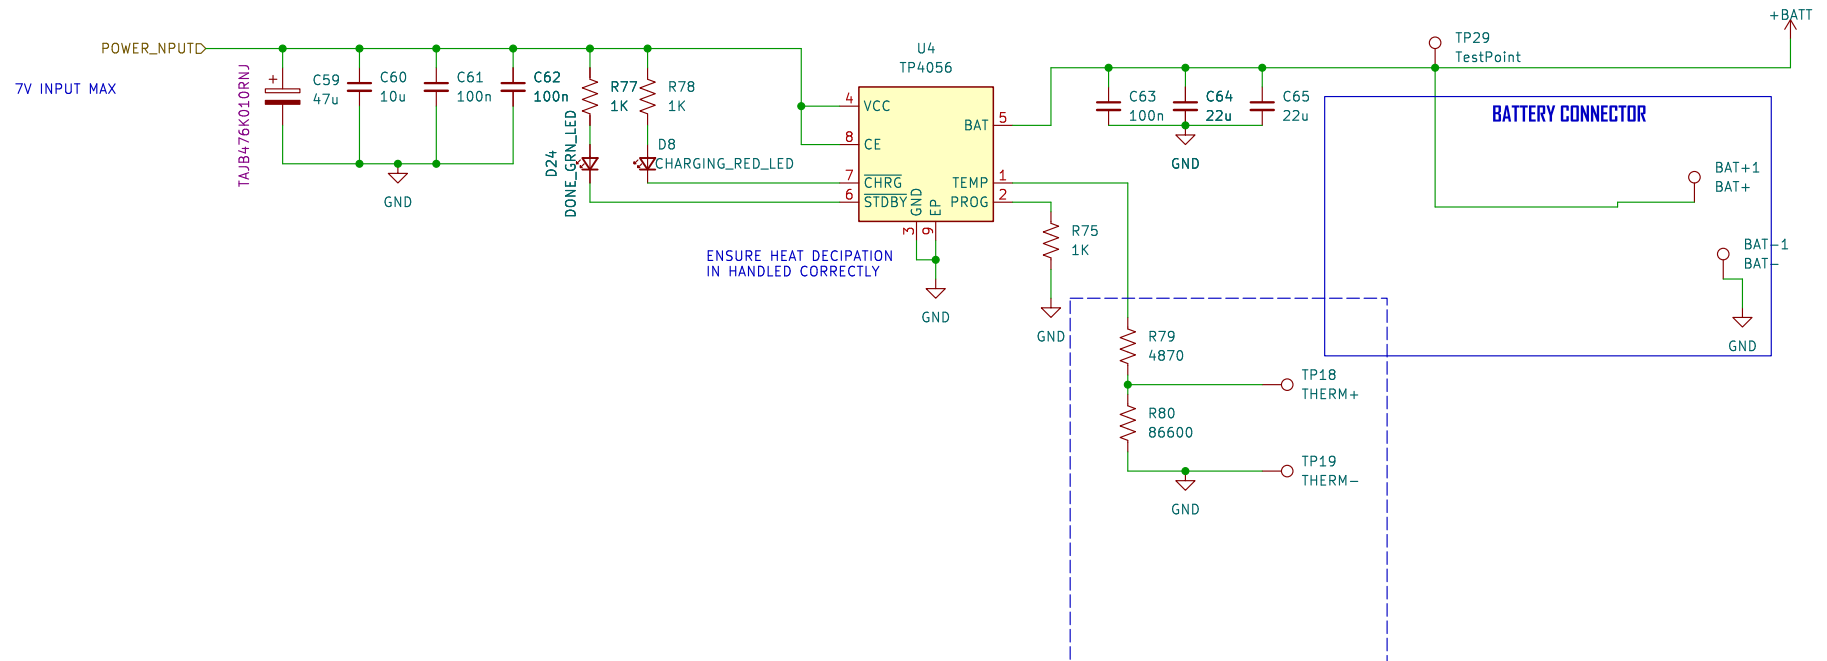

<https://www.best-microcontroller-projects.com/tp4056-page2.html>

For 45°C the thermistor resistance is about 4k2.
For 5°C the thermistor resistance is about 26k.

WORKING TEMEPERATURE RANGE

Sheet: /LIPO_BAT_CHARGER_TP4056/
File: LIPO_BAT_CHARGER_TP4056.kicad_sch

Title:


Size: A4

Date:

KiCad E.D.A. 9.0.0-rc2

Rev:

Id: 3/7

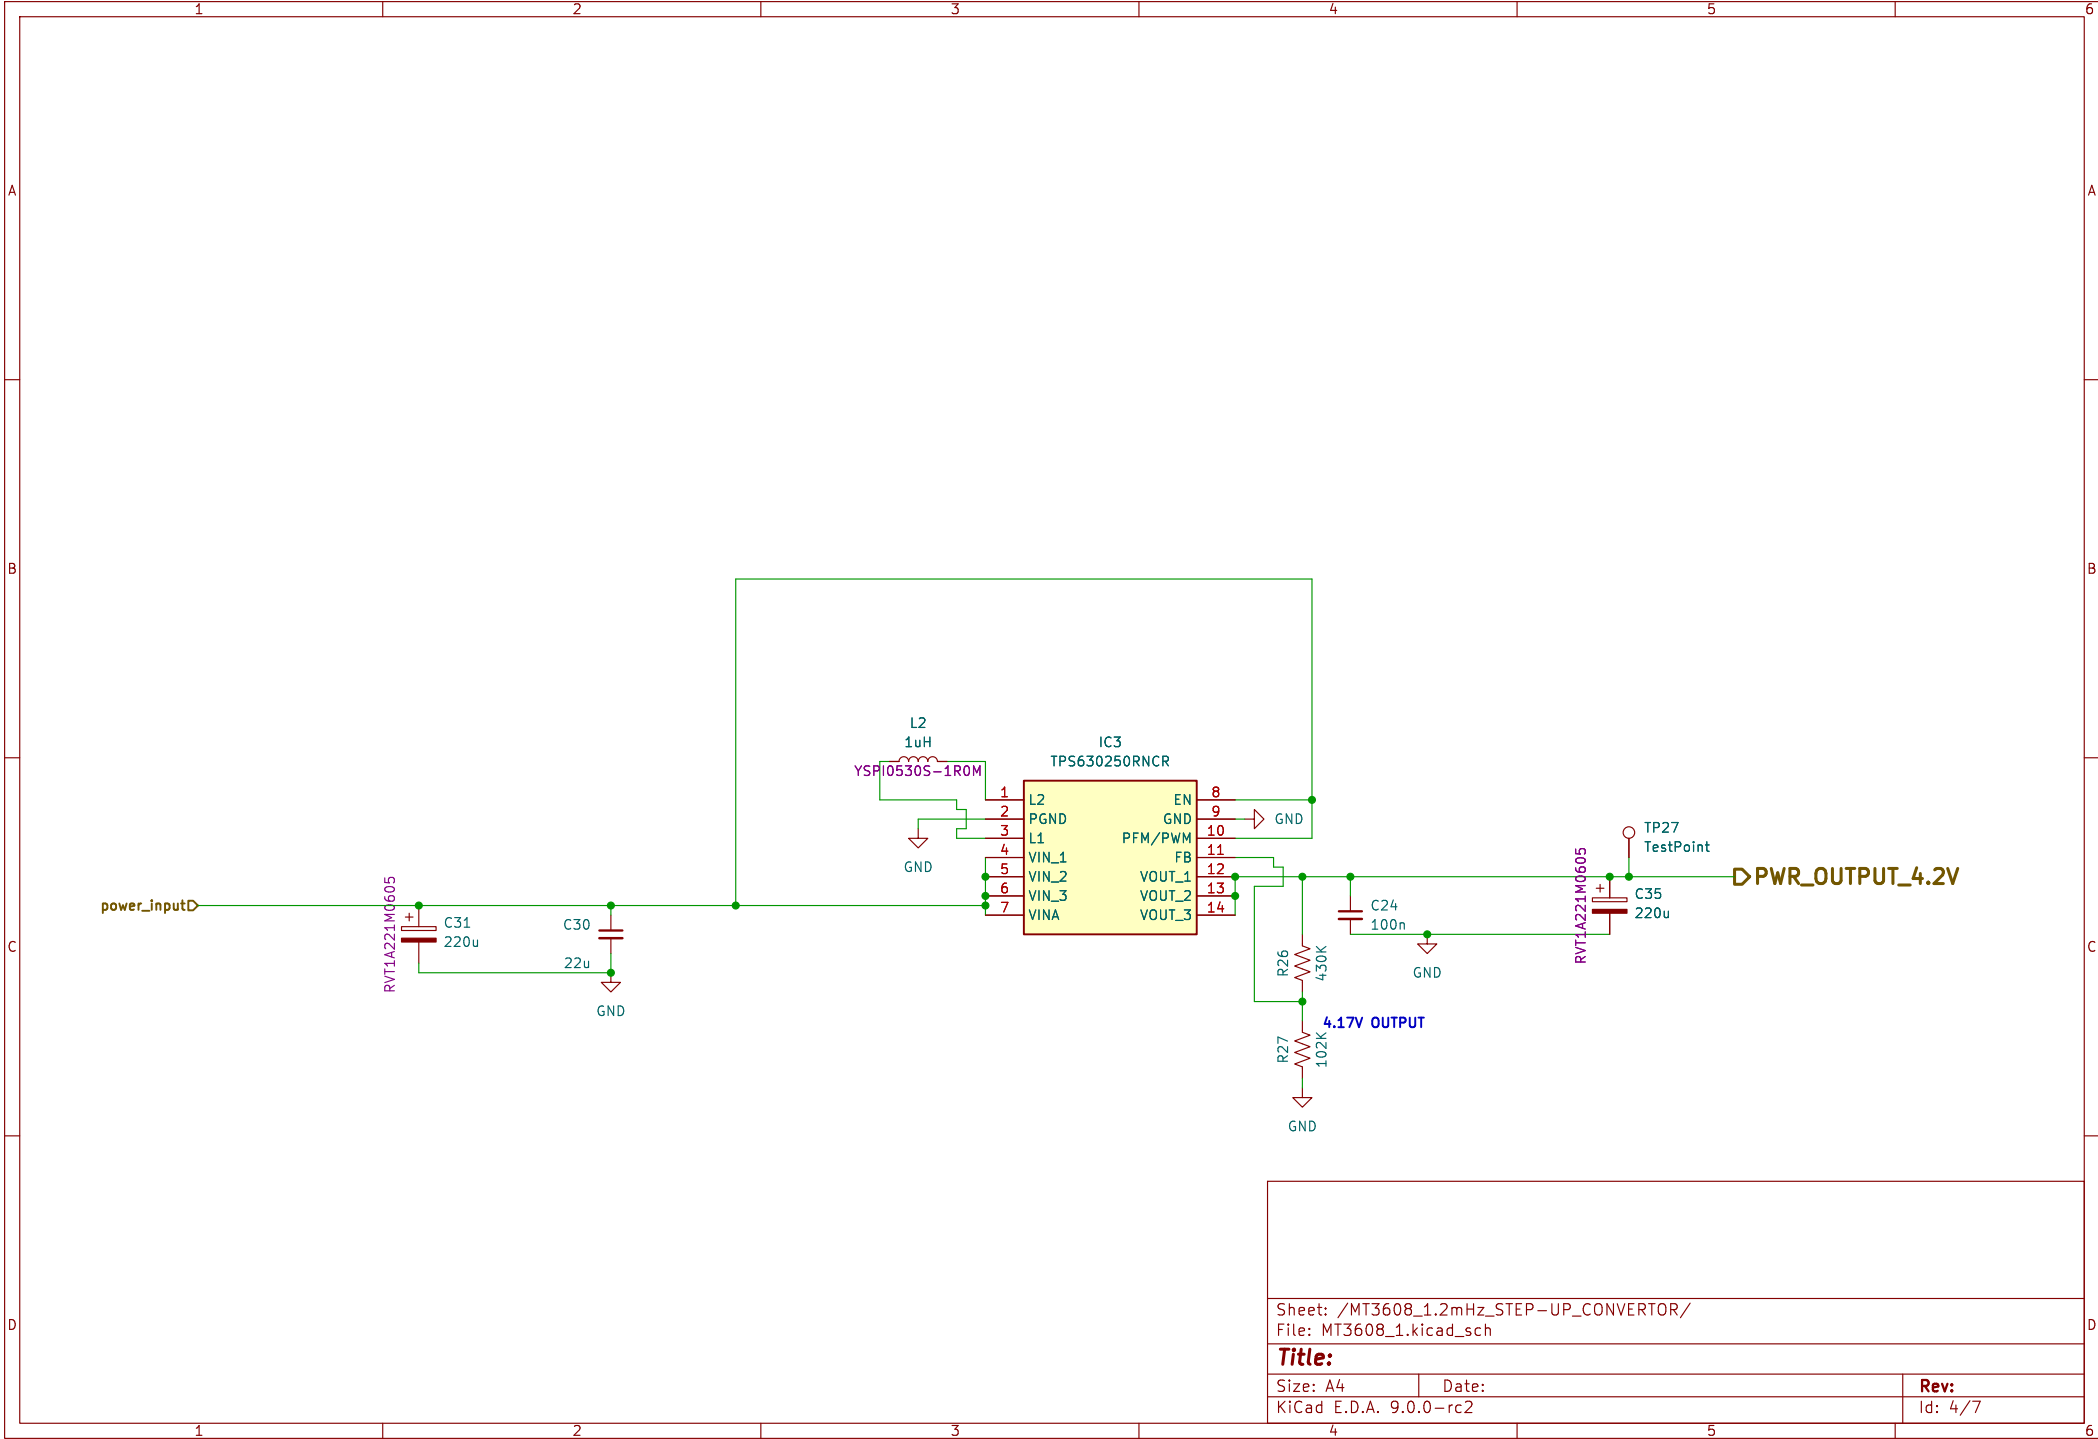

Sheet: /MT3608_1.2mHz_STEP-UP_CONVERTOR/
File: MT3608_1.kicad_sch

Title:

Size: A4


Date:

KiCad E.D.A. 9.0.0-rc2

Rev:

Id: 4/7

POWER INPUT SELECTOR

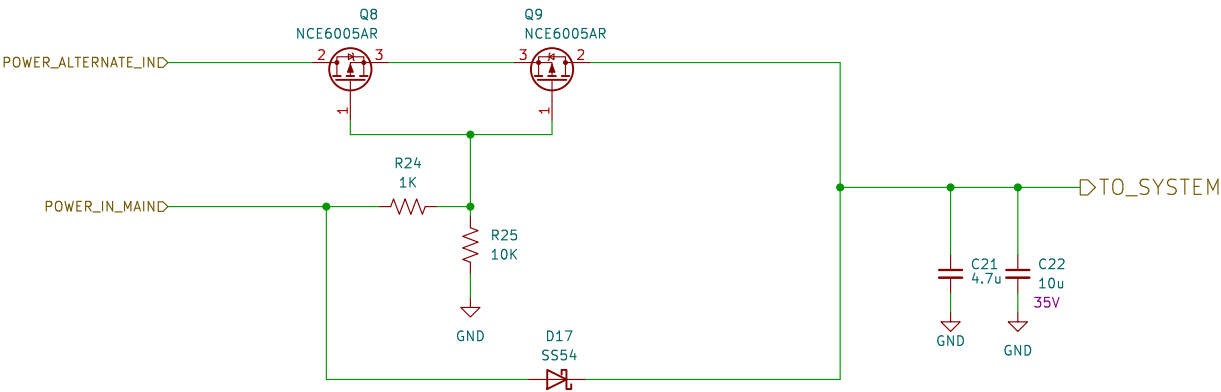

<https://www.homemade-circuits.com/bidirectional-switch/>

Sheet: /POWER_PATH_SELECTOR/
File: POWER_PATH_SELECTOR.kicad_sch

Title:


Size: A4

Date:

KiCad E.D.A. 9.0.0-rc2

Rev:

Id: 5/7

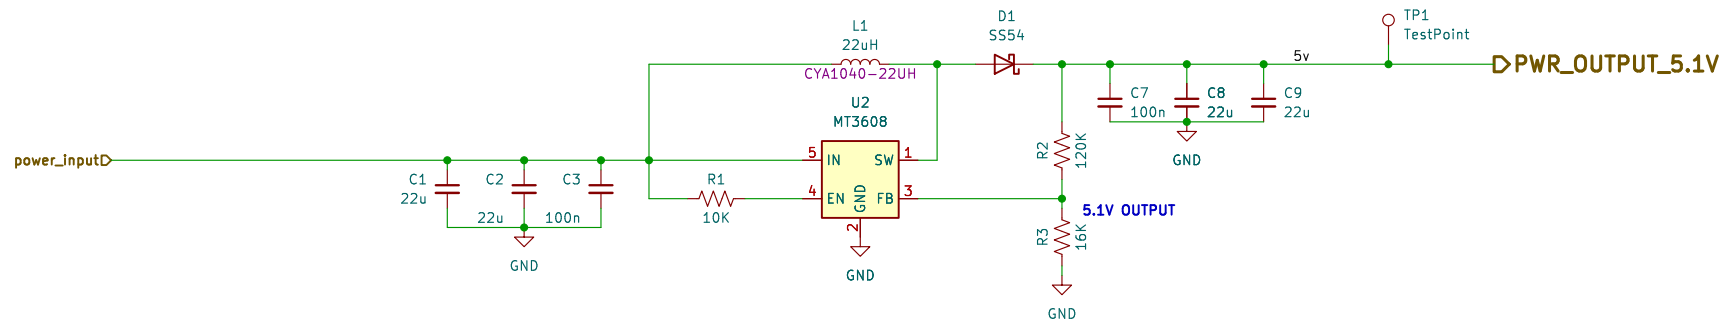

Sheet: /MT3608_5V_BOOST_CONVERTOR/
File: MT3608_5V_BOOST_CONVERTOR.kicad_sch

Title:

Size: A4
KiCad E.D.A. 9.0.0-rc2

Date:

Rev:
Id: 6/7

