

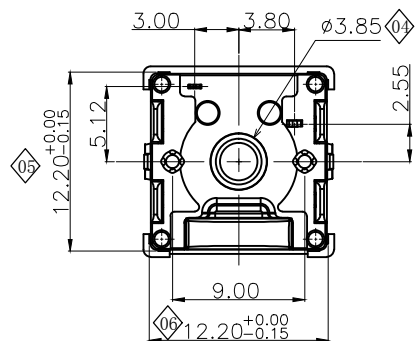
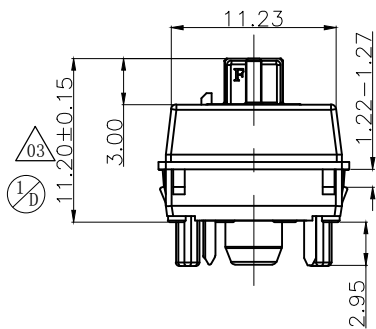
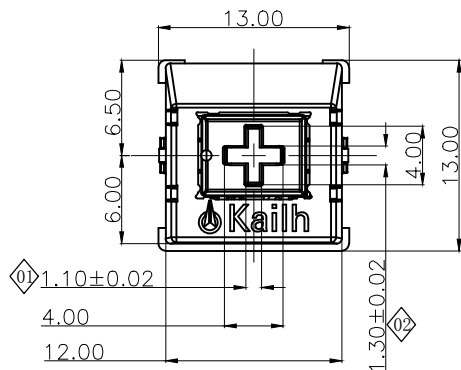
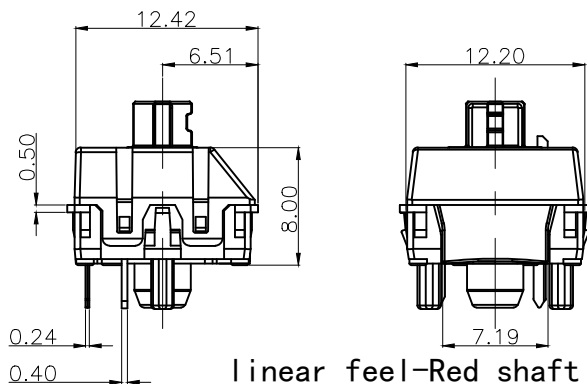



成品检验规范

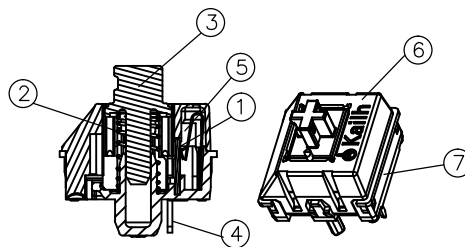

SWITCH FUNCTION



linear feel-Red shaft

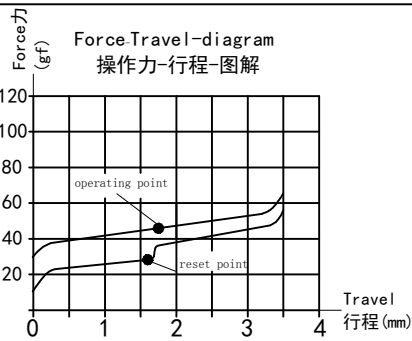

规格：

- 1. 额定值:  
电压: 12V AC/DC max., 2V DC min.  
电流: 10mA AC/DC max., 10μA DC min.
- 2. 接触阻抗: 100毫欧 最大
- 3. 绝缘阻抗: 100兆欧 最小 (DC500V)
- 4. 耐电压: 交流100V(50-60Hz) 持续1分钟。
- 5. 抖动时间: ≤5msec (3-4次/秒 按压速度)
- 6. 操作力: 45±10gf (全行程范围力范围35-65gf)
- 7. 导通行程: 1.8±0.5mm
- 8. 总行程: 3.5±0.5mm
- 9. 操作寿命: 5000万次
- 10. 安装 1\*1.5 倍以上键帽时, 须安装平衡杆。

明细表:

|    |                |      |      |    |                 |       |    |
|----|----------------|------|------|----|-----------------|-------|----|
| ⑦  | BSPG1280-02007 | 2#基座 | ——   | 1  | PA66            | 红 色   | —— |
| ⑥  | BSPG1280-04001 | 2#盖子 | ——   | 1  | PC              | 本 色   | —— |
| ⑤  | BZPG1583-01015 | 3#动片 | ——   | 1  | Copper Alloy    | ——    | —— |
| ④  | BZPG1280-01006 | 2#静片 | ——   | 1  | Copper Alloy    | ——    | —— |
| ③  | BSPG1280-05004 | 2#导芯 | ——   | 1  | POM             | ——    | —— |
| ②  | BWPG1280-03001 | A款弹簧 | ——   | 1  | Stainless Steel | ——    | —— |
| ①  | BWPG1511-09010 | 焊点   | ——   | 2  | ——              | ——    | —— |
| 序号 | 物料料号           | 零件名称 | 端子料号 | 用量 | 材料              | 镀层/颜色 | 备注 |

备注:

◇: 表示重点管控尺寸, 一般为功能尺寸, 首检时需量测。  
△: 表示次重点管控尺寸, 一般为装配尺寸, 首检时需量测。  
1) 重点及次重点管控尺寸中的序号不可重复, 需依次往后增加。若其中有某个尺寸在变更或其它状况下, 尺寸消失或不要求管控时, 原序号不可再用。有其它尺寸需要增加管控时, 序号往后增加。  
2) 版次定义: 新开发而未转量产之产品图面版次为A1, A2, A3...  
已转量产之产品图面版次为A, B, C...

|             |    |            |                           |     |    |    |
|-------------|----|------------|---------------------------|-----|----|----|
| ECN-2001-04 | E  | 2020.09.18 | 静片端子镀镍, 焊锡不良, 更换材料C5191H。 | 胡海鑫 |    |    |
| ECN-1810-23 | D  | 2018.10.24 | 依产品实际修正尺寸。                | 吴川东 |    |    |
| ECN-1810-21 | C  | 2018.10.23 | 修正导通行程和曲线。                | 吴川东 |    |    |
| ECN-1810-16 | B  | 2018.10.19 | 依实际修正产品克力、图框, 新增明细表。      | 吴川东 |    |    |
| 工程变更单号      | 版次 | 日期         | 说明                        | 修改  | 审核 | 核准 |

|        |                                  |   |                    |
|--------|----------------------------------|---|--------------------|
| 承 认    | 日期                               | 东莞市凯华电子有限公司<br>DONGGUAN CITY KAIHUA ELECTRONICS CO.,LTD |                    |
| 设 计    | 吴川东                              | 2018/10/10  |                    |
| 审 核    |                                  |   |                    |
| 核 准    |                                  |   |                    |
| 名称     | PG1280按键开关                       |   |                    |
| 料 号    | CPG128001S01                     |   |                    |
| 未注尺寸公差 | 30<L<br>10<L≤30<br>5<L≤10<br>L≤5 | ±0.30<br>±0.20<br>±0.15<br>±0.10                        | 角度<br>±2°          |
| 单位: mm | 比例: 1:1                          | 视角  | 图号: KHA-PG1280-001 |
| 页次 1   | OF 1                             |   |                    |




凱華電子  
KAIHUA EEELETRONICS

Document Number:

KH-PS1607-02

# 产品规格书

## Product Specification

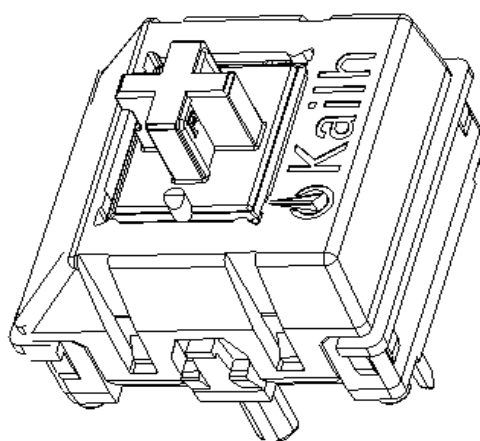

P/N: \_\_\_\_\_

**CPG128001S01**

Title :

**PG1280 keyboard Switch**

| Rev. | ECN         | Release and Revision Description: | PreparedBy /Date: | Checked By/Date: | Approved By/Date: |
|------|-------------|-----------------------------------|-------------------|------------------|-------------------|
| A    | _____       | New releasing 初版发行                | 罗衡军/2015/06/30    | 胡远峰/2015/01/15   | 陈军/2015/01/15     |
| B    | _____       | Revise format 修订格式                | 罗衡军 2016/9/12     | 胡远锋 2016/9/12    | 陈军/2015/01/15     |
| C    | ECN-2009-28 | Packaging correction<br>包装修正      | 胡海鑫 2020/09/19    | 胡前程 2020/09/19   | 郑建军 2020/09/19    |
|      |             |                                   |                   |                  |                   |
|      |             |                                   |                   |                  |                   |
|      |             |                                   |                   |                  |                   |



凱華電子  
KAIHUA EEELETRONICS

## Product Specification

|              |              |       |       |
|--------------|--------------|-------|-------|
| P/N:         | DOC. No.:    | Rev.: | Page: |
| CPG128001S01 | KH-PS1607-02 | C     | 2/11  |

## Content

### 目录

|  |    |
|--|----|
| 1. Scope/范围:                               | 3  |
| 2. Product Application/产品应用:               | 3  |
| 3. Technology Parameters/技术参数              | 3  |
| 4. Ratings/额定性能要求                          | 3  |
| 5. Profile Dimensions /外形尺寸                | 3  |
| 6. Electrical Performance/电气性能             | 4  |
| 7. Mechanical Performance/机械性能             | 5  |
| 8. Environmental Performance/环境性能          | 7  |
| 9. Recommended PCB Layout/推荐的 PCB 安装焊盘规格   | 9  |
| 10. Loading Parameter Specification/荷重参数规格 | 9  |
| 11. Packaging/包装                           | 10 |
| 12. Precaution/注意事项                        | 10 |

"Confidential"

All Right Reserved COPYRIGHT Kailh Electronics Co,LTD



凱華電子  
KAIHUA EEELETRONICS

## Product Specification

|              |              |       |       |
|--------------|--------------|-------|-------|
| P/N:         | DOC. No.:    | Rev.: | Page: |
| CPG128001S01 | KH-PS1607-02 | C     | 3/11  |

### 1. Scope/范围:

This Product Specification covers the requirement of Mechanical keyboard switch on product performance, test methods and quality assurance provisions.

本规格书内容涵盖机械键盘开关产品的要求，包括性能指标、测试方法及质量保证方面等。

### 2. Product Application/产品应用:

Mainly applied on computer keyboards, cash registers equipment and Man-Machine interface.

主要适用于电脑，收银机，工业设备和人机界面


### 3. Technology Parameters/技术参数

|                                     |              |
|-------------------------------------|--------------|
| Ambient Humidity 工作湿度:              | 45~95% R.H.; |
| Operating Temperature Range 使用温度范围: | -10℃~+60℃;   |
| Storage Temperature Range 保存温度范围:   | -20℃~+70℃;   |
| Normal Condition:                   |              |
| Ambient temperature 环境温度:           | 20±2℃        |
| Relative humidity 相对湿度:             | 65%±5% R.H.; |
| Air pressure 气压:                    | 86~101KPa;   |
| Contact Resistance 接触阻抗:            | 100 mΩ Max;  |

### 4. Ratings/额定性能要求

|                             |                                   |
|-----------------------------|-----------------------------------|
| Rating 额定负荷:                | DC12V / 10mA;                     |
| Insulation Resistance 绝缘电阻: | ≥100MΩ/DC 500V;                   |
| Withstand Voltage 耐电压:      | AC 100V 1 Minute;                 |
| Mechanical Life 机械寿命:       | 50,000,000 Cycles. (Without load) |

### 5. Profile Dimensions /外形尺寸

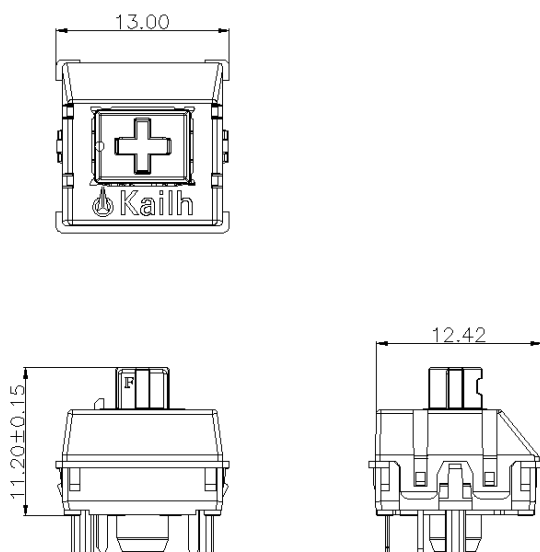

### 6. Electrical Performance/电气性能

"Confidential"

All Right Reserved COPYRIGHT Kailh Electronics Co,LTD



凱華電子  
KAIHUA EEELECTRONICS

## Product Specification

|              |              |       |       |
|--------------|--------------|-------|-------|
| P/N:         | DOC. No.:    | Rev.: | Page: |
| CPG128001S01 | KH-PS1607-02 | C     | 4/11  |


| Item<br>項目 | Description<br>項目描述                    | Test Condition 测试条件   | Requirement 规格要求  |
|------------|--|---|---|
| 6.1        | Contact Resistance<br>接触电阻             | Static load: (Operation force)x2, which is applied on the center of Switch stem.<br>静态负载: 动作力的 2 倍, 施加在手柄中心.<br><br>Measurement tool: Contact resistance Meter.<br>测量工具: 微电流接触电阻计(1KHz, 20mV,5~50mA)<br><br>在低电流 ( $\leq 100\text{mA}$ ) 条件下测试.<br>Measured at low current (100mA or less). | 100m $\Omega$ Max<br>100m $\Omega$ 以下   |
| 6.2        | Insulation Resistance<br>绝缘电阻          | Apply a Voltage of DC 500 V for 1 minute, according to the below method.<br>(1) Between terminals.<br>(2) Between terminal and Body.<br><br>输入 500V DC 电压 1 分钟, 按如下接触方法测试:<br>(1) 端子与端子之间.<br>(2) 端子与外壳之间.  | 100M $\Omega$ Min<br>100 兆欧以上   |
| 6.3        | Dielectric withstanding voltage<br>耐电压 | Apply a Voltage of AC 100 V (50~60Hz) for 1 minute, according to the below method.<br>(1) Between terminals.<br>(2) Between terminal and Body.<br><br>输入 100V AC 电压 1 分钟, 按如下接触方法测试:<br>(1) 端子与端子之间.<br>(2) 端子与外壳之间.  | No evidence of breakdown<br>无瞬断、击穿等破坏.  |
| 6.4        | Bouncing<br>触点抖动                       | Operation speed: 3~4 times/s<br>操作速度: 每秒 3~4 次<br><br>Slightly push the center of stem by 3~4 times/s, to test the bounce at "ON" and "OFF"<br>以每秒 3~4 次的速度, 轻轻在手柄中心加力, 在"导通"与"瞬断"间测试.<br><br>Oscillo scope 示波器<br>Switch Bouncing Test Circuit 抖动测定回路.                                     | Before Life cycle:<br>On:5ms MAX,5 毫秒以下<br>Off: 5ms MAX,5 毫秒以下<br><br>After Life cycle:<br>On:10ms MAX,10 毫秒以下<br>Off: 10ms MAX,10 毫秒以下 |

"Confidential"

All Right Reserved COPYRIGHT Kailh Electronics Co,LTD



触点抖动用图:

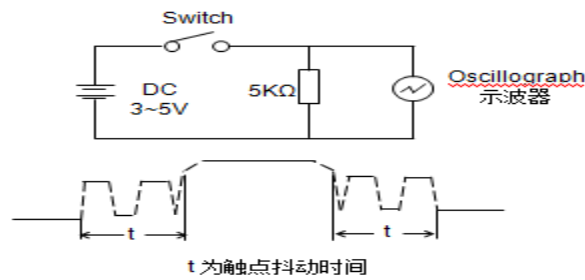

## 7. Mechanical Performance/机械性能

| Item<br>项目 | Description<br>项目描述       | Test Condition 测试条件  | Requirement 规格要求       |
|------------|---------------------------|--|------------------------|
| 7.1        | Load curve<br>荷重曲线        | <p>Place the vertical direction of switch operation and gradually increase the load applied to the center of the stem until it stop.<br/>开关的动作方向为垂直放置，向手柄中心逐渐施加负荷直到停止.</p> <p>Force-Travel-diagram<br/>操作力-行程-图解</p> | See page 10<br>见第 10 页 |
| 7.2        | Loading Parameter<br>荷重参数 | <p>Place the vertical direction of switch operation and gradually increase the load applied to the center of the stem until it stop.<br/>开关的动作方向为垂直放置，向手柄中心逐渐施加负荷直到停止.</p>   | See page 10<br>见第 10 页 |



凱華電子  
KAIHUA EEELETRONICS

## Product Specification

P/N:

CPG128001S01

DOC. No.:


KH-PS1607-02

Rev.:

C

Page:

6/11

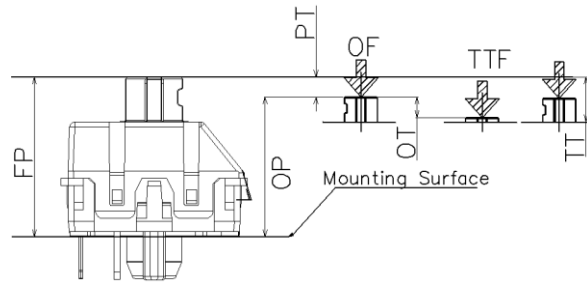


7.3

Static  
Strength  
静止强度

A static load of 3 Kgf shall be applied in the direction of button operation for a period of 60 seconds.

在手柄动作方向施加 3kgf 的静负荷 60 秒，然后测试参数。



No damage (Electrical and mechanical)  
电气和机械性能正常。

Contact resistance  
接触电阻: 200mΩ Max

Contact force 接触力:  
30gf Min

7.4

Stem Pull  
Strength  
手柄拉拔强度

Break by a pull force applied opposite to the direction of stem operation.

在推柄动作方向反向垂直施加拉力，使其破坏的程度。

5kgf Min

7.5


Shock  
机械冲击

Measured by according to the below condition:

(1) Acceleration: 80g 加速度

(2) Cycles of test: 3 cycles each in 6 directions, for a total of 18 cycles.

试验次数：每个方向 3 次，6 个方向共 18 次。



Shall meet No.6, 7.1, 7.2.  
满足 6, 7.1, 7.2 要求。

"Confidential"

All Right Reserved COPYRIGHT Kailh Electronics Co., LTD




|     |                   |   |   |
|-----|-------------------|---|---|
| 7.6 | Life Test<br>寿命测试 | (1) No load 无负载<br>(2) Operation speed: 5~6cycles/s<br>操作速度: 5~6 次/秒<br>(3) Push force: Maximum value of operation force.<br>按压力: 操作力规格值的上限.<br>(4) Cycles: 50,000,000 times Min<br>操作次数: 5000 万次以上 | Contact resistance:<br>200 m $\Omega$ Max<br>接触电阻: 200 毫欧以下<br>Bouncing: 10ms Max<br>触点抖动: 10 毫秒以下<br>Operation force: Variation rate within $\pm 30\%$<br>操作力的变化范围在初始值的 $\pm 30\%$ 以内. |
|-----|-------------------|---|---|

## 8. Environmental Performance/环境性能

| Item<br>项目      | Description<br>项目描述          | Test Condition 测试条件  | Requirement 规格要求   |                   |                          |                 |       |    |        |    |       |    |       |    |  |
|-----------------|------------------------------|--|--|-------------------|--------------------------|-----------------|-------|----|--------|----|-------|----|-------|----|--|
| 8.1             | Cold test<br>耐寒性             | (1) Temperature : - 20±2℃<br>温度： - 20±2℃<br>(2) Duration of test: 48h<br>持续时间： 48 小时<br>(3) Take off a drop water 去掉水珠<br>(4) Standard conditions after test : 1h<br>试验后的放置条件： 1 小时  | Contact resistance:<br>200m Ω Max<br>Shall meet :<br>No. 6.2 to 6.4<br>No. 7.1 to 7.2<br>接触电阻 200m Ω 以下<br>满足：<br>No. 6.2 to 6.4<br>No. 7.1 to 7.2 |                   |                          |                 |       |    |        |    |       |    |       |    |  |
| 8.2             | Heat test<br>耐热性             | (1) Temperature : 70±2℃<br>温度： 70±2℃<br>(2) Duration of test: 48h<br>持续时间： 48 小时<br>(3) Take off a drop water 去掉水珠<br>(4) Standard conditions after test : 1h<br>试验后的放置条件： 1 小时  | Contact resistance:<br>200m Ω Max<br>Shall meet :<br>No. 6.2 to 6.4<br>No. 7.1 to 7.2<br>接触电阻 200m Ω 以下<br>满足：<br>No. 6.2 to 6.4<br>No. 7.1 to 7.2 |                   |                          |                 |       |    |        |    |       |    |       |    |  |
| 8.3             | Temperature<br>cycle<br>温度循环 | <div><div>(1) Test cycles:5 cycles<br/>试验周期： 5 个周期</div><div>(2) Standard condition after test:1h<br/>试验后的放置条件： 1 小时</div><table><tr><td></td><td>Temperature<br/>温度</td><td>Duration of test<br/>持续时间</td></tr><tr><td rowspan="4">1 cycle<br/>一次循环</td><td>20±5℃</td><td>1h</td></tr><tr><td>-20±5℃</td><td>1h</td></tr><tr><td>20±5℃</td><td>1h</td></tr><tr><td>70±5℃</td><td>1h</td></tr></table></div> |  | Temperature<br>温度 | Duration of test<br>持续时间 | 1 cycle<br>一次循环 | 20±5℃ | 1h | -20±5℃ | 1h | 20±5℃ | 1h | 70±5℃ | 1h | Contact resistance:<br>200m Ω Max<br>Shall meet :<br>No. 6.2 to 6.4<br>No. 7.1 to 7.2<br>接触电阻 200m Ω 以下<br>满足：<br>No. 6.2 to 6.4<br>No. 7.1 to 7.2 |
|                 | Temperature<br>温度            | Duration of test<br>持续时间   |  |                   |                          |                 |       |    |        |    |       |    |       |    |  |
| 1 cycle<br>一次循环 | 20±5℃                        | 1h   |  |                   |                          |                 |       |    |        |    |       |    |       |    |  |
|                 | -20±5℃                       | 1h   |  |                   |                          |                 |       |    |        |    |       |    |       |    |  |
|                 | 20±5℃                        | 1h   |  |                   |                          |                 |       |    |        |    |       |    |       |    |  |
|                 | 70±5℃                        | 1h   |  |                   |                          |                 |       |    |        |    |       |    |       |    |  |



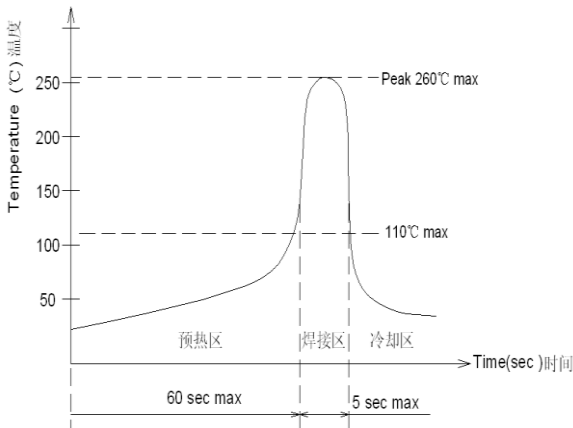

|     |                             |  |  |
|-----|-----------------------------|--|--|
| 8.4 | Soldering heat test<br>耐焊接热 | Soldering area: T/2 of PWB thickness.<br>(PWB: T=1.6mm)<br>焊接面积: 印刷基板的 1/2 厚度处<br>Soldering temperature: $260 \pm 5^{\circ}\text{C}$<br>Soldering time: $5 \pm 0.5\text{s}$<br>焊接温度: $260 \pm 5^{\circ}\text{C}$<br>焊接时间: $5 \pm 0.5$ 秒  | Appearance:<br>No abnormality.<br>外观无异常  |
| 8.5 | Solderability<br>可焊性        | 1. Hand soldering 手工焊接:<br>Please practice according to below condition:<br>(1) Soldering Temperature : $350 \pm 5^{\circ}\text{C}$<br>焊接温度: $350 \pm 5^{\circ}\text{C}$<br>(2) Continual soldering time: $3 \pm 0.5\text{s}$<br>连续焊接时间: $3 \pm 0.5$ 秒<br>(3) Capacity of soldering iron: $\leq 20\text{w}$<br>电烙铁功率: 20 瓦以下<br><br>2. Automatic PIPsoldering 自动波峰焊接:<br>For the product of T/H, according to below condition:<br> | At least 90% of surface area of immersed portion shall be covered by solder.<br>侵焊面积大于 90%以上.  |
| 8.6 | Humidity test<br>耐湿性        | (1) Temperature : $60 \pm 2^{\circ}\text{C}$<br>温度: $60 \pm 2^{\circ}\text{C}$<br>(2) relative humidity: 90~95% R.H.<br>相对湿度: 90~95% R.H.<br>(3) Duration of test: 48h<br>持续时间: 48 小时<br>(4) Take off a drop water<br>去掉水珠<br>(5) Standard conditions after test: 1h<br>试验后的放置条件: 1 小时   | Contact resistance:<br>$200\text{m}\Omega$ Max<br>Shall meet :<br>No. 6.2 to 6.4<br>No. 7.1 to 7.2<br>接触电阻 $200\text{m}\Omega$ 以下<br>满足:<br>No. 6.2 to 6.4<br>No. 7.1 to 7.2 |




|     |  |  |  |
|-----|--|--|--|
| 8.7 | Salt Spray<br>盐雾测试                     | Apply the following environment to test:<br>根据下列条件进行测试:<br><br>(1) Temperature : $35 \pm 5^{\circ}\text{C}$<br>温度: $35 \pm 5^{\circ}\text{C}$ ;<br>(2) Salt water density: $5 \pm 1\%$<br>盐水浓度: $5 \pm 1\%$ ;<br>(3) Duration: 12 hours<br>持续时间: 12 小时;<br>(4) After test, the salt deposit shall be removed by running water.<br>实验后将盐沉积物用水冲掉 | Appearance:<br>No corrosion spot, no crack, no base plate naked.<br>外观: 无腐蚀点, 无裂纹, 无裸露基材.<br><br>Contact Resistance:<br>$200\text{ m}\Omega$ Max<br>接触电阻: 200 毫欧以下 |
| 8.8 | Withstand $\text{K}_2\text{S}$<br>硫化测试 | Apply the following environment to test:<br>根据下列条件进行测试<br><br>(1) Temperature: $35 \pm 5^{\circ}\text{C}$ 温度: $35 \pm 5^{\circ}\text{C}$<br>(2) $\text{K}_2\text{S}$ Density: 2%;<br>硫化钾浓度: 2%<br>(3) Duration: 2 minute.<br>持续时间: 2 分钟  | Appearance:<br>No corrosion spot, no crack, no base plate naked.<br>外观: 无腐蚀点, 无裂纹, 无裸露基材.<br><br>Contact Resistance:<br>$500\text{ m}\Omega$ Max<br>接触电阻: 500 毫欧以下 |

## 9. Recommended PCB Layout 推荐的 PCB 安装焊盘规格

(Top View)

(Single face board T=1.6mm)

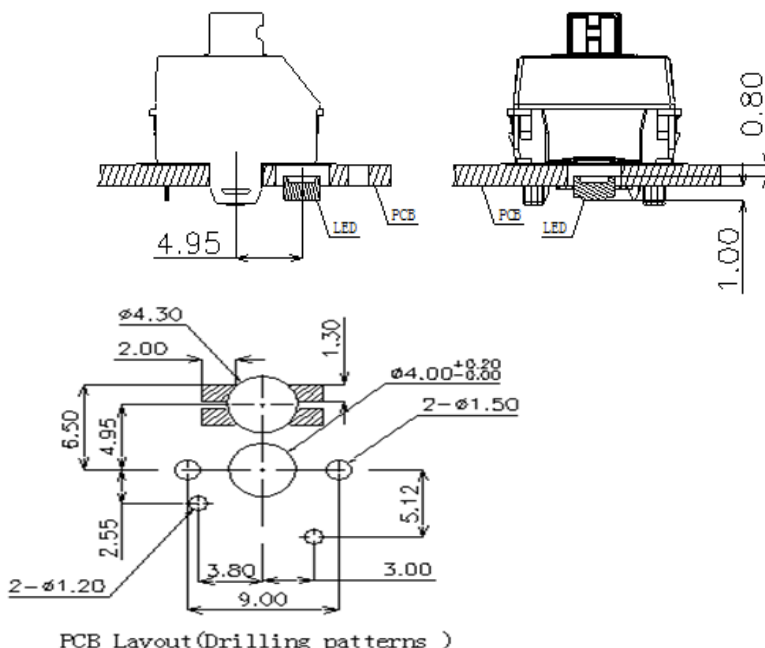

PCB Layout(Drilling patterns)





10. Loading Parameter (FP/OP/PT/OT/MD/OF/CF)Specification 荷重参数规格：

| Parameter | Unit | Specification | Remark |
|-----------|------|---------------|--------|
| FP(自由位置)  | mm   | 11.20±0.15    |        |
| OP(动作位置)  | mm   | 9.4±0.65      |        |
| PT(导通行程)  | mm   | 1.8±0.5       |        |
| OF(操作力)   | gf   | 45±10         |        |
| OT(过行程)   | mm   | 1.5           | Min    |
| TT(总行程)   | mm   | 3.5±0.5       |        |

11. Packaging 包装

Packaging type:Tray, 1000Pcs/Tray, 6000Pcs/Carton.

包装方式:Tray 盘, 1000Pcs/盘, 6000Pcs/箱.



12. Precaution 注意事项

12.1 Soldering condition 浸焊条件

| ITEM<br>项目                    | CONDITION<br>条件   |
|-------------------------------|---|
| Preheat temperature<br>预热温度   | 110℃ Max (Ambient temperature of soldering surface of P.W.B)<br>110℃ 以下(印刷基板焊锡面周围的温度) |
| Preheat time 预热时间             | 60s, Max 60 秒以内   |
| Area of flux<br>助焊剂面积         | 1/2 Max of PWB Thickness<br>印刷基板厚度的 1/2 以内  |
| Temperature of solder<br>焊锡温度 | 260±5℃<br>260±5℃  |
| Time of immersion<br>浸焊时间     | Within 5s<br>5 秒以内  |
| Number of soldering<br>焊接次数   | 2time Max (But should down heat of the first soldering)<br>2 次以内                      |
| Printed wiring board<br>印刷基板  | Single side copper-clad laminates<br>单面铜箔   |

(1) After switches were soldered, please be careful not to clean switches with solvent

开关浸焊后,注意不要用溶剂清洗.

(2) Under the condition of using soldering iron, soldering temperature shall be 350℃ max within 3 sec.

在使用烙铁的情况下,焊锡温度应在350℃以下,焊接时间3秒以内.

12.2 Notes 注意点



|              |              |       |       |
|--------------|--------------|-------|-------|
| P/N:         | DOC. No.:    | Rev.: | Page: |
| CPG128001S01 | KH-PS1607-02 | C     | 11/11 |

- (1) Please be cautious not to give excessive static load or shock to switches.  
注意不要施加超负荷的压力或晃动开关。
- (2) Please be careful not to stack up P. W. B. after switches were soldered.  
开关焊接以后,印刷基板注意不要叠放。
- (3) Preservation under high temperature and high humidity or corrosive gas should be avoided  
Especially. When you need to preserve for a long period, do not open the carton.  
保管时尤其应注意避开高湿高温和有腐蚀性气体的环境.如需长时间保存,请不要打开包装箱。
- (4) The standard storage period is 3 months, with maximum up to 6months, preferably to be used as soon as possible. After opening the package, you should put the remaining switches in a plastic bag to prevent from damp and corrosive gas.  
保存标准为 3 个月, 限度为 6 个月以内, 请尽早使用. 打开包装后, 有剩余品时, 应将剩余部分以胶袋包装好以同外界隔离, 请进行合适的防湿, 防腐蚀气体等处理后进行保管。
- (5) This Product Specification is considered as the technical agreement on product between the receiving customer and Kailh. Any information on Product Catalogue which is in conflict with or different from the corresponding information of this document is considered as invalid.  
该规格书为客户与凯华公司产品在技术方面的共识,其他相关数据上与该规格书不一致的内容都是无效的。
- (6) If customer issue purchase orders without confirmation by signature of this specification after receipt, such confirmation will be considered as granted upon receipt of the first purchase order.  
如果顾客收到规格书后没有信息反馈而直接向我公司订货, 我们将认为贵客已接受此规格书。
- (7) If there is no order or no request for new specification after 1 year upon this specification is issued, the specification will be regarded as invalid.  
本产品规格书从生效日起 1 年后, 如果没有订货或再次申请最新规格书时请做无效处理。
- (8) Products meet the ROHS & REACH environmental management substances control standards  
产品满足 **ROHS & REACH** 环境管理物质管制标准