

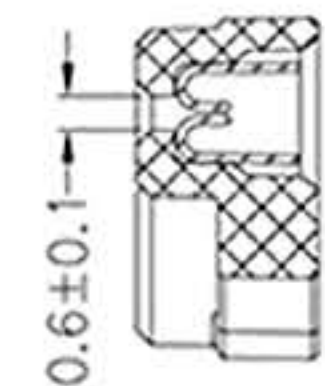
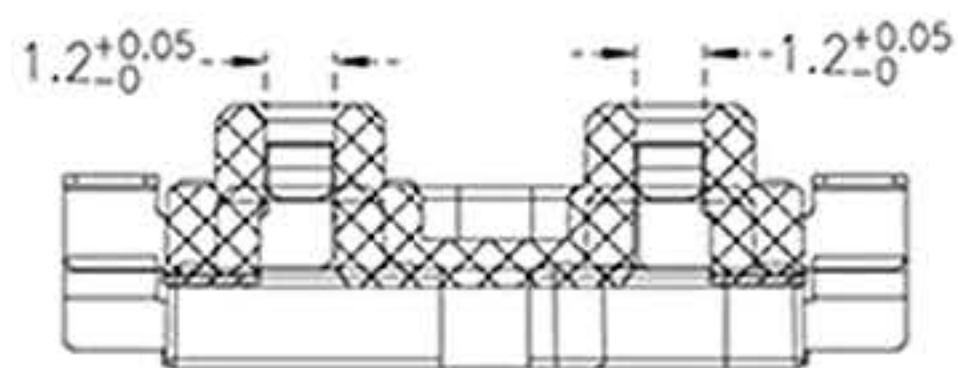
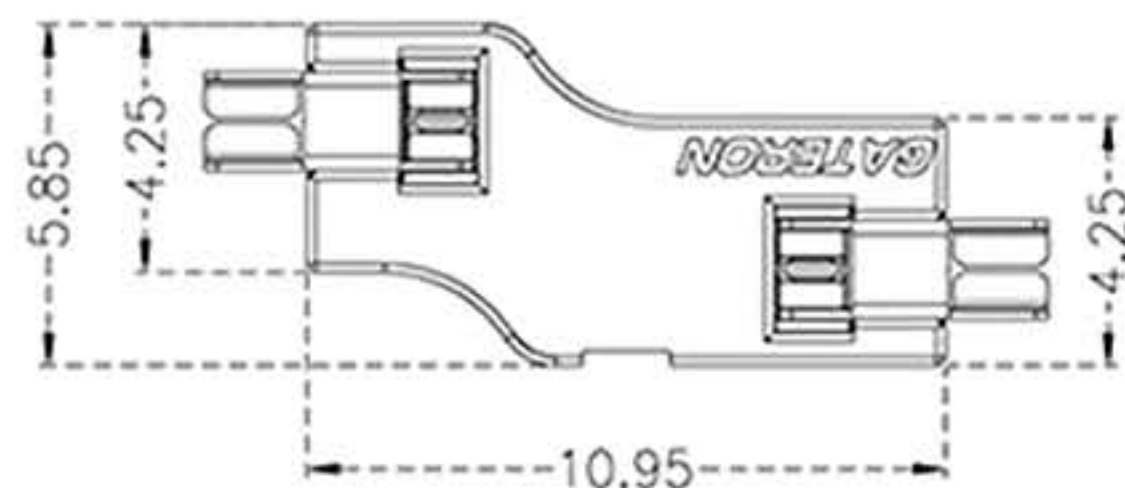
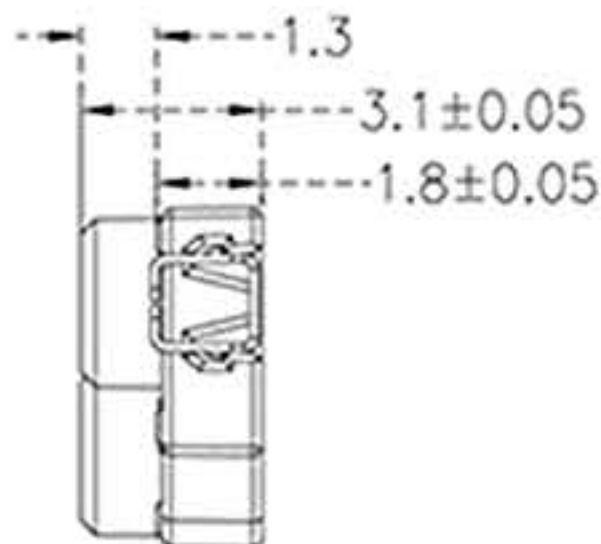



SECTION B-B

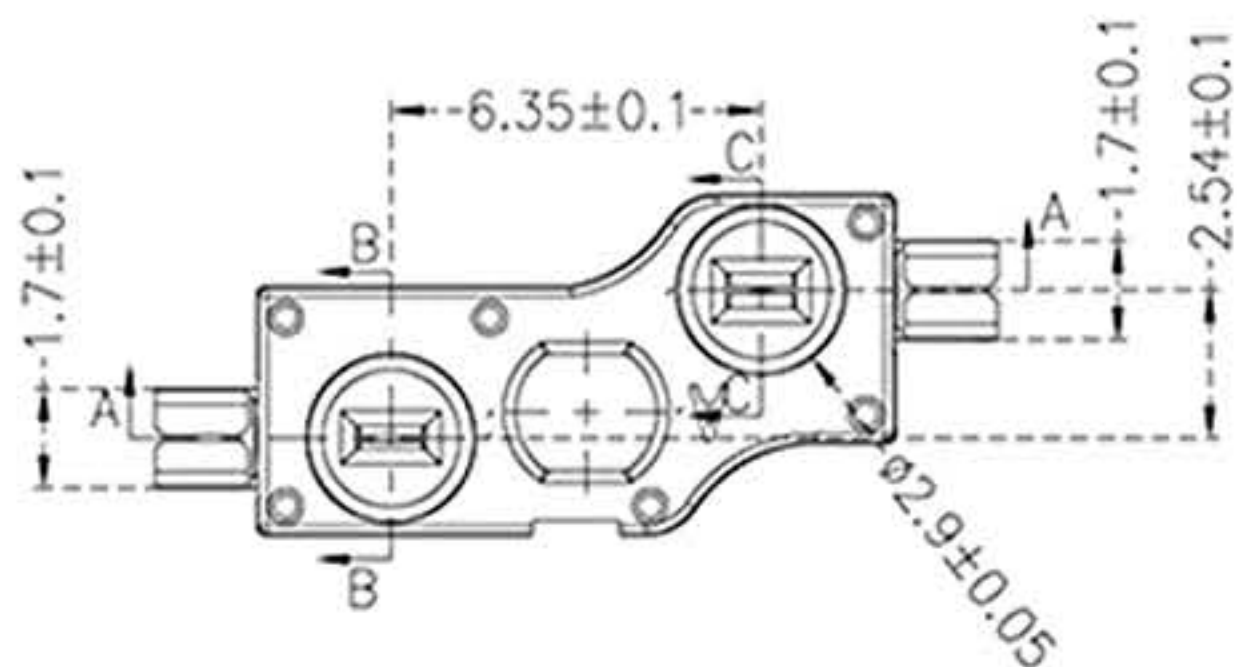

SECTION C-C

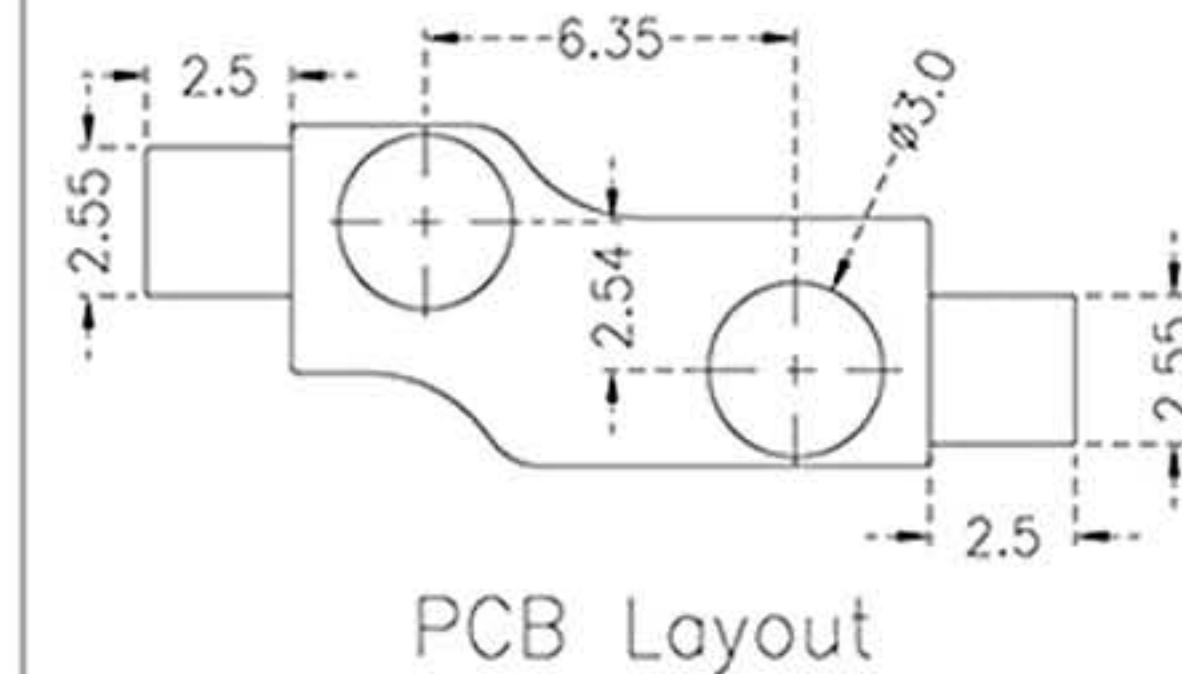

SECTION A-A

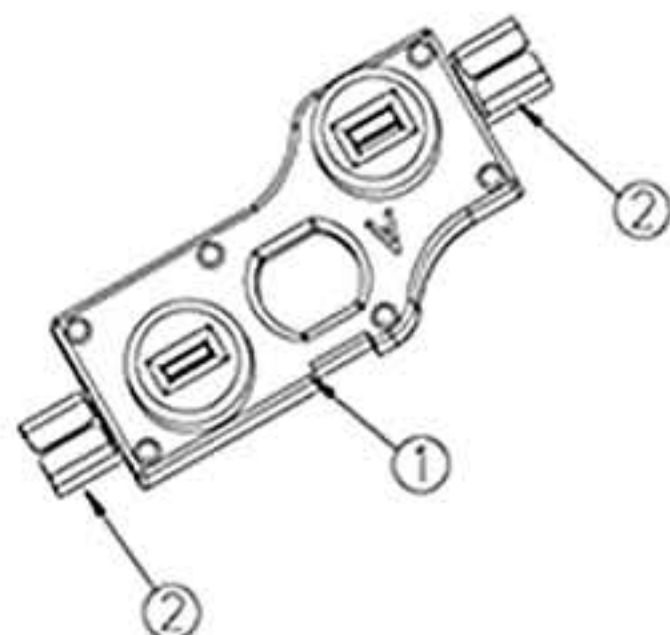

②	Terminal	2	Cu Alloy	Gold-plating	
①	Base	1	PA66	Black	
Item	Part name	QTY.	Material	Finishing	Remark

#### Specification:

##### 1. Rating:

Voltage: 12VAC/DC Max, 2VDC Min;

Current: 10mA AC/DC Max, 10μA DC Min;

2. Contact Resistance: 100mΩ Max;


3. Insulation Resistance: 100MΩ Min at 100VDC;

4. Withstand Voltage: AC100V(50~60Hz) for 1 minute;

5. Push force: 3.0Kgf Max;

6. Operation Life: 100 cycles.

REV.	DATE	MODIFICATION	ECN NO.	PRIOR VERSION
Title/Proj Mechanical shaft connection socket			Tolerance Unless Otherwise Specified	
Part No	KS-2P02B01-01	Version 1	~3	>3~10
Drawing No	KS-2P02B01-01	Scale 4:1	±0.2	±0.3
Drafted by	Date		Unit: mm	Size: A4
Checked by	Date		THIRD ANGLE	
Approved by	Date			



**GATERON**  
GATERON Electronic Technology Co., Ltd