

JianYan Testing Group Shenzhen Co., Ltd.

Report No: JYTSZB-R12-2100993

FCC REPORT

(LTE)

Applicant: Nebra LTD.

Address of Applicant: Unit 4 Bells Yew Green Business Court, Bells Yew Green,

Tunbridge Wells TN3 9BJ

Equipment Under Test (EUT)

Product Name: Nebra Smart Outdoor LoRa Gateway / Nebra HNT Outdoor

Hotspot Miner

Model No.: HNTOUT-915-G-LT+, HNTOUT-915-G-LT, HNTOUT-915-LT+,

HNTOUT-915 -LT, HNTOUT-915-G-LT+, HNTOUT-915-G,

HNTOUT-915

Trade mark: Nebra

FCC ID: 2AZDM-HNTOUT

Applicable standards: FCC CFR Title 47 Part 2

FCC CFR Title 47 Part 22 Subpart H
FCC CFR Title 47 Part 24 Subpart E
FCC CFR Title 47 Part 27 Subpart L
FCC CFR Title 47 Part 27 Subpart M
FCC CFR Title 47 Part 27 Subpart H
FCC CFR Title 47 Part 27 Subpart E
FCC CFR Title 47 Part 90 Subpart S

Date of sample receipt: 01 Jun., 2021

Date of Test: 01 Jun., to 08 Jul., 2021

Date of report issued: 09 Jul., 2021

Test Result: PASS*

*In the configuration tested, the EUT complied with the standards specified above.

Authorized Signature:

Bruce Zhang

Laboratory Manager

This report details the results of the testing carried out on one sample. The results contained in this test report do not relate to other samples of the same product and does not permit the use of the JYT product certification mark. The manufacturer should ensure that all products in series production are in conformity with the product sample detailed in this report.

This report may only be reproduced and distributed in full. If the product in this report is used in any configuration other than that detailed in the report, the manufacturer must ensure the new system complies with all relevant standards.

This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful, and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.





2. Version

Version No.	Date	Description
00	09 Jul., 2021	Original

Tested by:	Test Engineer	Date:	09 Jul., 2021
Reviewed by:	Project Engineer	Date:	09 Jul., 2021



3. Contents

		Page
1.	COVER PAGE	1
2.	VERSION	2
3.		
4.	TEST SUMMARY	
5.	GENERAL INFORMATION	
į	5.1 CLIENT INFORMATION	6
	5.2 GENERAL DESCRIPTION OF E.U.T.	
	5.3 TEST ENVIRONMENT AND MODE, AND TEST SAMPLES PLANS	
	5.4 DESCRIPTION OF SUPPORT UNITS	
	5.5 MEASUREMENT UNCERTAINTY	
į	5.6 RELATED SUBMITTAL(S) / GRANT (S)	18
	5.7 ADDITIONS TO, DEVIATIONS, OR EXCLUSIONS FROM THE METHOD	
ļ	5.8 LABORATORY FACILITY	19
	5.9 LABORATORY LOCATION	
į	5.10 TEST INSTRUMENTS LIST	
6.		
(6.1 CONDUCTED OUTPUT POWER, ERP AND EIRP	20
(6.2 PEAK-TO-AVERAGE RATIO	
(6.3 OCCUPY BANDWIDTH	22
(6.4 OUT OF BAND EMISSION AT ANTENNA TERMINALS	23
(6.5 FIELD STRENGTH OF SPURIOUS RADIATION MEASUREMENT	
(6.6 Frequency stability V.S. Temperature MEASUREMENT	
(6.7 FREQUENCY STABILITY V.S. VOLTAGE MEASUREMENT	39
7	TEST SETUP PHOTO	40
R	FUT CONSTRUCTIONAL DETAILS	11



4. Test Summary

Test Items	Section in CFR 47	Result
RF Exposure (SAR)	Part 1.1307	Pass*
IXI Exposure (SAIX)	Part 2.1093	(Please refer to SAR Report)
	Part 2.1046	
	Part 22.913 (a)(5)	
	Part 24.232 (c)	
DE Output Dower	Part 27.50 (b)(10)	Pass*
RF Output Power	Part 27.50 (c)(10)	rass
	Part 27.50 (d)(4)	
	Part 27.50 (h)(2)	
	Part 90.635 (b)	
	Part 24.232 (d)	
Peak-to-Average Ratio	Part 22.913 (d)	Pass*
	Part 27.50(d)(5)	
Modulation Characteristics	Part 2.1047	Pass*
	Part 2.1049	
	Part 22.917(b)	
	Part 24.238(b)	
000/ 9 OC dD Occurried Devolution	Part 27.53(c)	Dana*
99% & -26 dB Occupied Bandwidth	Part 27.53(g)	Pass*
	Part 27.53(h)	
	Part 27.53(m)	
	Part 90.691(a)	
	Part 2.1053	
	Part 22.917(a)	
	Part 24.238 (a)	
Out of band emission at antenna	Part 27.53(c)	Pass*
terminals	Part 27.53 (g)	r ass
	Part 27.53 (h)	
	Part 27.53(m)	
	Part 90.691(a)	
	Part 22.917(a)	
	Part 24.238 (a)	
	Part 27.53(c)	
Field strength of spurious radiation	Part 27.53 (g)	Pass
	Part 27.53 (h)	
	Part 27.53(m)	
	Part 90.691(a)	
	Part 22.355	
	Part 24.235	
Frequency stability vs. temperature	Part 27.54	Pass*
	Part 90.539	
	Part 2.1055(a)(1)(b)	





Frequency stability vs. voltage	Part 22.355 Part 24.235 Part 27.54 Part 90.539	Pass*
	Part 2.1055(d)(1)	

Remark:

1. Pass: The EUT complies with the essential requirements in the standard.

2. The cable insertion loss used by "RF Output Power" and other conduction measurement items is 0.5dB(Fundamental Frequency below 1GHz)/1.0dB(Fundamental Frequency above 1GHz) (provided by the customer).

Test Method: ANSI/TIA-603-E-2016 ANSI C63.26-2015







5. General Information

5.1 Client Information

Applicant:	Nebra LTD.
Address:	Unit 4 Bells Yew Green Business Court, Bells Yew Green, Tunbridge Wells TN3 9BJ
Manufacturer:	Nebra LTD.
Address:	Unit 4 Bells Yew Green Business Court, Bells Yew Green, Tunbridge Wells TN3 9BJ
Factory:	SUNSOAR TECH CO., LIMITED
Address:	4/F, Block E, Fengze Building, Huafeng No.2 Industrial Park, Hangkong Road, XiXiang Town, BaoAn District, Shenzhen, China

5.2 General Description of E.U.T.

Product Name:			
Model No.:			
Operation Frequency range:	LTE Band 2: TX: 1850MHz-1910MHz RX: 1930MHz-1990MHz		
	LTE Band 4: TX: 1710MHz-1755MHz RX: 2110MHz-2155MHz		
	LTE Band 5: TX: 824MHz-849MHz RX: 869MHz-894MHz		
	LTE Band 7: TX: 2500MHz-2570MHz RX: 2620MHz-2690MHz		
	LTE Band 12: TX: 699MHz-716MHz RX: 729MHz-746MHz		
	LTE Band 13: TX: 777MHz-787MHz RX: 746MHz-756MHz		
	LTE Band 25: TX: 1850MHz-1915MHz RX: 1930MHz-1995MHz		
	LTE Band 26: TX: 814MHz-894MHz RX: 859MHz-894MHz		
	LTE Band 38: TX: 2570MHz-2620MHz RX: 2570MHz-2620MHz		
	LTE Band 41: TX: 2496MHz-2690MHz RX: 2496MHz-2690MHz		
Modulation type:	⊠QPSK ⊠16QAM □64QAM		
Antenna type:	Internal Antenna		
Antenna gain:	LTE Band 2: 2.39 dBi(declare by Applicant)		
	LTE Band 4: 2.31 dBi(declare by Applicant)		
	LTE Band 5: 1.75 dBi(declare by Applicant)		
	LTE Band 7: 2.78 dBi(declare by Applicant)		
	LTE Band 12: 1.75 dBi(declare by Applicant)		
	LTE Band 13: 1.75 dBi(declare by Applicant)		
	LTE Band 25: 2.39 dBi(declare by Applicant)		
	LTE Band 26: 1.75 dBi(declare by Applicant)		
	LTE Band 38: 2.78 dBi(declare by Applicant)		
	LTE Band 41: 2.78 dBi(declare by Applicant)		
Test Power supply:	AC 120V / 60Hz		
Test Sample Condition:	The applicant provided engineering samples for staying in continuously transmitting for testing.		
Remark:	Model No.: HNTOUT-915-G-LT+, HNTOUT-915-G-LT, HNTOUT-915-		
	LT+, HNTOUT-915 –LT, HNTOUT-915-G-LT+, HNTOUT-915-G,		
	HNTOUT-915 The difference: we will offer the unit with or without a GPS module included. Models with the GPS Included are indicated with a -G		
	on the end of the model number. For example a unit with model no		
	HNTOUT-915 is 915 Mhz, no GPS. A unit with Model No HNTOUT-915-		
	G, is 915Mhz with GPS. We offer the unit using the Raspberry Pi		
	Compute Module 3+ 32GB by standard (no suffix) but have an -LT		





variant which uses the Raspberry Pi Compute Module 3 Lite with a 32 GB eMMC to SD adapter card and a -LT+ variant which uses the Raspberry Pi Compute Module 3+ Lite with a 32 GB eMMC to SD adapter card. These suffixes can be applied to the models both with and without GPS as described above. We also provide customers the ability to, optionally, add both cellular connectivity and an additional 8 channel LoRa gateway to any of these models by using an mPCIe module however these come as optional extras.



Tel: +86-755-23118282, Fax: +86-755-23116366





Operation Frequency List:

Operation Frequency List:				
LTE Band 2 (1.4MHz)		LTE Band 2 (3MHz)		
Channel	Frequency (MHz)	Channel	Frequency (MHz)	
18607	1850.70	18615	1851.50	
18608	1850.80	18616	1851.60	
••••				
18899	1879.90	18899	1879.90	
18900	1880.00	18900	1880.00	
18901	1880.10	18901	1880.10	
•••		•••	•••	
19193	1909.20	19185	1908.40	
19194	1909.30	19186	1908.50	
LTE Band	l 2 (5MHz)	LTE Band 2	2 (10MHz)	
Channel	Frequency (MHz)	Channel	Frequency (MHz)	
18625	1852.50	18650	1855.00	
18626	1852.60	18651	1855.10	
			••••	
18899	1879.90	18899	1879.90	
18900	1880.00	18900	1880.00	
18901	1880.10	18901	1880.10	
			•••	
19175	1907.40	19150	1904.90	
19176	1907.50	19151	1905.00	
LTE Band	2 (15MHz)	LTE Band 2	2 (20MHz)	
Channel	Frequency (MHz)	Channel	Frequency (MHz)	
18675	1857.50	18700	1860.00	
18676	1857.60	18701	1860.10	
			••••	
18899	1879.90	18899	1879.90	
18900	1880.00	18900	1880.00	
18901	1880.10	18901	1880.10	
•••				
19125	1902.40	19100	1899.90	
19126	1902.50	19101	1900.00	



LTE Band	4 (1.4MHz)	LTE Band	4 (3MHz)
Channel	Frequency (MHz)	Channel	Frequency (MHz)
19957	1710.70	19965	1711.50
19958	1710.80	19966	1711.60
20174	1732.40	20174	1732.40
20175	1732.50	20175	1732.50
20176	1732.60	20176	1732.60
20392	1754.20	20384	1753.40
20393	1754.30	20385	1753.50
LTE Band	l 4 (5MHz)	LTE Band 4	ł (10MHz)
Channel	Frequency (MHz)	Channel	Frequency (MHz)
19975	1712.50	20000	1715.00
19976	1712.60	20001	1715.10
	••••		••••
20174	1732.40	20174	1732.40
20175	1732.50	20175	1732.50
20176	1732.60	20176	1732.60
	•••		•••
20374	1752.40	20349	1749.90
20375	1752.50	20350	1750.00
LTE Band	4 (15MHz)	LTE Band 4	ł (20MHz)
Channel	Frequency (MHz)	Channel	Frequency (MHz)
20025	1717.50	20050	1720.00
20026	1717.60	20051	1720.10
			••••
20174	1732.40	20174	1732.40
20175	1732.50	20175	1732.50
20176	1732.60	20176	1732.60
	,		•••
20324	1747.40	20299	1744.90
20325	1747.50	20300	1745.00



LTE Band 5 (1.4MHz)		LTE Band 5 (3MHz)	
Channel	Frequency (MHz)	Channel	Frequency (MHz)
20407	824.70	20415	825.50
20408	824.80	20416	825.60
••••	••••		••••
20524	836.40	20524	836.40
20525	836.50	20525	836.50
20526	836.60	20526	836.60
	•••	•••	
20642	848.20	20634	847.40
20643	848.30	20635	847.50
LTE Band	l 5 (5MHz)	LTE Band 5 (10MHz)	
Channel	Frequency (MHz)	Channel	Frequency (MHz)
20425	826.50	20450	829.00
20426	826.60	20451	829.10
			••••
20524	836.40	20524	836.40
20525	836.50	20525	836.50
20526	836.60	20526	836.60
20624	846.40	20599	839.90
20625	846.50	20600	844.00

LTE Band 7 (5MHz)		LTE Band 7	7 (10MHz)
Channel	Frequency (MHz)	Channel	Frequency (MHz)
20775	2502.50	20800	2505.00
20776	2502.60	20801	2502.10
		••••	
21099	2534.90	21099	2534.90
21100	2535.00	21100	2535.00
21101	2535.20	21101	2535.20
	,	•••	
21424	2567.40	21399	2564.90
21425	2567.50	21400	2565.00
LTE Band	7 (15MHz)	LTE Band 7 (20MHz)	
Channel	Frequency (MHz)	Channel	Frequency (MHz)
20825	2507.50	20850	2510.00
20826	2507.60	20851	2510.10
21099	2534.90	21099	2534.90
21100	2535.00	21100	2535.00
21101	2535.20	21101	2535.20
21374	2562.40	21349	2559.90
21375	2562.50	21350	2560.00

Tel: +86-755-23118282, Fax: +86-755-23116366



LTE Band 12 (1.4MHz)		LTE Band 12 (3MHz)		
Channel	Frequency (MHz)	Channel	Frequency (MHz)	
23017	699.70	23025	700.50	
23756	699.80	23026	700.60	
23094	707.40	23094	707.40	
23095	707.50	23095	707.50	
23096	707.60	23096	707.60	
		•••	•••	
23172	715.20	23164	714.40	
23173	715.30	23165	714.50	
LTE Band	12 (5MHz)	LTE Band 12 (10MHz)		
Channel	Frequency (MHz)	Channel	Frequency (MHz)	
23035	701.50	23060	704.00	
23036	701.60	23061	704.10	
			••••	
23094	707.40	23094	707.40	
23095	707.50	23095	707.50	
23096	707.60	23096	707.60	
23154	713.40	23129	710.90	
23155	713.50	23130	711.00	

LTE Band	13 (5MHz)	LTE Band 1	3 (10MHz)
Channel	Frequency (MHz)	Channel	Frequency (MHz)
23025	779.50		
23026	779.60		
23229	781.90		
23230	782.00	23230	751.00
23231	782.10		
23254	784.40		
23255	784.50		



LTE Band 2	25 (1.4MHz)	LTE Band 2	25 (3MHz)	
Channel	Frequency (MHz)	Channel	Frequency (MHz)	
26047	1850.70	26055	1851.50	
26048	1850.80	26056	1851.60	
26364	1882.40	26364	1882.40	
26365	1882.50	26365	1882.50	
26366	1882.60	26366	1882.60	
		•••	•••	
26682	1914.20	26674	1913.40	
26683	1914.30	26675	1913.50	
LTE Band	25 (5MHz)	LTE Band 25 (10MHz)		
Channel	Frequency (MHz)	Channel	Frequency (MHz)	
26065	1852.50	26090	1855.00	
26066	1852.60	26091	1855.10	
26364	1882.40	26364	1882.40	
26365	1882.50	26365	1882.50	
26366	1882.60	26366	1882.60	
26664	1912.40	26639	1909.90	
26665	1912.50	26640	1910.00	
LTE Band 2	25 (15MHz)	LTE Band 2	5 (20MHz)	
Channel	Frequency (MHz)	Channel	Frequency (MHz)	
26115	1857.50	26140	1860.00	
26116	1857.60	26141	1860.10	
26364	1882.40	26364	1882.40	
26365	1882.50	26365	1882.50	
26366	1882.60	26366	1882.60	
			•••	
26614	1907.40	26589	1904.90	
26615	1907.50	26590	1905.00	



LTE Ban	d 26 (1.4MHz)	LTE Ban	d 26 (3MHz)	
Channel	Frequency (MHz)	Channel	Frequency (MHz)	
26697	814.70	26705	815.50	
26698	814.80	26706	815.60	
		••••	••••	
26864	831.40	26864	831.40	
26865	831.50	26865	831.50	
26866	831.60	26866	831.60	
		•••		
27032	848.20	27024	847.40	
27033	848.30	27025	847.50	
LTE Ba	nd 26 (5MHz)	LTE Band 26 (10MHz)		
Channel	Frequency (MHz)	Channel	Frequency (MHz)	
26715	816.50	26750	820.00	
26716	816.60	26751	820.10	
26864	831.40	26864	831.40	
26865	831.50	26865	831.50	
26866	831.60	26866	831.60	
27014	846.40	26989	843.90	
27015	846.50	26990	844.00	
LTE Bar	d 26 (15MHz)			
Channel	Frequency (MHz)			
26775	822.50			
26776	922.60			

LTE Band 26 (15MHz)				
Channel	Frequency (MHz)			
26775	822.50			
26776	822.60			
••••				
26864	831.40			
26865	831.50			
26866	831.60			
•••				
26964	841.40			
26965	841.50			

Page 13 of 41



LTE Band	38 (5MHz)	LTE Band 3	8 (10MHz)	
Channel	Frequency (MHz)	Channel	Frequency (MHz)	
37775	2572.50	37800	2575.00	
37776	2572.60	37801	2575.10	
			••••	
37999	2594.90	37999	2594.90	
38000	2595.00	38000	2595.00	
38001	2595.10	38001	2595.10	
38224	2617.40	38199	2614.90	
38225	2617.50	38200	2615.00	
LTE Band	38 (15MHz)	LTE Band 38 (20MHz)		
Channel	Frequency (MHz)	Channel	Frequency (MHz)	
37825	2577.50	37850	2580.00	
37826	2577.60	37851	2580.10	
••••				
37999	2594.90	37999	2594.90	
38000	2595.00	38000	2595.00	
38001	2595.10	38001	2595.10	
38174	2612.40	38149	2609.90	
38175	2612.50	38150	2610.00	

LTE Band	41 (5MHz)	LTE Band 4	1 (10MHz)		
Channel	Frequency (MHz)	Channel	Frequency (MHz)		
39675	2498.50	39700	2501.00		
39676	2498.60	39701	2501.10		
40619	2592.90	40619	2592.90		
40620	2593.00	40620	2593.00		
40621	2593.10	40621	2593.10		
	<i>y.</i> :				
41564	2687.40	41539	2679.90		
41565	2687.50	41540	2680.00		
LTE Band	41 (15MHz)	LTE Band 4	TE Band 41 (20MHz)		
Channel	Frequency (MHz)	Channel	Frequency (MHz)		
39725	2503.50	39750	2506.00		
39726	2503.60	39751	2506.10		
40619	2592.90	40619	2592.90		
40620	2593.00	40620	2593.00		
40621	2593.10	40621	2593.10		
		•••			
41514	2682.40	41489	2679.90		
41515	2682.50	41490	2680.00		



Regards to the operating frequency range, the lowest frequency, the middle frequency, and the highest frequency of channel were selected to perform the test, and the selected channels as below:

LTE Band 2 (1.4MHz)			LTE Band 2 (3MHz)			
Chann	el	Frequency (MHz)	Chann	el	Frequency (MHz)	
Lowest channel	18607	1850.70	Lowest channel	18615	1851.50	
Middle channel	18900	1880.00	Middle channel	18900	1880.00	
Highest channel	19193	1909.30	Highest channel	19185	1908.50	
L1	LTE Band 2 (5MHz)			Band 2 (10MI	Hz)	
Chann	el	Frequency (MHz)	Channel		Frequency (MHz)	
Lowest channel	18625	1852.50	Lowest channel	18650	1855.00	
Middle channel	18900	1880.00	Middle channel	18900	1880.00	
Highest channel	19175	1907.50	Highest channel 19150		1905.00	
LT	E Band 2 (15M	Hz)	LTE	LTE Band 2 (20MHz)		
Chann	el	Frequency (MHz)	Channel Freq		Frequency (MHz)	
Lowest channel	18675	1857.50	Lowest channel	18700	1860.00	
Middle channel	18900	1880.00	Middle channel 18900		1880.00	
Highest channel	19125	1902.50	Highest channel	19100	1900.00	

LTE Band 4 (1.4MHz)			LTE Band 4 (3MHz)		
Channe	el:	Frequency (MHz)	Channe	ı	Frequency (MHz)
Lowest channel	19957	1710.70	Lowest channel	19965	1711.50
Middle channel	20175	1732.50	Middle channel	20175	1732.50
Highest channel	20393	1754.30	Highest channel	20385	1753.50
LT	LTE Band 4 (5MHz)			Band 4 (10M	Hz)
Chann	el	Frequency (MHz)	Channe	Frequency (MHz)	
Lowest channel	19975	1712.50	Lowest channel	20000	1715.00
Middle channel	20175	1732.50	Middle channel	20175	1732.50
Highest channel	20375	1752 <mark>.50</mark>	Highest channel	20350	1750.00
LT	E Band 4 (15M	Hz)	LTE	Band 4 (20M	Hz)
Chann	el	Frequency (MHz)	Channe	Frequency (MHz)	
Lowest channel	20025	1717.50	Lowest channel	20050	1720.00
Middle channel	20175	1732.50	Middle channel	20175	1732.50
Highest channel	20325	1747.50	Highest channel	20300	1745.00

LTE Band 5 (1.4MHz)			LTE Band 5 (3MHz)			
Channe	el:	Frequency (MHz)	Channe	I	Frequency (MHz)	
Lowest channel	20407	824.70	Lowest channel	20415	825.50	
Middle channel	20525	836.50	Middle channel 20525		836.50	
Highest channel	20643	848.30	Highest channel 20635		847.50	
L1	E Band 5 (5Mb	Hz)	LTE Band 5 (10MHz)		Hz)	
Chann	el	Frequency (MHz)	Channe	I	Frequency (MHz)	
Lowest channel	20425	826.50	Lowest channel 20450		829.00	
Middle channel	20525	836.50	Middle channel 20525		836.50	
Highest channel	20625	846.50	Highest channel	20600	844.00	

Tel: +86-755-23118282, Fax: +86-755-23116366





LTE Band 7 (5MHz)			LTE Band 7 (10MHz)		
Channe	el	Frequency (MHz)	Channel		Frequency (MHz)
Lowest channel	20775	2502.50	Lowest channel	20800	2505.00
Middle channel	21100	2535.00	Middle channel 21100		2535.00
Highest channel	21425	2567.50	Highest channel 21400		2565.00
LTE Band 7 (15MHz)			LTE Band 7 (20MHz)		
Channe	el	Frequency (MHz)	Channel		Frequency (MHz)
Lowest channel	20825	2507.50	Lowest channel	20850	2510.00
Middle channel	21100	2535.00	Middle channel 21100		2535.00
Highest channel	21375	2562.50	Highest channel	21350	2560.00

LTE	Band 12(1.4N	1Hz)	LTE Band 12(3MHz)			
Channe	I	Frequency (MHz)	Channel		Frequency (MHz)	
Lowest channel	23017	699.70	Lowest channel	23025	700.50	
Middle channel	23095	707.50	Middle channel	23095	707.50	
Highest channel	23173	715.30	Highest channel 23165		714.50	
LTE	Band 12(5M	Hz)	LTE Band 12(10MHz)		Hz)	
Channe	I	Frequency (MHz)	Channel Frequency		Frequency (MHz)	
Lowest channel	23035	701.50	Lowest channel 23060		704.00	
Middle channel	23095	707.50	Middle channel 23095		707.50	
Highest channel	23155	713.50	Highest channel	23130	711.00	

LTE	Band 13(5M	Hz)	LTE Band 13(10MHz)			Hz)
Channe	I	Frequency (MHz)	Channel Frequency (M			Frequency (MHz)
Lowest channel	23025	779.50	Lowest	Lowest channel		782.00
Middle channel	23230	782.00	Middle channel		23230	782.00
Highest channel	23255	784.50	Highest channel		23230	782.00

LTE Band 25 (1.4MHz)			LTE Band 25 (3MHz)		
Chann	el	Frequency (MHz)	Channel		Frequency (MHz)
Lowest channel	26047	1850.70	Lowest channel	26055	1851.50
Middle channel	26365	1882.50	Middle channel	26365	1882.50
Highest channel	26683	1914.30	Highest channel	26675	1913.50
LT	LTE Band 25 (5MHz)			Band 25 (10M	Hz)
Channel		Frequency (MHz)	Channel		Frequency (MHz)
Lowest channel	26065	1852.50	Lowest channel	26090	1855.00
Middle channel	26365	1882.50	Middle channel	26365	1882.50
Highest channel	26665	1912.50	Highest channel	26640	1910.00
LTE	E Band 25 (15M	1Hz)	LTE	Band 25 (20M	Hz)
Channel Fre		Frequency (MHz)	Channel Frequenc		Frequency (MHz)
Lowest channel	26115	1857.50	Lowest channel	26140	1860.00
Middle channel	26365	1882.50	Middle channel	26365	1882.50
Highest channel	26615	1907.50	Highest channel	26590	1905.00

Tel: +86-755-23118282, Fax: +86-755-23116366

Project No.: JYTSZE2105127



LTE Band 26 (1.4MHz)			LTE	Band 26 (3MI	Hz)
Channel		Frequency (MHz)	Channel		Frequency (MHz)
Lowest channel	26697	814.70	Lowest channel	26705	815.50
Middle channel	26865	831.50	Middle channel	26865	831.50
Highest channel	27033	848.30	Highest channel	27025	847.50
LTE	LTE Band 26 (5MHz)			Band 26 (10M	Hz)
Channel		Frequency (MHz)	Channel		Frequency (MHz)
Lowest channel	26715	816.50	Lowest channel	26750	820.00
Middle channel	26865	831.50	Middle channel	26865	831.50
Highest channel	27015	846.50	Highest channel	26990	844.00
LTE	LTE Band 26 (15MHz)				
Channel		Frequency (MHz)			
Lowest channel	26775	822.50			
Middle channel	26865	831.50			
Highest channel	26965	841.50			

LTE	Band 38 (5M	Hz)	LTE I	Band 38 (10M	Hz)	
Channel Frequency (MHz		Frequency (MHz)	Channel		Frequency (MHz)	
Lowest channel	37775	2572.50	Lowest channel	37800	2575.00	
Middle channel	38000	2595.00	Middle channel	38000	2595.00	
Highest channel	38225	2617.50	Highest channel	38200	2615.00	
LTE	LTE Band 38 (15MHz)			LTE Band 38 (20MHz)		
Channel Frequency (MHz)		Channel		Frequency (MHz)		
Lowest channel	37825	2577.50	Lowest channel	37850	2580.00	
Middle channel	38000	2595.00	Middle channel	38000	2595.00	
Highest channel	38175	2612.50	Highest channel	38150	2610.00	

LTE Band 41 (5MHz)			LTE Band 41 (10MHz)			
Channel		Frequency (MHz)	Channel		Frequency (MHz)	
Lowest channel	39675	2498.50	Lowest channel	39700	2501.00	
Middle channel	40620	2593.00	Middle channel	40620	2593.00	
Highest channel	41565	2687.50	Highest channel	41540	2685.00	
LTE	LTE Band 41 (15MHz)			LTE Band 41 (20MHz)		
Channe	I	Frequency (MHz)	Hz) Channel Frequency		Frequency (MHz)	
Lowest channel	39725	2503.50	Lowest channel	39750	2506.00	
Middle channel	40620	2593.00	Middle channel	40620	2593.00	
Highest channel	41515	2682.50	Highest channel	41490	2680.00	

Page 17 of 41





5.3 Test environment and mode, and test samples plans

Operating Environment:	Operating Environment:			
Temperature:	Normal: 15℃ ~ 35℃, Extreme: -30℃ ~ +50℃			
Humidity:	20 % ~ 75 % RH			
Atmospheric Pressure:	1008 mbar			
Voltage:	Nominal: 120Vac, Extreme: Low 102 Vac, High 138Vac			
Test mode:				
LTE QPSK mode	Keep the EUT communication with simulated station in QPSK mode			
LTE 16-QAM mode	Keep the EUT communication with simulated station in 16-QAM mode			
Remark: The EUT has been tested under continuous transmitting mode. Channel Low, Mid and High				
	for each type band with rated data rate were chosen for full testing. The field strength of spurious			
radiation emission was me	radiation emission was measured as EUT stand-up position (H mode) and lie down position (E1, E2			

5.4 Description of Support Units

Test Equi	ipment	Manufacturer	Model No.	Serial No.
Simulated	Station	Rohde & Schwarz	CMW500	140493

5.5 Measurement Uncertainty

Parameters	Expanded Uncertainty
Radiated Emission (9kHz ~ 30MHz)	±3.12 dB (k=2)
Radiated Emission (30MHz ~ 1000MHz)	±4.32 dB (k=2)
Radiated Emission (1GHz ~ 18GHz)	±5.16 dB (k=2)
Radiated Emission (18GHz ~ 40GHz)	±3.20 dB (k=2)

5.6 Related Submittal(s) / Grant (s)

This is an original grant, no related submittals and grants.

5.7 Additions to, deviations, or exclusions from the method

mode) for these modes. Just the worst case position (H mode) shown in report.

No

Tel: +86-755-23118282, Fax: +86-755-23116366





5.8 Laboratory Facility

The test facility is recognized, certified, or accredited by the following organizations:

• FCC - Designation No.: CN1211

JianYan Testing Group Shenzhen Co., Ltd. has been accredited as a testing laboratory by FCC (Federal Communications Commission). The test firm Registration No. is 727551.

● ISED - CAB identifier.: CN0021

The 3m Semi-anechoic chamber of JianYan Testing Group Shenzhen Co., Ltd. has been Registered by Certification and Engineering Bureau of Industry Canada for radio equipment testing with Registration No.: 10106A-1.

● A2LA - Registration No.: 4346.01

This laboratory is accredited in accordance with the recognized International Standard ISO/IEC 17025:2005 General requirements for the competence of testing and calibration laboratories. The test scope can be found as below link: https://portal.a2la.org/scopepdf/4346-01.pdf

5.9 Laboratory Location

JianYan Testing Group Shenzhen Co., Ltd.

Address: No.101, Building 8, Innovation Wisdom Port, No.155 Hongtian Road, Huangpu Community, Xingiao Street, Bao'an District, Shenzhen, Guangdong, People's Republic of China.

Tel: +86-755-23118282, Fax: +86-755-23116366

Email: info-JYTee@lets.com, Website: http://www.ccis-cb.com

5.10 Test Instruments list

Test Equipment	Manufacturer	Model No.	Serial No.	Cal. Date (mm-dd-yy)	Cal. Due date (mm-dd-yy)
3m SAC	ETS	9m*6m*6m	966	01-19-2021	01-18-2024
BiConiLog Antenna	SCHWARZBECK	VULB9163	497	03-03-2021	03-02-2022
Diseries Antonno	CCLIMAD ZDECK	\/UDA0447	250	06-18-2020	06-17-2021
Biconical Antenna	SCHWARZBECK	VUBA9117	359	06-17-2021	06-16-2022
Horn Antenna	SCHWARZBECK	BBHA9120D	916	03-03-2021	03-02-2022
Horn Antenna	SCHWARZBECK	BBHA9120D	1805	06-18-2020	06-17-2021
nom Antenna	SCHWARZBECK	DDHA9120D	1605	06-17-2021	06-16-2022
Horn Antenna	SCHWARZBECK	BBHA 9170	BBHA9170582	11-18-2020	11-17-2021
EMI Test Software	AUDIX	E3	\	/ersion: 6.110919b)
Pre-amplifier	HP	8447D	2944A09358	03-03-2021	03-02-2022
Pre-amplifier	CD	PAP-1G18	11804	03-03-2021	03-02-2022
Spectrum analyzer	Rohde & Schwarz	FSP30	101454	03-03-2021	03-02-2022
Spectrum analyzer	Rohde & Schwarz	FSP40	100363	11-18-2020	11-17-2021
EMI Test Receiver	Rohde & Schwarz	ESRP7	101070	03-03-2021	03-02-2022
Spectrum Analyzer	Agilent	N9020A	MY50510123	11-18-2020	11-17-2021
Signal Generator	Rohde & Schwarz	SMX	835454/016	03-03-2021	03-02-2022
Signal Generator	R&S	SMR20	1008100050	03-03-2021	03-02-2022
RF Switch Unit	MWRFTEST	MW200	N/A	N/A	N/A
Test Software	MWRFTEST	MTS8200		Version: 2.0.0.0	
Cable	ZDECL	Z108-NJ-NJ-81	1608458	03-03-2021	03-02-2022
Cable	MICRO-COAX	MFR64639	K10742-5	03-03-2021	03-02-2022
Cable	SUHNER	SUCOFLEX100	58193/4PE	03-03-2021	03-02-2022
DC Power Supply	XinNuoEr	WYK-10020K	1409050110020	09-25-2020	09-24-2021
Temperature Humidity Chamber	HengPu	HPGDS-500	20140828008	11-01-2020	10-31-2021
Simulated Station	Rohde & Schwarz	CMW500	140493	07-22-2020	07-21-2021

Tel: +86-755-23118282, Fax: +86-755-23116366






6. Test results

6.1 Conducted Output Power, ERP and EIRP

Test Requirement:	Part 22.913(a)(5), Part 24.232(c), part 27.50(b)(10), part 27.50(c)(10), Part 27.50(d)(4), Part 27.50 (h)(2), part 90.635(b)
Limit:	LTE Band 2: 2W, LTE Band 4: 1W, LTE Band 5: 7W, LTE Band 7: 2W, LTE Band 12: 3W, LTE Band 13: 3W, LTE Band 25: 2W, LTE Band 26: 7W, LTE Band 38: 2W, LTE Band 41: 2W,
Test setup:	
Test Procedure:	
Test Instruments:	Refer to the FCC ID:XMR201903EG25G
Test mode:	
Measurement Data:	
Test results:	Passed

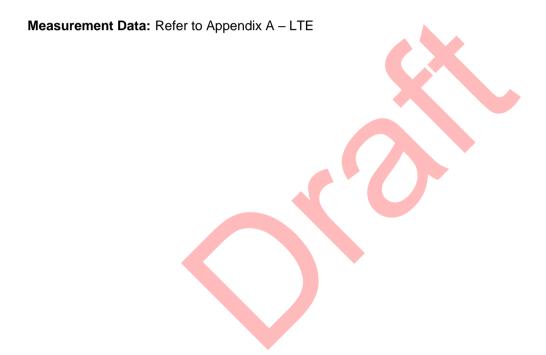





6.2 Peak-to-Average Ratio

Test Requirement:	Part 24.232(d), Part 24.232 (d), Part 27.50(d)(5)
Limit:	The peak-to-average ratio (PAR) of the transmission may not exceed 13 dB.
Test setup:	
Test Procedure:	
Test Instruments:	Refer to the FCC ID:XMR201903EG25G
Test mode:	
Measurement Data:	
Test results:	Passed







6.3 Occupy Bandwidth

Test Requirement:	Part 22.917(b), Part 24.238(b), Part 27.53(c), Part 27.53(g), Part 27.53(h), Part 27.53(m), Part 90.691(a)
Test setup:	
Test Procedure:	
Test Instruments:	Refer to the FCC ID:XMR201903EG25G
Test mode:	
Measurement Data:	
Test results:	Passed





6.4 Out of band emission at antenna terminals

Test Requirement: Part 22.917(a), Part 24.238 (a), Part 27.53(c), part 27.53(g), part 27.53(g)	
	Part 27.53(m), Part 90.691(a)
Limit:	LTE Band 2 & 4 & 5 & 12 & 25 & 26: The power of any emission outside a licensee's frequency block shall be attenuated below the transmitter power (P) in watts by at least 43 + 10 log ₁₀ (P) dB (-13 dBm). LTE Band 13: (1) On any frequency outside the 746-758 MHz band, the power of any emission shall be attenuated outside the band below the transmitter power (P) by at least 43 + 10 log (P) dB (2) On any frequency outside the 776-788 MHz band, the power of any emission shall be attenuated outside the band below the transmitter power (P) by at least 43 + 10 log (P) dB (3) On all frequencies between 763-775 MHz and 793-805 MHz, by a factor not less than 76 + 10 log (P) dB in a 6.25 kHz band segment, for base and fixed stations (4) On all frequencies between 763-775 MHz and 793-805 MHz, by a factor not less than 65 + 10 log (P) dB in a 6.25 kHz band segment, for mobile and portable stations (5) Compliance with the provisions of paragraphs (c)(1) and (c)(2) of this section is based on the use of measurement instrumentation employing a resolution bandwidth of 100 kHz or greater. However, in the 100 kHz bands immediately outside and adjacent to the frequency block, a resolution bandwidth of at least 30 kHz may be employed (6) Compliance with the provisions of paragraphs (c)(3) and (c)(4) of this section is based on the use of measurement instrumentation such that the reading taken with any resolution bandwidth setting should be adjusted to indicate spectral energy in a 6.25 kHz segment LTE Band 7 & 38 & 41: For mobile digital stations, the attenuation factor shall be not less than 40 + 10 log (P) dB on all frequencies between the channel edge, and 55 + 10 log (P) dB on all frequencies more than X megahertz from the channel edge, where X is the greater of 6 megahertz or the actual emission bandwidth as defined in paragraph (m)(6) of this section. In addition, the attenuation factor shall not be less that 43 + 10 log (P) dB on all frequencies between 2490.5 MHz and 2496 MHz and 55 + 10 log (P) dB at or below 249
Test setup:	
Test Procedure:	
Test Instruments:	Refer to the FCC ID:XMR201903EG25G
Test mode:	
Measurement Data:	
Test results:	Passed

Tel: +86-755-23118282, Fax: +86-755-23116366



6.5 Field strength of spurious radiation measurement

6.5 Field Strength of Spi	,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,
Test Requirement:	Part 22.917(a), Part 24.238 (a), Part 27.53(c), part 27.53(g), part 27.53(h),
	Part 27.53(m), Part 90.691(a)
Limit:	Part 27.53(m), Part 90.691(a) LTE Band 2 & 4 & 5 & 12 & 25 & 26: The power of any emission outside a licensee's frequency block shall be attenuated below the transmitter power (P) in watts by at least 43 + 10 log ₁₀ (P) dB (-13 dBm). LTE Band 13: (7) On any frequency outside the 746-758 MHz band, the power of any emission shall be attenuated outside the band below the transmitter power (P) by at least 43 + 10 log (P) dB (8) On any frequency outside the 776-788 MHz band, the power of any emission shall be attenuated outside the band below the transmitter power (P) by at least 43 + 10 log (P) dB (9) On all frequencies between 763-775 MHz and 793-805 MHz, by a factor not less than 76 + 10 log (P) dB in a 6.25 kHz band segment, for base and fixed stations (10)On all frequencies between 763-775 MHz and 793-805 MHz, by a factor not less than 65 + 10 log (P) dB in a 6.25 kHz band segment, for mobile and portable stations (11)Compliance with the provisions of paragraphs (c)(1) and (c)(2) of this section is based on the use of measurement instrumentation employing a resolution bandwidth of 100 kHz or greater. However, in the 100 kHz bands immediately outside and adjacent to the frequency block, a resolution bandwidth of at least 30 kHz may be employed (12)Compliance with the provisions of paragraphs (c)(3) and (c)(4) of this section is based on the use of measurement instrumentation such that the reading taken with any resolution bandwidth setting should be adjusted to indicate spectral energy in a 6.25 kHz segment LTE Band 7 & 38 & 41: For mobile digital stations, the attenuation factor shall be not less than 40 + 10 log (P) dB on all frequencies between the channel edge, and 55 + 10 log (P) dB on all frequencies more than X megahertz from the channel edge, where X is the greater of 6 megahertz or the actual emission
	bandwidth as defined in paragraph (m)(6) of this section. In addition, the
	attenuation factor shall not be less that 43 + 10 log (P) dB on all
	frequencies between 2490.5 MHz and 2496 MHz and 55 + 10 log (P) dB at or below 2490.5 MHz.
Toot cotup:	
Test setup:	Below 1GHz Antenna Tower Ground Reference Plane Ground Reference Plane Generator Amplifier Above 1GHz
	ANOVE I GITZ

Page 24 of 41



	Hom Antenna Tower Antenna Tower
Test Procedure:	 The EUT was placed on the top of a rotating table 0.8m(below 1GHz)/1.5m(above 1GHz) above the ground at a 3 meter camber. The radiated emission at the fundamental frequency was measured at 3 m with a test antenna and EMI spectrum analyzer. During the tests, the antenna height and the EUT azimuth were varied in order to identify the maximum level of emissions from the EUT. This maximization process was repeated with the EUT positioned in each of its three orthogonal orientations. The frequency range up to tenth harmonic was investigated for each of three fundamental frequency (low, middle and high channels). Once spurious emission was identified, the power of the emission was determined using the substitution method. The spurious emissions attenuation was calculated as the difference between radiated power at the fundamental frequency and the spurious emissions frequency. ERP / EIRP = S.G. output (dBm) + Antenna Gain(dB/dBi) - Cable Loss (dB)
Test Instruments:	Refer to section 5.10 for details
Test mode:	Refer to section 5.3 for details.
Test results:	Passed

Page 25 of 41





Measurement Data: LTE Band 2 part:

		Bar	nd 2 (1.4MHz)			
		Lov	vest channel			
Frequency (MHz)	Level at antenna terminals (dBm)	Factor (dB)	Spurous Emission level (dBm)	Limit Line (dBm)	Margin (dB)	Polarization
3701.40	-60.11	-1.40	-61.51	-13.00	48.51	Vertical
5552.10	-64.14	5.27	-58.87	-13.00	45.87	Vertical
7402.00	-63.66	13.00	-50.66	-13.00	37.66	Vertical
3701.40	-60.24	-1.40	-61.64	-13.00	48.64	Horizontal
5552.10	-63.76	5.27	-58.49	-13.00	45.49	Horizontal
7402.00	-64.22	13.00	-51.22	-13.00	38.22	Horizontal
		Mic	ddle channel			
Frequency (MHz)	Level at antenna terminals (dBm)	Factor (dB)	Spurous Emission level (dBm)	Limit Line (dBm)	Margin (dB)	Polarization
3760.00	-59.90	-1.03	-60.93	-13.00	47.93	Vertical
5640.00	-64.43	6.06	-58.37	-13.00	45.37	Vertical
7520.00	-63.98	13.29	-50.69	-13.00	37.69	Vertical
3760.00	-60.24	-1.03	-61.27	-13.00	48.27	Horizontal
5640.00	-63.75	6.06	-57.69	-13.00	44.69	Horizontal
7520.00	-63.94	13.29	-50.65	-13.00	37.65	Horizontal
		Hig	hest c <mark>ha</mark> nnel			
Frequency (MHz)	Level at antenna terminals (dBm)	Factor (dB)	Spur <mark>ous Emis</mark> sion level (dBm)	Limit Line (dBm)	Margin (dB)	Polarization
3816.60	-60.37	-0.83	-61.20	-13.00	48.20	Vertical
5724.90	-64.00	6.82	-57.18	-13.00	44.18	Vertical
7633.20	-63.41	13.44	-49.97	-13.00	36.97	Vertical
3816.60	-59.93	-0.83	-60.76	-13.00	47.76	Horizontal
5724.90	-63.51	6.82	-56.69	-13.00	43.69	Horizontal
7633.20	-63.79	13.44	-50.35	-13.00	37.35	Horizontal
Remark:	<u> </u>		<u> </u>			

Remark:

The emission levels of below 1 GHz are lower than the limit 20dB and not show in test report.

Page 26 of 41





		Baı	nd 2 (20MHz)			
		Lov	west channel			
Frequency (MHz)	Level at antenna terminals (dBm)	Factor (dB)	Spurous Emission level (dBm)	Limit Line (dBm)	Margin (dB)	Polarization
3720.00	-60.26	-1.28	-61.54	-13.00	48.54	Vertical
5580.00	-63.66	5.36	-58.30	-13.00	45.30	Vertical
7440.00	-64.00	13.04	-50.96	-13.00	37.96	Vertical
3720.00	-60.11	-1.28	-61.39	-13.00	48.39	Horizontal
5580.00	-63.42	5.36	-58.06	-13.00	45.06	Horizontal
7440.00	-64.61	13.04	-51.57	-13.00	38.57	Horizontal
		Mic	ddle channel			
Frequency (MHz)	Level at antenna terminals (dBm)	Factor (dB)	Spurous Emission level (dBm)	Limit Line (dBm)	Margin (dB)	Polarization
3760.00	-60.52	-1.03	-61.55	-13.00	48.55	Vertical
5640.00	-64.05	6.06	-57.99	-13.00	44.99	Vertical
7520.00	-63.62	13.29	-50.33	-13.00	37.33	Vertical
3760.00	-60.49	-1.03	-61.52	-13.00	48.52	Horizontal
5640.00	-63.85	6.06	-57.79	-13.00	44.79	Horizontal
7520.00	-63.99	13.29	-50.70	-13.00	37.70	Horizontal
		Hig	he <mark>st</mark> channel			
Frequency (MHz)	Level at antenna terminals (dBm)	Factor (dB)	Spurous Emission level (dBm)	Limit Line (dBm)	Margin (dB)	Polarization
3800.00	-60.59	-0.83	-61.42	-13.00	48.42	Vertical
5700.00	-64.24	6.62	-57.62	-13.00	44.62	Vertical
7600.00	-63.24	13.71	-49.53	-13.00	36.53	Vertical
3800.00	-60.20	-0.83	-61.03	-13.00	48.03	Horizontal
5700.00	-63.81	6.62	-57.19	-13.00	44.19	Horizontal
7600.00	-63.97	13.71	-50.26	-13.00	37.26	Horizontal
Pomark:						

Remark:

The emission levels of below 1 GHz are lower than the limit 20dB and not show in test report.

Page 27 of 41





LTE Band 4 part:

		Bar	nd 4 (1.4MHz)			
		Lov	west channel			
Frequency (MHz)	Level at antenna terminals (dBm)	Factor (dB)	Spurous Emission level (dBm)	Limit Line (dBm)	Margin (dB)	Polarization
3421.40	-60.45	-1.82	-62.27	-13.00	49.27	Vertical
5132.10	-63.70	4.62	-59.08	-13.00	46.08	Vertical
6842.80	-63.50	10.44	-53.06	-13.00	40.06	Vertical
3421.40	-60.51	-1.82	-62.33	-13.00	49.33	Horizonta
5132.10	-63.77	4.62	-59.15	-13.00	46.15	Horizontal
6842.80	-64.22	10.44	-53.78	-13.00	40.78	Horizontal
		Mic	ddle channel			
Frequency (MHz)	Level at antenna terminals (dBm)	Factor (dB)	Spurous Emission level (dBm)	Limit Line (dBm)	Margin (dB)	Polarization
3465.00	-60.27	-1.73	-62.00	-13.00	49.00	Vertical
5197.50	-63.66	4.76	-58.90	-13.00	45.90	Vertical
6930.00	-63.03	10.76	-52. <mark>27</mark>	-13.00	39.27	Vertical
3465.00	-60.82	-1.73	-62.55	-13.00	49.55	Horizontal
5197.50	-63.98	4.76	-59.22	-13.00	46.22	Horizontal
6930.00	-64.65	10.76	-53.89	-13.00	40.89	Horizontal
		Hig	hest c <mark>ha</mark> nnel			
Frequency (MHz)	Level at antenna terminals (dBm)	Factor (dB)	Spurous Emission level (dBm)	Limit Line (dBm)	Margin (dB)	Polarization
3508.60	-60.58	-1.64	-62.22	-13.00	49.22	Vertical
5262.90	-63.94	5.04	-58.90	-13.00	45.90	Vertical
7017.20	-63.10	11.33	-51.77	-13.00	38.77	Vertical
3508.60	-60.25	-1.64	-61.89	-13.00	48.89	Horizonta
5262.90	-63.54	5.04	-58.50	-13.00	45.50	Horizonta
7017.20	-64.11	11.33	-52.78	-13.00	39.78	Horizonta

The emission levels of below 1 GHz are lower than the limit 20dB and not show in test report.

Tel: +86-755-23118282, Fax: +86-755-23116366



		Bar	nd 4 (20MHz)			
		Lov	vest channel			
Frequency (MHz)	Level at antenna terminals (dBm)	Factor (dB)	Spurous Emission level (dBm)	Limit Line (dBm)	Margin (dB)	Polarization
3440.00	-60.07	-1.82	-61.89	-13.00	48.89	Vertical
5160.00	-63.94	4.71	-59.23	-13.00	46.23	Vertical
6880.00	-63.14	10.54	-52.60	-13.00	39.60	Vertical
3440.00	-60.13	-1.82	-61.95	-13.00	48.95	Horizontal
5160.00	-63.94	4.71	-59.23	-13.00	46.23	Horizontal
6880.00	-64.46	10.54	-53.92	-13.00	40.92	Horizontal
		Mic	ddle channel			
Frequency (MHz)	Level at antenna terminals (dBm)	Factor (dB)	Spurous Emission level (dBm)	Limit Line (dBm)	Margin (dB)	Polarization
3465.00	-60.95	-1.73	-62.68	-13.00	49.68	Vertical
5197.50	-64.17	4.76	-59.41	-13.00	46.41	Vertical
6930.00	-63.28	10.76	-52.52	-13.00	39.52	Vertical
3465.00	-60.08	-1.73	-61.81	-13.00	48.81	Horizontal
5197.50	-64.21	4.76	-59.45	-13.00	46.45	Horizontal
6930.00	-64.31	10.76	-53.55	-13.00	40.55	Horizontal
		Hig	hest channel			
Frequency (MHz)	Level at antenna terminals (dBm)	Factor (dB)	Spur <mark>ou</mark> s Emi <mark>ssi</mark> on level (dBm)	Limit Line (dBm)	Margin (dB)	Polarization
3490.00	-60.81	-1.65	-62.46	-13.00	49.46	Vertical
5235.00	-63.57	4.95	-58.62	-13.00	45.62	Vertical
6980.00	-63.25	10.98	-52.27	-13.00	39.27	Vertical
3490.00	-60.88	-1.65	-62.53	-13.00	49.53	Horizontal
5235.00	-63.81	4.95	-58.86	-13.00	45.86	Horizontal
6980.00	-64.50	10.98	-53.52	-13.00	40.52	Horizontal
Remark:	•			•	•	•

The emission levels of below 1 GHz are lower than the limit 20dB and not show in test report.

Tel: +86-755-23118282, Fax: +86-755-23116366





LTE Band 5 part:

	Band 5 (1.4MHz)								
		Lov	vest channel						
Frequency (MHz)	Level at antenna terminals (dBm)	Factor (dB)	Spurous Emission level (dBm)	Limit Line (dBm)	Margin (dB)	Polarization			
1649.40	-36.36	-9.89	-46.25	-13.00	33.25	Vertical			
2474.10	-57.96	-5.57	-63.53	-13.00	50.53	Vertical			
3298.80	-57.36	-2.14	-59.50	-13.00	46.50	Vertical			
1649.40	-28.93	-9.89	-38.82	-13.00	25.82	Horizontal			
2474.10	-57.94	-5.57	-63.51	-13.00	50.51	Horizontal			
3298.80	-57.33	-2.14	-59.47	-13.00	46.47	Horizontal			
		Mic	ddle channel						
Frequency (MHz)	Level at antenna terminals (dBm)	Factor (dB)	Spurous Emission level (dBm)	Limit Line (dBm)	Margin (dB)	Polarization			
1673.30	-36.65	-9.88	-46.53	-13.00	33.53	Vertical			
2509.50	-57.88	-5.29	-63.17	-13.00	50.17	Vertical			
3346.00	-57.31	-2.05	-59.36	-13.00	46.36	Vertical			
1673.30	-28.55	-9.88	-38.43	-13.00	25.43	Horizontal			
2509.50	-57.56	-5.29	-62.85	-13.00	49.85	Horizontal			
3346.00	-57.69	-2.05	-59.74	-13.00	46.74	Horizontal			
		Hig	he <mark>st</mark> channel						
Frequency (MHz)	Level at antenna terminals (dBm)	Factor (dB)	Spur <mark>ou</mark> s Emis <mark>si</mark> on level (dBm)	Limit Line (dBm)	Margin (dB)	Polarization			
1696.60	-36.81	-9.87	-46.68	-13.00	33.68	Vertical			
2544.90	-57.79	-5.13	-62.92	-13.00	49.92	Vertical			
3393.20	-57.50	-1.97	-59.47	-13.00	46.47	Vertical			
1696.60	-28.61	-9.87	-38.48	-13.00	25.48	Horizontal			
2544.90	-58.30	-5.13	-63.43	-13.00	50.43	Horizontal			
3393.20	-57.18	-1.97	-59.15	-13.00	46.15	Horizontal			
Remark [.]			ı	1		1			

Remark:

The emission levels of below 1 GHz are lower than the limit 20dB and not show in test report.

Tel: +86-755-23118282, Fax: +86-755-23116366





		Baı	nd 5 (10MHz)						
	Lowest channel								
Frequency (MHz)	Level at antenna terminals (dBm)	Factor (dB)	Spurous Emission level (dBm)	Limit Line (dBm)	Margin (dB)	Polarization			
1658.00	-36.34	-9.89	-46.23	-13.00	33.23	Vertical			
2487.00	-58.30	-5.45	-63.75	-13.00	50.75	Vertical			
3316.00	-57.85	-2.09	-59.94	-13.00	46.94	Vertical			
1658.00	-28.49	-9.89	-38.38	-13.00	25.38	Horizontal			
2487.00	-57.56	-5.45	-63.01	-13.00	50.01	Horizontal			
3316.00	-57.09	-2.09	-59.18	-13.00	46.18	Horizontal			
		Mic	ddle channel						
Frequency (MHz)	Level at antenna terminals (dBm)	Factor (dB)	Spurous Emission level (dBm)	Limit Line (dBm)	Margin (dB)	Polarization			
1673.30	-36.10	-9.88	-45.98	-13.00	32.98	Vertical			
2509.50	-58.43	-5.29	-63.72	-13.00	50.72	Vertical			
3346.00	-56.88	-2.05	-58.93	-13.00	45.93	Vertical			
1673.30	-28.49	-9.88	-38.37	-13.00	25.37	Horizontal			
2509.50	-57.94	-5.29	-63.23	-13.00	50.23	Horizontal			
3346.00	-57.01	-2.05	-59.06	-13.00	46.06	Horizontal			
		Hig	he <mark>st</mark> channel						
Frequency (MHz)	Level at antenna terminals (dBm)	Factor (dB)	Spurous Emission level (dBm)	Limit Line (dBm)	Margin (dB)	Polarization			
1688.00	-36.77	-9.87	-46.64	-13.00	33.64	Vertical			
2532.00	-58.00	-5.13	-63.13	-13.00	50.13	Vertical			
3376.00	-57.77	-1.97	-59.74	-13.00	46.74	Vertical			
1688.00	-28.97	-9.87	-38.84	-13.00	25.84	Horizontal			
2532.00	-57.59	-5.13	-62.72	-13.00	49.72	Horizontal			
3376.00	-57.42	-1.97	-59.39	-13.00	46.39	Horizontal			
Pomark:		•							

Remark:

The emission levels of below 1 GHz are lower than the limit 20dB and not show in test report.





LTE Band 7 part:

		Ва	nd 7 (5MHz)			
		Lov	west channel			
Frequency (MHz)	Level at antenna terminals (dBm)	Factor (dB)	Spurous Emission level (dBm)	Limit Line (dBm)	Margin (dB)	Polarization
5005.00	-60.37	4.56	-55.81	-25.00	30.81	Vertical
7507.50	-64.54	13.14	-51.40	-25.00	26.40	Vertical
10010.00	-64.11	16.93	-47.18	-25.00	22.18	Vertical
5005.00	-59.85	4.56	-55.29	-25.00	30.29	Horizontal
7507.50	-63.35	13.14	-50.21	-25.00	25.21	Horizontal
10010.00	-64.05	16.93	-47.12	-25.00	22.12	Horizontal
		Mic	ddle channel			
Frequency (MHz)	Level at antenna terminals (dBm)	Factor (dB)	Spurous Emission level (dBm)	Limit Line (dBm)	Margin (dB)	Polarization
5070.00	-59.91	4.55	-55.36	-25.00	30.36	Vertical
7605.00	-64.98	13.58	-51.40	-25.00	26.40	Vertical
10140.00	-63.94	17.44	-46.50	-25.00	21.50	Vertical
5070.00	-59.50	4.55	-54.95	-25.00	29.95	Horizontal
7605.00	-63.53	13.58	-49.95	-25.00	24.95	Horizontal
10140.00	-64.22	17.44	-46.78	-25.00	21.78	Horizontal
		Hig	hest c <mark>ha</mark> nnel			
Frequency (MHz)	Level at antenna terminals (dBm)	Factor (dB)	Spur <mark>ous Emis</mark> sion level (dBm)	Limit Line (dBm)	Margin (dB)	Polarization
5135.00	-60.13	4.62	-55.51	-25.00	30.51	Vertical
7702.50	-64.76	13.24	-51.52	-25.00	26.52	Vertical
10270.00	-64.42	18.40	-46.02	-25.00	21.02	Vertical
5135.00	-59.64	4.62	-55.02	-25.00	30.02	Horizontal
7702.50	-63.48	13.24	-50.24	-25.00	25.24	Horizontal
10270.00	-64.06	18.40	-45.66	-25.00	20.66	Horizontal

The emission levels of below 1 GHz are lower than the limit 20dB and not show in test report.

Page 32 of 41





		Baı	nd 7 (20MHz)			
		Lov	west channel			
Frequency (MHz)	Level at antenna terminals (dBm)	Factor (dB)	Spurous Emission level (dBm)	Limit Line (dBm)	Margin (dB)	Polarization
5020.00	-60.52	4.56	-55.96	-25.00	30.96	Vertical
7530.00	-64.55	13.29	-51.26	-25.00	26.26	Vertical
10040.00	-64.00	16.98	-47.02	-25.00	22.02	Vertical
5020.00	-59.11	4.56	-54.55	-25.00	29.55	Horizontal
7530.00	-63.62	13.29	-50.33	-25.00	25.33	Horizontal
10040.00	-64.47	16.98	-47.49	-25.00	22.49	Horizontal
		Mic	ddle channel			
Frequency (MHz)	Level at antenna terminals (dBm)	Factor (dB)	Spurous Emission level (dBm)	Limit Line (dBm)	Margin (dB)	Polarization
5070.00	-60.11	4.55	-55.56	-25.00	30.56	Vertical
7605.00	-64.14	13.58	-50.56	-25.00	25.56	Vertical
10140.00	-63.90	17.44	-46.46	-25.00	21.46	Vertical
5070.00	-60.10	4.55	-55.55	-25.00	30.55	Horizontal
7605.00	-63.20	13.58	-49.62	-25.00	24.62	Horizontal
10140.00	-64.28	17.44	-46.84	-25.00	21.84	Horizontal
		Hig	hest channel			
Frequency (MHz)	Level at antenna terminals (dBm)	Factor (dB)	Spurous Emission level (dBm)	Limit Line (dBm)	Margin (dB)	Polarization
5120.00	-60.84	4.62	-56.22	-25.00	31.22	Vertical
7680.00	-64.60	13.18	-51.42	-25.00	26.42	Vertical
10240.00	-63,87	18.27	-45.60	-25.00	20.60	Vertical
5120.00	-60.26	4.62	-55.64	-25.00	30.64	Horizontal
7680.00	-63.07	13.18	-49.89	-25.00	24.89	Horizontal
10240.00	-63.76	18,27	-45.49	-25.00	20.49	Horizontal
Remark:	•		•			•

The emission levels of below 1 GHz are lower than the limit 20dB and not show in test report.

Page 33 of 41





LTE Band 12 part:

	Band 12 (1.4MHz)							
		Lov	vest channel					
Frequency (MHz)	Level at antenna terminals (dBm)	Factor (dB)	Spurous Emission level (dBm)	Limit Line (dBm)	Margin (dB)	Polarization		
1399.40	-41.12	-8.43	-49.55	-13.00	36.55	Vertical		
2099.10	-57.53	-7.76	-65.29	-13.00	52.29	Vertical		
2798.80	-57.40	-3.98	-61.38	-13.00	48.38	Vertical		
1399.40	-35.78	-8.43	-44.21	-13.00	31.21	Horizontal		
2099.10	-58.29	-7.76	-66.05	-13.00	53.05	Horizontal		
2798.80	-57.66	-3.98	-61.64	-13.00	48.64	Horizontal		
		Mic	ddle channel					
Frequency (MHz)	Level at antenna terminals (dBm)	Factor (dB)	Spurous Emission level (dBm)	Limit Line (dBm)	Margin (dB)	Polarization		
1415.00	-41.39	-8.60	-49.99	-13.00	36.99	Vertical		
2122.50	-57.43	-7.65	-65.08	-13.00	52.08	Vertical		
2830.00	-57.87	-3.91	-61.78	-13.00	48.78	Vertical		
1415.00	-35.53	-8.60	-44.13	-13.00	31.13	Horizontal		
2122.50	-57.94	-7.65	-65.59	-13.00	52.59	Horizontal		
2830.00	-58.04	-3.91	-61.95	-13.00	48.95	Horizontal		
		Hig	hest channel					
Frequency (MHz)	Level at antenna terminals (dBm)	Factor (dB)	Spur <mark>ous Emiss</mark> ion level (dBm)	Limit Line (dBm)	Margin (dB)	Polarization		
1430.60	-41.51	-8.77	-50.28	-13.00	37.28	Vertical		
2145.90	-57. <mark>53</mark>	-7.54	-65.07	-13.00	52.07	Vertical		
2861.20	-57.82	-3.78	-61.60	-13.00	48.60	Vertical		
1430.60	-35.33	-8.77	-44.10	-13.00	31.10	Horizontal		
2145.90	-58.17	-7 .54	-65.71	-13.00	52.71	Horizontal		
2861.20	-57.50	-3.78	-61.28	-13.00	48.28	Horizontal		

Remark:

The emission levels of below 1 GHz are lower than the limit 20dB and not show in test report.

Tel: +86-755-23118282, Fax: +86-755-23116366



		Ban	nd 12 (10MHz)			
		Lov	west channel			
Frequency (MHz)	Level at antenna terminals (dBm)	Factor (dB)	Spurous Emission level (dBm)	Limit Line (dBm)	Margin (dB)	Polarization
1408.00	-41.41	-8.60	-50.01	-13.00	37.01	Vertical
2112.00	-57.68	-7.65	-65.33	-13.00	52.33	Vertical
2816.00	-57.68	-3.91	-61.59	-13.00	48.59	Vertical
1408.00	-35.63	-8.60	-44.23	-13.00	31.23	Horizontal
2112.00	-57.94	-7.65	-65.59	-13.00	52.59	Horizontal
2816.00	-57.63	-3.91	-61.54	-13.00	48.54	Horizontal
		Mic	ddle channel			
Frequency (MHz)	Level at antenna terminals (dBm)	Factor (dB)	Spurous Emission level (dBm)	Limit Line (dBm)	Margin (dB)	Polarization
1415.00	-41.57	-8.60	-50.17	-13.00	37.17	Vertical
2122.50	-57.46	-7.65	-65.11	-13.00	52.11	Vertical
2830.00	-57.63	-3.91	-61.54	-13.00	48.54	Vertical
1415.00	-35.30	-8.60	-43.90	-13.00	30.90	Horizontal
2122.50	-58.41	-7.65	-66.06	-13.00	53.06	Horizontal
2830.00	-57.46	-3.91	-61.37	-13.00	48.37	Horizontal
		Hig	hest channel			
Frequency (MHz)	Level at antenna terminals (dBm)	Factor (dB)	Spur <mark>ou</mark> s Emission level (dBm)	Limit Line (dBm)	Margin (dB)	Polarization
1422.00	-40.84	-8.60	-49.44	-13.00	36.44	Vertical
2133.00	-57.59	-7.54	-65.13	-13.00	52.13	Vertical
2844.00	-57.21	-3.85	-61.06	-13.00	48.06	Vertical
1422.00	-35.36	-8.60	-43.96	-13.00	30.96	Horizontal
2133.00	-58.26	-7.54	-65.80	-13.00	52.80	Horizontal
2844.00	-57.91	-3.85	-61.76	-13.00	48.76	Horizontal

Remark:

The emission levels of below 1 GHz are lower than the limit 20dB and not show in test report.





LTE Band 13 part:

Band 13 (5MHz)						
		Lov	vest channel			
Frequency (MHz)	Level at antenna terminals (dBm)	Factor (dB)	Spurous Emission level (dBm)	Limit Line (dBm)	Margin (dB)	Polarization
1559.00	-40.87	-9.65	-50.52	-13.00	37.52	Vertical
2338.50	-57.76	-6.29	-64.05	-13.00	51.05	Vertical
3118.00	-57.52	-2.31	-59.83	-13.00	46.83	Vertical
1559.00	-35.89	-9.65	-45.54	-13.00	32.54	Horizontal
2338.50	-58.38	-6.29	-64.67	-13.00	51.67	Horizontal
3118.00	-57.77	-2.31	-60.08	-13.00	47.08	Horizontal
Middle channel						
Frequency (MHz)	Level at antenna terminals (dBm)	Factor (dB)	Spurous Emission level (dBm)	Limit Line (dBm)	Margin (dB)	Polarization
1564.00	-40.46	-9.65	-50.11	-13.00	37.11	Vertical
2346.00	-57.73	-6.16	-63.89	-13.00	50.89	Vertical
3128.00	-57.30	-2.31	-59.61	-13.00	46.61	Vertical
1564.00	-36.21	-9.65	-45.86	-13.00	32.86	Horizontal
2346.00	-58.36	-6.16	-64.52	-13.00	51.52	Horizontal
3128.00	-58.22	-2.31	-60.53	-13.00	47.53	Horizontal
Highe <mark>st channel</mark>						
Frequency (MHz)	Level at antenna terminals (dBm)	Factor (dB)	Spur <mark>ou</mark> s Emis <mark>si</mark> on level (dBm)	Limit Line (dBm)	Margin (dB)	Polarization
1569.00	-40.83	-9.83	-50.66	-13.00	37.66	Vertical
2353.50	-57.59	-6.16	-63.75	-13.00	50.75	Vertical
3138.00	-57.71	-2.31	-60.02	-13.00	47.02	Vertical
1569.00	-35.48	-9.83	-45.31	-13.00	32.31	Horizontal
2353.50	-58.06	-6.16	-64.22	-13.00	51.22	Horizontal
3138.00	-58.13	-2.31	-60.44	-13.00	47.44	Horizontal
Remark:						•

The emission levels of below 1 GHz are lower than the limit 20dB and not show in test report.

Tel: +86-755-23118282, Fax: +86-755-23116366





Band 13 (10MHz)						
Lowest channel						
Frequency (MHz)	Level at antenna terminals (dBm)	Factor (dB)	Spurous Emission level (dBm)	Limit Line (dBm)	Margin (dB)	Polarization
1564.00	-41.06	-9.65	-50.71	-13.00	37.71	Vertical
2346.00	-57.29	-6.16	-63.45	-13.00	50.45	Vertical
3128.00	-57.95	-2.31	-60.26	-13.00	47.26	Vertical
1564.00	-36.14	-9.65	-45.79	-13.00	32.79	Horizontal
2346.00	-57.91	-6.16	-64.07	-13.00	51.07	Horizontal
3128.00	-58.12	-2.31	-60.43	-13.00	47.43	Horizontal
Middle channel						
Frequency (MHz)	Level at antenna terminals (dBm)	Factor (dB)	Spurous Emission level (dBm)	Limit Line (dBm)	Margin (dB)	Polarization
1564.00	-40.55	-9.65	-50.20	-13.00	37.20	Vertical
2346.00	-58.23	-6.16	-64.39	-13.00	51.39	Vertical
3128.00	-57.06	-2.31	-59.37	-13.00	46.37	Vertical
1564.00	-35.46	-9.65	-45.11	-13.00	32.11	Horizontal
2346.00	-58.05	-6.16	-64.21	-13.00	51.21	Horizontal
3128.00	-57.37	-2.31	-59.68	-13.00	46.68	Horizontal
	Highe <mark>st</mark> chan <mark>nel</mark>					
Frequency (MHz)	Level at antenna terminals (dBm)	Factor (dB)	Spurous Emission level (dBm)	Limit Line (dBm)	Margin (dB)	Polarization
1564.00	-41.35	-9.65	-51.00	-13.00	38.00	Vertical
2346.00	-57.83	-6.16	-63.99	-13.00	50.99	Vertical
3128.00	-57.09	-2.31	-59.40	-13.00	46.40	Vertical
1564.00	-35.71	-9.65	-45.36	-13.00	32.36	Horizontal
2346.00	-58.84	-6.16	-65.00	-13.00	52.00	Horizontal
3128.00	-58.02	-2.31	-60.33	-13.00	47.33	Horizontal
Remark:						

The emission levels of below 1 GHz are lower than the limit 20dB and not show in test report.

Page 37 of 41



6.6 Frequency stability V.S. Temperature measurement

Test Requirement:	Part 22.355, Part 24.235, Part 27.54, Part 2.1055(a)(1)(b)		
Limit:	±2.5 ppm for Band 5&26 Within authorized band for Band 2 & 4 & 7 & 12 & 13 & 25 & 38 & 41		
Test setup:			
Test Procedure:	Refer to the FCC ID:XMR201903EG25G		
Test Instruments:			
Test mode:			
Measurement Data:			
Test results:	Passed		








6.7 Frequency stability V.S. Voltage measurement

	-
Test Requirement:	Part 22.355, Part 24.235, Part 27.54, Part 2.1055(d)(1)
Limit:	±2.5 ppm for Band 5&26 Within authorized band for Band 2 & 4 & 7 & 12 & 13 & 25 & 38 & 41
Test setup:	
Test Procedure:	
Test Instruments:	Refer to the FCC ID:XMR201903EG25G
Test mode:	
Measurement Data:	
Test results:	Passed





Test Setup Photo

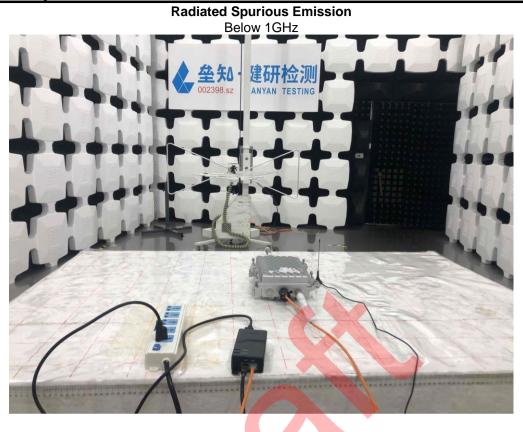







8 EUT Constructional Details

Reference to the test report No. JYTSZB-R12-2100992

-----End of report-----

