





Page 1 of 42

RF Test Report

Report No.: AGC03773210601EE11

PRODUCT DESIGNATION: USB WiFi Bluetooth Adapter

BRAND NAME : EDUP

MODEL NAME : EP-N8568, EP-N8567

APPLICANT : Shenzhen EDUP Electronics Technology Co., Ltd

DATE OF ISSUE : Jul. 08, 2021


STANDARD(S) : ETSI EN 300 328 V2.2.2 (2019-07)

REPORT VERSION: V1.0

Attestation of Global Edition (Shenzhen) Co., Ltd



Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the speciated restriction Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written provided in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15day after the issued of the test report Further enquiry of validity or verification of the test report should be addressed to AGC by agc@agc-cert.com.





REPORT REVISE RECORD

Report Version	Revise Time	Issued Date	Valid Version	Notes
V1.0	1	Jul. 08, 2021	Valid	Initial release

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the special pedicated fresh dynapection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the writter appropriation of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15day after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc@agc-cert.com.



TABLE OF CONTENTS

1. TEST REPORT CERTIFICATION	
2. GENERAL INFORMATION	5
2.1. DESCRIPTION OF EUT 2.2. SUPPORT EQUIPMENT 2.3. DESCRIPTION OF TEST MODES 2.4. OBJECTIVE	6 6
2.5. TEST ITEMS AND THE RESULTS	
3. MEASUREMENT UNCERTAINTY	8
4. IDENTIFICATION OF THE RESPONSIBLE TESTING LOCATION	9
5. ETSI EN 300 328 REQUIREMENTS	10
5.1. RF OUTPUT POWER	13 16 18
5.5. TRANSMITTER UNWANTED EMISSIONS IN THE OUT-OF-BAND DOMAIN	22 31
APPENDIX A: PHOTOGRAPHS OF TEST SETUP	41
APPENDIX B: PHOTOGRAPHS OF THE EUT	42

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the Bedicated Pesting/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the writter authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15day after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc@agc-cert.com.



1. TEST REPORT CERTIFICATION

Applicant	Shenzhen EDUP Electronics Technology Co., Ltd	
Address	6 Floor, #6 Building, No.48, Kangzheng Road Liantang Industrial Area, Buji Town, Shenzhen, China	
Manufacturer	Shenzhen EDUP Electronics Technology Co., Ltd	
Address	6 Floor, #6 Building, No.48, Kangzheng Road Liantang Industrial Area, Buji Town, Shenzhen, China	
Factory	Shenzhen EDUP Electronics Technology Co., Ltd	
Address	6 Floor, #6 Building, No.48, Kangzheng Road Liantang Industrial Area, Buji Town, Shenzhen, China	
Product Designation	USB WiFi Bluetooth Adapter	
Brand Name EDUP		
Test Model EP-N8568		
Series Model	EP-N8567	
Difference Description	All the series models are the same as the test model except for the model names and the shape of appearance.	
Date of test	Jun. 25, 2021 to Jul. 08, 2021	
Deviation	None	
Condition of Test Sample Normal		
Test Result	Pass	
Report Template AGCRT-EC-BLE/RF		

We, Attestation of Global Compliance (Shenzhen) Co., Ltd., for compliance with the requirements set forth in the European Standard ETSI EN 300 328 V2.2.2. The results of test in this report apply to the product/system which was tested only. Other similar equipment will not necessarily produce the same results due to production tolerance and measurement uncertainties.

Prepared By	and change	
No.	Cool Cheng Project Engineer	Jul. 08, 2021
Reviewed By	Max Zhang	
C	Max Zhang Reviewer	Jul. 08, 2021
Approved By	Towascies	
	Forrest Lei Authorized Officer	Jul. 08, 2021

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the bedicated restriction Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the writter pathorization of AGC within 15day after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc@agc-cert.com.



Page 5 of 42

2. GENERAL INFORMATION


2.1. DESCRIPTION OF EUT

Operating Frequency	2402MHz-2480MHz
Support Channels	40 Channels
Modulation	GFSK
Bluetooth Version	V4.0
Hardware Version	V1.2
Software Version	V2.1
The type of the equipment	non-FHSS adaptive equipment with only one antenna
The maximum RF Output Power	3.49dBm
Nominal Channel Bandwidth	⊠1MHz □2MHz
Antenna designation	☑PCB Antenna(Temporary RF connector provided by manufacturer)☑Dedicated Antenna
Antenna Gain	2.07dBi
Power Supply	DC 5V PC
The extreme operating conditions	Operating temperature range: -10°C~40°C
Geo-location capability	□Yes ⊠No

Note:

- 1. The above information was decl ared by the manufacturer.
- 2. The equipment submitted are representative production models.
- 3. The EUT cannot operated unmodulated.
- 4. The EUT provides Bluetooth wireless interface operating at 2.4G ISM band (2402MHZ-2480MHZ).
- 5. Only the Bluetooth was tested according the standard requirement.
- 6. The EUT is a stand-alone and portable equipment according to ETSI EN 300 328 V2.2.2.
- 7. For more details, please refer to the User's manual of the EUT.

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the Bedicated Pesting/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the writter authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15day after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc@agc-cert.com.





2.2. SUPPORT EQUIPMENT

Item	Equipment	Mfr/Brand	Model/Type No.	Remark
				CO

2.3. DESCRIPTION OF TEST MODES

TEST MODE DESCRIPTION		
Low channel TX		
Middle channel TX		
High channel TX		
Low channel (Receiver Mode)		
Middle channel (Receiver Mode)		
High channel (Receiver Mode)		

Note

1. All modes have been tested and the worst mode test data recording in the test report, if no any other data.

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the specificated resting/inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the writter pathorization of AGC, the test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15day after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc@agc-cert.com.



Page 7 of 42

2.4. OBJECTIVE

Perform Radio Spectrum tests for CE Marking according to the provisions of article 3.2 of the Radio Equipment Directive (2014/53/EU) for the BT function of the EUT.

2.5. TEST ITEMS AND THE RESULTS

The EUT has been tested according to ETSI EN 300 328 V2.2.2 (2019-07).

Wideband transmission systems;
Data transmission equipment operating in the 2,4 GHz band;
Harmonised Standard for access to radio spectrum

Test items and the results are as bellow:

No.	Basic Standard	Test Type	Result
1	ETSI EN 300 328 4.3.2.2	RF Output Power	Pass
2	ETSI EN 300 328 4.3.2.3	Power Spectral Density	Pass
3	ETSI EN 300 328 4.3.2.4	Duty Cycle, Tx-sequence, Tx-gap	N/A
4	ETSI EN 300 328 4.3.2.5	Medium Utilisation(MU) factor	N/A
5	ETSI EN 300 328 4.3.2.6	Adaptivity	N/A
6	ETSI EN 300 328 4.3.2.7	Occupied Channel Bandwidth	Pass
7	ETSI EN 300 328 4.3.2.8	Transmitter unwanted emissions in the out-of-band domain	Pass
8	ETSI EN 300 328 4.3.2.9	Transmitter unwanted emissions in the spurious domain	Pass
9	ETSI EN 300 328 4.3.2.10	Receiver spurious emissions	Pass
10	ETSI EN 300 328 4.3.2.11	Receiver Blocking	Pass

Note:

1. N/A- Not Applicable.

2. The latest versions of basic standards are applied.


2.6. ENVIRONMENTAL CONDITIONS

Temperature: 15-35°C

- Relative Humidity: 30-60 %

- Atmospheric pressure: 86-106 kPa

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the Bedicated Pest of Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc@agc-cert.com.





3. MEASUREMENT UNCERTAINTY

The uncertainty is calculated using the methods suggested in the "Guide to the Expression of Uncertainty in Measurement" (GUM) published by ISO.

- -Uncertainty of Radio Frequency, Uc=±1 x 10-7
- Uncertainty of total RF power, conducted, $Uc = \pm 0.8dB$
- Uncertainty of RF power density, conducted, Uc = ±2.6dB
- Uncertainty of spurious emissions, conducted, Uc = ±2.7dB
- Uncertainty of spurious emissions, radiated, Uc = ±5.4dB
- Uncertainty of Temperature: ±0.5°C
- Uncertainty of Humidity: ±1 %
- Uncertainty of DC and low frequency voltages: ±2%

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the Bedicated Feeting/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC he test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15day after the issuence of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc@agc-cert.com.



Page 9 of 42

4. IDENTIFICATION OF THE RESPONSIBLE TESTING LOCATION

Site Attestation of Global Compliance(Shenzhen) Co., Ltd.		Attestation of Global Compliance(Shenzhen) Co., Ltd.
3)	Location	1-2/F, Building 19, Junfeng Industrial Park, Chongqing Road, Heping Community, Fuhai Street, Bao'an District, Shenzhen, Guangdong, China

LIST OF EQUIPMENTS USED

Description	Manufacturer	Model No.	S/N	Calibration Due.	Calibration Due.
MXG X-Series Vector Signal Generator	Agilent	N5182B	MY50140530	Aug. 21,2020	Aug. 20,2021
Signal Generator	Agilent	N5171B	MY45141029	Aug. 21,2020	Aug. 20,2021
EXA Signal Analyzer	Agilent	N9020A	MY52090123	Aug. 21,2020	Aug. 20,2021
USB Wideband Power Sensor	Agilent	U2021XA	MY54110007	May 11, 2021	May 10, 2025
USB Wideband Power Sensor	Agilent	U2021XA	MY54110009	May 11, 2021	May 10, 2025
RF Communication Tester	R&S	CMW270	1201.0002K75 -100528-Tu WIRELESSCO NN.TESTER	Aug. 21,2020	Aug. 20,2021
Attenuator	Wariors	W13	11324	N/A	N/A
Power spliter	Mini-Circuits	ZFRSC-183-s	3122	N/A	N/A
2.4G Band Fliter	EM Electronics	2400-2500	N/A	Mar. 23, 2020	Mar. 22, 2022
Small environment tester	ESPEC	SH-242	N/A	Sep. 03, 2020	Sep. 02, 2022
AMPLIFIER	ETS-LINDGREN	3117PA	00225134	Oct. 15, 2019	Oct. 14, 2021
ANTENNA	SCHWARZBECK	VULB9168	494	Sep. 20, 2019	Sep. 19, 2021
ANTENNA	ETS-LINDGREN	3142C	00060447	N/A	N/A
HORN ANTENNA	ETS-LINDGREN	3117	00154520	Oct. 26, 2019	Oct. 25, 2021
HORN ANTENNA	ETS-LINDGREN	3117	00034609	Apr. 23, 2021	Apr. 22, 2022
RF Cable	Harbour	RE004	N/A	May 15, 2020	May 14, 2022

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the Bedicated Pesting/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the writter authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15day after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc@agc-cert.com.



5. ETSI EN 300 328 REQUIREMENTS

5.1. RF OUTPUT POWER

5.1.1 **LIMIT**


RF Output Power <= 100mW (20dBm) over Normal and Extreme conditions.

5.1.2 MEASUREMENT PROCEDURE


- 1) Use a fast power sensor and set the samples speed 1MS/s or faster.
- 2) Connect one power sensor to each transmit port, Trigger the power sensors so that they start sampling at the same time. For each instant in time, sum the power of the individual samples of all ports and store them. Use these stored samples in all following steps.
- 3) Find the start and stop times of each burst in the stored measurement samples.
- 4) Between the start and stop times of each individual burst calculate the RMS power over the burst. Save these P burst values, as well as the start and stop times for each burst.
- 5) The highest of all P burst values (Value "A" in dBm) will be used for maximum e.i.r.p calculations.
- 6) The cable loss and attenuator factor shall be considered to the value "A".
- 6) Add the (stated) antenna assembly gain "G" in dBi of the individual antenna. If applicable, add the additional beamforming gain"Y" in dB.
- 7) The RF output power (P) shall be calculated using the formula: P=A+G+Y

5.1.3 TEST CONFIGURATION

Temperature and Voltage Measurement (under normal and extreme test conditions)

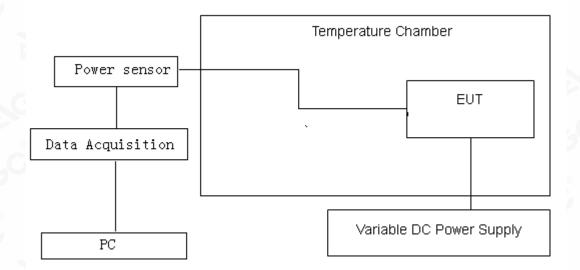

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the specificated restriction of stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGE. The test resurresented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report further enquiry of validity or verification of the test report should be addressed to AGC by agc@agc-cert.com.





5.1.4 MEASUREMENT RESULTS

Operation Mode	Single TX	Test Date Jul. 06, 2021			
Temperature	25°C	Tested by Cool			
Humidity	55 % RH	Polarity			
Antenna assembly (Gain	=2.07dBi	=2.07dBi		
Cable Loss		=0.5dB	@		
Beamforming gain		=0dB	-,0		
EIRP		=P+ Gain+Y			


TEST COMPLETIONS	RF OUTPUT POWER (dBm)			
TEST CONDITIONS	Temp (25)°C	Temp (-10)°C	Temp (40)°C	
Low Channel TX	2.78	2.74	2.70	
Middle Channel TX	3.34	3.29	3.24	
High Channel TX	3.49	3.44	3.38	
Limit	20dBm		2.0	

Note: Only the worst case data is reported as below.

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the Bedicated Festing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written prohorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15day after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc@agc-cert.com.

The test results



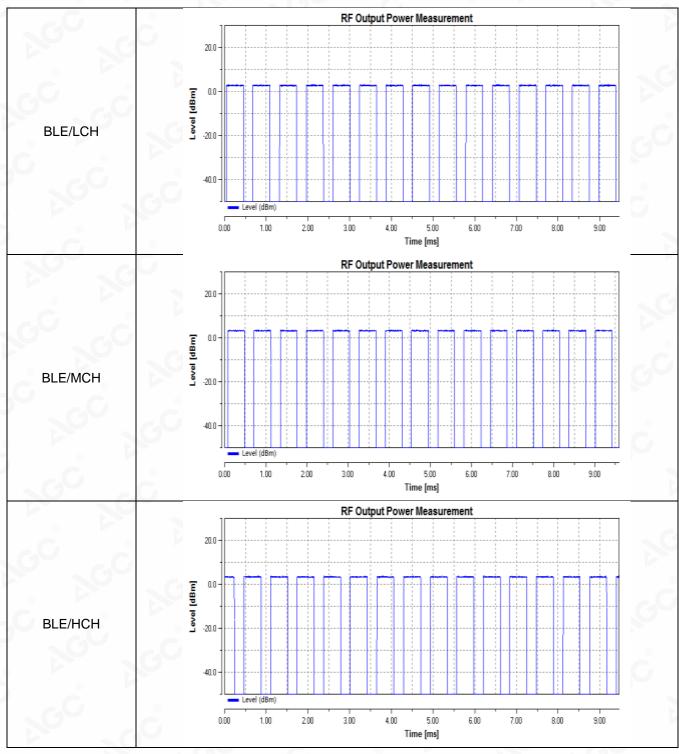

Conclusion: PASS

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the bedicated restriction. Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15day after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc@agc-cert.com.



5.2. POWER SPECTRAL DENSITY


5.2.1 **LIMIT**

For non-adaptive equipment using wide band modulations other than FHSS, The maximum Power spectral density is limited to 10mW Per MHz


5.2.2 TEST PROCEDURE

- 1) Set the frequency from 2400MHz to 2483.5MHz, use 10kHz RBW and 30kHz VBW for pre-scan. The number of sweep points shall be more than 8350.Wait for the trace to be completed and save the (trace) data set to a file
- 2) Add up the values for amplitude (power) for all the samples in the file.
- 3) Normalize the individual values for amplitude so that the sum is equal to the RF Output Power(e.i.r.p) measured in 5.1.
- 4)Starting from the first sample in the file (lowest frequency), add up the power of the following samples representing a 1MHz segment and record the results for power and position (i.e. sample #1 to #100). This is the Power Spectral Density (e.i.r.p) for the first 1MHz segment which shall be recorded.
- 5) Shift the start point of the samples added up in step 5 by 1 sample and repeat the procedure in step 4(i.e. sample #2 to #101).
- 6) Repeat step 5 until the end of the data set and record the radiated power spectral Density values for each of the 1MHz segments.
- 7) The cable loss and attenuator factor shall be considered to the test result.
- 8) The highest value shall be recorded in the test report.

5.2.3 TEST CONFIGURATION



Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the Bolicated Pesting/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGE. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15day after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc@agc=cert.com.






5.2.4 TEST RESULTS

BLE Power Spectral Density								
Channel Tested	Power Density (dBm/MHz)	Test Limit (dBm/MHz)	Pass / Fail					
Low Channel TX	2.71	10	Pass					
Middle Channel TX	3.27	10	Pass					
High Channel TX	3.42	10	Pass					


Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the Bedicated Pasting/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the writter purportation of AGE. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15day after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc@agc-cert.com.



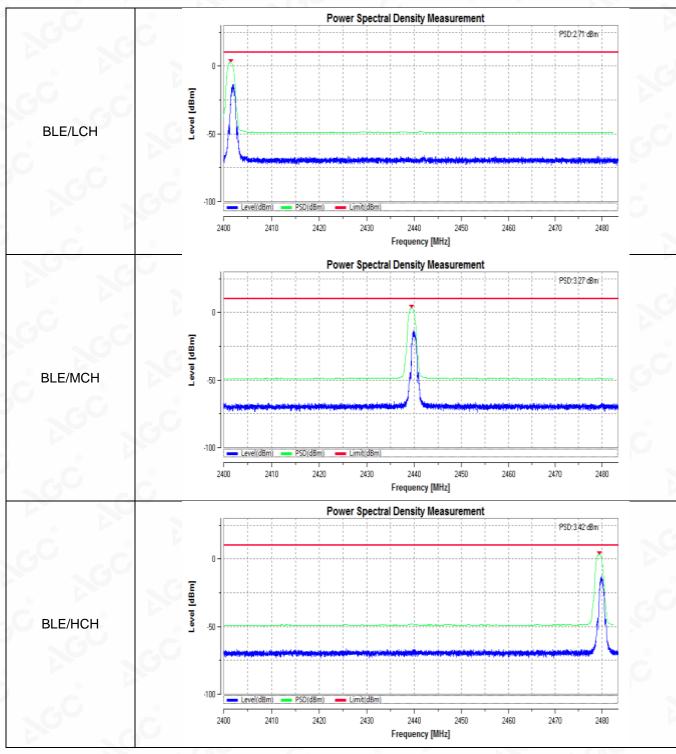

Conclusion: PASS

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the Bedicated Restriction Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the writter pathorization of AGC, the test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15day after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc@agc-cert.com.





5.3. ADAPTIVITY

The method of adaptivity is using LBT based on LBE.

5.3.1 **LIMIT**

The Channel Occupancy Time shall be less than 13ms.

If implemented, Short Control Signalling Transmissions of adaptive equipment using wide band modulations other than FHSS shall have a maximum duty cycle of 10 % within an observation period of 50 ms.

For power levels less than 20 dBm e.i.r.p., the CCA threshold level(TL) may be relaxed to:

 $TL = -70 \text{ dBm/MHz} + 10 \times \log 10 (100 \text{ mW / Pout}) (Pout in mW e.i.r.p.)$

An unwanted CW signal as defined in the below table.

Wanted signal mean power from companion device					
sufficier	nt to maintain the link	2 395 or 2 488,5	-35		
	(see note 2)	(see note 1)	(see note 3)		
NOTE 1:	range 2 400 MHz to 2	442 MHz, while the lowes	operating channels within the t frequency shall be used for 2 MHz to 2 483,5 MHz. See		
NOTE 2:					
NOTE 3:	NOTE 2: A typical conducted value which can be used in most cases is -50 dBm/MHz.				


5.3.2 TEST PROCEDURE

- 1) The EUT connect to a companion device during the test. Adjust the received signal level at the EuT to the value of -50dBm/MHz.
- 2) the analyzer shall be set as below: RBW>=Occupied Channel Bandwidth (if the analyser does not support this setting, the highest available setting shall be used) and VBW>=3×RBW.
- 3) Configure the EUT for normal transmission with a sufficiently high payload to allow demonstration of compliance of the adaptive mechanism on the channel being tested.
- 4) Adding the interference signal and verification of reaction to the interference signal.
- 5) Adding the unwanted signal and verification of reaction to the unwanted signal.
- 6) Removing the interference and unwanted signal.

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the Bedicated Pestud/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc@agc-cert.com.



5.3.3 TEST CONFIGURATION

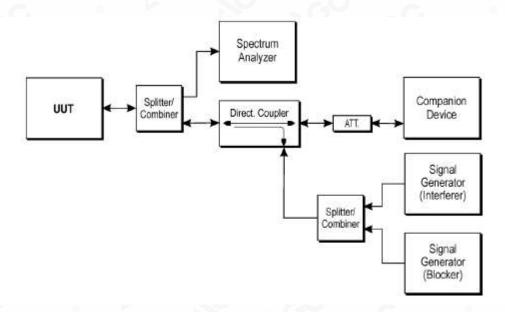

5.3.4TEST RESULTS

The EIRP of the EUT is less than 10dBm/MHz, So the adaptivity test is not applicable for the EUT.

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the specificated resting/inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the writter pathorization of AGC, the test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15day after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc@agc-cert.com.



5.4. OCCUPIED CHANNEL BANDWIDTH

5.4.1 LIMIT

The Occupied Channel Bandwidth shall fall completely within the band 2400MHz to 2483.5MHz.

5.4.2 TEST PROCEDURE

1) The spectrum analyser shall be used the following settings:

Centre Frequency: The centre frequency of the channel under test


Resolution BW: ~1% of the span without going below 1%

Video BW: 3×RBW Span: 2×OBW Detector: RMS

Trace mode: Max Hold

- 2) Wait until the trace is completed, find the peak value of the trace and place the analyser marker on this peak.
- 3) Use the 99 % bandwidth function of the spectrum analyser to measure the Occupied Channel Bandwidth of the UUT. This value shall be recorded.

5.4.3 TEST CONFIGURATION

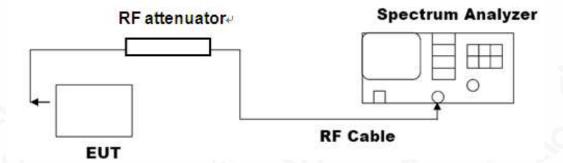

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the Bedicated Psycho/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written endorization of AGC, the test result presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15day after the issuence of the test report apply only to the test report should be addressed to AGC by agc@agc-cert.com.



5.4.4 TEST RESULTS

Modulation	Channel	OBW [MHz]	FL@OBW	FH@OBW	Verdict
GFSK	LCH	1.0422	2401.43	2402.47	PASS
GFSK	HCH	1.0371	2479.44	2480.48	PASS





Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the Bedicated restriction. Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the writter pathorization of AGC within 15day after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc@agc-cert.com.



5.5. TRANSMITTER UNWANTED EMISSIONS IN THE OUT-OF-BAND DOMAIN

5.5.1 **LIMIT**

The transmitter unwanted emissions in the out-of-band domain but outside the allocated band, shall not exceed the values provided by the mask.

5.5.2 TEST PROCEDURE

1) The spectrum analyser shall be used the following settings:

Centre Frequency: 2484MHz

Resolution BW: 1MHz; Video BW: 3MHz; Span: 0Hz; Detector: RMS

Trace mode: Max Hold; Sweep Points: 5000

2) (segment 2 483.5 MHz to 2 483.5 MHz + BW)

Adjust the trigger level to select the transmissions with the highest power level.

Increase the centre frequency in steps of 1 MHz and repeat this measurement for every 1 MHz segment within the range 2 483.5 MHz to 2 483.5 MHz + BW.


- 3) Segment 2 483.5 MHz + BW to 2 483.5 MHz + 2BW

 Change the centre frequency of the analyser to 2 484 MHz + BW and perform the measurement for the first 1

 MHz segment within range 2 483.5 MHz + BW to 2 483.5 MHz + 2BW. Increase the centre frequency in 1

 MHz steps and repeat the measurements to cover this whole range. The centre frequency of the last 1 MHz segment shall be set to 2 483,5 MHz + 2 BW 0.5 MHz.
- 4) Segment 2 400 MHz BW to 2 400 MHz
- Change the centre frequency of the analyser to 2 399.5 MHz and perform the measurement for the first 1 MHz segment within range 2 400 MHz BW to 2 400 MHz Reduce the centre frequency in 1 MHz steps and repeat the measurements to cover this whole range. The centre frequency of the last 1 MHz segment shall be set to 2 400 MHz 2BW + 0.5 MHz.
- 5) Segment 2 400 MHz 2BW to 2 400 MHz BW
- Change the centre frequency of the analyser to 2 399,5 MHz BW and perform the measurement for the first 1 MHz segment within range 2 400 MHz 2BW to 2 400 MHz BW. Reduce the centre frequency in 1 MHz steps and repeat the measurements to cover this whole range. The centre frequency of the last 1 MHz segment shall be set to 2 400 MHz 2BW + 0.5 MHz.
- 6)The cable loss and attenuator factor shall be considered to the test result.

5.5.3 TEST CONFIGURATION

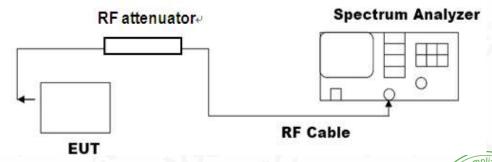

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the standard restriction (Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGE. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc@agc-cert.com.

/Inspection The test results the test report.




5.5.4TEST RESULT


TEST ITEM	TRANSMITTER UNWANTED EMISSIONS IN THE OUT-OF-BAND DOMAIN
TEST MODE	GFSK MODULATION

MEASUREMENT RESULT					
Test Data (MHz)	Criteria				
Low Channel	PASS				
High Channel	PASS				

CH Low-2402 (BLE)

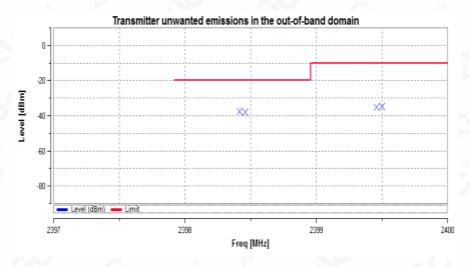

CH High-2480 (BLE)

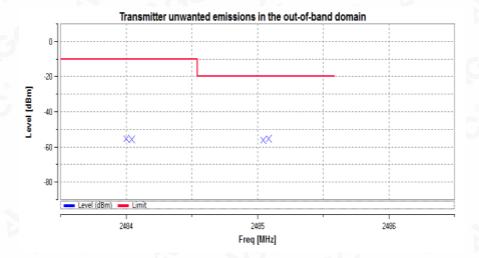

Note: All the modes had been tested, but only the worst data recorded in the report.

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Bedicated Pest Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15day after the issue of Further enquiry of validity or verification of the test report should be addressed to AGC by agc@agc-cert.com.



Page 22 of 42

5.6. TRANSMITTER UNWANTED EMISSIONS IN THE SPURIOUS DOMAIN

5.6.1 LIMIT

Spurious emissions are emissions outside the frequency range(s) of the equipment as defined in Clause 4.3.2.9.

The spurious emissions of the transmitter shall not exceed the values in tables in the indicated bands:

Frequency Range	Maximum Power e.r.p(<=1GHz)/e.i.r.p(>1GHz)	Bandwidth	
30MHz to 47MHz	-36dBm	100kHz	
47MHz to 74MHz	-54dBm	100kHz	
74MHz to 87.5MHz	-36dBm	100kHz	
87.5MHz to 118MHz	-54dBm	100kHz	
118MHz to 174MHz	-36dBm	100kHz	
174 MHz to 230MHz	-54dBm	100kHz	
230 MHz to 470MHz	-36dBm	100kHz	
470 MHz to 694MHz	-54dBm	100kHz	
694 MHz to 1GHZ	-36dBm	100kHz	
1 GHZ to 12.75GHZ	-30dBm	1MHz	

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the Dedicated Festivo/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC he test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15day after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc@agc-cert.com.



Page 23 of 42

5.6.2 TEST PROCEDURE

1) The emissions over the range 30 MHz to 1 000 MHz shall be identified.

2) Spectrum analyzer settings: Resolution bandwidth: 100 kHz

Video bandwidth: 300 kHz

Detector mode: Peak

Sweep Points: ≥19 400 Trace Mode: Max Hold

3) Allow the trace to stabilize. Any emissions identified during the sweeps above and that fall within the 6 dB range below the applicable limit or above, shall be individually measured using RMS detector and compared to the limits.

4) The emissions over the range 1 GHz to 12,75 GHz shall be identified.

5) Resolution bandwidth: 1 MHz


Video bandwidth: 3 MHz Detector mode: Peak Trace Mode: Max Hold Sweep Points: ≥23 500

- 6) Allow the trace to stabilize. Any emissions identified during the sweeps above and that fall within the 6 dB range below the applicable limit or above, shall be individually measured using RMS detector and compared to the limits.
- 7) For radiated method, the applicable measurement procedures as described in the EN 300 328 V2.2.2 annex C.2 and C.4 are used.

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written action of AG presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15d Further enquiry of validity or verification of the test report should be addressed to AGC by agc@agc-cert.com.




5.6.3 TEST CONFIGURATION

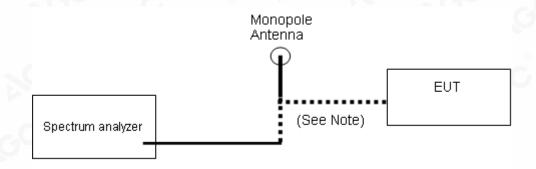


Conducted Method

Below 1GHz

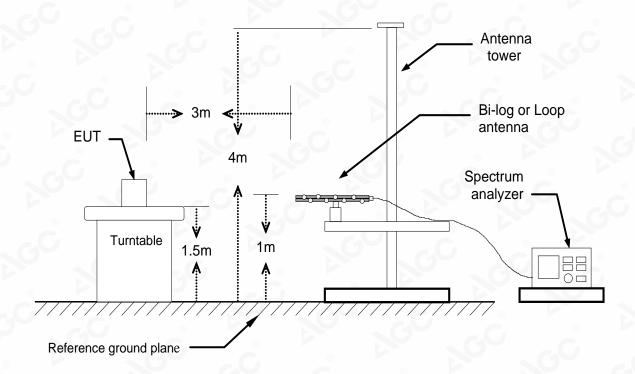


Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the Bedicated Pesting/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the writter authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15day after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc@agc-cert.com.





Above 1GHz

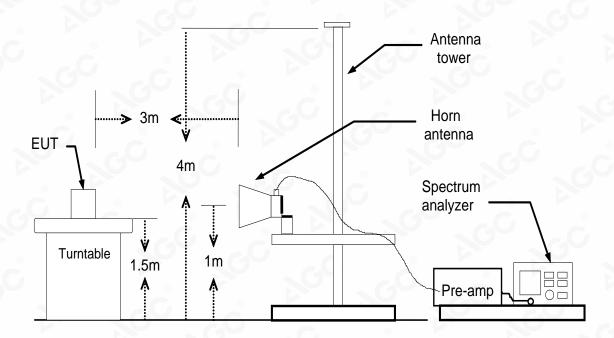

Radiated Method


Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the Bedicated Pesting/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the writter authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15day after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc@agc-cert.com.




5.6.4 CONDUCTED RESULTS:

Test Mode	Channel	Freq. [MHz]	Level[dBm]	Limit[dBm]	Verdict
	- 0	954.75		-36	PASS
	2402	2397.05	-35.75	-30	PASS
DIE DT40		12206.72	-54.2	-30	PASS
BLE_BT4.0	2480	959.97	-64.02	-36	PASS
100		2485.72	-36.66	-30	PASS
		12240.81	-53.96	-30	PASS

(Worst Case: Low channel, 1Mbps)

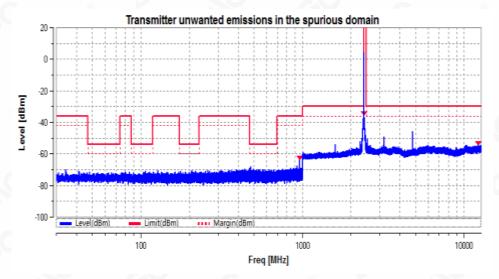

(Worst Case: High channel, 1Mbps)

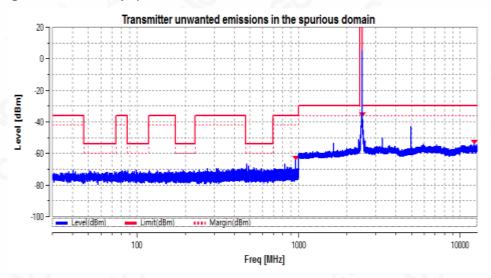

Note: 1. All the modes had been test but only the worst data record in the report.

2. The 2.4G fundamental frequency is not considered to compare with the limit.

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the Bedicated Pestud/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15day after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc@agc~cert.com.



Page 27 of 42

Radiated Method:

(Worst Case: Low channel)

Transmitter Spurious Emission below 1GHz (30MHz-1GHz)

Frequency	Reading Level	Antenna	S.G.	Cable Loss	Ant.Gain	Emission Level	Limit	Margin
(MHz)	(dBuV/m)	Polarizat ion	(dBm)	(dB)	(dBi)	(dBm)	(dBm)	(dB)
89.62	32.16	V	-62.24	0.04	1.26	-61.02	-54.00	7.02
154.93	28.63	V	-64.29	0.06	0.70	-63.65	-36.00	27.65
353.83	31.35	V	-68.17	0.25	5.89	-62.53	-36.00	26.53
425.27	27.26	V	-72.18	0.33	7.00	-65.52	-36.00	29.52
631.52	29.78	V	-69.91	0.52	7.28	-63.14	-54.00	9.14
757.39	28.38	V	-70.14	0.61	6.45	-64.30	-36.00	28.30
Other(30-10 00)		V		~ - 50	8	0	-36.00/- 54.00	- -C
0	-C	(8)	(8)				(8)	(6)
103.54	31.15	H	-63.91	0.04	1.00	-62.95	-54.00	8.95
151.02	26.01	Н	-68.20	0.06	0.70	-67.56	-36.00	31.56
351.62	29.57	Н	-68.69	0.25	5.63	-63.31	-36.00	27.31
431.18	26.75	Н	-73.20	0.34	6.83	-66.71	-36.00	30.71
628.47	29.51	Н	-69.74	0.51	7.22	-63.03	-54.00	9.03
731.92	27.41	Н	-72.62	0.59	6.76	-66.45	-36.00	30.45
Other(30-10 00)	-	Н	_ , , C			10	-36.00/- 54.00	

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the Bedicated Festing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15day after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc@agc-cert.com.

Inspection he test results




Transmitter Spurious Emission above 1GHz (1GHz-12.75GHz)

Frequency	Reading Level	Antenna	S.G.	Cable Loss	Ant.Gain	Emission Level	Limit	Margin
(MHz)	(dBuV/m)	Polarizat ion	(dBm)	(dB)	(dBi)	(dBm)	(dBm)	(dB)
4804	52.00	V	-46.91	2.65	9.34	-40.22	-30.00	10.22
7206	46.58	V	-55.30	3.13	11.32	-47.11	-30.00	17.11
-C-	·	V	·	60	46			<u> </u>
9 - 6	9	V	®		9	<u>60.</u>	C	© - -
®		V	<i>)</i>		o			-,CL
Other(1000- 12750)	0	V	100	-,0	0 -	Ŝ Z	-30.00	·
		-6	(8)					
4804	51.83	Н	-48.84	2.65	9.34	-42.15	-30.00	12.15
7206	44.03	Н	-56.70	3.13	11.32	-48.51	-30.00	18.51
-	0	Н	<u></u>	_®			- C	
<u>-</u>		Н	3 -	r.G				Ci-
6-	G	Н			6-	a.C-	®	
Other(1000- 12750)	- G	н) <u></u>	Ğ-	·	}	-30.00	-3G

Note: 1.The margins of the other spectrum are not exceeding the minimum value of margin, and this part of the results without recording in the test report.

2. Measurements above show only up to 6 maximum emissions noted, or would be lesser, with "--" remark, if no specific emission from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the Bedicated Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written exchorization of presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15day after the issue Further enquiry of validity or verification of the test report should be addressed to AGC by agc@agc-cert.com.





(Worst Case: High channel)

Transmitter Spurious Emission below 1GHz (30MHz-1GHz)

Frequency	Reading Level	Antenna	S.G.	Cable Loss	Ant.Gain	Emissio n Level	Limit	Margin
(MHz)	(dBuV/m)	Polarizati on	(dBm)	(dB)	(dBi)	(dBm)	(dBm)	(dB)
94.35	32.70	V	-62.26	0.04	1.72	-60.58	-54.00	6.58
156.95	27.89	V	-65.94	0.06	0.80	-65.20	-36.00	29.20
356.50	31.28	V	-67.77	0.25	6.28	-61.74	-36.00	25.74
424.81	27.91	V	-72.08	0.33	7.02	-65.39	-36.00	29.39
631.30	28.64	V	-72.27	0.52	7.28	-65.51	-54.00	11.51
760.48	27.15	V	-72.90	0.61	6.60	-66.91	-36.00	30.91
Other(30-1000)		g v					-36.00/-54.00	
	0					· · · · · · · · · · · · · · · · · · ·		
108.71	30.81	Н	-63.58	0.04	1.16	-62.46	-54.00	8.46
154.00	26.12	Н	-68.71	0.06	0.70	-68.07	-36.00	32.07
349.13	28.77	Н	-70.59	0.24	5.52	-65.31	-36.00	29.31
434.45	26.75	H ®	-72.82	0.34	6.62	-66.54	-36.00	30.54
629.65	29.34	н	-71.53	0.51	7.26	-64.78	-54.00	10.78
730.69	28.05	Н	-72.36	0.59	6.80	-66.15	-36.00	30.15
Other(30-1000)	(GC)	H			0		-36.00/-54.00	

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the Bedicated Festing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC within 15day after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc@agc-cert.com.



Transmitter Spurious Emission above 1GHz (1GHz-12.75GHz)

Frequency	Reading Level	Antenna	S.G.	Cable Loss	Ant.Gain	Emission Level	Limit	Margin
(MHz)	(dBuV/m)	Polarizat ion	(dBm)	(dB)	(dBi)	(dBm)	(dBm)	(dB)
4960	52.50	V	-47.74	2.65	9.34	-41.05	-30.00	11.05
7440	46.83	V	-54.73	3.13	11.32	-46.54	-30.00	16.54
<u> </u>	®	V	9	GO.	-6	Q		<u> </u>
	9	V	®		9	<u>69.</u>	C	©
®	(0)	V	<i>)</i>		®			-,01
Other(1000- 12750)	0	V	- C	0	0 _	Ŝ Z	-30.00	·
		a.C	©					
4960	51.47	Н	-48.12	2.65	9.34	-41.43	-30.00	11.43
7440	44.12	Н	-57.24	3.13	11.32	-49.05	-30.00	19.05
	9	CH				<u></u>	<u>_</u>	
	·	Н	9	60	<u> </u>	-		<u> </u>
G	G ,	Н	®		O	C.C.		
Other(1000- 12750)	10	н) <u>.</u> .	Ğ-	o	·	-30.00	_G G

Note: 1.The margins of the other spectrum are not exceeding the minimum value of margin, and this part of the results without recording in the test report.

2. Measurements above show only up to 6 maximum emissions noted, or would be lesser, with "--" remark, if no specific emission from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.

Conclusion: PASS

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the Bedicated Pesting/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written appropriation of AGE. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15day after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc@agc-cert.com.



Page 31 of 42

5.7. RECEIVER UNWANTED EMISSIONS IN THE SPURIOUS DOMAIN

5.7.1 **LIMIT**

ETSI EN300328 SUBCLAUSE 4.3.2.10

Receiver spurious emissions are emissions at any frequency when the equipment is in receive mode.

The spurious emissions of the receiver shall not exceed the values given in table.

Frequency Range	Maximum Power e.r.p(<=1GHz)/e.i.r.p(>1GHz)	Measurement Bandwidth
30MHz to 1000MHz	-57dBm	100kHz
1GHz to 12.75GHz	-47dBm	1MHz

5.7.2 TEST PROCEDURE

- 1) The emissions over the range 30 MHz to 1 000 MHz shall be identified.
- Spectrum analyzer settings: Resolution bandwidth: 100 kHz

Video bandwidth: 300 kHz

Detector mode: Peak

Sweep Points: ≥19 400 Trace Mode: Max Hold

- 3) Allow the trace to stabilize. Any emissions identified during the sweeps above and that fall within the 6 dB range below the applicable limit or above, shall be individually measured using RMS detector and compared to the limits given in 5.7.1.
- 4) The emissions over the range 1 GHz to 12.75 GHz shall be identified.

5) Resolution bandwidth: 1 MHz

Video bandwidth: 3 MHz Detector mode: Peak Trace Mode: Max Hold Sweep Points: ≥23200

- 6) Allow the trace to stabilize. Any emissions identified during the sweeps above and that fall within the 6 dB range below the applicable limit or above, shall be individually measured using RMS detector and compared to the limits given in 5.7.1.
- 7) For radiated method, the applicable measurement procedures as described in the EN 300 328 V2.2.2 annex C.2 and C.4 are used.

5.7.3 TEST CONFIGURATION

Refer to 5.6.3


Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Pesting/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the writter authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc@agc~cert.com.




5.7.4 TEST RESULTS FOR CONDUCTED METHOD

Test Mode	Channel	Freq. [MHz]	Level[dBm]	Limit[dBm]	Verdict
	2402	843.83	-78.83	-57.00	PASS
DIE DT40	2402	11006.59	-66.24	-47.00	PASS
BLE_BT4.0	2480	479.84	-78.38	-57.00	PASS
	2400	11698.38	-64.98	-47.00	PASS

(Worst Case: Low channel, 1Mbps)

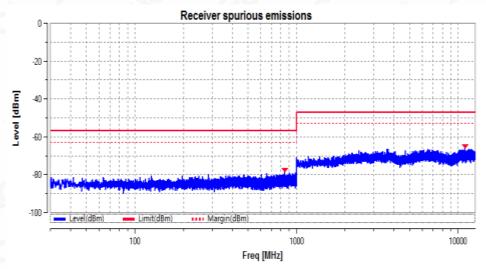

(Worst Case: High channel, 1Mbps)

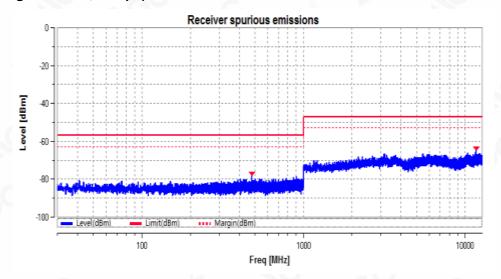

Note: All the modes had been test but only the worst data record in the report.

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the Bedicated Pesting/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the writter authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15day after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc@agc-cert.com.



Page 33 of 42

Radiated Method:

(Worst Case: Low channel)

Receiver Spurious Emission below 1GHz (30MHz-1GHz)

Frequency	Reading Level	Antenna	S.G.	Cable Loss	Ant.Gain	Emission Level	Limit	Margin
(MHz)	(dBuV/m)	Polarizat ion	(dBm)	(dB)	(dBi)	(dBm)	(dBm)	(dB)
120.36	26.97	V	-67.25	0.04	0.80	-66.49	-57.00	9.49
156.68	28.27	V	-64.74	0.06	0.80	-64.00	-57.00	7.00
359.93	29.68	V	-70.18	0.26	6.67	-63.77	-57.00	6.77
534.31	27.43	V	-73.03	0.44	6.84	-66.63	-57.00	9.63
674.05	31.96	V	-67.26	0.55	6.64	-61.17	-57.00	4.17
829.20	29.51	V	-69.82	0.66	6.35	-64.13	-57.00	7.13
Other(30-10 00)		V		, ,, ,C		®	-57.00	<u></u> C
	-C	(8)				C	8	(8)
134.88	27.48	Н	-65.20	0.05	0.02	-65.23	-57.00	8.23
160.30	28.85	Н	-66.34	0.06	1.20	-65.20	-57.00	8.20
344.16	30.66	Н	-67.10	0.24	5.62	-61.71	-57.00	4.71
539.97	28.22	Н	-71.17	0.45	7.14	-64.48	-57.00	7.48
677.80	29.02	Н	-69.31	0.55	6.52	-63.34	-57.00	6.34
828.10	27.45	Н	-70.66	0.66	6.40	-64.92	-57.00	7.92
Other(30-10 00)	-	Н	-5C			10	-57.00	: - -

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the Bedicated Festing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written perhorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15day after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc@agc-cert.com.

Inspection he test results

ne test report.




Receiver Spurious Emission above 1GHz (1GHz-12.75GHz)

Frequency	Reading Level	Antenna	S.G.	Cable Loss	Ant.Gain	Emission Level	Limit	Margin
(MHz)	(dBuV/m)	Polarizat ion	(dBm)	(dB)	(dBi)	(dBm)	(dBm)	(dB)
1540.05	32.14	V	-68.19	1.22	6.84	-62.57	-47.00	15.57
	<u>.</u>	V	-G	®			<u>G</u> .	
<u> </u>	®	V	<i>-</i> - ,	00	-C	G		<u> </u>
6	9	V	©		9 \	<u> </u>	<u> </u>	©
®	0	V	<i>)</i>		o			-, C1.
Other(1000- 12750)	®	V	- C	,0	<u> </u>	Ŝ Z	-47.00	·
		- G	8					
1539.49	32.84	Н	-67.79	1.19	6.67	-62.31	-47.00	15.31
- G-C	<u>®</u>	Н			-,0		 ®	-
	0	Н					- C	
<u> </u>	·	Н	3 -	c.G				<u> </u>
G- ,	G	Н			6	a.C-	®	
Other(1000- 12750)	+ 6	н	٠- ر	Ĝ-	o	- 19	-47.00	r.G

Note: 1.The margins of the other spectrum are not exceeding the minimum value of margin, and this part of the results without recording in the test report.

2. Measurements above show only up to 6 maximum emissions noted, or would be lesser, with "--" remark, if no specific emission from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the stededated feather Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written actionization of AGC presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15day after the issuance of Further enquiry of validity or verification of the test report should be addressed to AGC by agc@agc-cert.com.





(Worst Case: High channel)

Receiver Spurious Emission below 1GHz (30MHz-1GHz)

Frequency	Reading Level	Antenna	S.G.	Cable Loss	Ant.Gain	Emission Level	Limit	Margin
(MHz)	(dBuV/m)	Polarizat ion	(dBm)	(dB)	(dBi)	(dBm)	(dBm)	(dB)
125.14	27.66	_	-65.24	0.05	0.30	-64.99	-57.00	7.99
159.70	28.41	V	-65.66	0.06	1.10	-64.62	-57.00	7.62
359.20	29.24	V	-70.29	0.26	6.67	-63.88	-57.00	6.88
531.36	26.70	V	-71.98	0.44	6.66	-65.77	-57.00	8.77
674.17	30.89	V	-68.47	0.55	6.64	-62.38	-57.00	5.38
834.72	30.51	V	-68.46	0.66	6.58	-62.54	-57.00	5.54
Other(30-10 00)	0	V	<u></u> C				-57.00	- 6
	<u></u>					- @		
139.57	27.57	Н	-66.14	0.05	0.00	-66.19	-57.00	9.19
163.65	29.17	Н	-66.04	0.06	1.44	-64.66	-57.00	7.66
343.99	29.27	Н	-70.30	0.24	5.64	-64.90	-57.00	7.90
539.69	27.51	Н	-71.63	0.45	7.14	-64.93	-57.00	7.93
674.83	28.06	Н	-70.28	0.55	6.64	-64.19	-57.00	7.19
827.81	27.16	Н	-71.48	0.66	6.45	-65.69	-57.00	8.69
Other(30-10 00)	- CO	Н	@		- 0		-57.00	<u></u>

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the Bedicated Pesting/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the writter authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15day after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc@agc-cert.com.



Receiver Spurious Emission above 1GHz (1GHz-12.75GHz)

Frequency	Reading Level	Antenna	S.G.	Cable Loss	Ant.Gain	Emission Level	Limit	Margin
(MHz)	(dBuV/m)	Polarizat ion	(dBm)	(dB)	(dBi)	(dBm)	(dBm)	(dB)
1555.33	31.03	V	-68.17	1.22	6.84	-62.55	-47.00	15.55
	· -	V	- G	8			C-	- - C
- C-	·	V	·	60	-C	©		<u> </u>
9 - 0	9	V	® 		<u> </u>	gQ <u>.</u>	<u> </u>	
·		V	<i>)</i>		·			-,01.
Other(1000- 12750)	0	V	100	-, C	G _	Š Z	-47.00	·
		-6	0				(
1548.74	32.37	Н	-66.72	1.19	6.67	-61.24	-47.00	14.24
- GO		Н		-		®	③	-
	0	Н	<u>.</u>			(2)	c.O	
<u>-</u>		Н	3 -	r.G		-		Ci-
6-	G	Н			0 -	₂ C ₇ -	®	
Other(1000- 12750)	- G	н) <u></u>	c -	⊚	\	-47.00	r ₃ G

Note: 1.The margins of the other spectrum are not exceeding the minimum value of margin, and this part of the results without recording in the test report.

2. Measurements above show only up to 6 maximum emissions noted, or would be lesser, with "--" remark, if no specific emission from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.

Conclusion: PASS

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the Dedicated Psychological Psycholo



Page 37 of 42

5.8. RECEIVER BLOCKING

5.8.1 **LIMIT**

Receiver Blocking parameters for Receiver Category 1 equipment

Wanted signal mean power from companion device (dBm) (see notes 1 and 4)	Blocking signal frequency (MHz)	Blocking signal power (dBm) (see note 4)	Type of blocking signal	
(-133 dBm + 10 × log10(OCBW)) or -68 dBm	2 380	8		
whichever is less (see note 2)	2 504	20 20	8	
	2 300		~GO	
	2 330	24	0)4/	
(-139 dBm + 10 × log10(OCBW)) or -74 dBm	2 360	-34	CW	
whichever is less (see note 3)	2 524			
	2 584	0		
0 20	2 674	c.C	8	

NOTE 1: OCBW is in Hz.

NOTE 2: In case of radiated measurements using a companion device and the level of the wanted signal from the companion device cannot be determined, a relative test may be performed using a wanted signal up to Pmin + 26 dB where Pmin is the minimum level of wanted signal required to meet the minimum performance criteria as defined in clause 4.3.2.11.3 in the absence of any blocking signal.

NOTE 3: In case of radiated measurements using a companion device and the level of the wanted signal from the companion device cannot be determined, a relative test may be performed using a wanted signal up to Pmin + 20 dB where Pmin is the minimum level of wanted signal required to meet the minimum performance criteria as defined in clause 4.3.2.11.3 in the absence of any blocking signal.

NOTE 4: The level specified is the level at the UUT receiver input assuming a 0 dBi antenna assembly gain. In case of conducted measurements, this level has to be corrected for the (in-band) antenna assembly gain (G). In case of radiated measurements, this level is equivalent to a power flux density (PFD) in front of the UUT antenna with the UUT being configured/positioned as recorded in clause 5.4.3.2.2.

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the Bedicated Pesting/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written achorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc@agc-cert.com.



Page 38 of 42

Receiver Blocking parameters for Receiver Category 2 equipment

Wanted signal mean power from companion device (dBm) (see notes 1 and 3)	Blocking signal frequency (MHz)	Blocking signal power (dBm) (see note 3)	Type of blocking signal		
(400 dB + 40 d 40/00BM) + 40 dB)	2 380				
(-139 dBm + 10 × log10(OCBW) + 10 dB)	2 504		OW		
or (-74 dBm + 10 dB) whichever is less (see note 2)	2 300	-34	CW		
	2 584				

NOTE 1: OCBW is in Hz.

NOTE 2: In case of radiated measurements using a companion device and the level of the wanted signal from the companion device cannot be determined, a relative test may be performed using a wanted signal up to Pmin + 26 dB where Pmin is the minimum level of wanted signal required to meet the minimum performance criteria as defined in clause 4.3.2.11.3 in the absence of any blocking signal.

NOTE 3: The level specified is the level at the UUT receiver input assuming a 0 dBi antenna assembly gain. In case of conducted measurements, this level has to be corrected for the (in-band) antenna assembly gain (G). In case of radiated measurements, this level is equivalent to a power flux density (PFD) in front of the UUT antenna with the UUT being con figured/ positioned as recorded in clause 5.4.3.2.2.

Receiver Blocking parameters for Receiver Category 3 equipment


Wanted signal mean power from companion device (dBm) (see notes 1 and 3)	Blocking signal frequency (MHz)	Blocking signal power (dBm) (see note 3)	Type of blocking signal	
(-139 dBm + 10 × log10(OCBW) + 20 dB)	2 380		GC -	
or (-74 dBm + 20 dB) whichever is less	2 504	-34	CW	
(see note 2)	2 300	-54	CVV	
	2 584			

NOTE 1: OCBW is in Hz.

NOTE 2: In case of radiated measurements using a companion device and the level of the wanted signal from the companion device cannot be determined, a relative test may be performed using a wanted signal up to Pmin + 30 dB where Pmin is the minimum level of wanted signal required to meet the minimum performance criteria as defined in clause 4.3.2.11.3 in the absence of any blocking signal.

NOTE 3: The level specified is the level at the UUT receiver input assuming a 0 dBi antenna assembly gain. In case of conducted measurements, this level has to be corrected for the (in-band) antenna assembly gain (G). In case of radiated measurements, this level is equivalent to a power flux density (PFD) in front of the UUT antenna with the UUT being con figured/ positioned as recorded in clause 5.4.3.2.2.

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the Bedicated Pestud/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15day after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc@agc~cert.com.





5.8.2 TEST PROCEDURE

For non-FHSS equipment, having more than one operating channel, the operating channels on which the testing has to be performed shall be selected as follows:

- For testing blocking frequencies less than 2 400 MHz, the equipment shall operate on the lowest operating channel.
- For testing blocking frequencies greater than 2 500 MHz, the equipment shall operate on the highest operating channel.


The simplified conducted measure procedures are as follows:

- 1) For non-FHSS equipment, the UUT shall be set to the lowest operating channel on which the blocking test has to be performed.
- 2) The blocking signal generator is set to the first frequency as defined in the appropriate table corresponding to the receiver category and type of equipment.
- 3)With the blocking signal generator switched off, a communication link is established between the UUT and the associated companion device using the test setup. The level of the wanted signal shall be set to the value provided in the table corresponding to the receiver category and type of equipment. This level may be measured directly at the output of the companion device and a correction is made for the coupling loss into the UUT. The actual level for the wanted signal shall be recorded in the test report.
- 4) The blocking signal at the UUT is set to the level provided in the table corresponding to the receiver category and type of equipment. It shall be verified and recorded in the test report that the performance criteria is met.
- 5) Repeat step 4 for each remaining combination of frequency and level for the blocking signal as provided in the table corresponding to the receiver category and type of equipment.
- 6) Repeat step 2 to step 5 with the UUT operating at the highest operating channel.

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the content of Bedicated Pesting/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc@agc~cert.com.



5.8.3 TEST CONFIGURATION

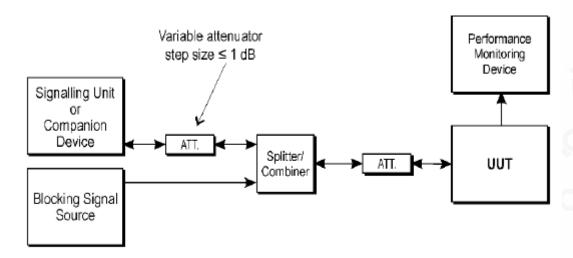

Test Set-up for receiver blocking

5.8.4TEST RESULT

Test channel	Blocking Signal Frequency(MHz)	Blocking Signal Power(dBm)	Wanted signal mean power from companion device(dBm)	Performance PER	Limit PER	Result
	2300	-31.93	-66.75	1.22%	10%	®
Low	2380	-31.93	-66.75	1.11%	10%	
	2504	-31.93	-66.77	2.52%	10%	Pass
High	2584	-31.93	-66.77	1.89%	10%	

Note: The levels of the blocking signal and wanted signal have to be corrected for the (in-band) antenna assembly gain.

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the Bedicated Festing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC, the test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15day after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc@agc=cert.com.



APPENDIX A: PHOTOGRAPHS OF TEST SETUP


RADIATED SPURIOUS EMISSION -BELOW 1GHz



RADIATED SPURIOUS EMISSION - ABOVE 1GHz



Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the specificated resting/inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the writter pathorization of AGC, the test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15day after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc@agc-cert.com.





APPENDIX B: PHOTOGRAPHS OF THE EUT

Refer to the Report No.: AGC03773210601AP01

----END OF REPORT----

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the special pedicated fresh dynapection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the writter appropriation of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15day after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc@agc-cert.com.



Conditions of Issuance of Test Reports

- 1. All samples and goods are accepted by the Attestation of Global Compliance (Shenzhen) Co., Ltd (the "Company") solely for testing and reporting in accordance with the following terms and conditions. The company provides its services on the basis that such terms and conditions constitute express agreement between the company and any person, firm or company requesting its services (the "Clients").
- 2. Any report issued by Company as a result of this application for testing services (the "Report") shall be issued in confidence to the Clients and the Report will be strictly treated as such by the Company. It may not be reproduced either in its entirety or in part and it may not be used for advertising or other unauthorized purposes without the written consent of the Company. The Clients to whom the Report is issued may, however, show or send it, or a certified copy thereof prepared by the Company to its customer, supplier or other persons directly concerned. The Company will not, without the consent of the Clients, enter into any discussion or correspondence with any third party concerning the contents of the Report, unless required by the relevant governmental authorities, laws or court orders.
- 3.The Company shall not be called or be liable to be called to give evidence or testimony on the Report in a court of law without its prior written consent, unless required by the relevant governmental authorities, laws or court orders.
- 4. The non-CMA report issued by AGC is only permitted to be used by the client as internal reference use and shall not be used for public demonstration purpose.
- 5. In the event of the improper use of the report as determined by the Company, the Company reserves the right to withdraw it, and to adopt any other additional remedies which may be appropriate.
- 6. Samples submitted for testing are accepted on the understanding that the Report issued cannot form the basis of, or be the instrument for, any legal action against the Company.
- 7. The Company will not be liable for or accept responsibility for any loss or damage however arising from the use of information contained in any of its Reports or in any communication whatsoever about its said tests or investigations.
- 8. Clients wishing to use the Report in court proceedings or arbitration shall inform the Company to that effect prior to submitting the sample for testing.
- 9. The Company is not responsible for recalling the electronic version of the original report when any revision is made to them. The Client assumes the responsibility to providing the revised version to any interested party who uses them.
- 10. Subject to the variable length of retention time for test data and report stored hereinto as otherwise specifically required by individual accreditation authorities, the Company will only keep the supporting test data and information of the test report for a period of six years. The data and information will be disposed of after the aforementioned retention period has elapsed. Under no circumstances shall we provide any data and information which has been disposed of after retention period. Under no circumstances shall we be liable for damage of any kind, including (but not limited to) compensatory damages, lost profits, lost data, or any form of special, incidental, indirect, consequential or punitive damages of any kind, whether based on breach of contract of warranty, tort (including negligence), product liability or otherwise, even if we are informed in advance of the possibility of such damages.

he test report.

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the /Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the writter enhorization of AGE The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15da Further enquiry of validity or verification of the test report should be addressed to AGC by agc@agc-cert.com.