


# Bodysuit · Square Neck · Low Back

*A stretch-fabric bodysuit with a snap-fastening gusset.*

TECHNICAL DRAWING (from the same draft)

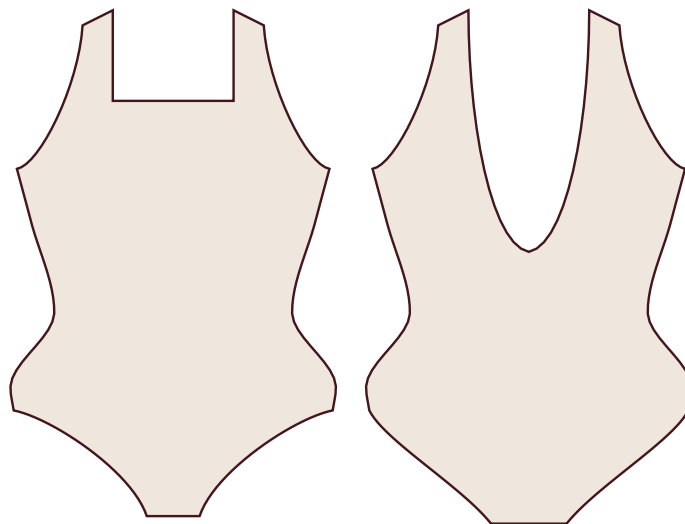

## BODY MEASUREMENTS FOR THIS PATTERN

|                                    |                          |
|------------------------------------|--------------------------|
| Bust (body)                        | <b>92 cm (36.2 in)</b>   |
| Waist (body)                       | <b>70 cm (27.6 in)</b>   |
| Hip (body)                         | <b>98 cm (38.6 in)</b>   |
| Finished bust (10 % negative ease) | <b>82.8 cm (32.6 in)</b> |
| Front length, shoulder to crotch   | <b>65 cm (25.6 in)</b>   |
| Side height, underarm to leg       | <b>32 cm (12.6 in)</b>   |

## PATTERN PIECES

Front — 1 fabric  
 Back — 1 fabric  
 Snap gusset — 1 fabric + 1 cotton

## MATERIALS

Fabric: lycra, microfiber or stretch lace with good recovery (at least 40 % stretch across the width): 1 m (1.1 yd).  
 Cotton lining for the gusset: 12 × 15 cm (4.7 × 6 in). 3 lingerie snap fasteners.  
 Lingerie elastic, 8 mm (3/8 in): 2.5 m (2.7 yd) (legs, neckline and armholes).

## HOW TO PRINT

A4: print at 100 % ("Actual size") with "Fit to page" turned off. Follow the assembly map.

Plotter: send the sheet at actual size as it is (the file is already at 1:1 scale).

Before cutting, measure the test square: 10 × 10 cm (3.94 × 3.94 in).

## ORDER OF CONSTRUCTION

1. Cut with the greatest stretch running across. Check the torso length on a sample: it is the measurement that varies most from body to body.
2. Join the shoulders.
3. Close the side seams with a serger or zigzag.
4. Apply elastic to the neckline, armholes and legs, 10 % shorter than the edge.
5. Sew the gusset with its lining and the snap fasteners for the closure.

Pattern drafted with classic pattern-making formulas from the measurements above (one size), for stretch fabric. A 0.6 cm (1/4 in) allowance is included. Make a first sample in scrap fabric.

