


Bodysuit · Halter Neck · Keyhole Back

A stretch-fabric bodysuit with a snap-fastening gusset.

TECHNICAL DRAWING (from the same draft)

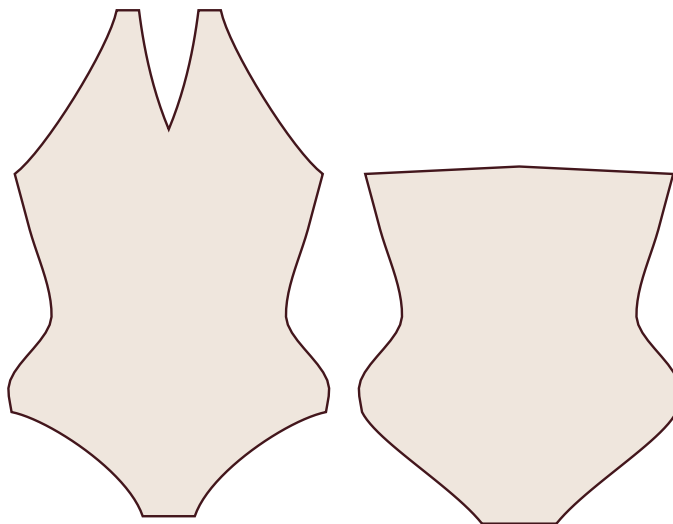

BODY MEASUREMENTS FOR THIS PATTERN

Bust (body)	92 cm (36.2 in)
Waist (body)	70 cm (27.6 in)
Hip (body)	98 cm (38.6 in)
Finished bust (10 % negative ease)	82.8 cm (32.6 in)
Front length, shoulder to crotch	68 cm (26.8 in)
Side height, underarm to leg	32 cm (12.6 in)

PATTERN PIECES

Front — 1 fabric
 Back — 1 fabric
 Snap gusset — 1 fabric + 1 cotton
 Neck tie — 2 fabric (folded in half lengthwise)

MATERIALS

Fabric: lycra, microfiber or stretch lace with good recovery (at least 40 % stretch across the width): 1 m (1.1 yd).
 Cotton lining for the gusset: 12 × 15 cm (4.7 × 6 in). 3 lingerie snap fasteners.
 Lingerie elastic, 8 mm (3/8 in): 2.5 m (2.7 yd) (legs, neckline and armholes). Neck tie in the same fabric.

HOW TO PRINT

A4: print at 100 % ("Actual size") with "Fit to page" turned off. Follow the assembly map.

Plotter: send the sheet at actual size as it is (the file is already at 1:1 scale).

Before cutting, measure the test square: 10 × 10 cm (3.94 × 3.94 in).

ORDER OF CONSTRUCTION


1. Cut with the greatest stretch running across. Check the torso length on a sample: it is the measurement that varies most from body to body.
2. Attach the straps or the neck tie at the fitting.
3. Cut out the keyhole at the back and finish it with elastic or with a binding in the same fabric.
4. Close the side seams with a serger or zigzag.
5. Apply elastic to the neckline, armholes and legs, 10 % shorter than the edge.
6. Sew the gusset with its lining and the snap fasteners for the closure.


Pattern drafted with classic pattern-making formulas from the measurements above (one size), for stretch fabric. A 0.6 cm (1/4 in) allowance is included. Make a first sample in scrap fabric.


ASSEMBLY MAP


30 A4 sheets · 5 rows (A–E) × 6 columns (1–6).


1. Print every sheet at 100 % ("Actual size"). Measure the test square: 10 × 10 cm (3.94 × 3.94 in).
2. Trim each sheet along the gray dotted line at the top and on the left (not needed for row A or column 1).
3. Lay the trimmed sheet over its neighbor until the gray line and the cross marks match, then tape it down.
4. Assemble row by row (A1, A2, A3...), then join the rows together.

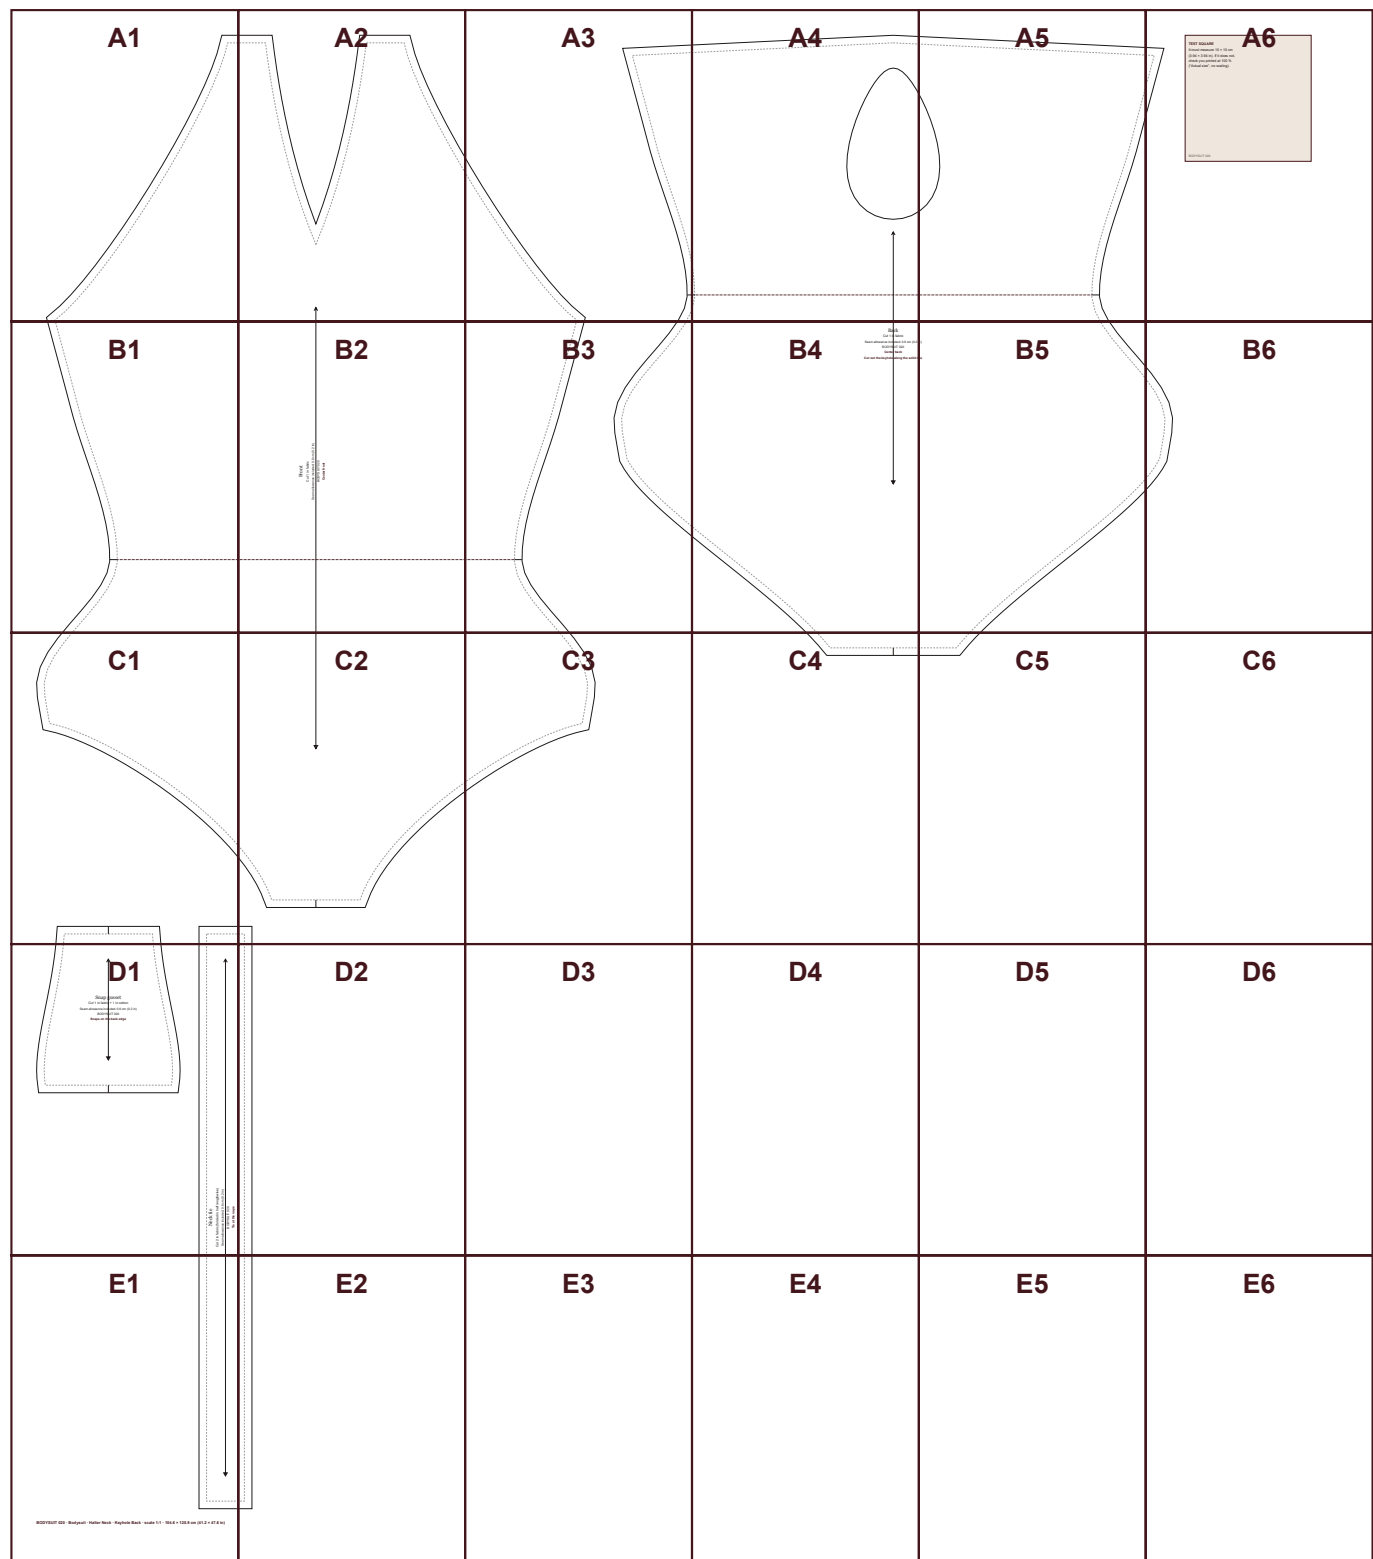


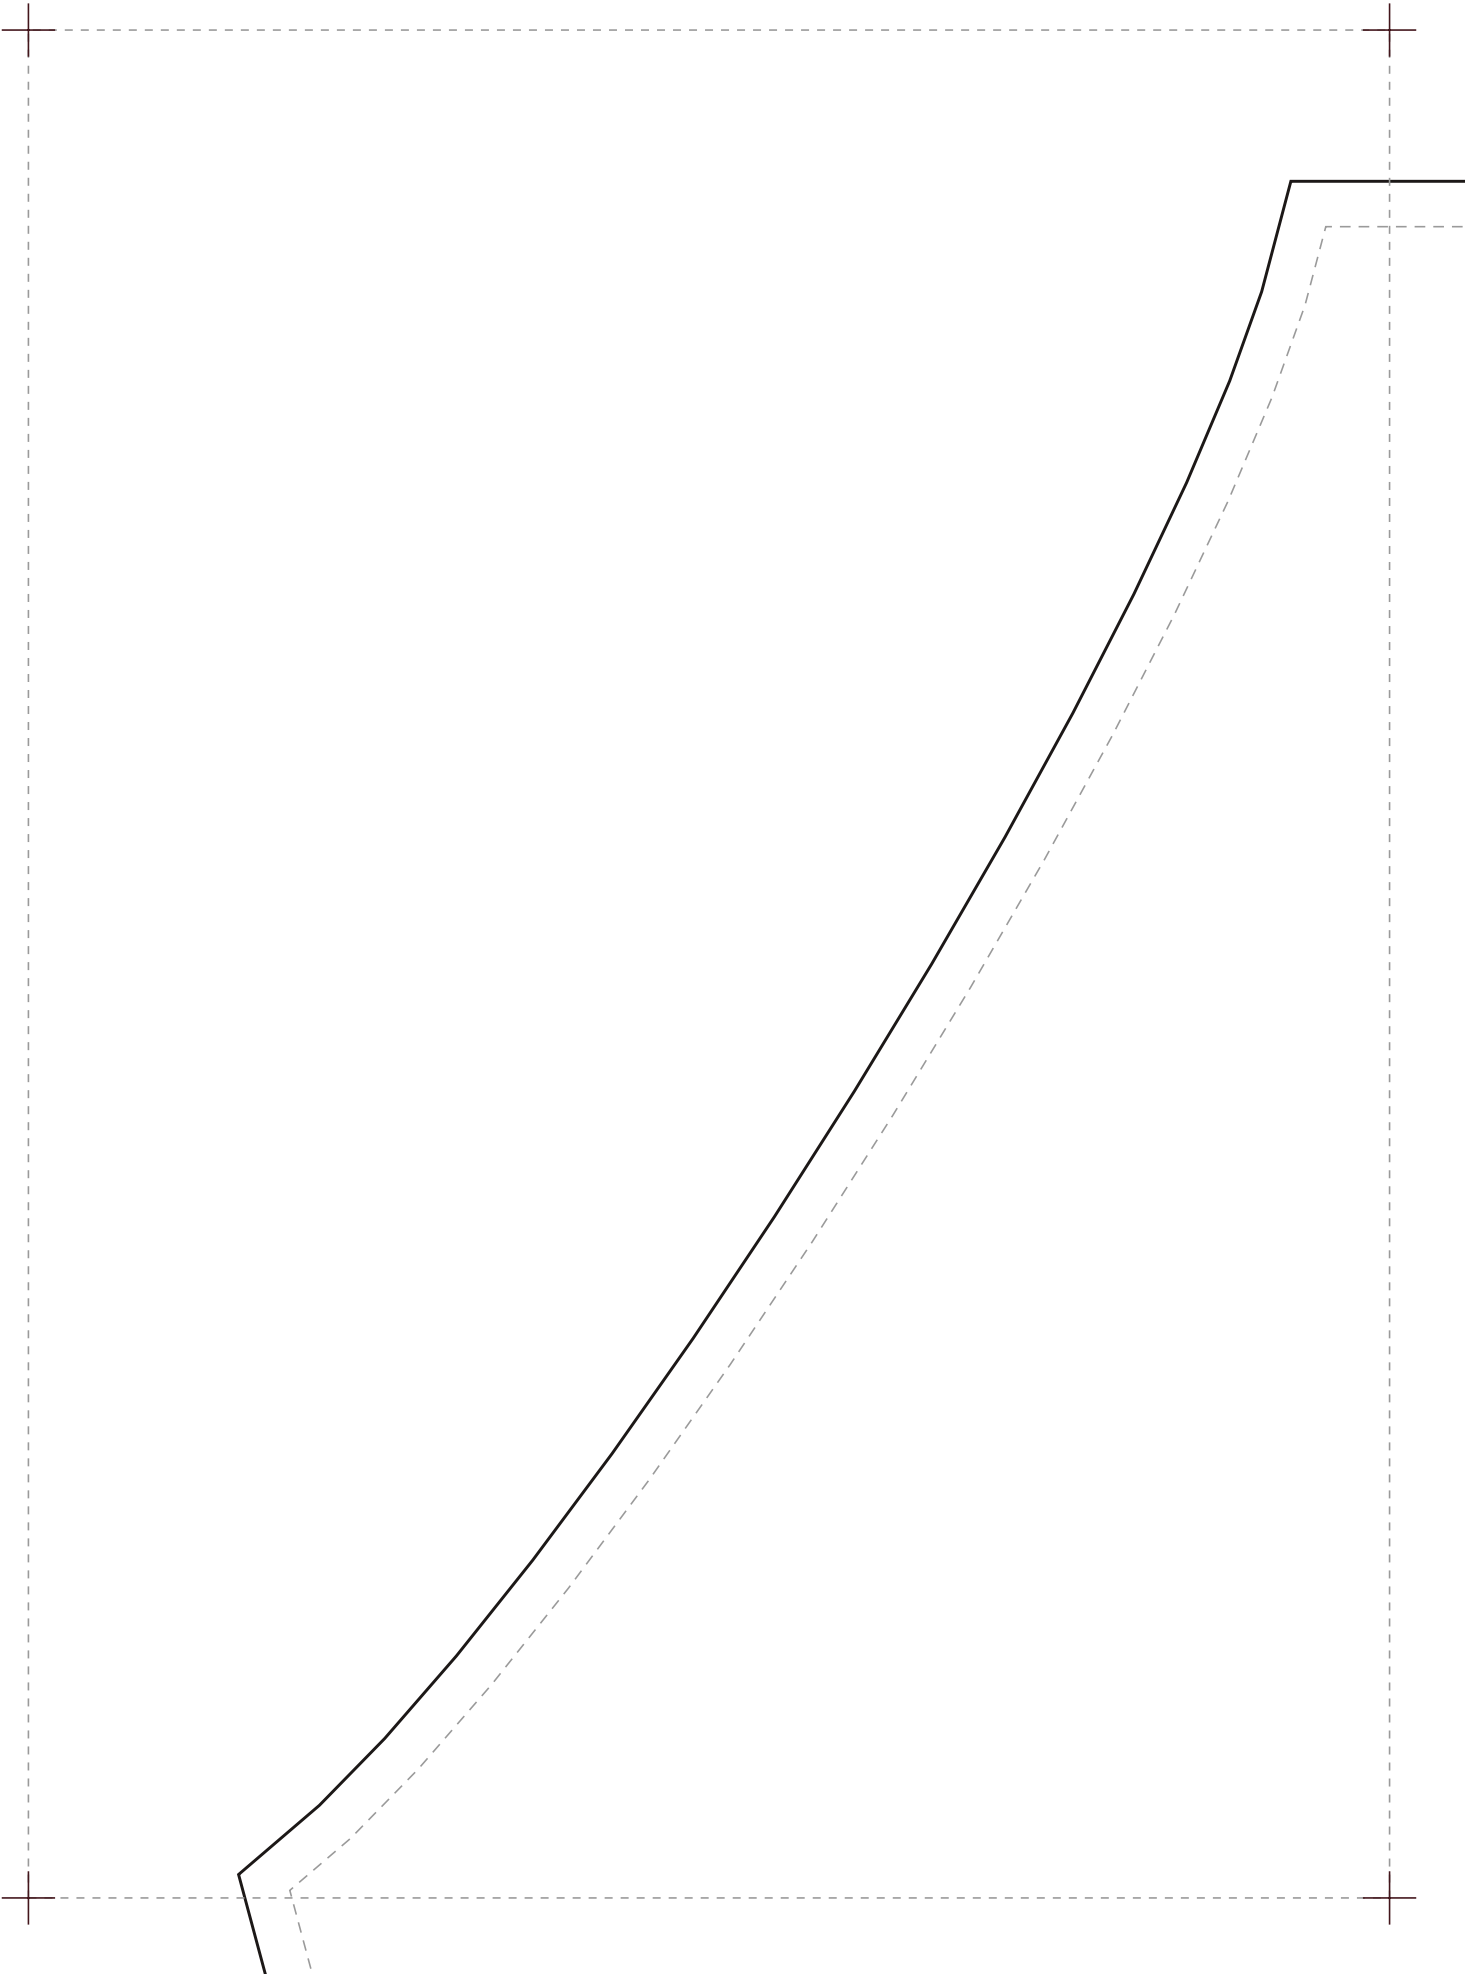

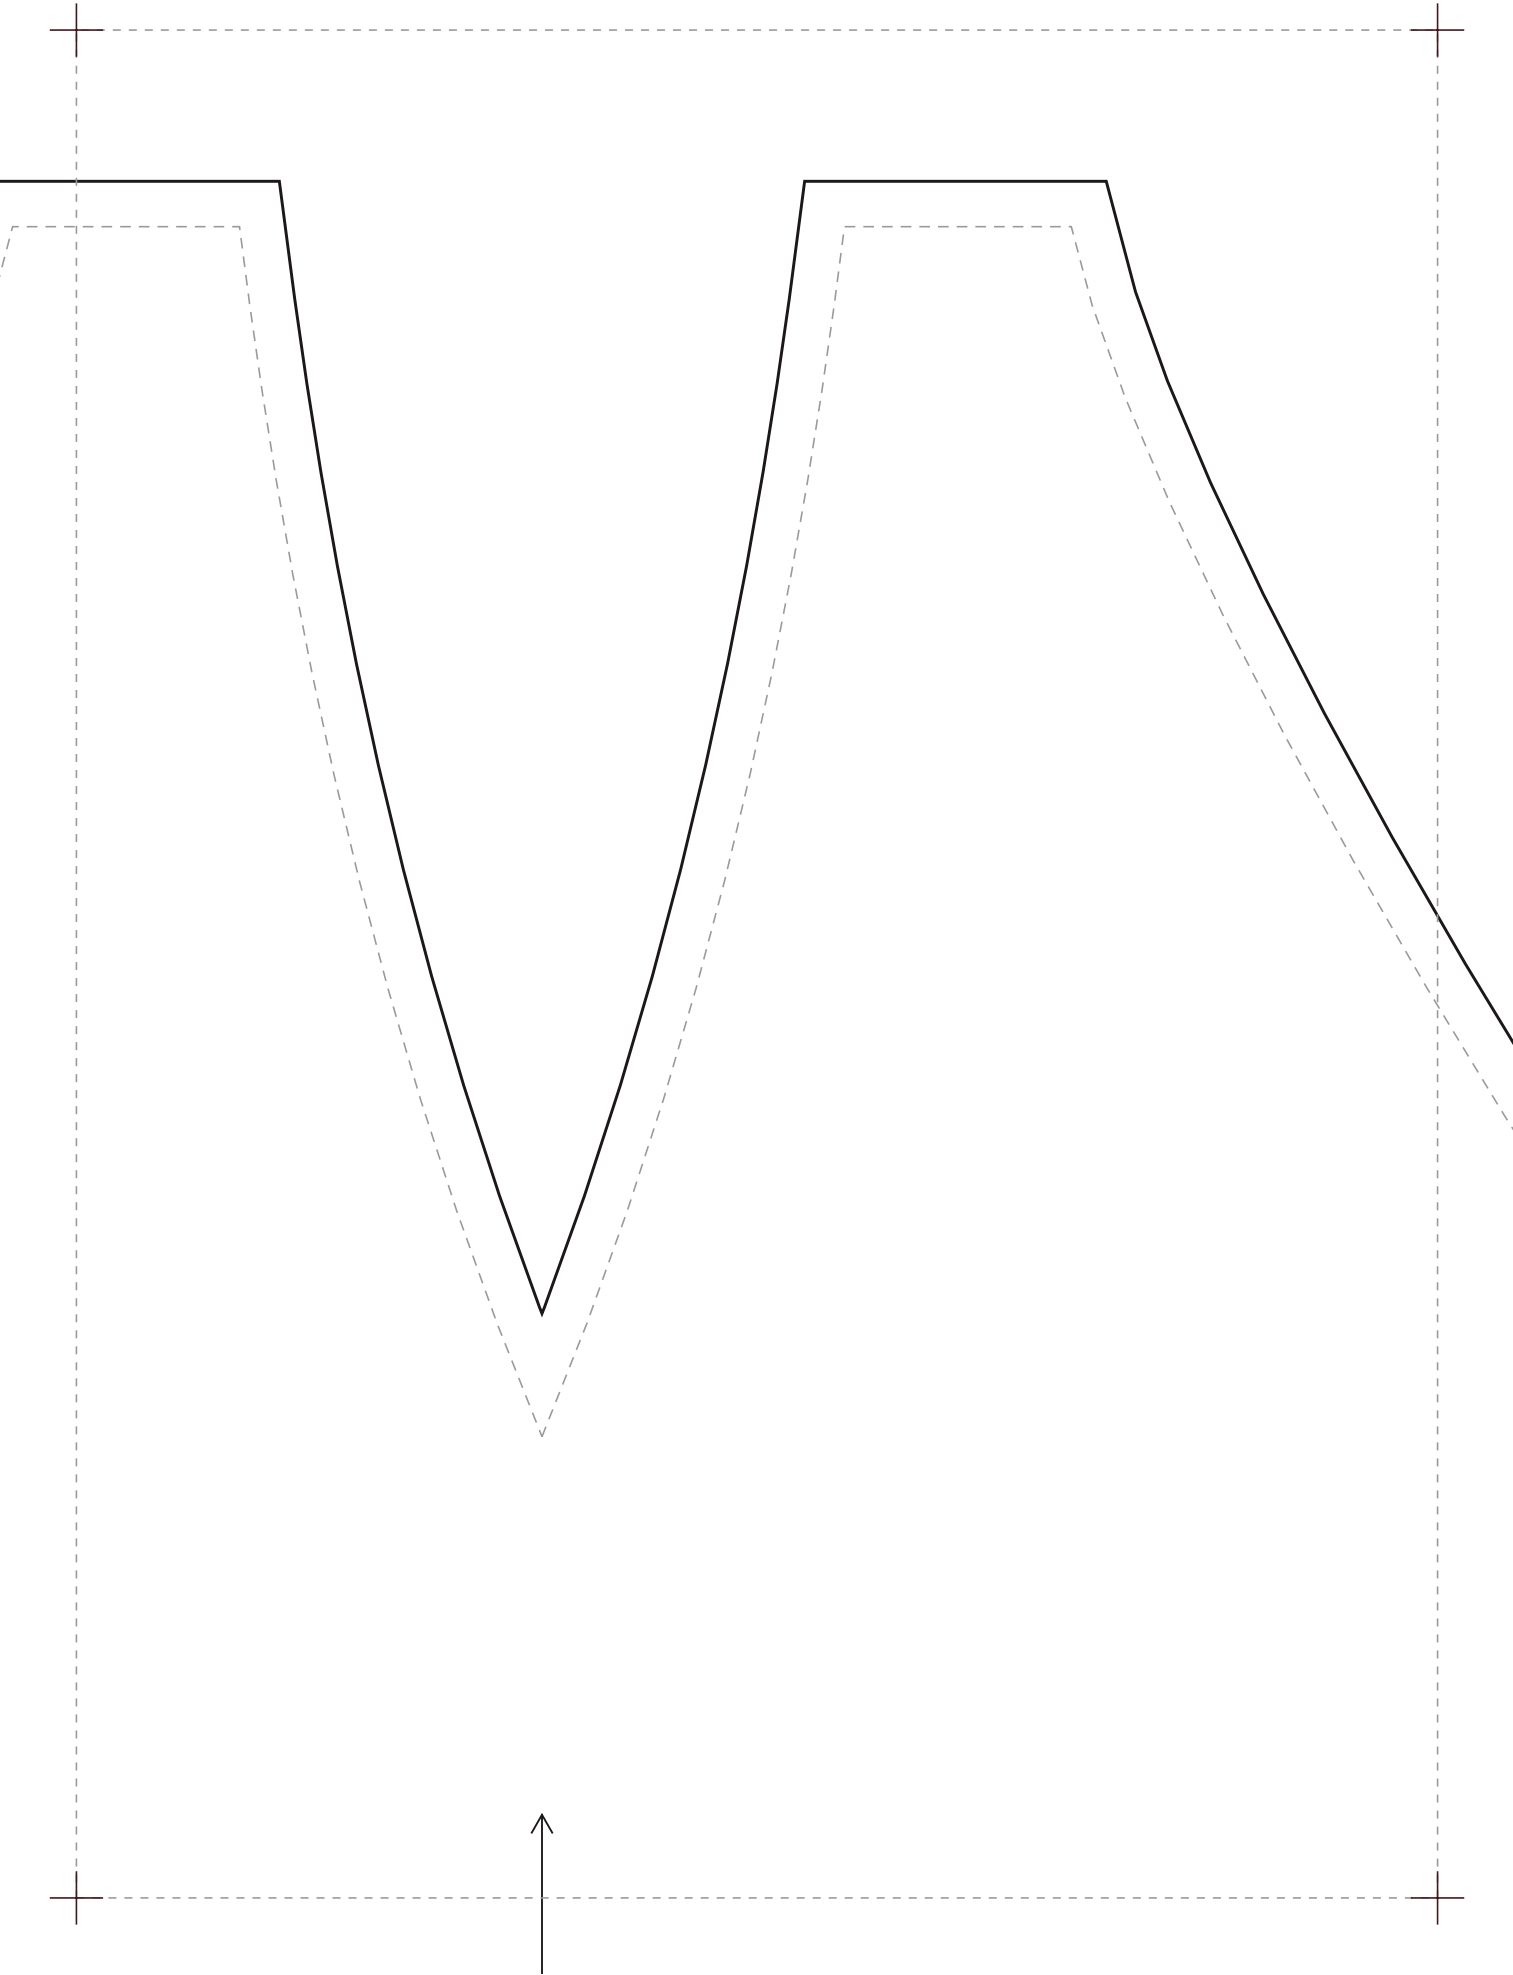

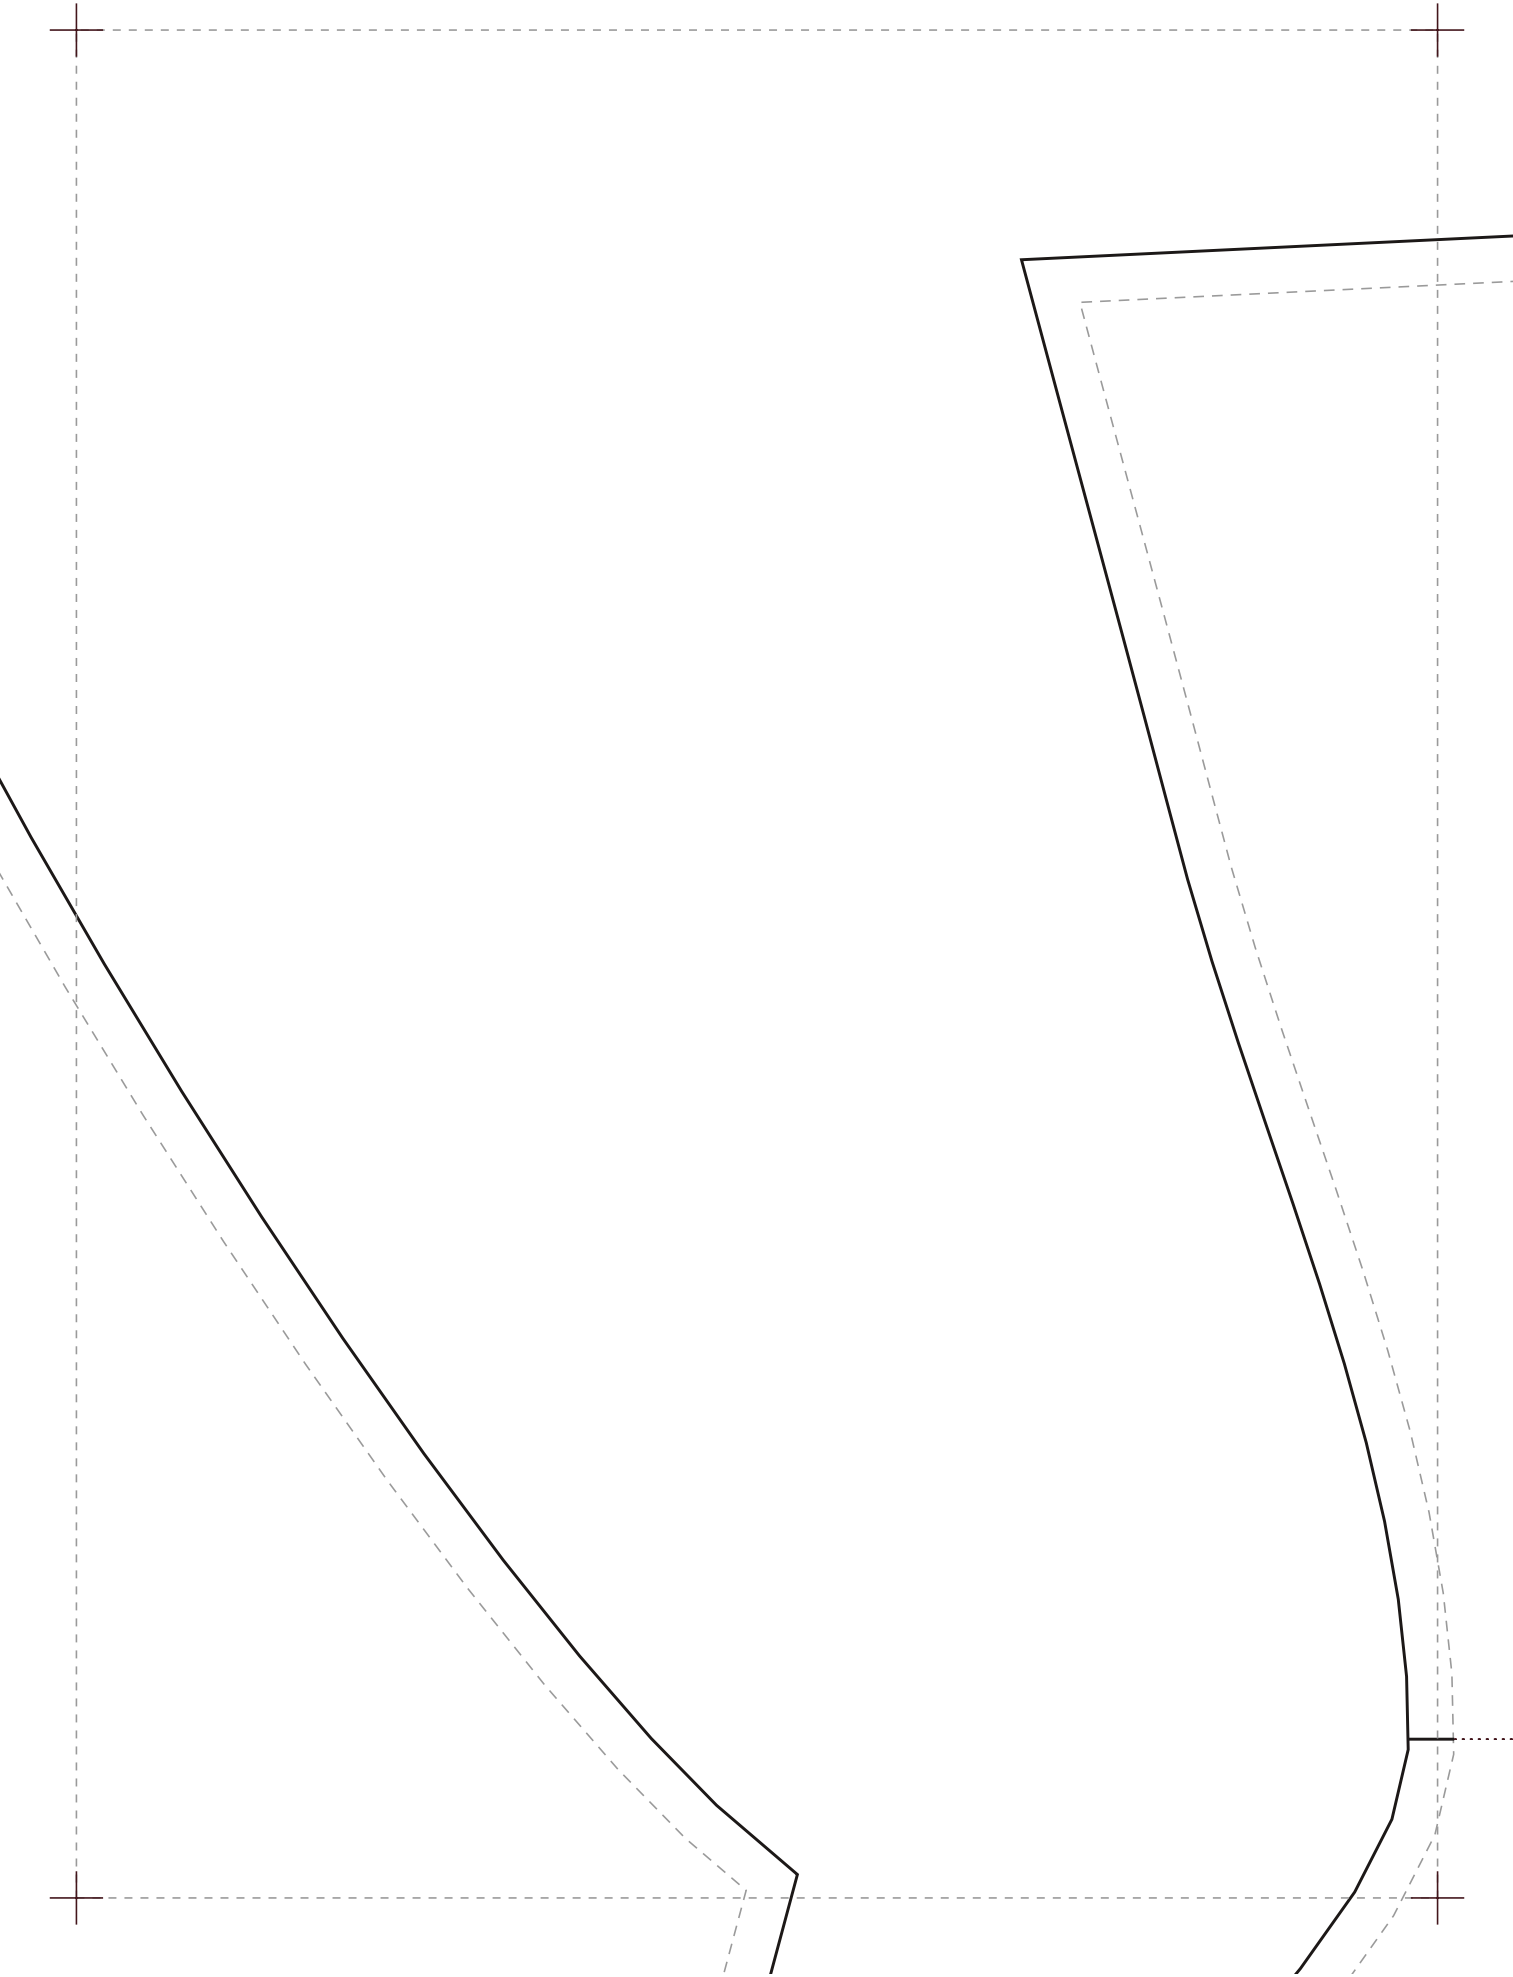

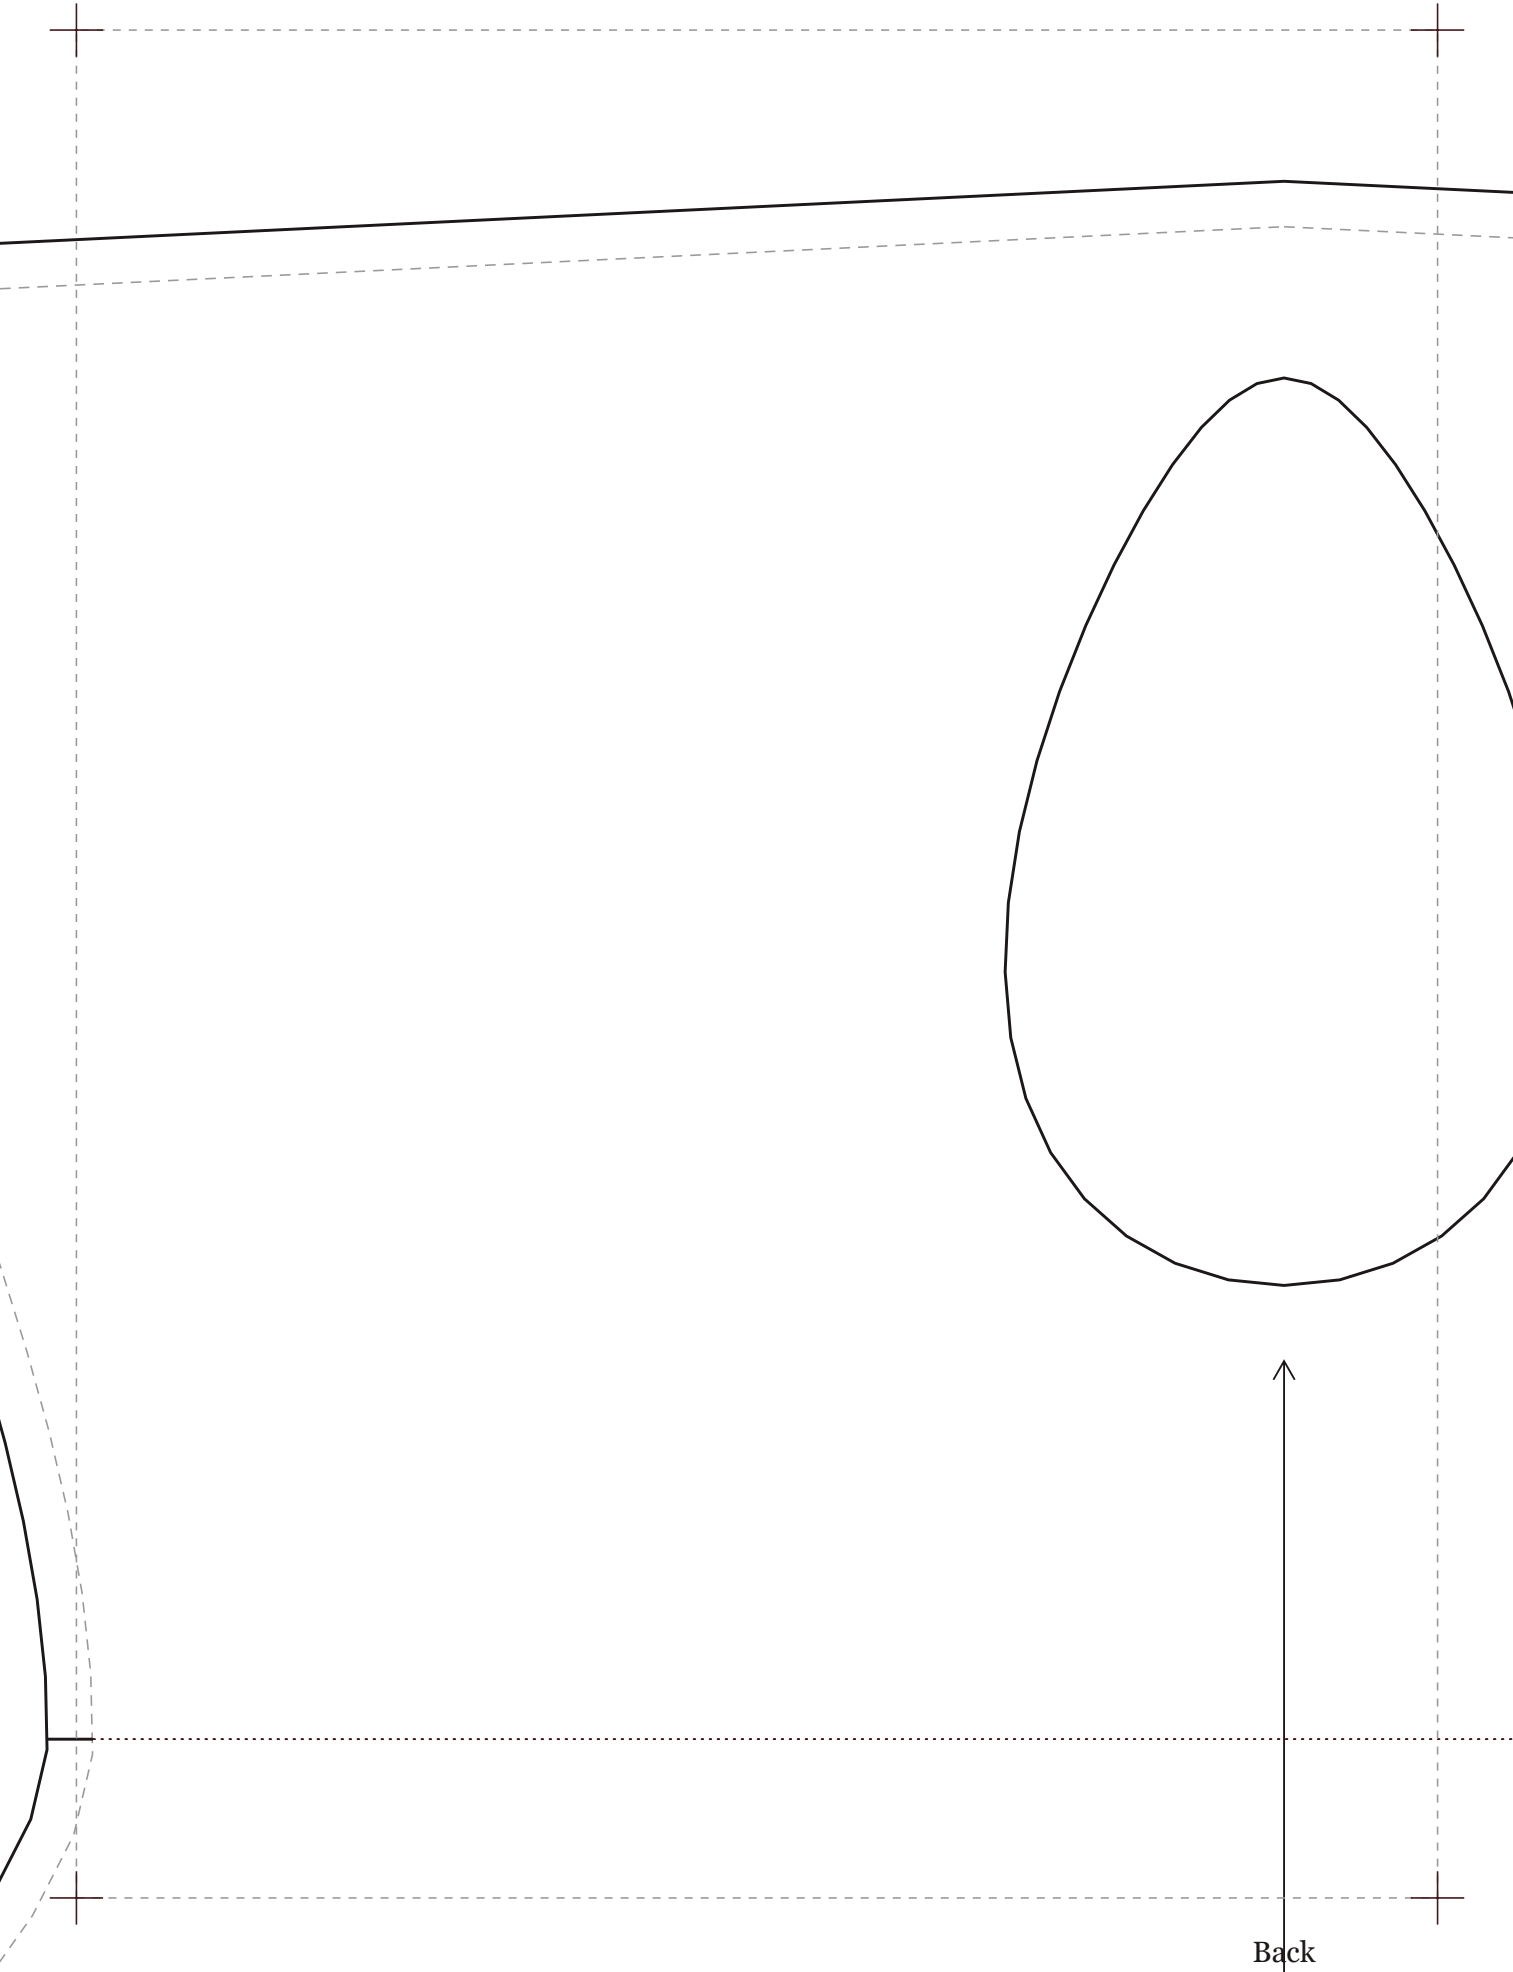


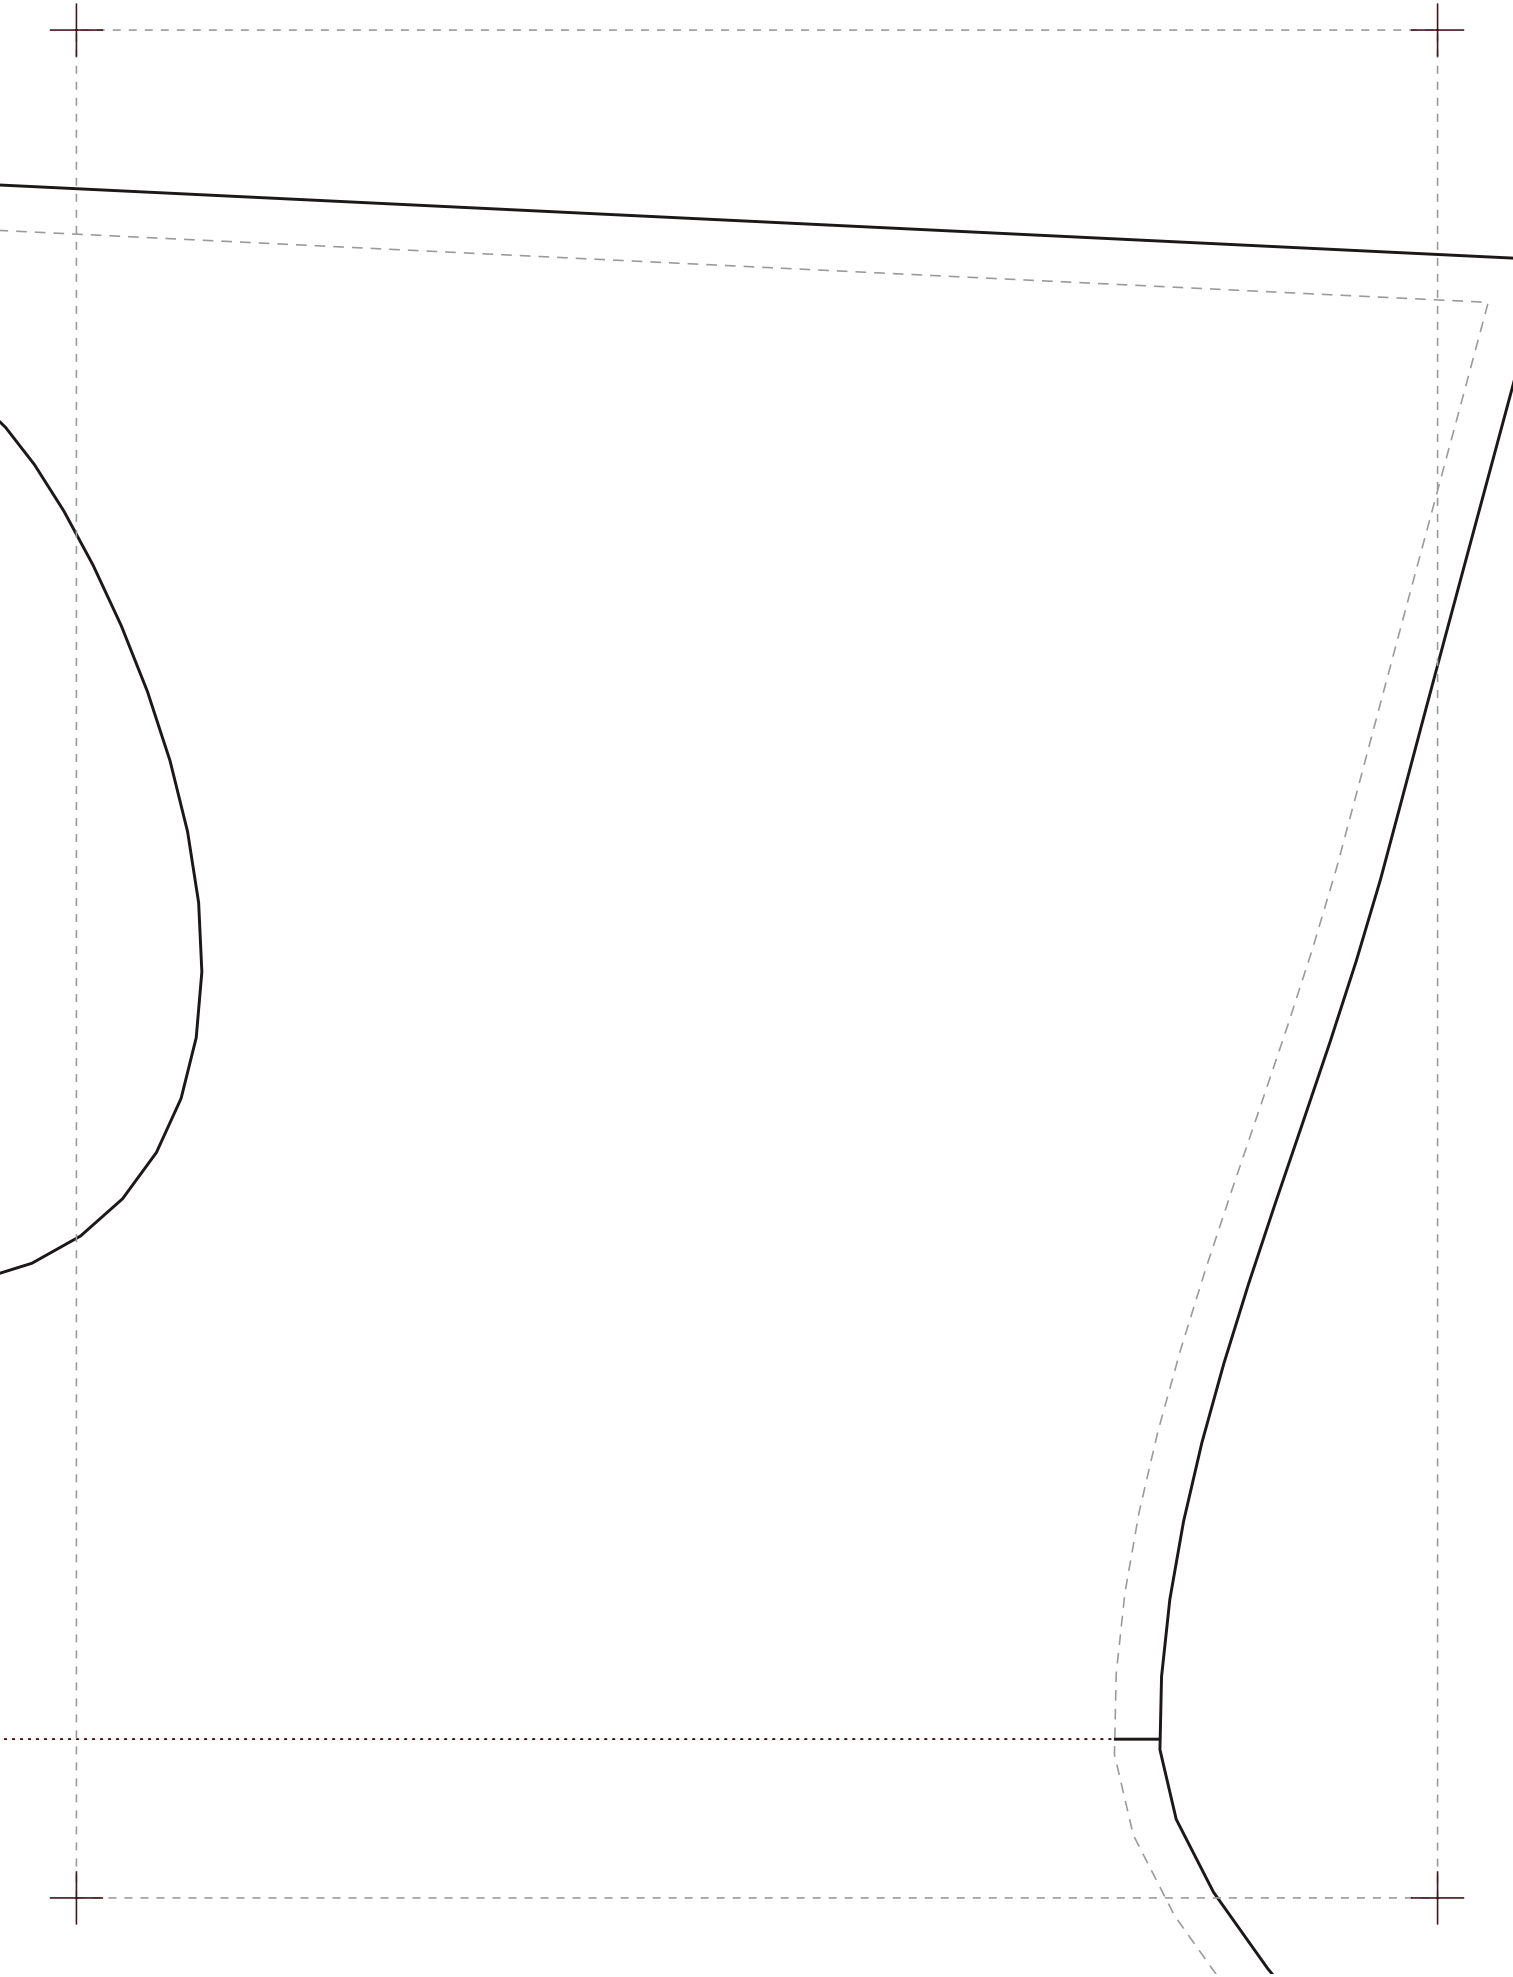



TEST SQUARE


It must measure 10 × 10 cm
(3.94 × 3.94 in). If it does not,
check you printed at 100 %
("Actual size", no scaling).


BODYSUIT 020

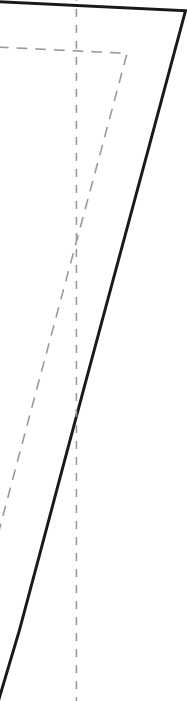

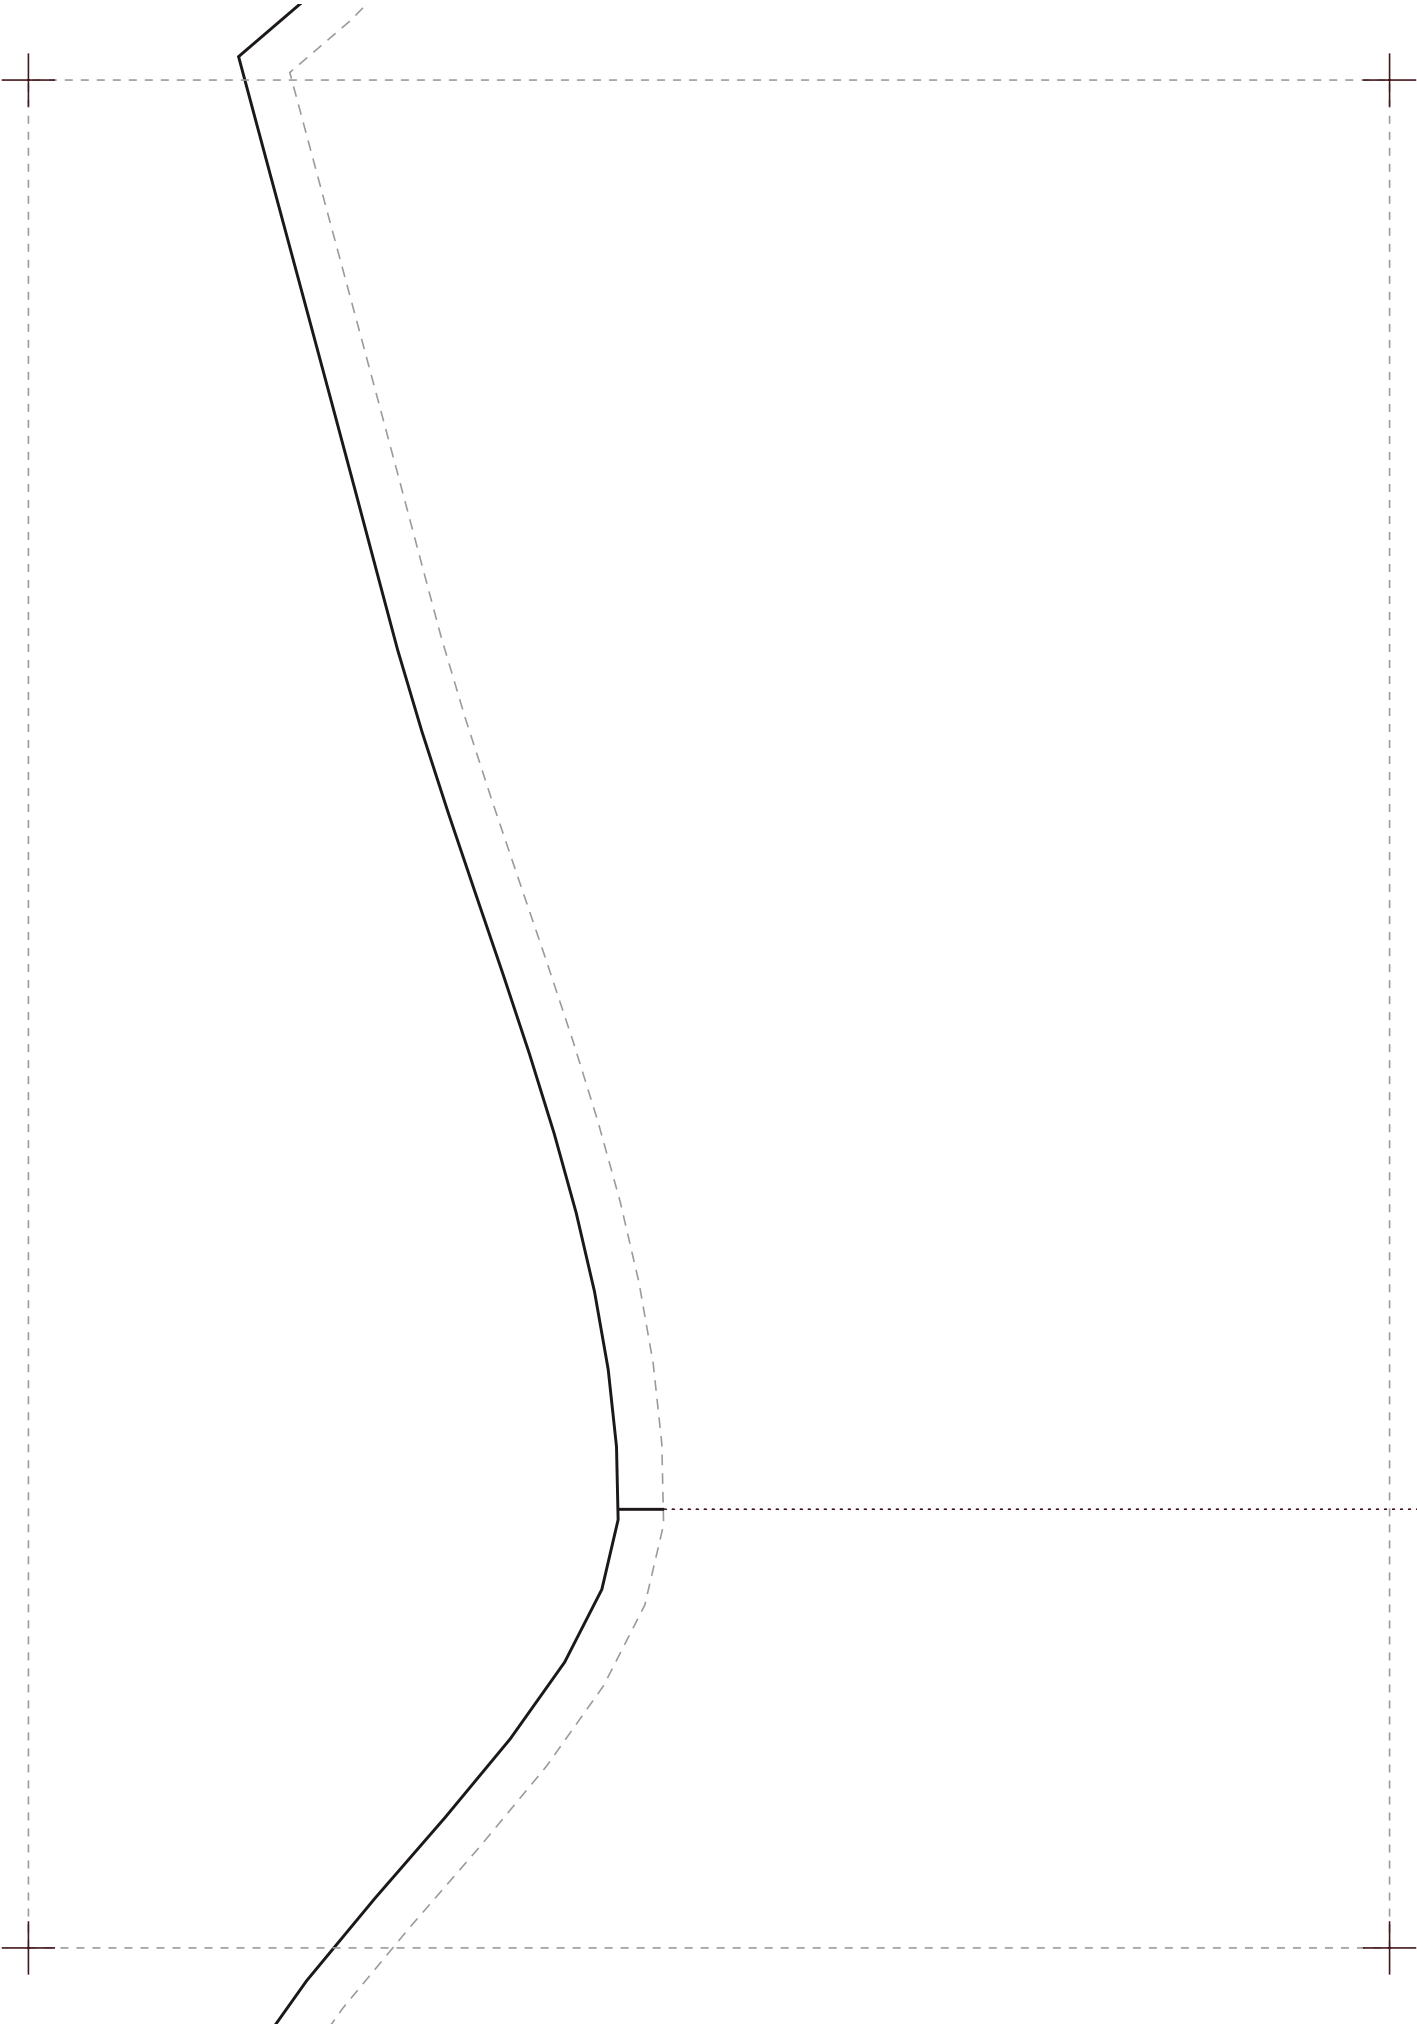

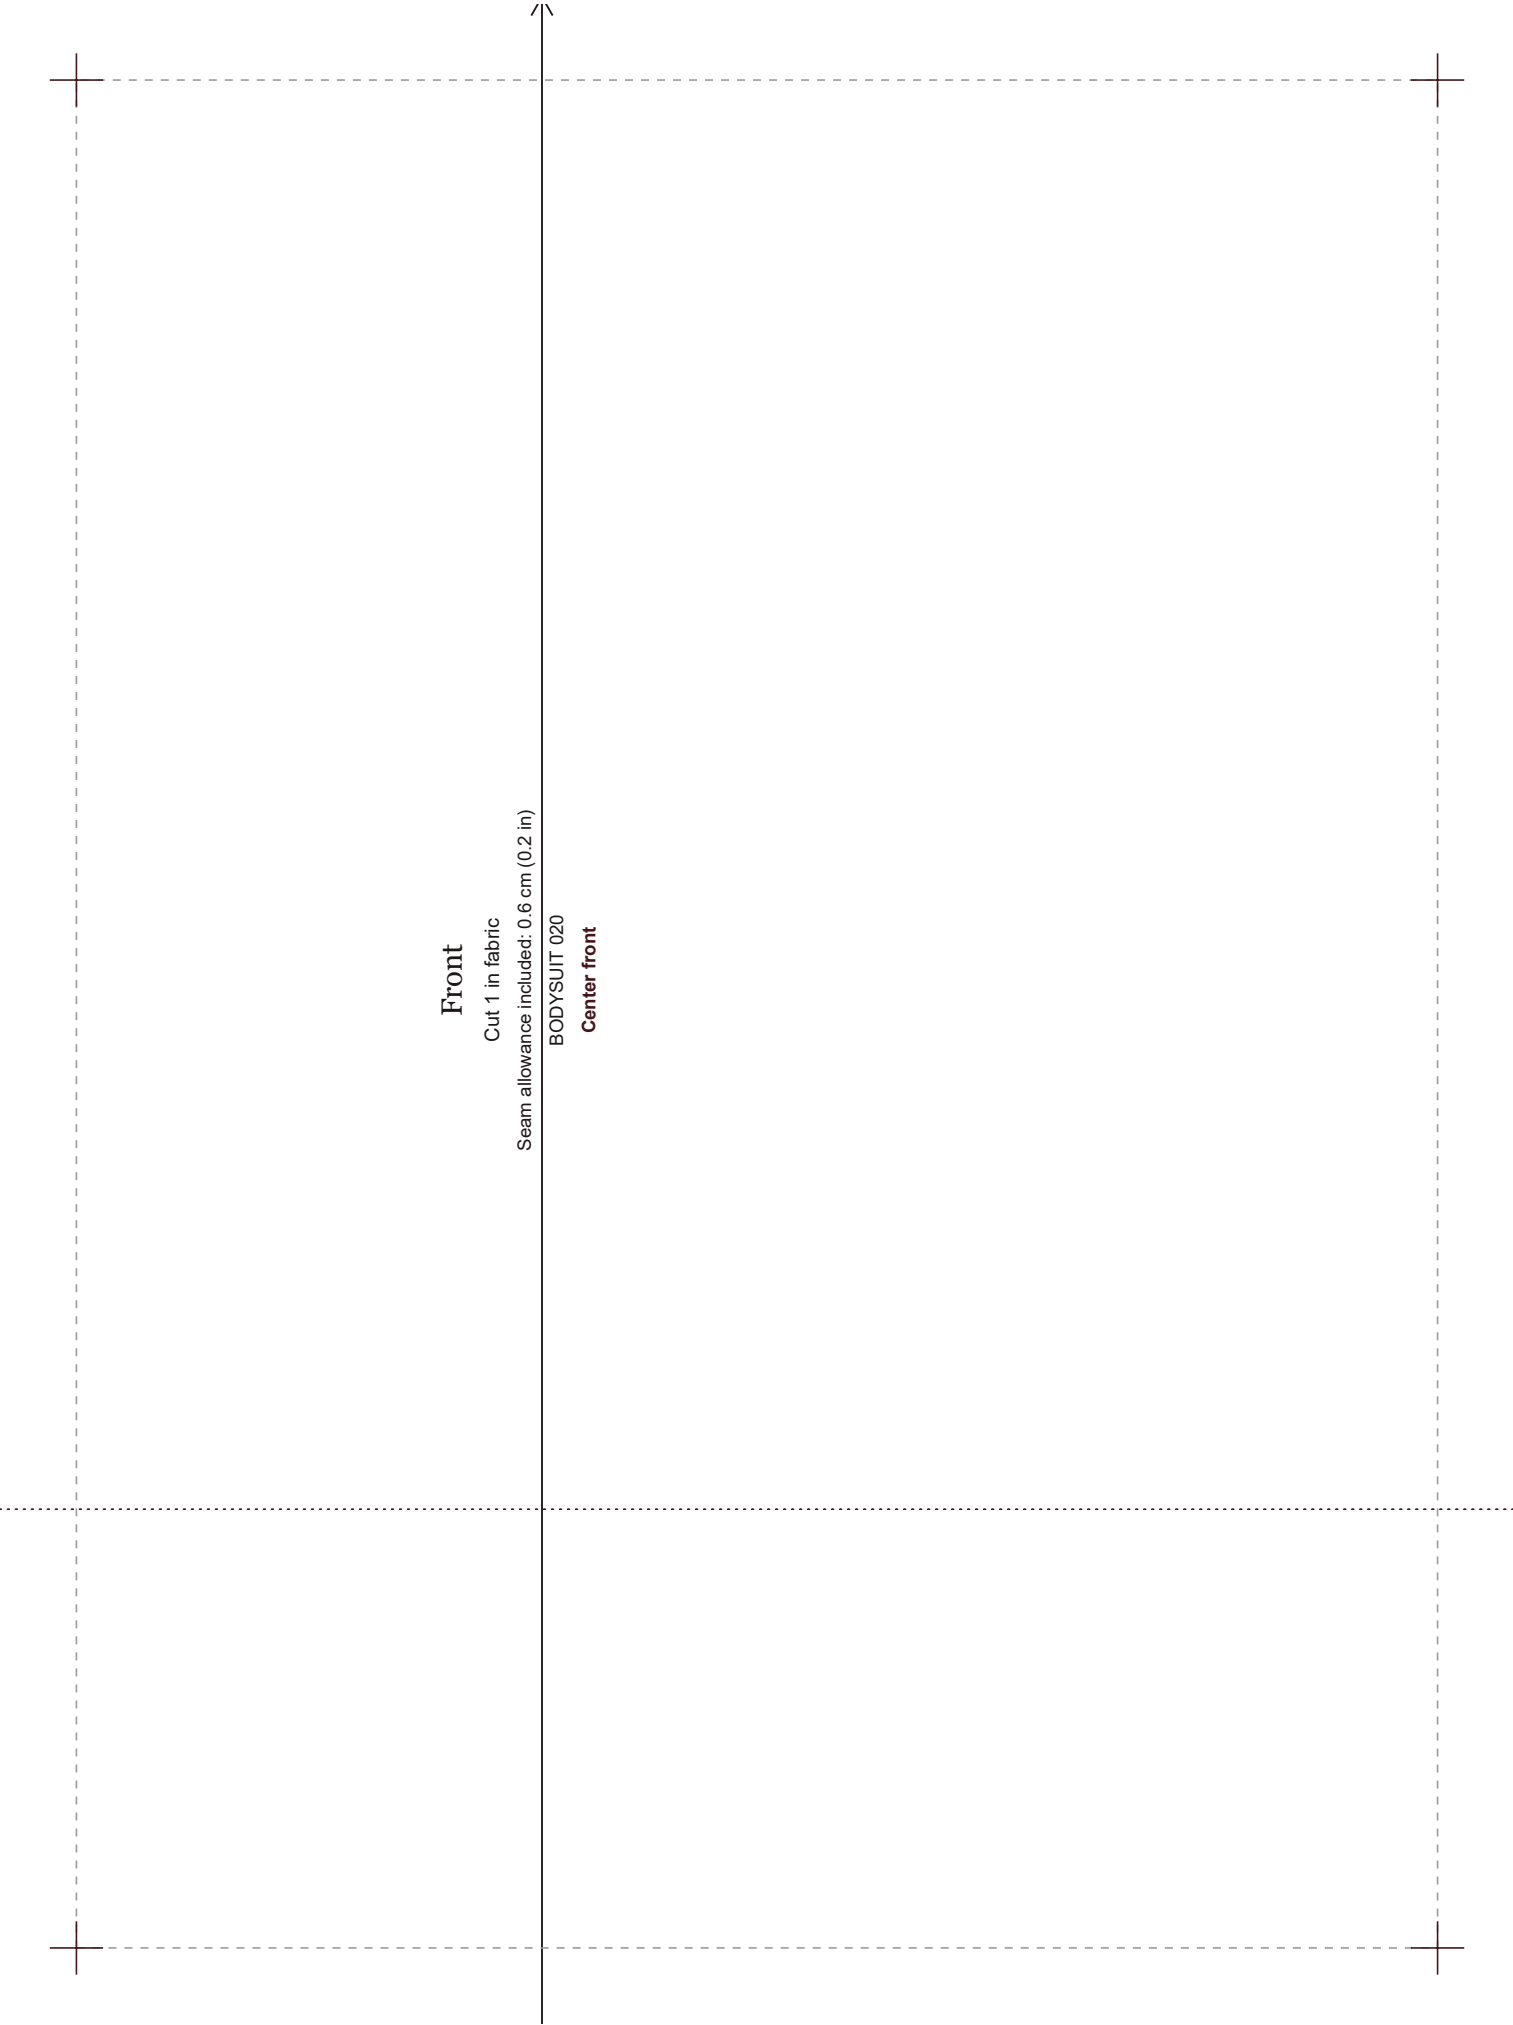

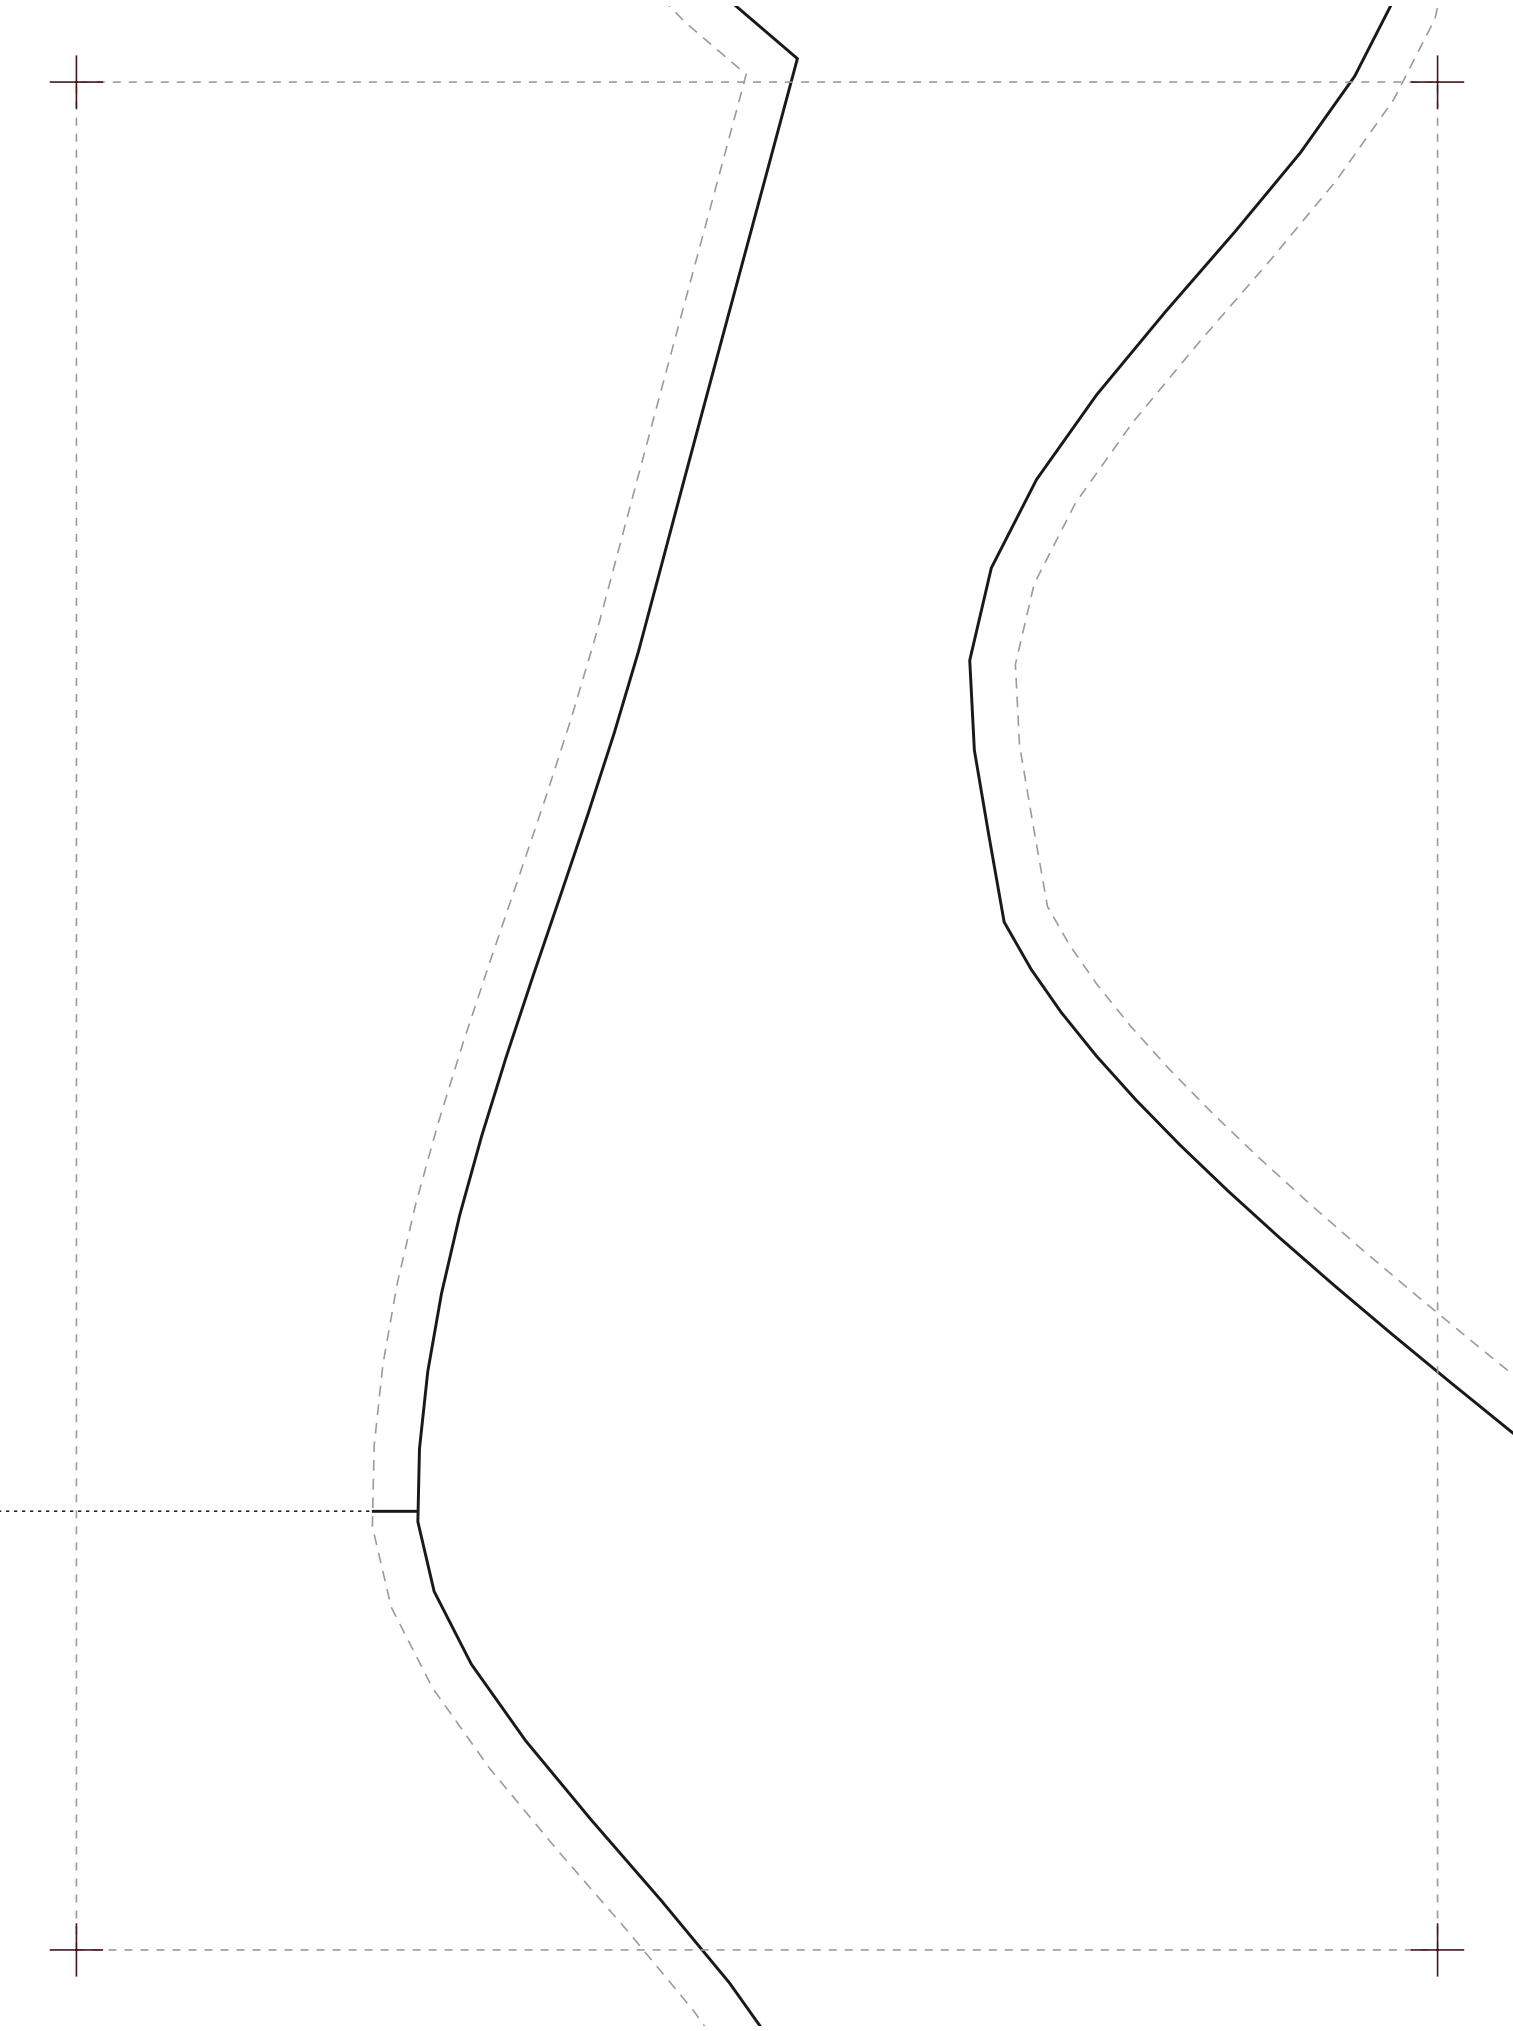


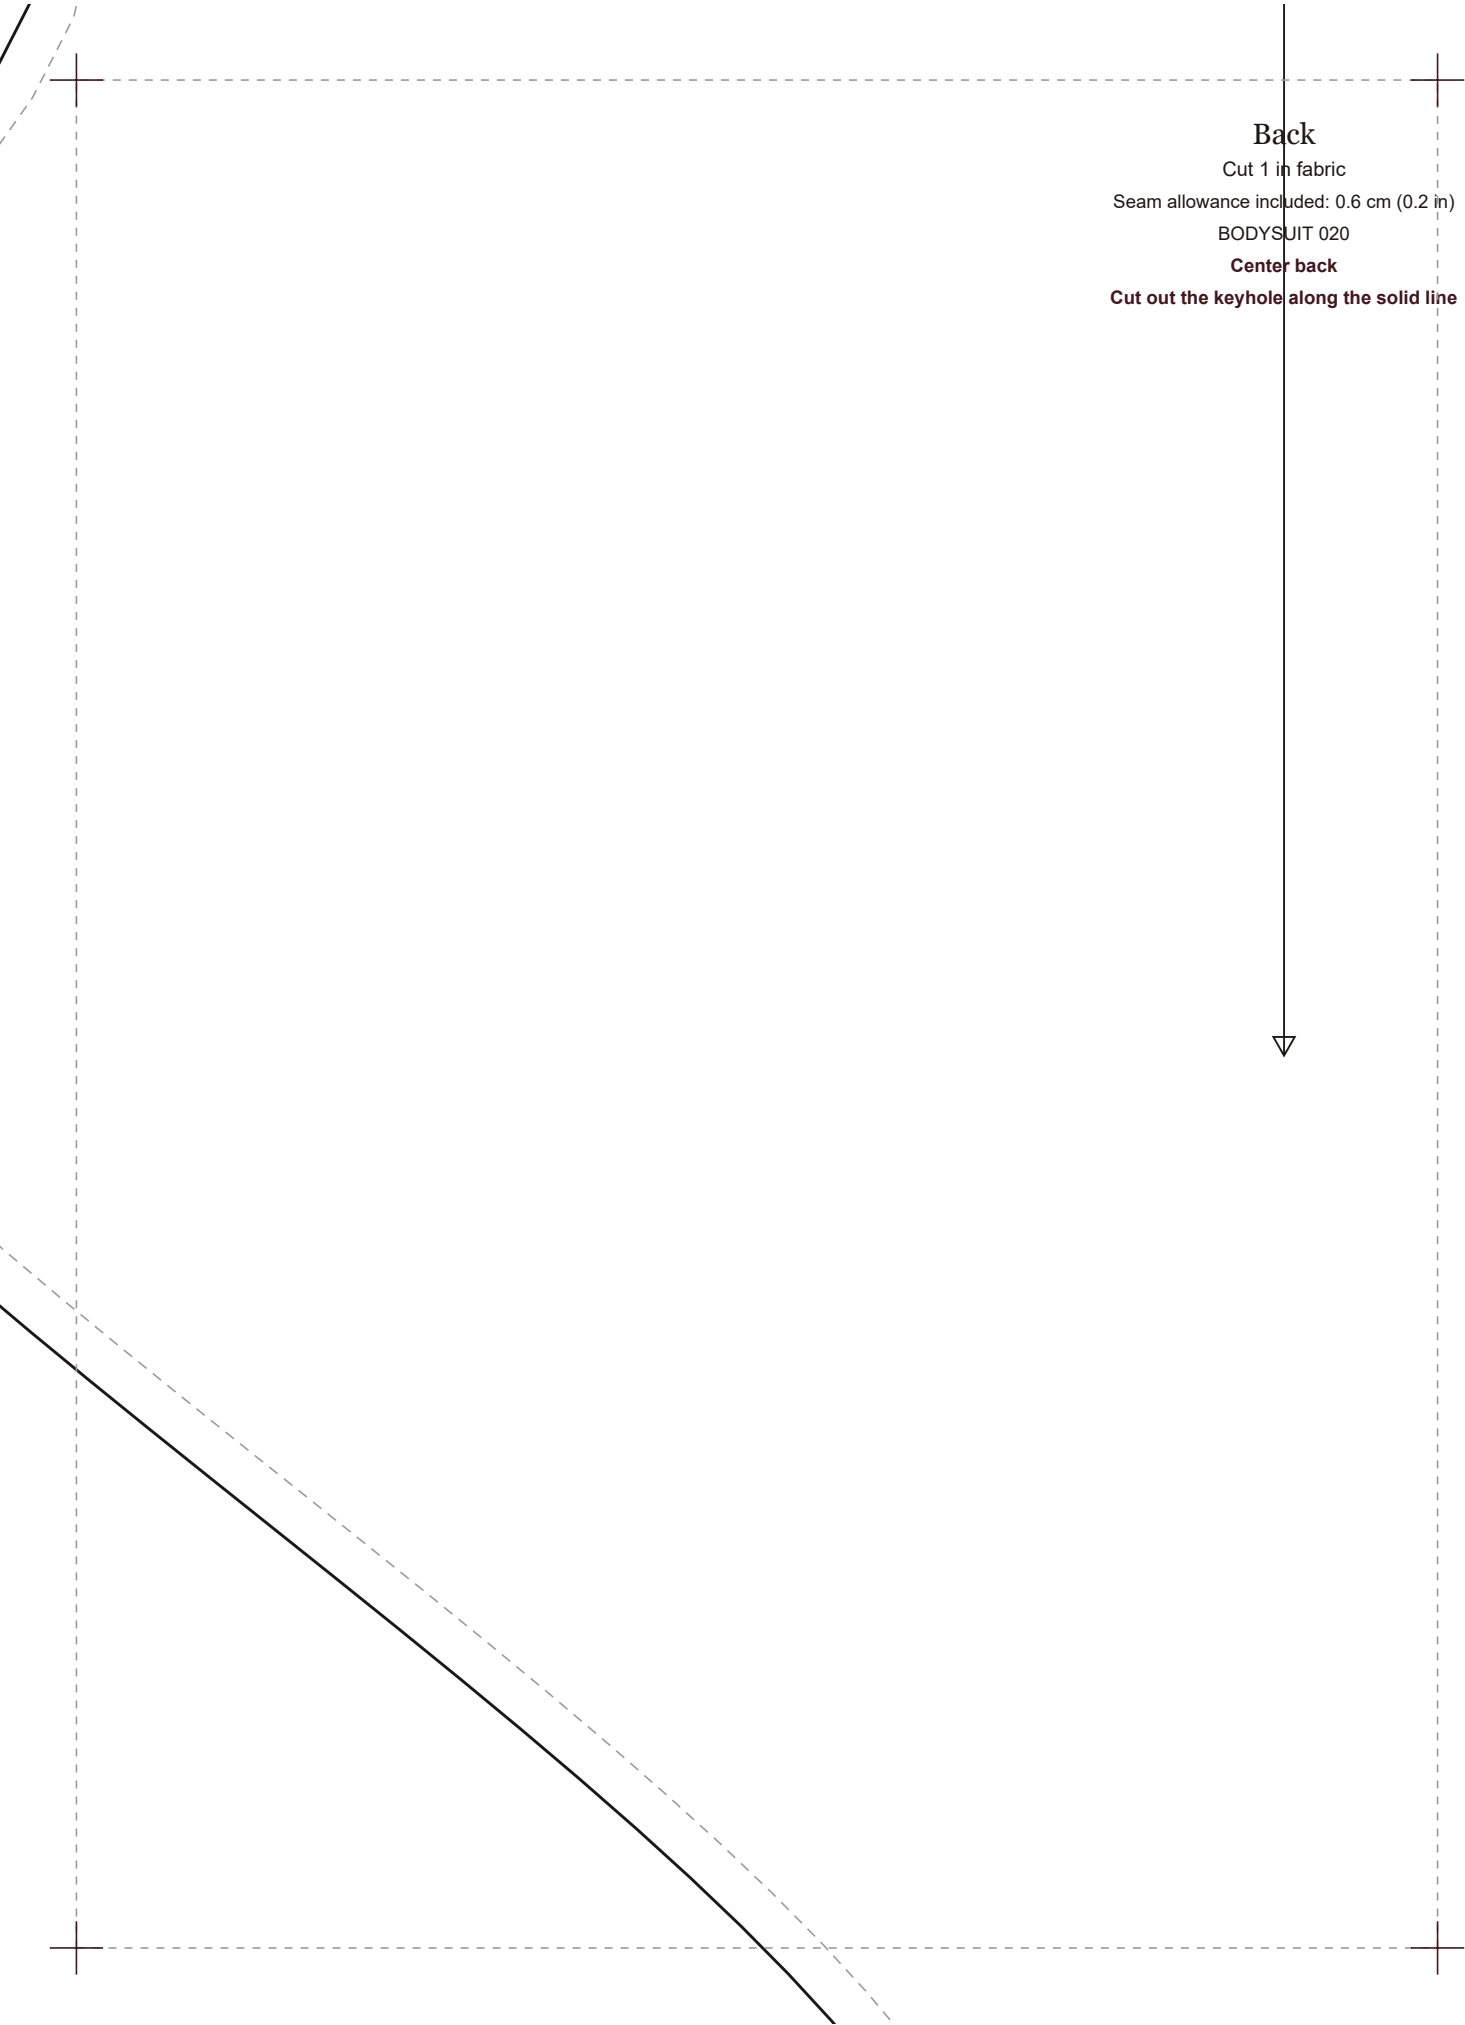



cm (0.2 in)


e solid line




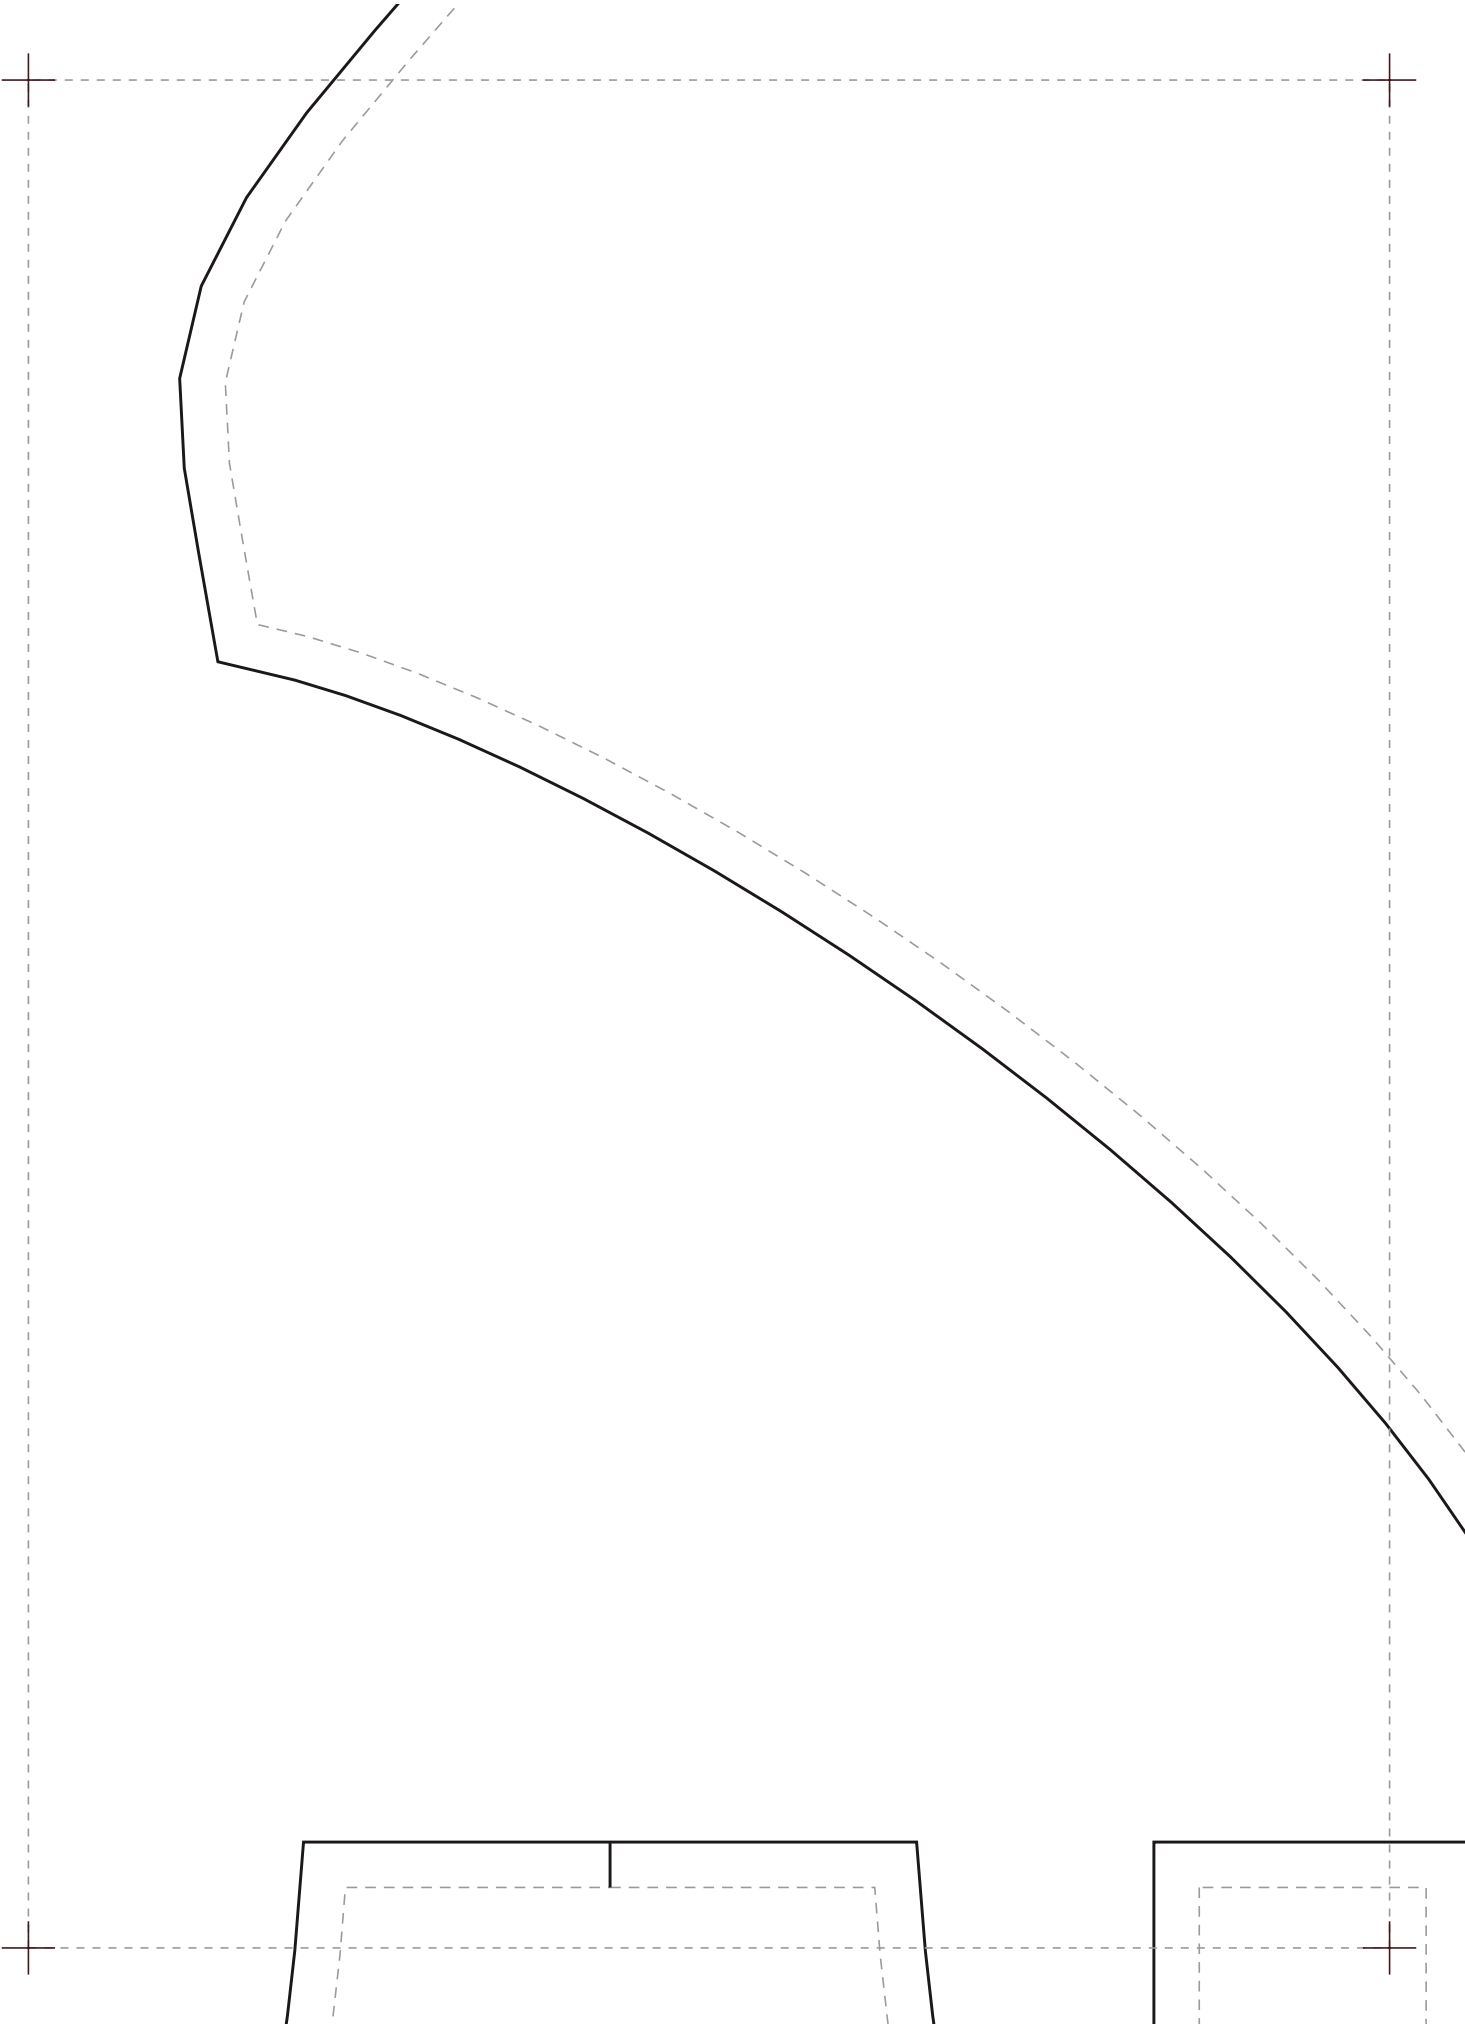

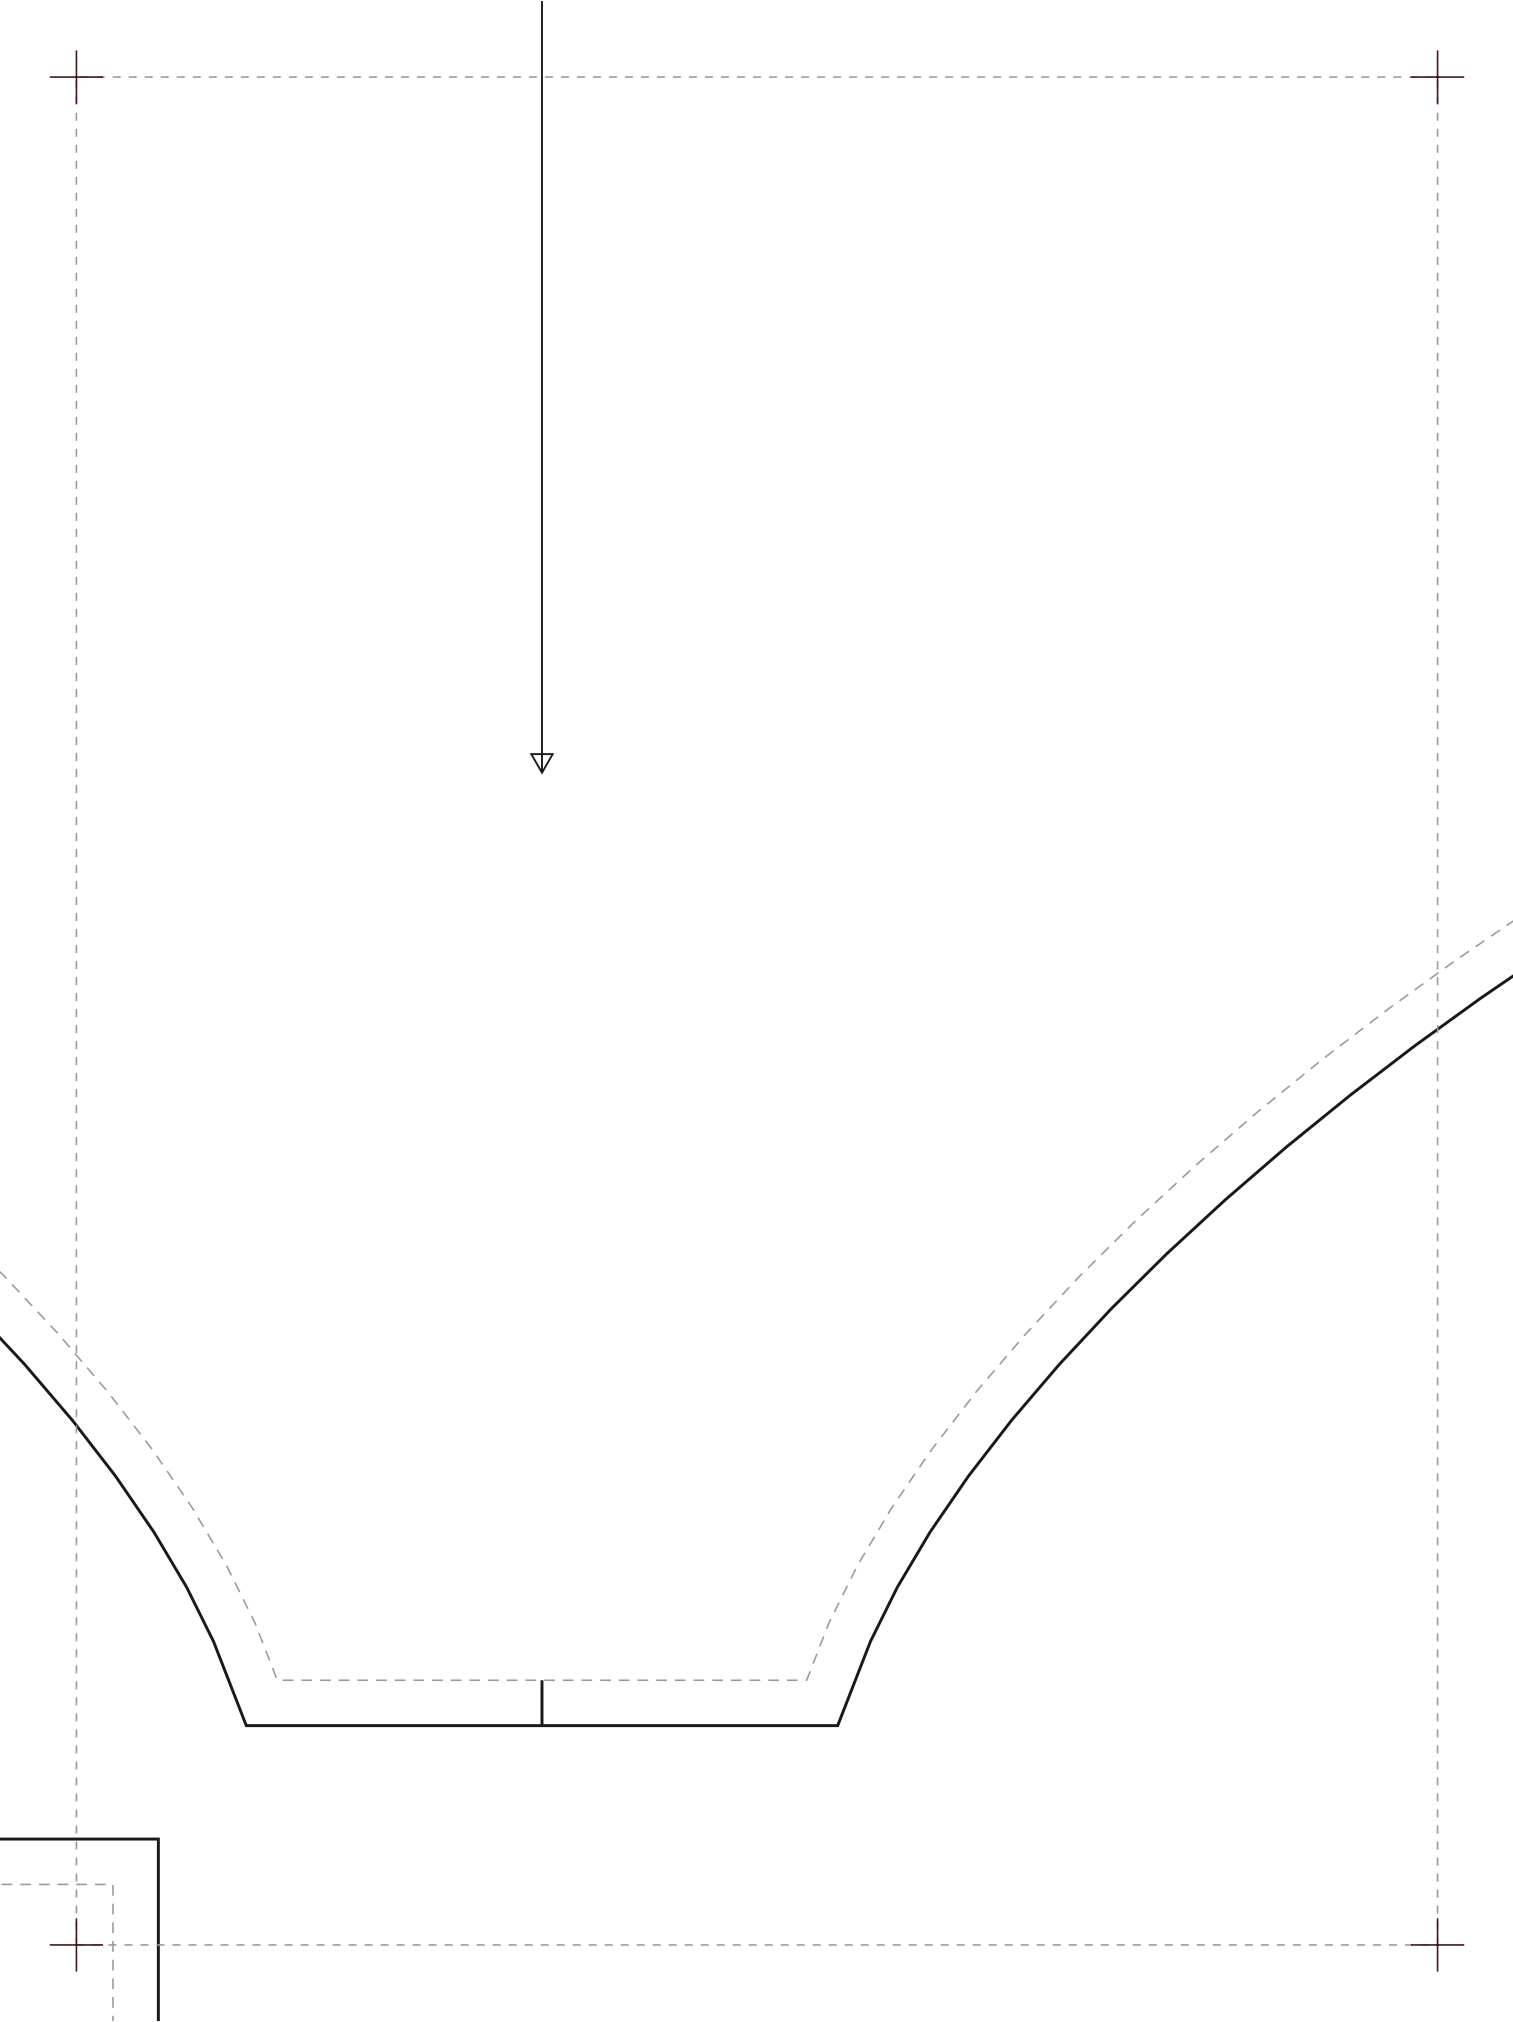


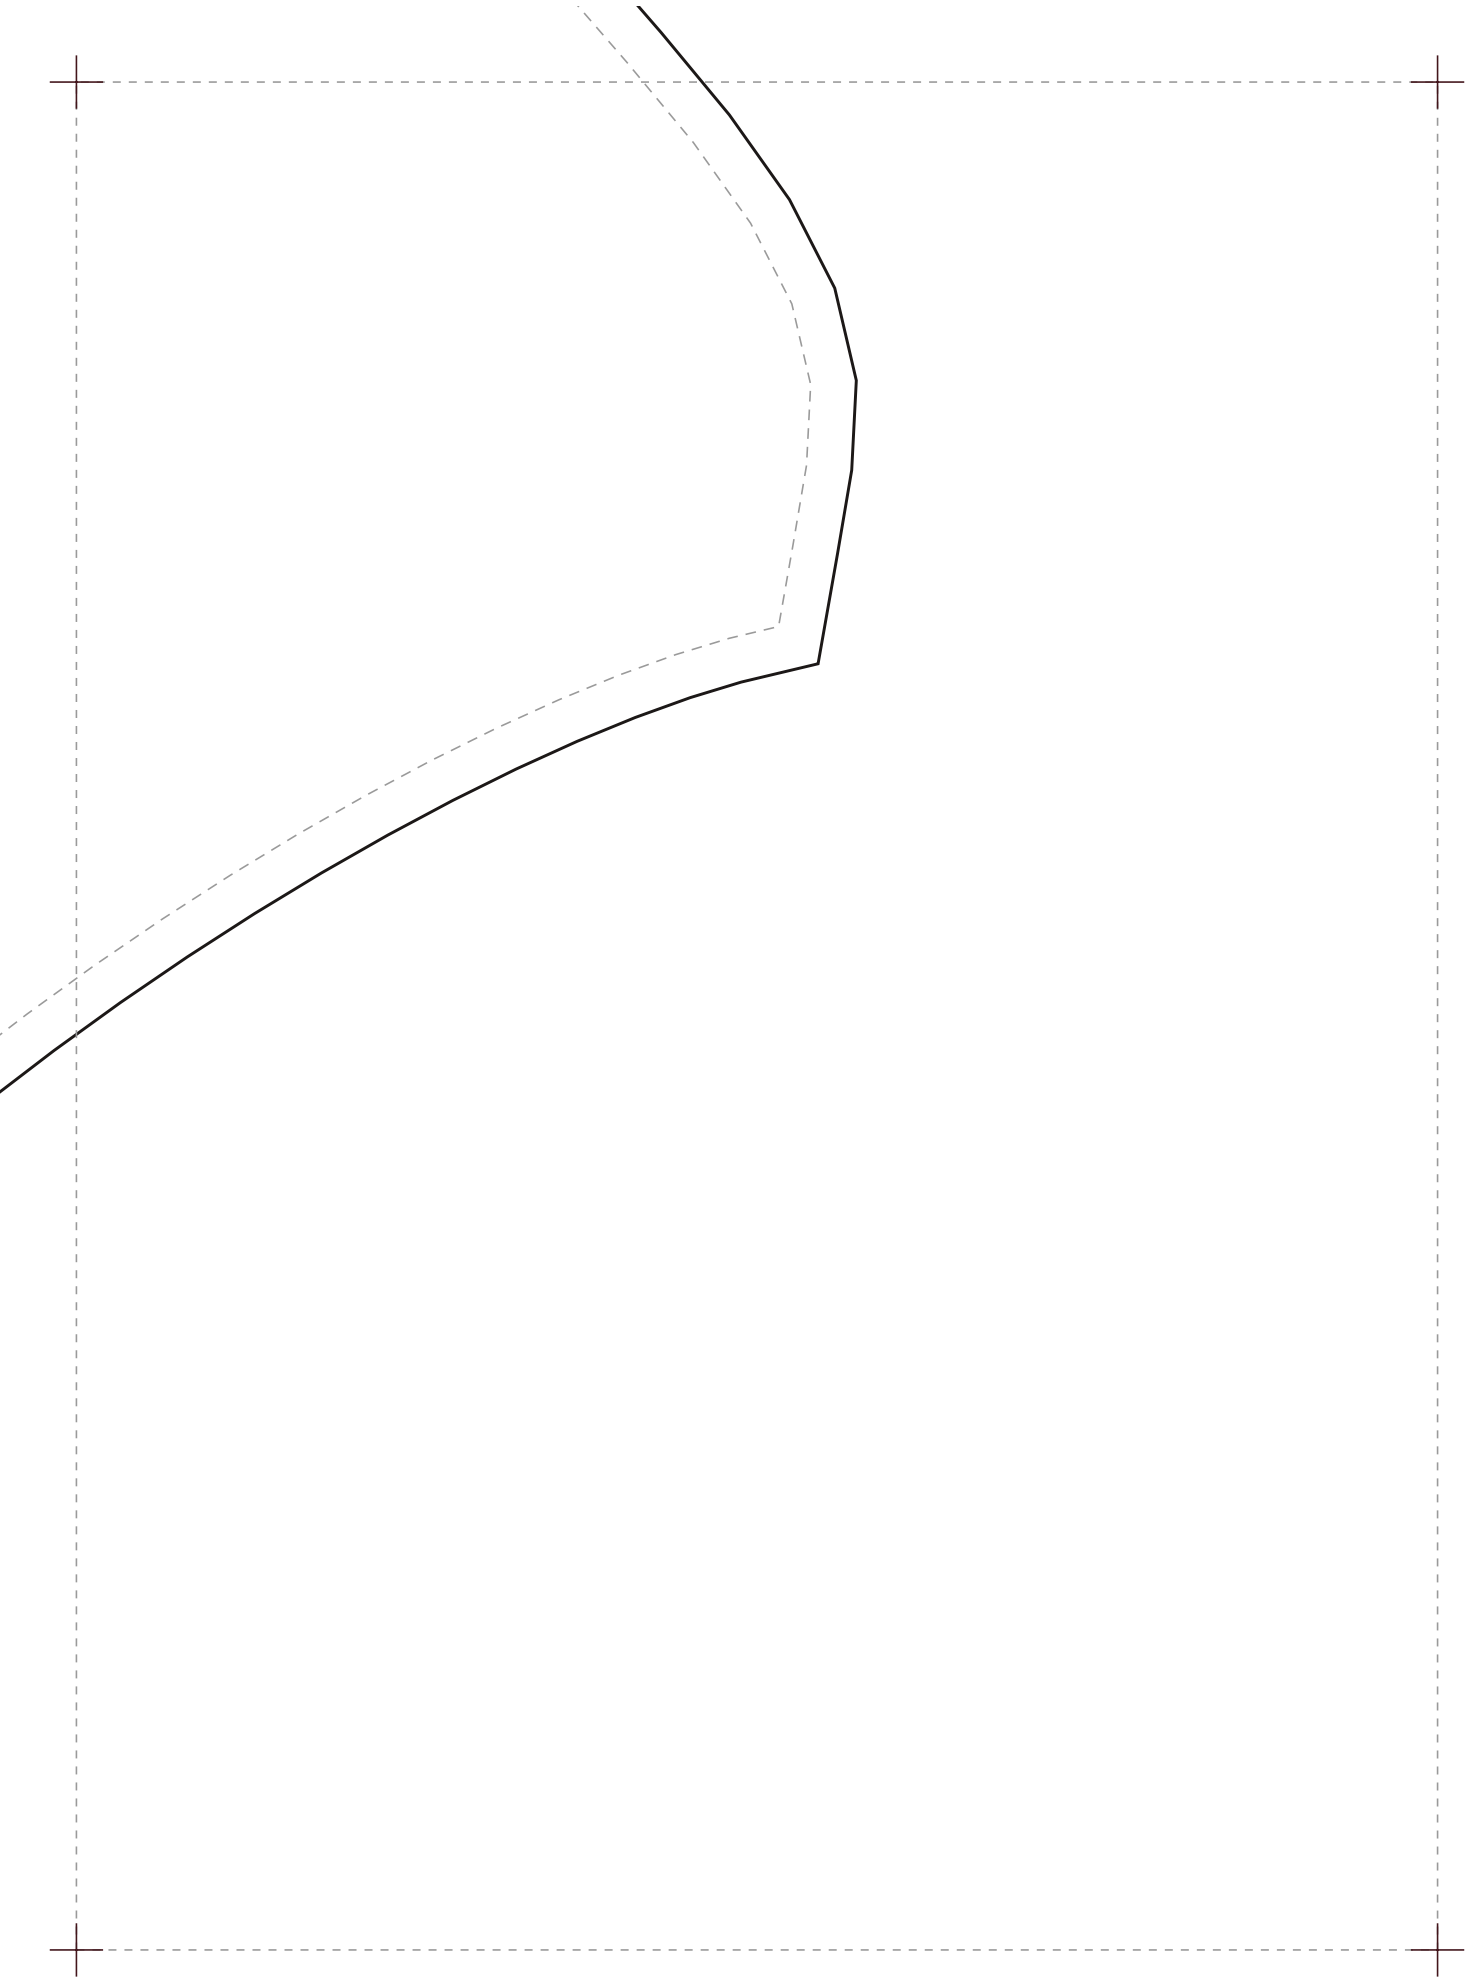


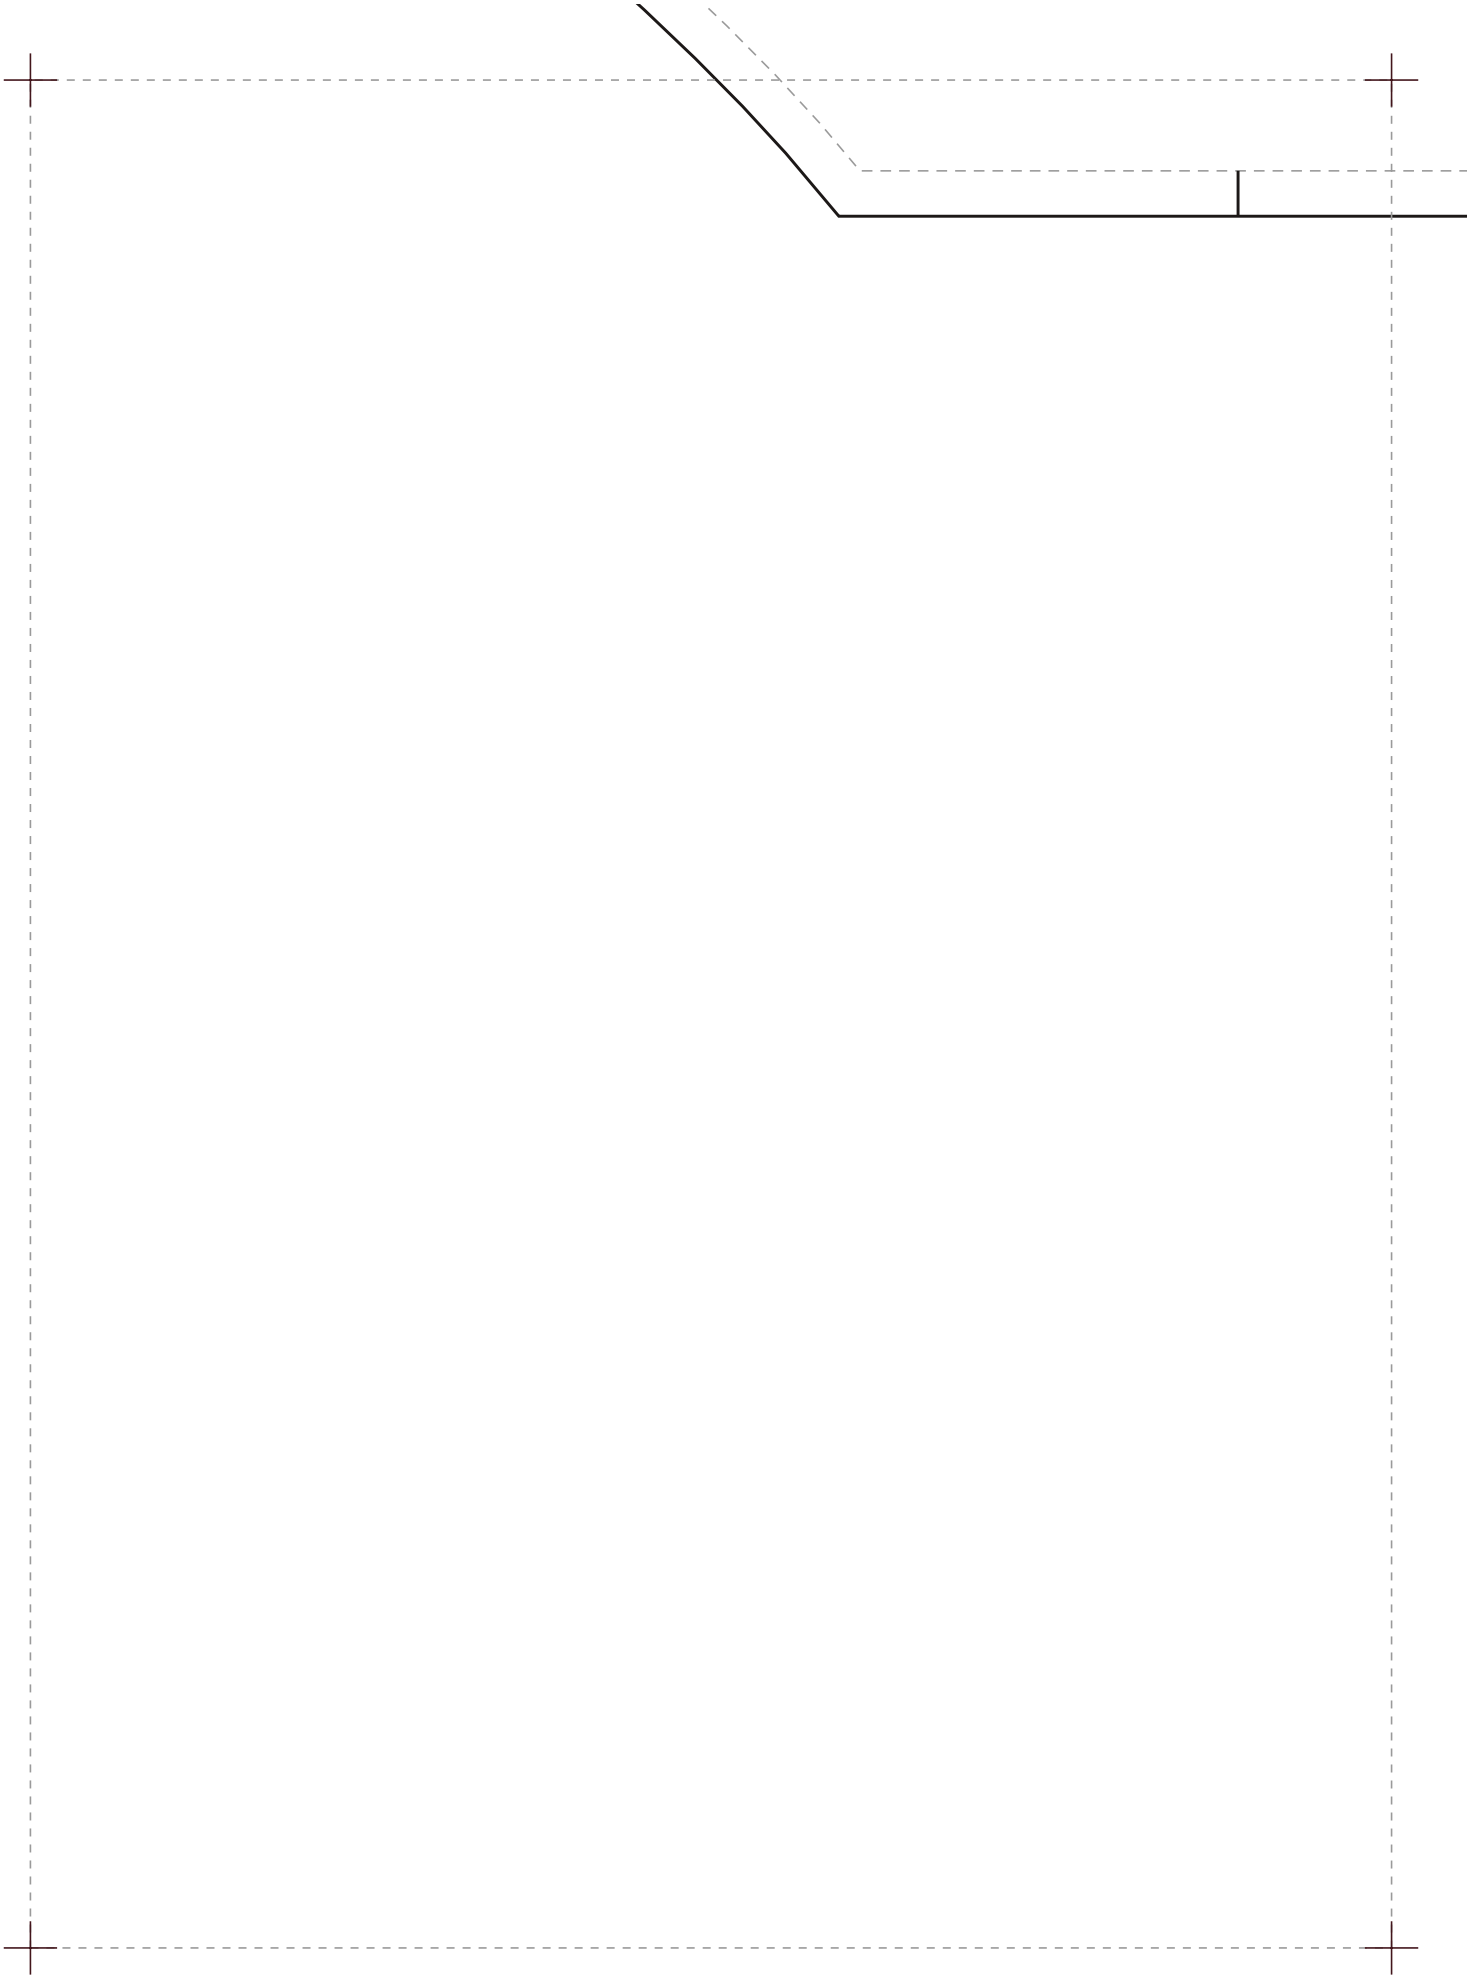

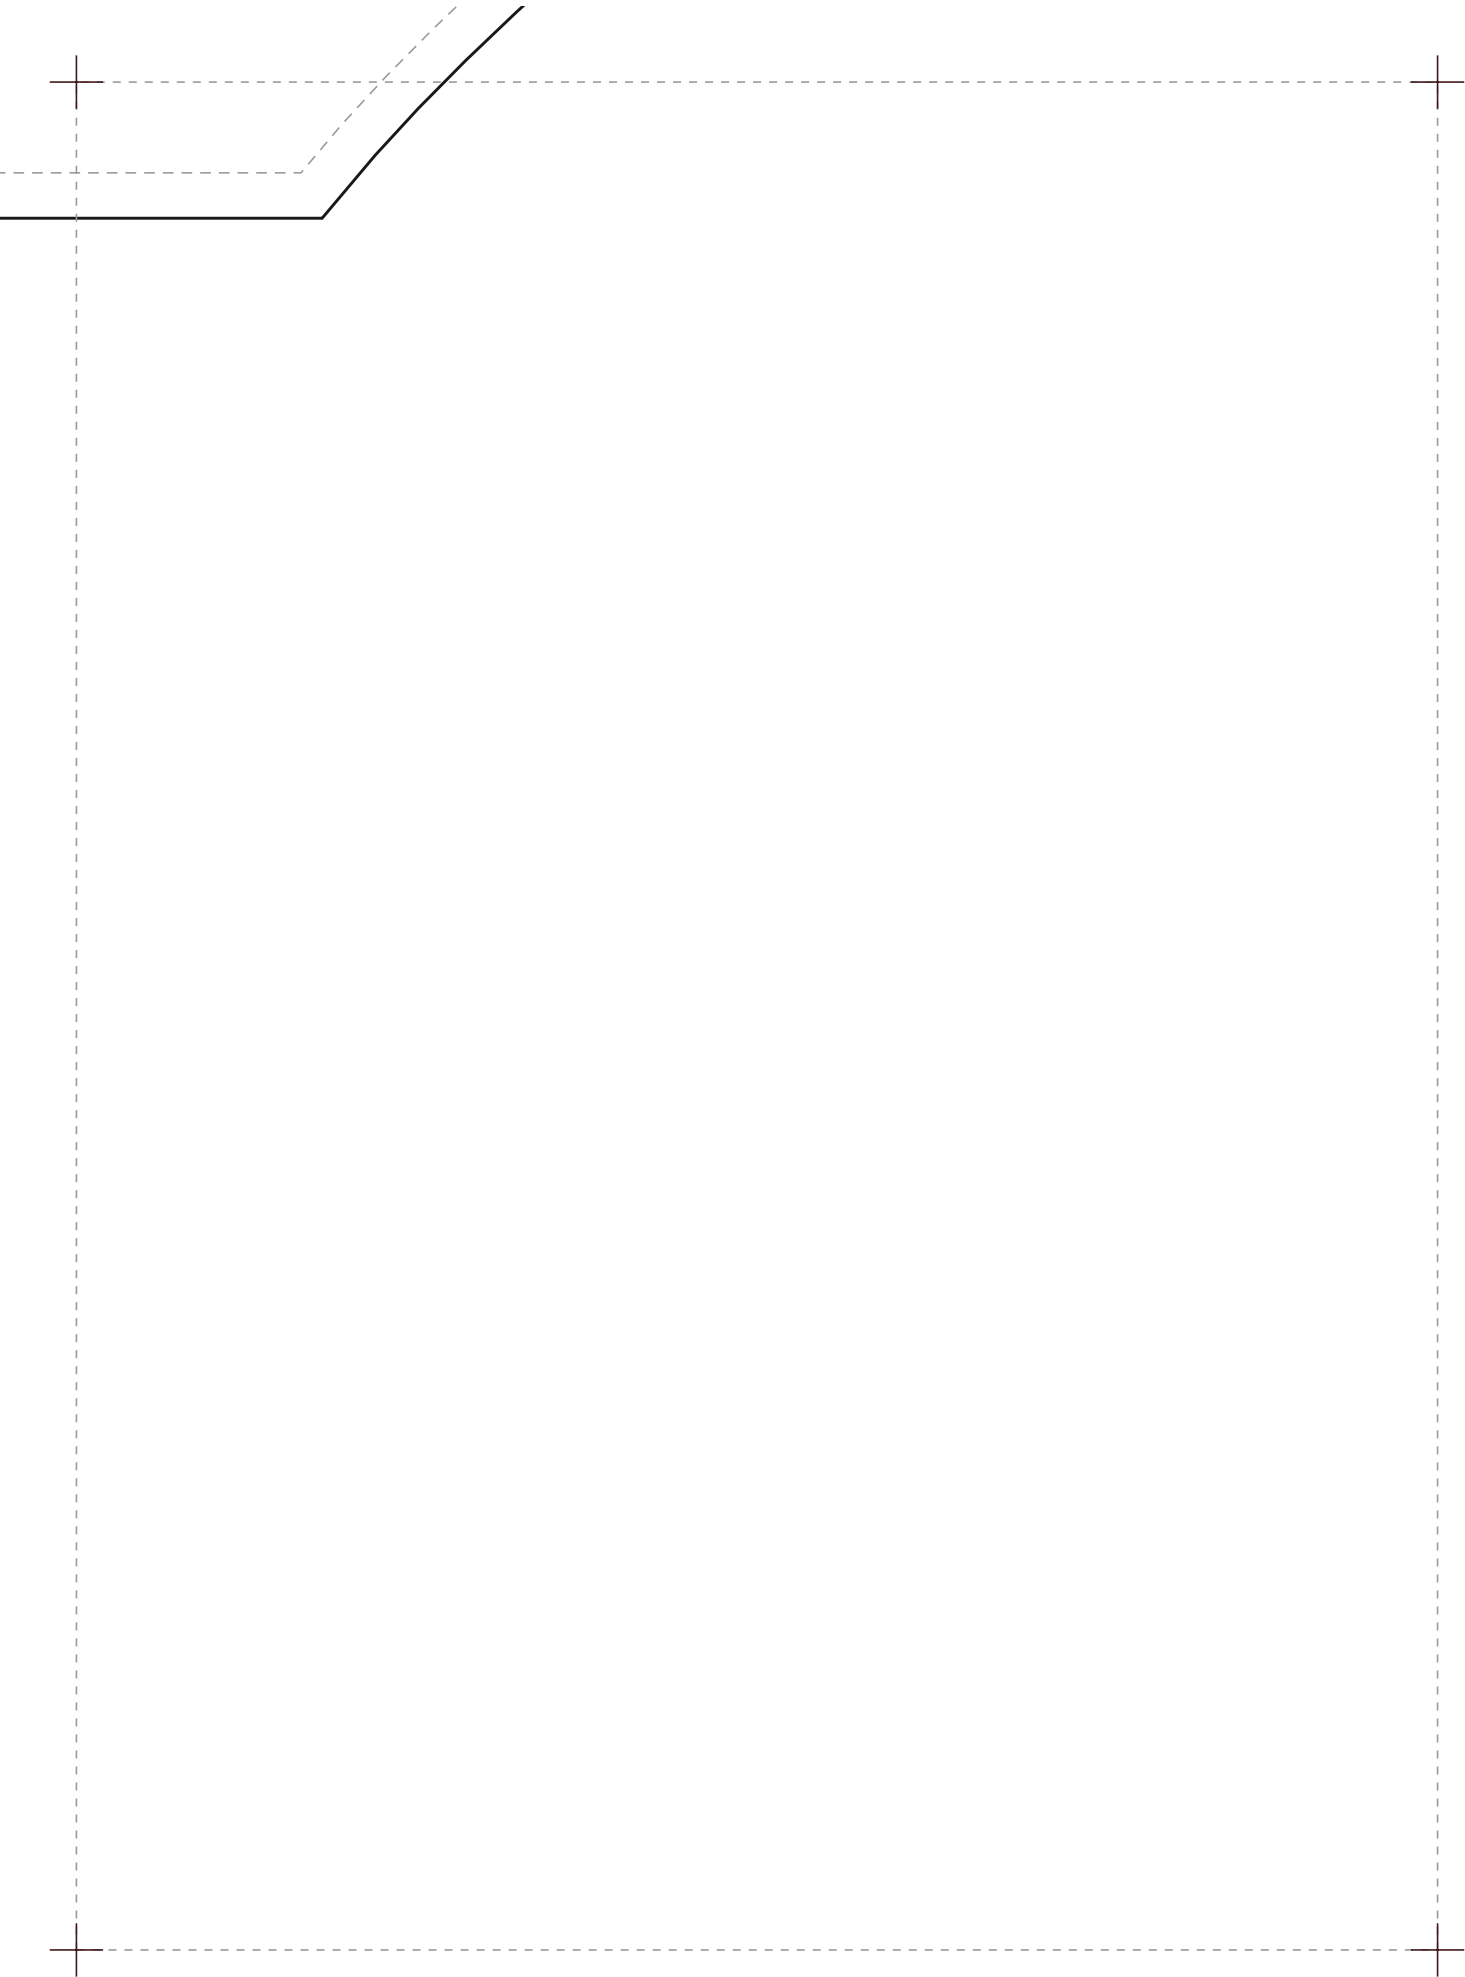



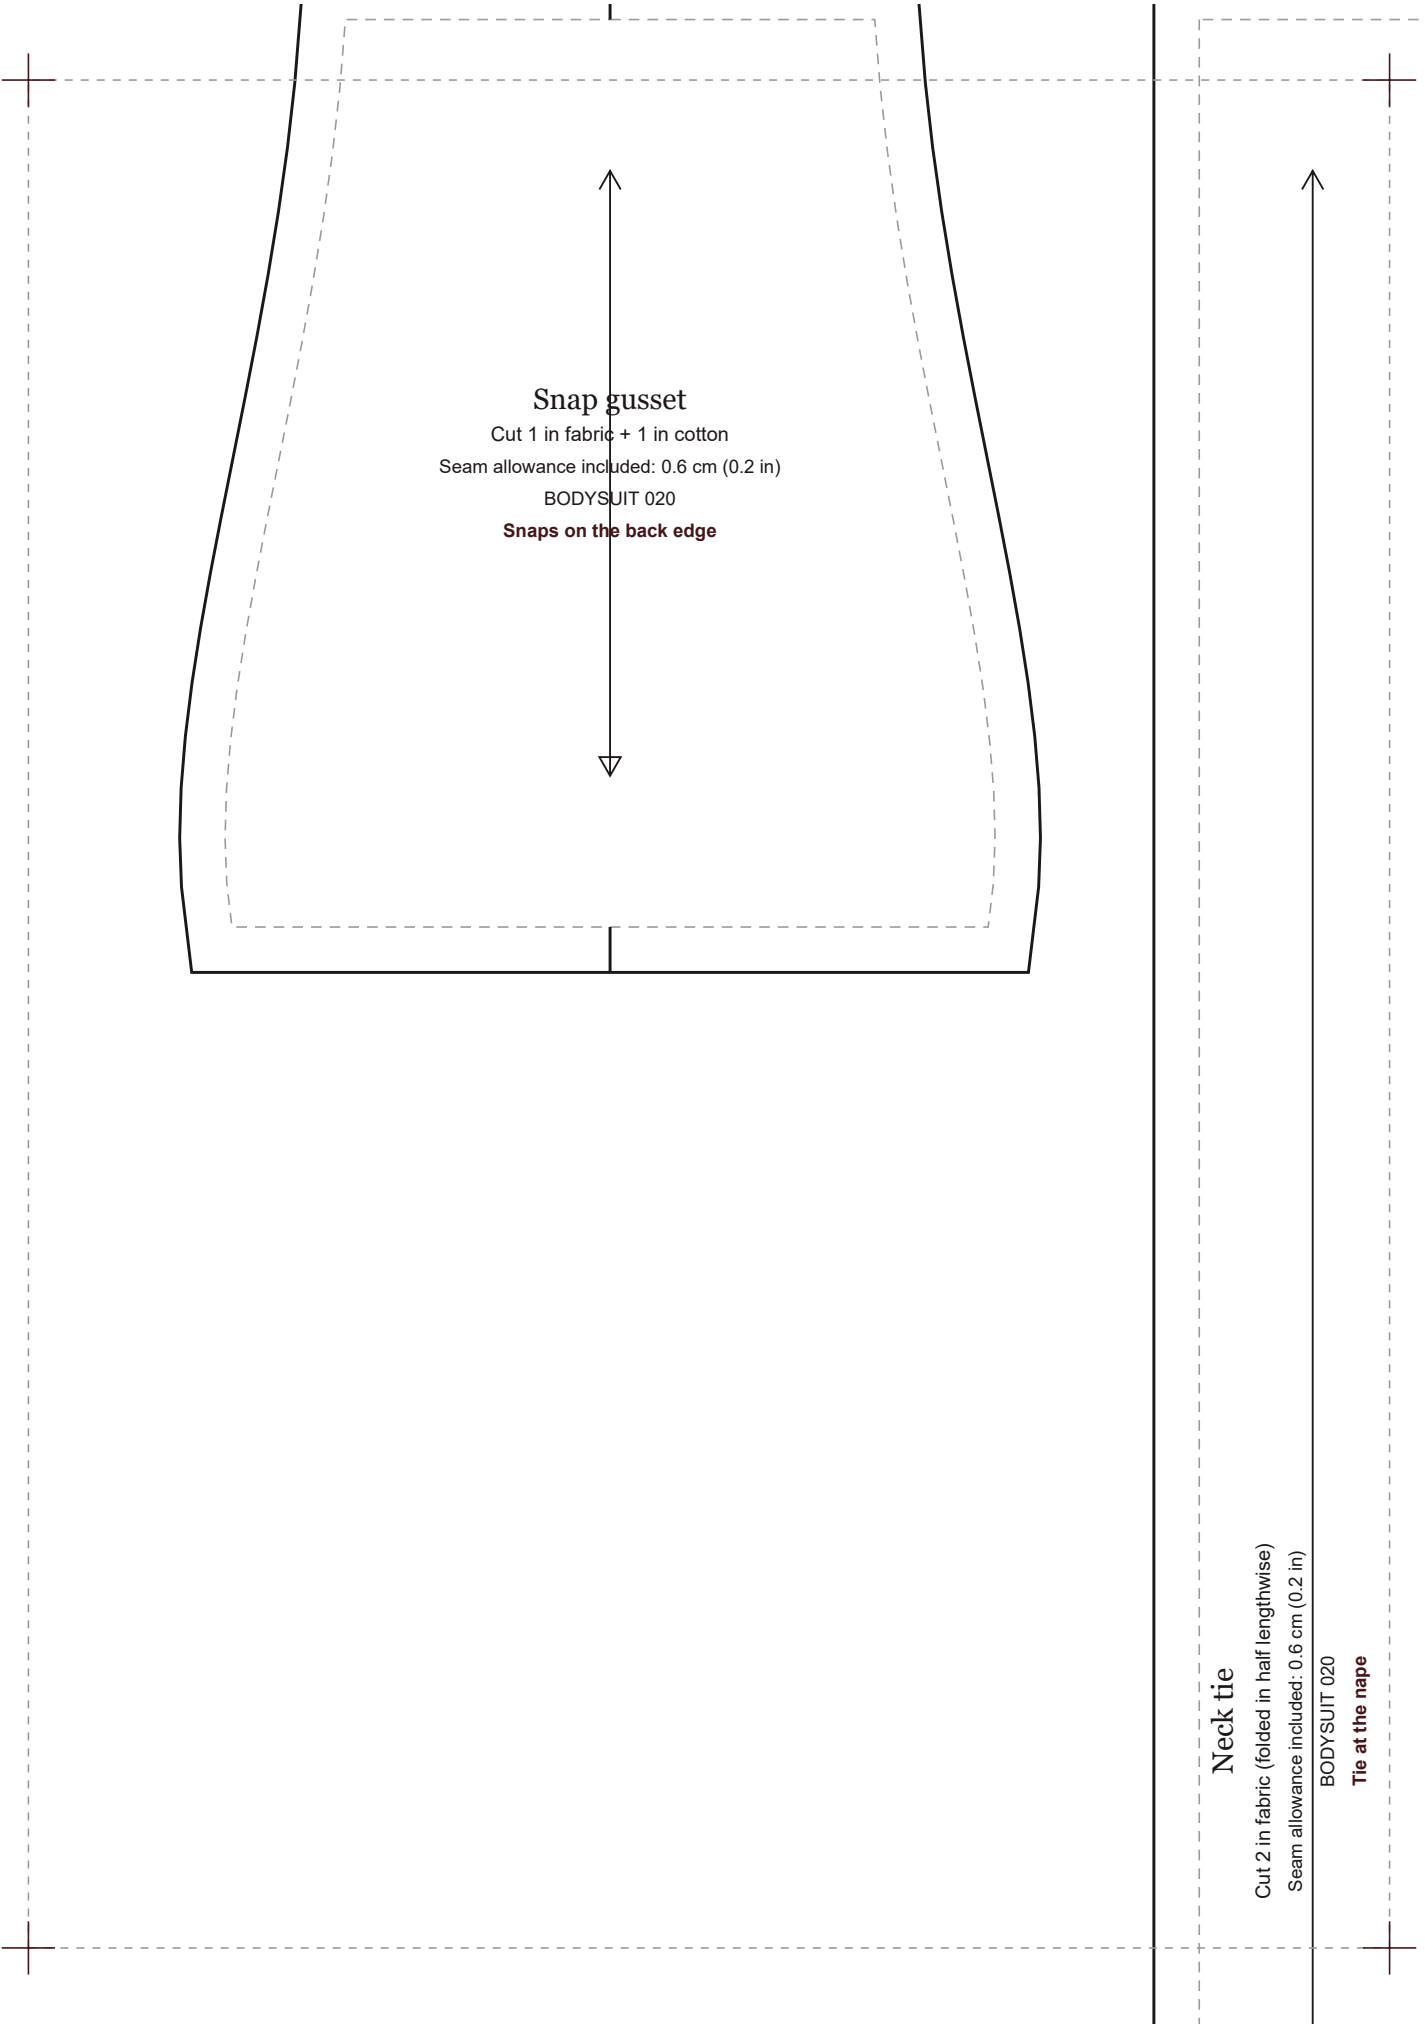


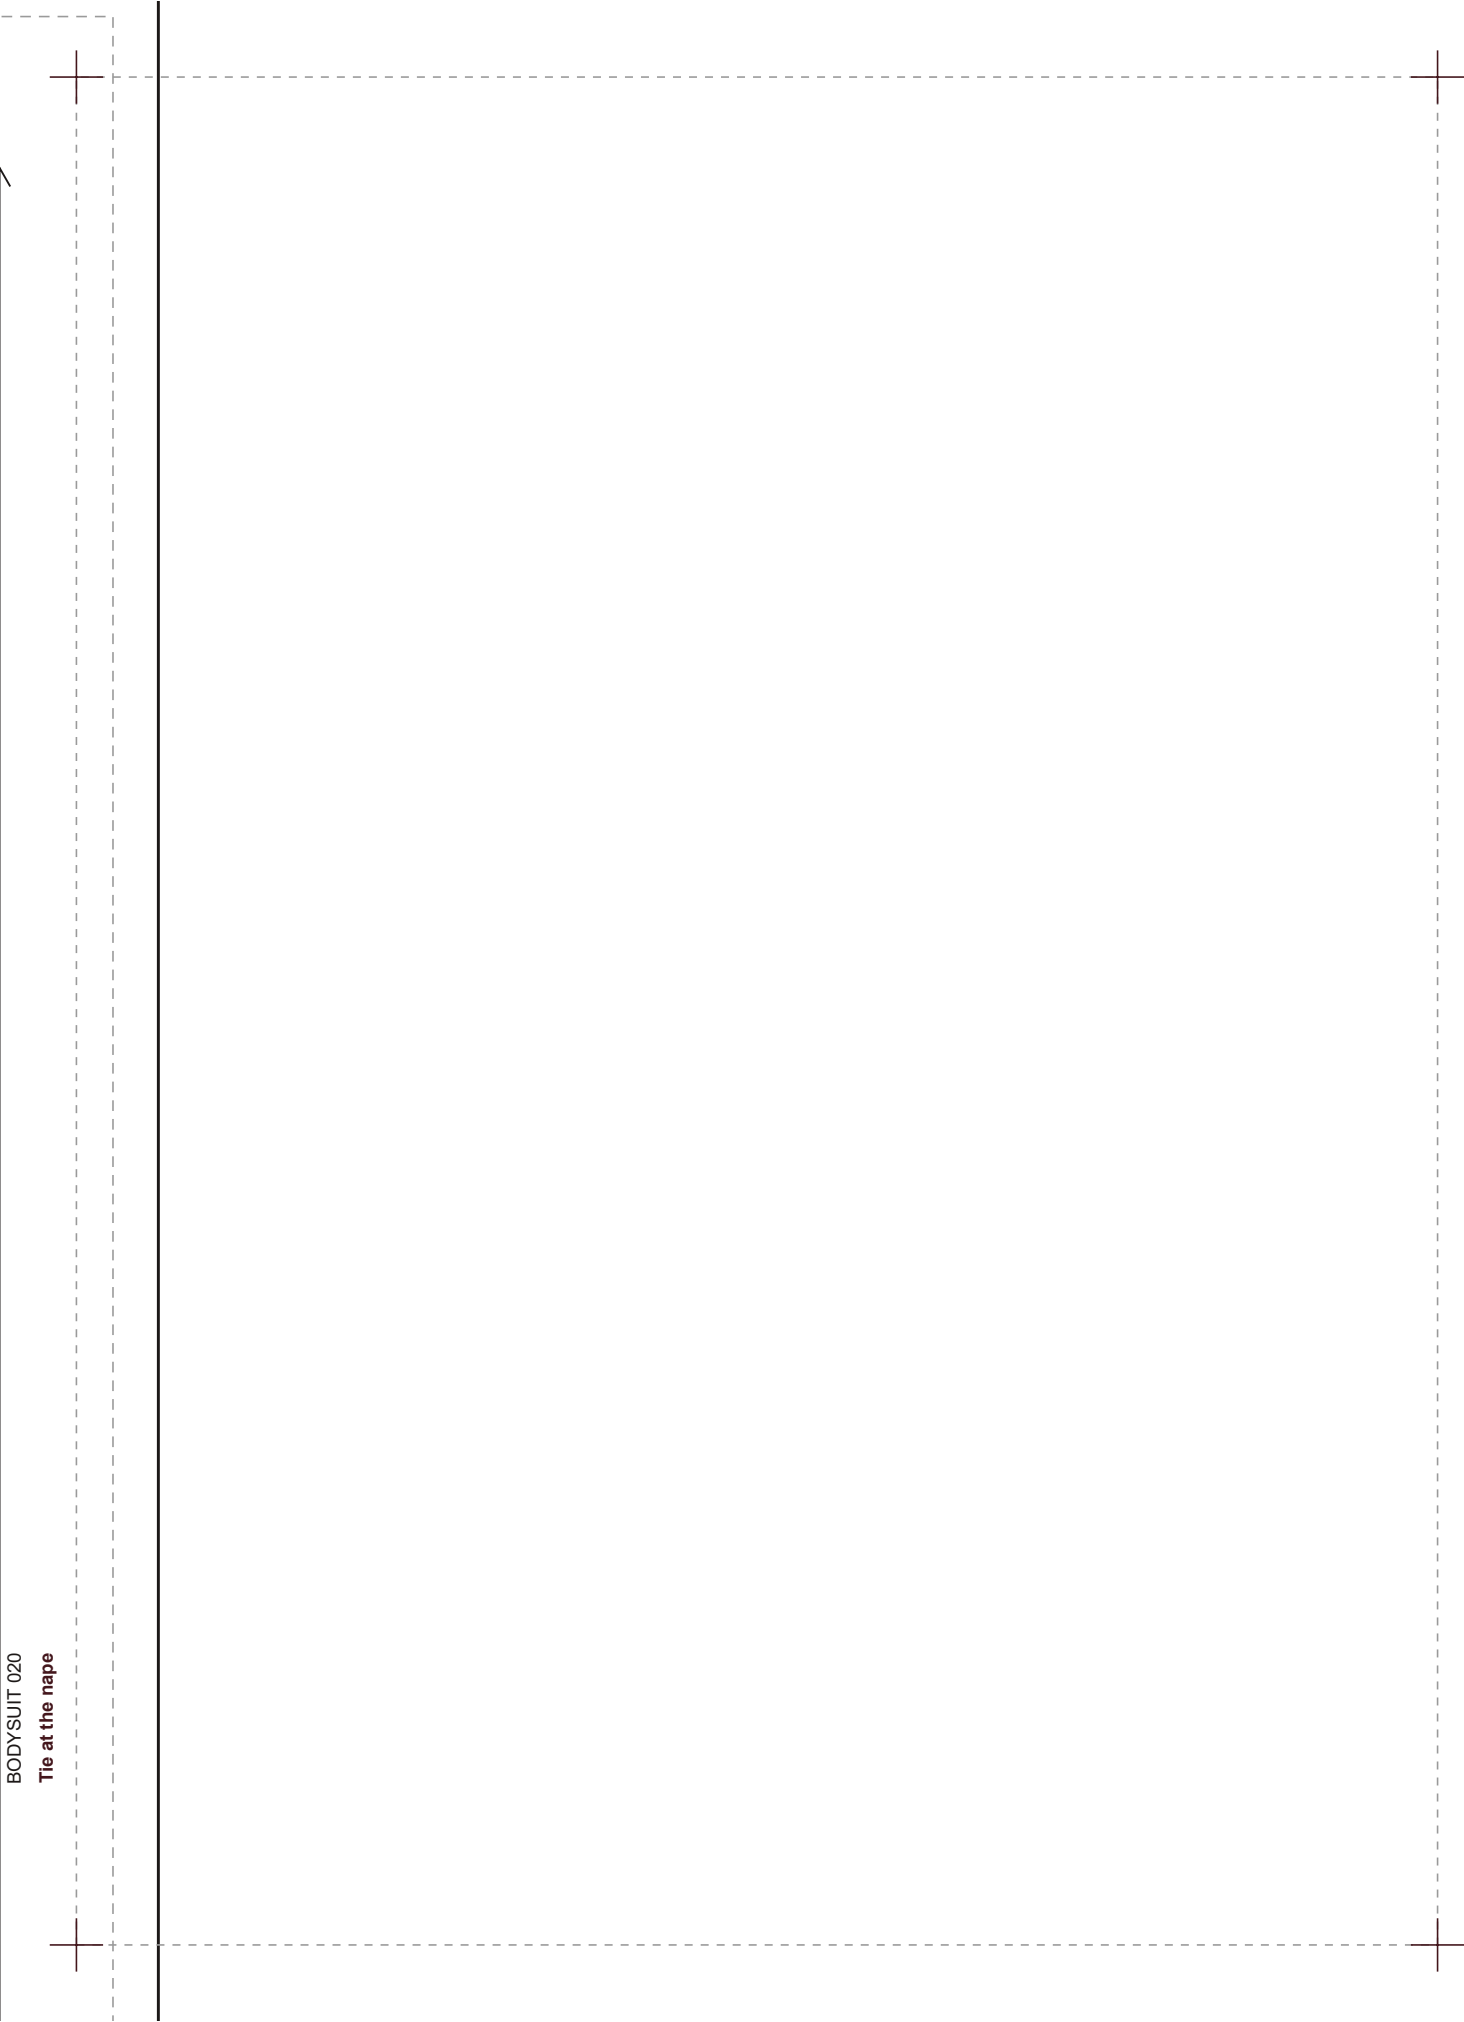


BODYSUIT 020
Tie at the nape









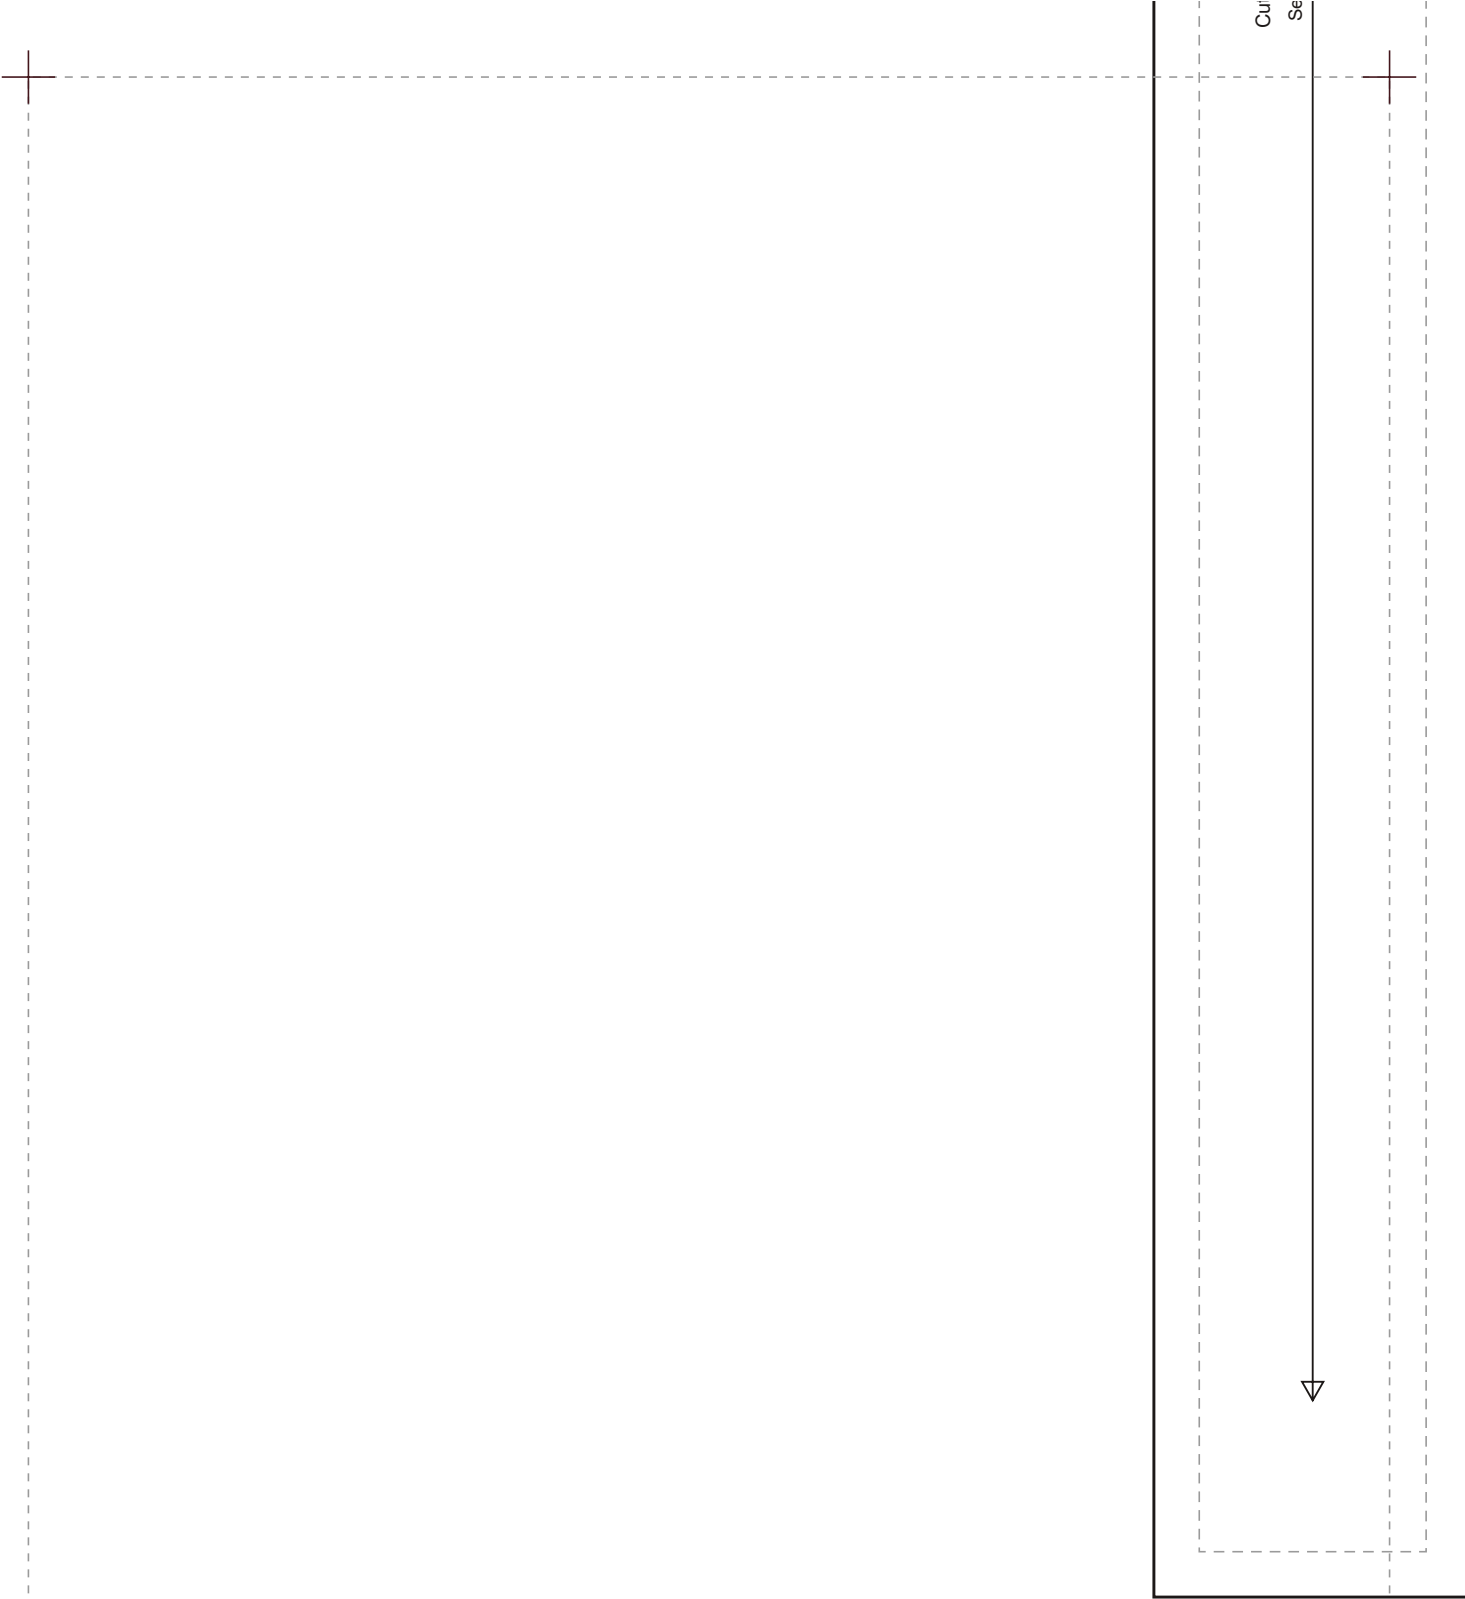

BODYSUIT 020 · Bodysuit · Halter Neck · Keyhole Back · scale 1:1 · 104.6 × 120.9 cm (41.2 × 47.6 in)

